Technical Construction File

Product Type:	Mounting Press
Test Model:	FlexPRESS
Model No.:	FlexPRESS,MT-1H,MT-2H,ThetaMount,ThetaVAC-2,TJ-2000,UVmount
Trademark:	TROJAN
Applicant:	Trooly (Suzhou) Technology Co., Ltd. Room 1079, Building 6, No.2 Luoxiang Road, Gusu District, Suzhou, China
Manufacturer:	Trojan (Suzhou) Material Technology Co., Ltd. Building 26, No.228 Gongtang Road, Luzhi Town, Wuzhong Suzhou, Jiangsu, China
Factory:	Trojan (Suzhou) Material Technology Co., Ltd. Building 26, No.228 Gongtang Road, Luzhi Town, Wuzhong Suzhou, Jiangsu, China
Report Number:	JS-TLL202512206
Testing Standard:	EN IEC 61000-6-4:2019,EN IEC 61000-6-2:2019
Date of Test:	Nov. 13, 2025 to Dec. 02, 2025
Date of Report:	Dec. 03, 2025
Test Result:	☒ Positive ☐ Negative

Revision Record			
Version	Description	Date	Remark
Ver.0.0	Original	Dec. 03, 2025	/

2 Test Summary

Emission Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Conducted Emissions at Mains Terminals (150kHz-30MHz)	EN IEC 61000-6-4:2019	CISPR 16-2-1	Table 4	Pass
Radiated Emissions (30MHz-1GHz)	EN IEC 61000-6-4:2019	CISPR 16-2-3	Table 3	Pass

Immunity Part				
Item	**Standard**	**Method**	**Requirement**	**Result**
Electrostatic Discharge	EN IEC 61000-6-2:2019	EN 61000-4-2:2009	4kV Contact Discharge 8kV Air Discharge	Pass
Electrical Fast Transients/Burst at Power Port	EN IEC 61000-6-2:2019	EN 61000-4-4:2012	1kV 5/50ns Tr/Td 5kHz Repetition Frequency	Pass
Surge at Power Port	EN IEC 61000-6-2:2019	EN 61000-4-5:2014 +A1:2017	1.2/50us Tr/Td 1kV Line to Line 2kV Line to Ground	Pass
Voltage Dips and Interruptions	EN IEC 61000-6-2:2019	EN 61000-4-11:2004 +A1:2017	For 50Hz 0 % UT for 0.5per 0 % UT for 1per 70 % UT for 25per 0 % UT for 250per	Pass
Conducted Immunity at Power Port (150kHz-80MHz)	EN IEC 61000-6-2:2019	EN 61000-4-6:2014	3Vrms (emf),80%,1kHz Amp. Mod.	Pass
Radiated Immunity (80MHz -6GHz)	EN IEC 61000-6-2:2019	EN 61000-4-3:2006 +A1:2008+A2:2010	3V/m 80%,1kHz	Pass

Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model FlexPRESS was tested since their differences were the model number and appearance.

3 Contents

		Page
1	**COVER PAGE**	1
2	**TEST SUMMARY**	2
3	**CONTENTS**	3
4	**GENERAL INFORMATION**	4
4.1	DETAILS OF E.U.T	4
4.2	DESCRIPTION OF SUPPORT UNITS	4
4.3	MEASUREMENT UNCERTAINTY	4
4.4	TEST LOCATION	4
4.5	DEVIATION FROM STANDARDS	4
4.6	ABNORMALITIES FROM STANDARD CONDITIONS	4
4.7	MONITORING OF EUT FOR ALL IMMUNITY TEST	4
5	**EQUIPMENT LIST**	5
6	**EMISSION TEST RESULTS**	8
6.1	CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MH8z)	8
6.2	RADIATED EMISSIONS (30MHz-1GHz)	11
7	**IMMUNITY TEST RESULTS**	14
7.1	PERFORMANCE CRITERIA DESCRIPTION IN EN IEC 61000-6-2:2019	14
7.2	ELECTROSTATIC DISCHARGE	15
7.3	ELECTRICAL FAST TRANSIENTS/BURST AT POWER PORT	16
7.4	SURGE AT POWER PORT	17
7.5	CONDUCTED IMMUNITY AT POWER PORT (150KHz-80MHz)	19
7.6	VOLTAGE DIPS AND INTERRUPTIONS	20
7.7	RADIATED IMMUNITY (80MHz-3.6GHz)	21
8	**PHOTOGRAPHS**	22
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	22

4 General Information

4.1 Details of E.U.T.

Power supply: 220VAC

Test voltage: 220VAC

Signal wire cable: N/A

Maximum Clock Frequency:＜108MHz

4.2 Description of Support Units

The EUT has been tested as an independent unit

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Conducted Emission at mains port using AMN	3.28 dB (150kHz to 30MHz)
2	Radiated Emission(H)	4.40 dB (30MHz-200MH) 4.67 dB (200MHz-1000MH)
3	Radiated Emission(V)	4.52 dB (30MHz-200MH) 4.56 dB (200MHz-1000MH)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Deviation from Standards

None

4.5 Abnormalities from Standard Conditions

None

4.6 Monitoring of EUT for All Immunity Test

Visual: Monitor the work status

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
EMI test receiver	Rohde&Schwarz	ESR3	YQ132	2025-05-06	2026-05-05
Artificial mains network	AFJ	LT32C	YQ133	2025-05-06	2026-05-05
Shielding Room	Everfine	SR-500	/	2022-08-24	2027-08-23

Radiated Emissions (30MHz-1GHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
EMI test receiver	Rohde&Schwarz	ESR3	YQ125	2025-05-06	2026-05-05
Controller	Maturo	XTJC-1	YQ128	/	/
Receiving antenna	SCHWARZBECK	VULB9163	YQ129	2025-05-06	2026-05-05
ANTENNA MAST	Maturo	XTJC-2	/	/	/
TURN DEVICE	Noyetec	XTJC-3	/	/	/
Pre-Amplifier	Noyetec	NYPA0930	YQ131	2025-05-06	2026-05-05
Semi/Fully Anechoic	Noyetec	966	/	2022-08-24	2027-08-23

Electrostatic Discharge Test Setup					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
ESD generator	Everfine	EMS61000-2A	YQ124	2025-05-06	2026-05-05

Electrical Fast Transients/Burst at Power Port					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Burst generator	Everfine	EMS61000-4A	YQ127	2025-05-06	2026-05-05
Coupling clamp	Everfine	EFTC-2	YQ128	2025-05-06	2026-05-05

Surge at Power Port					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Lightning surge generator	Everfine	EMS61000-5A	YQ125	2025-05-06	2026-05-05
Coupling / Decoupling Network (CDN)	Everfine	CDNI-3A	YQ126	2025-05-06	2026-05-05


Conducted Immunity at Power Port (150kHz-230MHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Signal generator	Rigol	DSG821	YQ134	2025-05-06	2026-05-05
Power Amplifier	Noyetec	NYPA 0123-100	YQ135	2025-05-06	2026-05-05
6dB Attenuator	Noyetec	ATT01	YQ136	2025-05-06	2026-05-05
Coupling and Decoupling Network (CDN)	SCHWARZBECK	CDN M2/M3PE	YQ137	2025-05-06	2026-05-05
Impedance matching converter	Noyetec	SR100-6W	YQ139	2025-05-06	2026-05-05
Shielding Room	Everfine	SR-500	/	2022-08-24	2027-08-23
Coupling and Decoupling Network (CDN)	SCHWARZBECK	CDN M4PE	YQ141	2025-05-06	2026-05-05

Radiated Immunity (80MHz-6GHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Signal generator	Rigol	DSG836	YQ134	2025-05-06	2026-05-05
Antenna	SCHWARZBECK	VUSLP9111E	YQ145	2025-05-06	2026-05-05
Amplifier	Noyetec	NYPA0810-200	YQ144	2025-05-06	2026-05-05
Power meter sensor	Ceyear	87230	YQ148	2025-05-06	2026-05-05
Power meter sensor	Ceyear	87230	YQ149	2025-05-06	2026-05-05
Electro Magnetic Field Probe	Narda	EP601	YQ149	2025-05-06	2026-05-05
Shielding Room	Everfine	SR-500	YQ127	2022-08-24	2027-08-23


Voltage Dips and Interruptions					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Three-phase cycle drop generator	Everfine	EMS61000-11 CA	YQ129	2025-05-06	2026-05-05
Manual step transformer	Everfine	SG-15KVA	YQ130	2025-05-06	2026-05-05

General used equipment					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date Cal**	**Due Date**
Digital pressure meter	YIOU	DPH-103	YQ073	2025-05-06	2026-05-05
Temperature& humidity recorder	Dongguan Jinghe Electronic Technology Co., Ltd	MC501	YQ095	2025-05-06	2026-05-05

Software	Manufacturer	Software version
EZ-EMC	Farad Technology	Software version:EMEC-3A1+
ESD generator Software	Everfine	Software version:V1.0
Three-phase cycle drop generator Software	Everfine	Software version:V2.07
Lightning surge generator Software	Everfine	Software version:V2.07
Radiated Immunity	Noyetec	Software version:V1.0
EFT Software	Everfine	Software version:V2.07
Conducted Immunity Software	Noyetec	Software version:V4.0

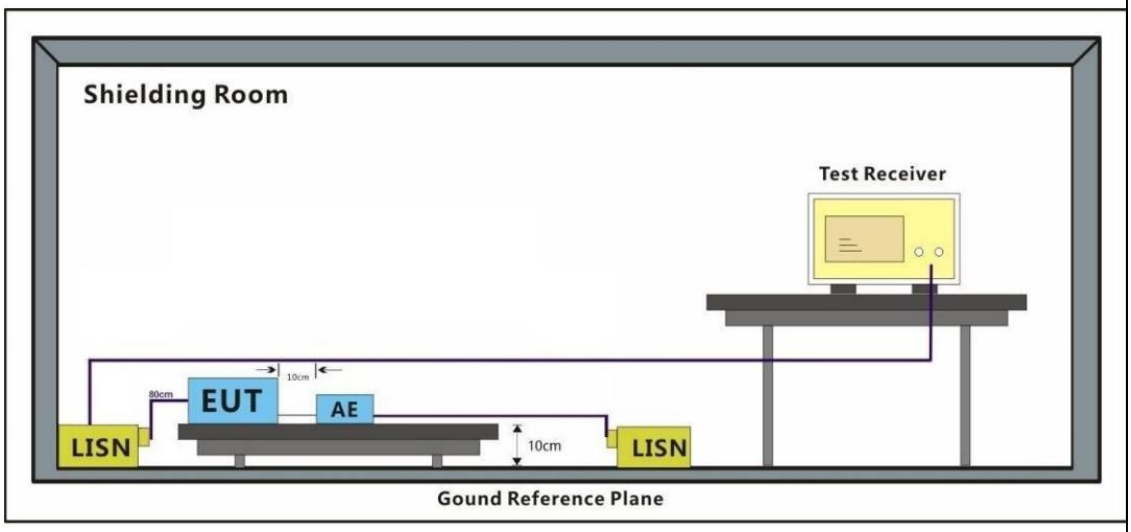6	**Emission Test Results**
6.1	Conducted Emissions at Mains Terminals (150kHz-30MHz)
	Test Requirement: EN IEC 61000-6-4:2019
	Test Method: CISPR 16-2-1
	Frequency Range: 150kHz to 30MHz
	Limit: 0.15M-0.5MHz 79dB(μV) quasi-peak, 66dB(μV) average 0.5M-30MHz 73dB(μV) quasi-peak, 60dB(μV) average Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz
6.1.1	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
6.1.2	Test Setup Diagram
	
6.1.3	Measurement Data
	An initial pre-scan was performed with peak detector.Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected


Model: FlexPRESS; Line:Live Line

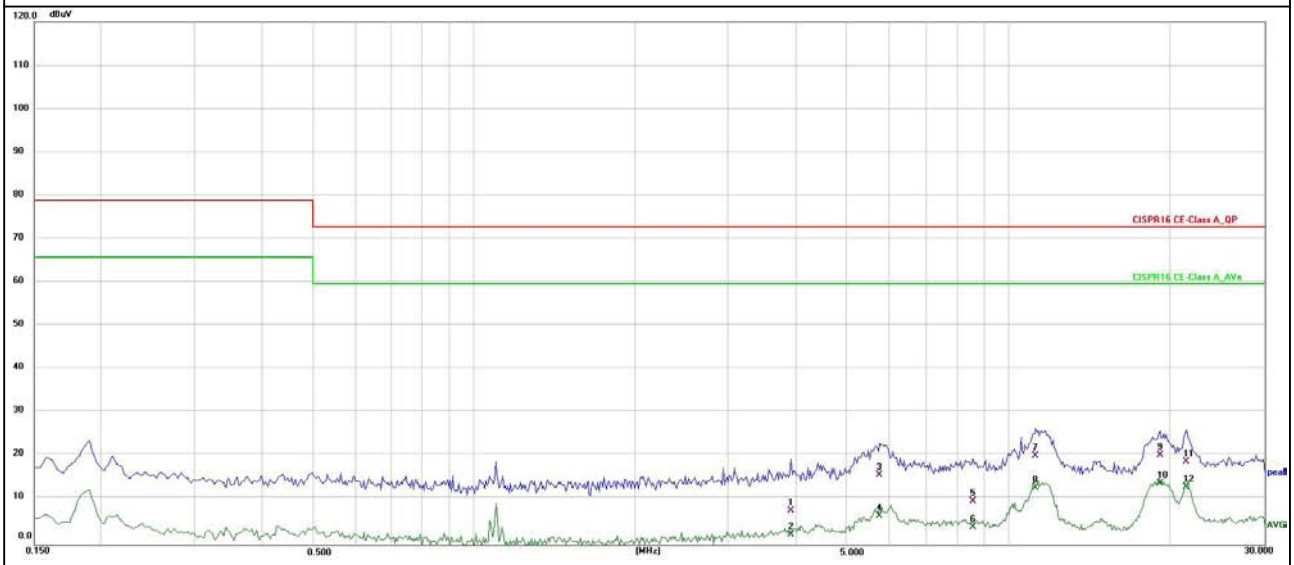

No.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Measure-Ment (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	3.9180	-3.11	11.09	7.98	73.00	-65.02	QP
2	3.9180	-8.61	11.09	2.48	60.00	-57.52	AVG
3	5.7140	4.97	11.14	16.11	73.00	-56.89	QP
4	5.7140	-4.34	11.14	6.80	60.00	-53.20	AVG
5	8.5540	-1.15	11.28	10.13	73.00	-62.87	QP
6	8.5540	-7.08	11.28	4.20	60.00	-55.80	AVG
7	11.2260	9.18	11.38	20.56	73.00	-52.44	QP
8	11.2260	1.78	11.38	13.16	60.00	-46.84	AVG
9	19.1820	8.91	11.79	20.70	73.00	-52.30	QP
10	19.1820	2.41	11.79	14.20	60.00	-45.80	AVG
11	21.4540	7.18	12.04	19.22	73.00	-53.78	QP
12	21.4540	1.35	12.04	13.39	60.00	-46.61	AVG


Notes:Measure-Ment=Reading Level+Factor

Model: FlexPRESS; Line:Neutral Line

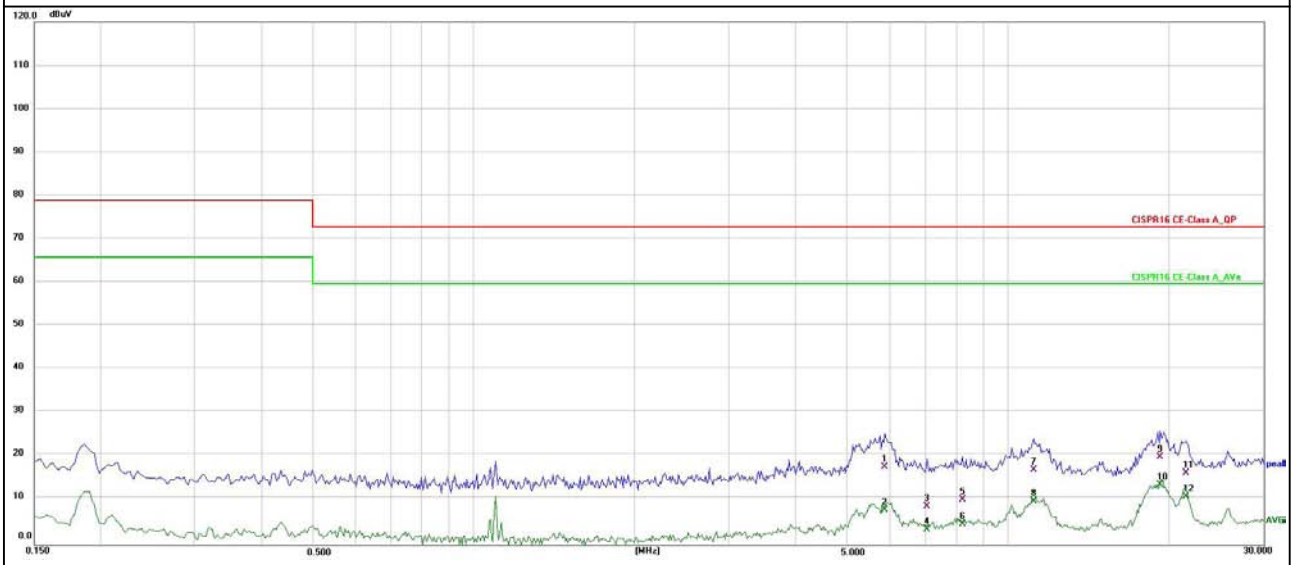


No.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Measure-Ment (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	5.8780	6.92	11.01	17.93	73.00	-55.07	QP
2	5.8780	-2.94	11.01	8.07	60.00	-51.93	AVG
3	7.0420	-2.15	11.04	8.89	73.00	-64.11	QP
4	7.0420	-7.41	11.04	3.63	60.00	-56.37	AVG
5	8.2140	-0.67	11.10	10.43	73.00	-62.57	QP
6	8.2140	-6.29	11.10	4.81	60.00	-55.19	AVG
7	11.1540	5.99	11.25	17.24	73.00	-55.76	QP
8	11.1540	-1.12	11.25	10.13	60.00	-49.87	AVG
9	19.3060	8.55	11.70	20.25	73.00	-52.75	QP
10	19.3060	2.24	11.70	13.94	60.00	-46.06	AVG
11	21.5860	4.80	11.90	16.70	73.00	-56.30	QP
12	21.5860	-0.73	11.90	11.17	60.00	-48.83	AVG

Notes:Measure-Ment=Reading Level+Factor

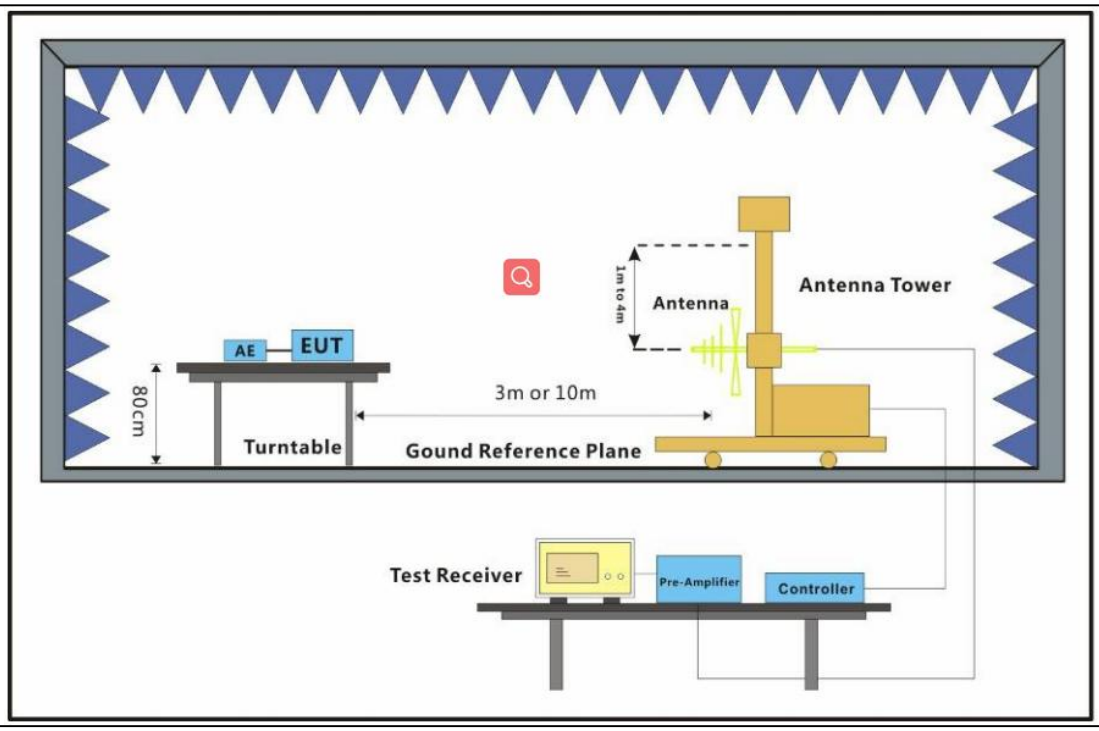6.2	Radiated Emissions (30MHz-1GHz)
	Test Requirement: EN IEC 61000-6-4:2019
	Test Method: CISPR 16-2-3
	Frequency Range: 30MHz to 1GHz
	Measurement Distance: 3m
	Limit: 30MHz-230MHz 50 dB(μV/m) quasi-peak 230MHz-1GHz 57 dB(μV/m) quasi-peak Detector: Peak for pre-scan (120kHz resolution bandwidth) 30M to 1000MHz
6.2.1	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
6.2.2	Test Setup Diagram
	
6.2.3	Measurement Data
	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities


Model: FlexPRESS; Polarization:Horizontal

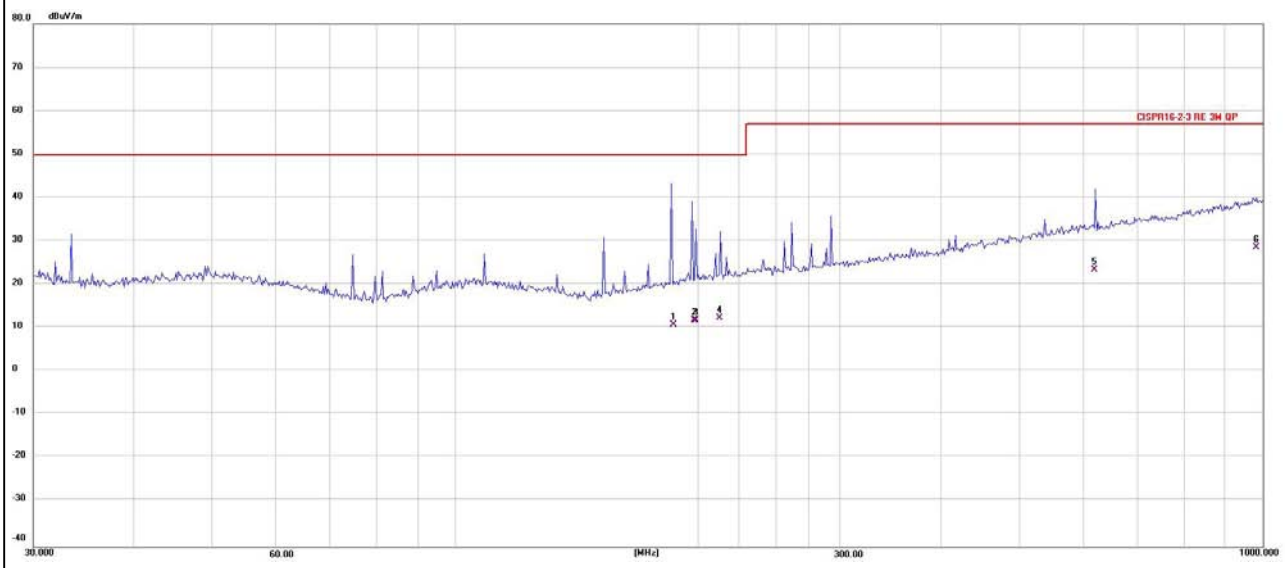

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	186.7962	-1.86	12.91	11.05	50.00	-38.95	QP
2	198.1132	-1.83	13.89	12.06	50.00	-37.94	QP
3	198.9277	-1.86	13.95	12.09	50.00	-37.91	QP
4	212.3158	-1.82	14.39	12.57	50.00	-37.43	QP
5	619.1362	-0.27	24.02	23.75	57.00	-33.25	QP
6	983.6590	-0.36	29.18	28.82	57.00	-28.18	QP

Notes:Level=Reading+Factor


Model: FlexPRESS; Polarization:Vertical

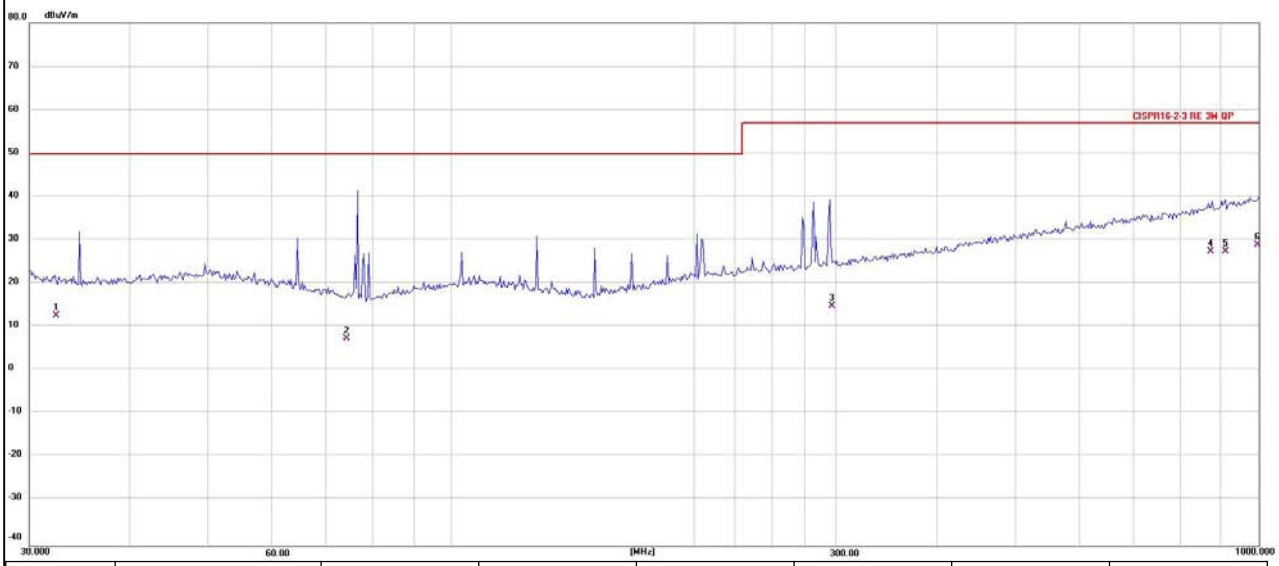

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	32.4906	-0.15	13.00	12.85	50.00	-37.15	QP
2	74.1894	-2.09	9.78	7.69	50.00	-42.31	QP
3	296.2366	2.30	12.87	15.17	57.00	-41.83	QP
4	874.0032	6.32	21.26	27.58	57.00	-29.42	QP
5	910.5608	5.92	21.67	27.59	57.00	-29.41	QP
6	999.6429	6.52	22.68	29.20	57.00	-27.80	QP


Notes:Level=Reading+Factor

7	**Immunity Test Results**	
7.1	Performance Criteria Description in EN IEC 61000-6-2:2019	
	Criterion A	The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
	Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
	Criterion C	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

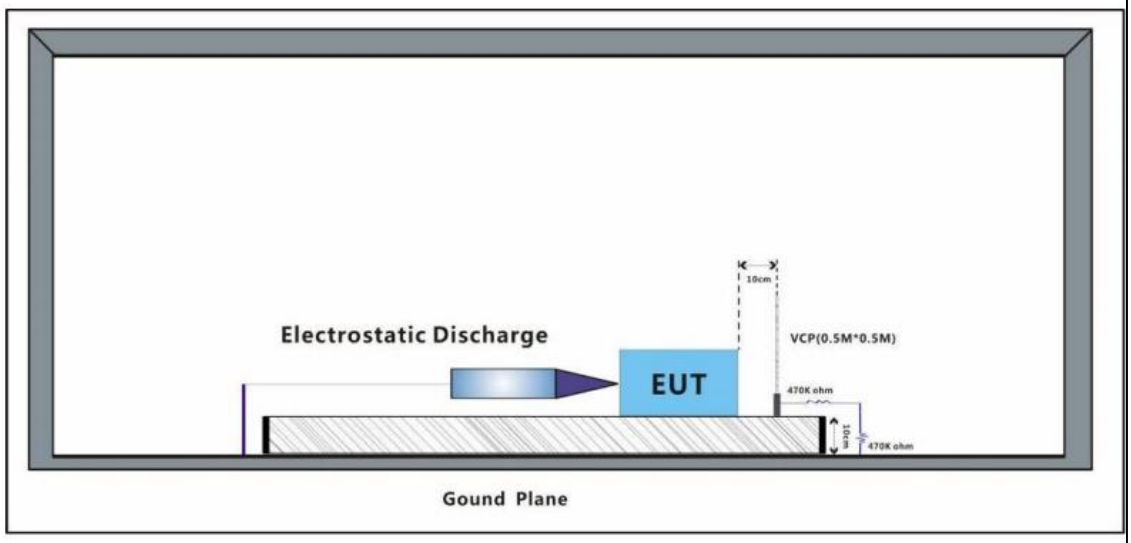7.2	Electrostatic Discharge
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-2:2009
	Performance Criterion: B
	Discharge Impedance: 330Ω/150pF
	Number of Discharge: Minimum 10 times at each test point
	Discharge Mode: Single Discharge
	Discharge Period: 1 second minimum
7.2.1	Test Setup Diagram
	
7.2.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
7.2.3	Test Results:
	Observations: Test Point:
	1. All insulated enclosure and seams.
	2. All accessible metal parts of the enclosure.
	3. All side


Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+,-	1,3	A
Contact discharge	2,4,8	+,-	2	A

Results:
A: No degradation in the performance of the EUT was observed.

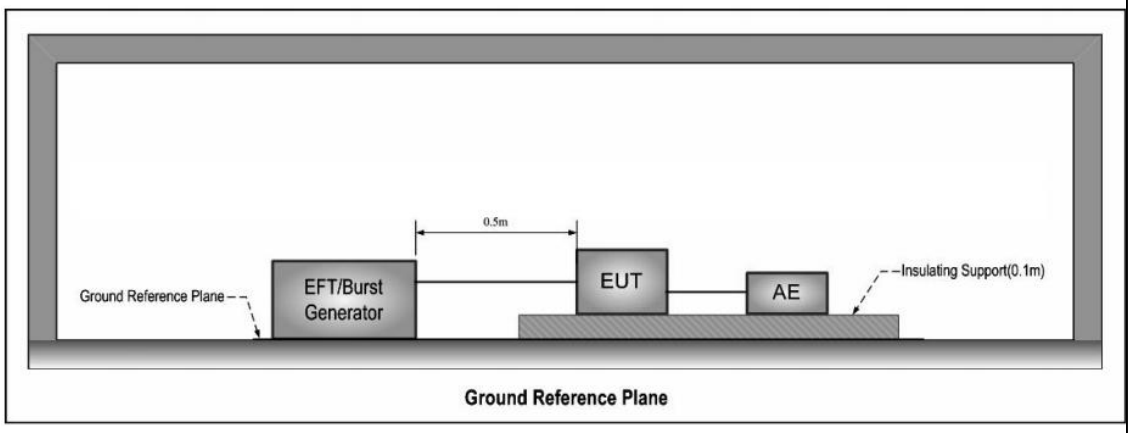7.3	Electrical Fast Transients/Burst at Power Port
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-4:2012
	Performance Criterion: B
	Repetition Frequency: 5kHz
	Burst Period: 300ms
	Test Duration: 2 minute per level & polarity
7.3.1	Test Setup Diagram
	
7.3.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual ..
7.3.3	Test Results:


Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	2	+	CDN	A
AC power port	2	-	CDN	A

Results:
A: No degradation in the performance of the EUT was observed.

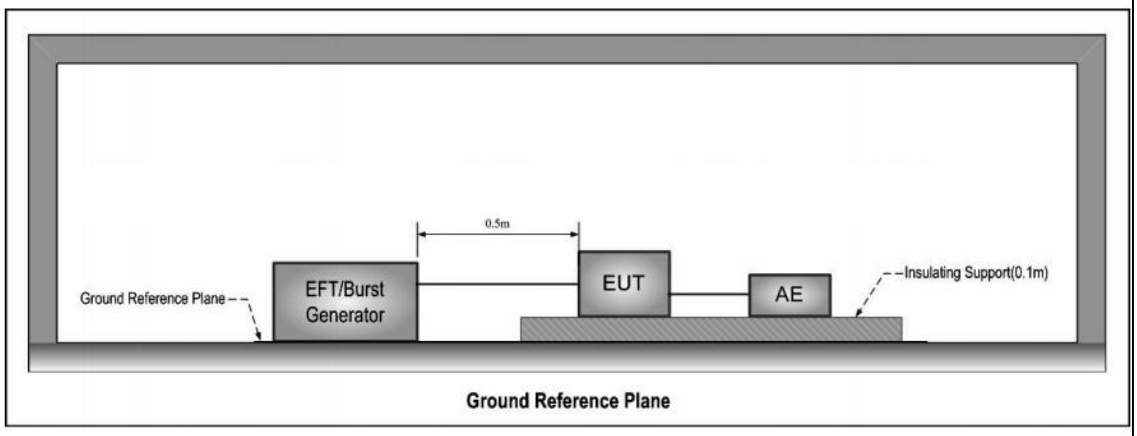7.4	Surge at Power Port
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-5:2014 +A1:2017
	Performance Criterion: B
	Interval: 60s between each surge
	Test level:±2 kV(AC power ports, line-to-earth); ±1 kV (AC power ports, line-to-line)
	No. of surges: 5 positive, 5 negative at 0°, 90°,180°, 270°
7.4.1	Test Setup Diagram
	
7.4.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
7.4.3	Test Results:


Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	0°	A
L-N	1	-	0°	A
L-N	1	+	90°	A
L-N	1	-	90°	A
L-N	1	+	180°	A
L-N	1	-	180°	A
L-N	1	+	270°	A
L-N	1	-	270°	A
L-PE	2	+	0°	A
L-PE	2	-	0°	A
L-PE	2	+	90°	A
L-PE	2	-	90°	A
L-PE	2	+	180°	A
L-PE	2	-	180°	A
L-PE	2	+	270°	A
L-PE	2	-	270°	A
N-PE	2	+	0°	A
N-PE	2	-	0°	A
N-PE	2	+	90°	A

N-PE	2	-	90°	A
N-PE	2	+	180°	A
N-PE	2	-	180°	A
N-PE	2	+	270°	A
N-PE	2	-	270°	A
Results: A: No degradation in the performance of the EUT was observed				

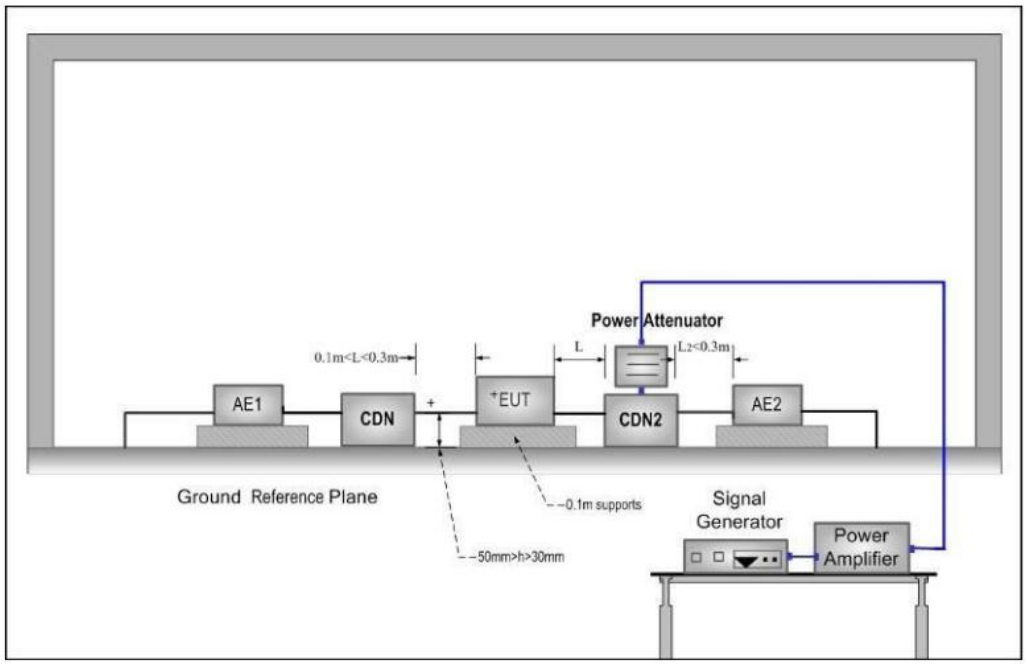7.5	Conducted Immunity at Power Port (150kHz-80MHz)
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-6:2014
	Performance Criterion: A
	Frequency Range: 0.15MHz to 80MHz
	Modulation: 80%, 1kHz Amplitude Modulation
	Step Size 1%
7.5.1	Test Setup Diagram
	
7.5.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
7.5.3	Test Results:


Cable port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	10	CDN	3s	A

Results:
A: No degradation in the performance of the EUT was observed.

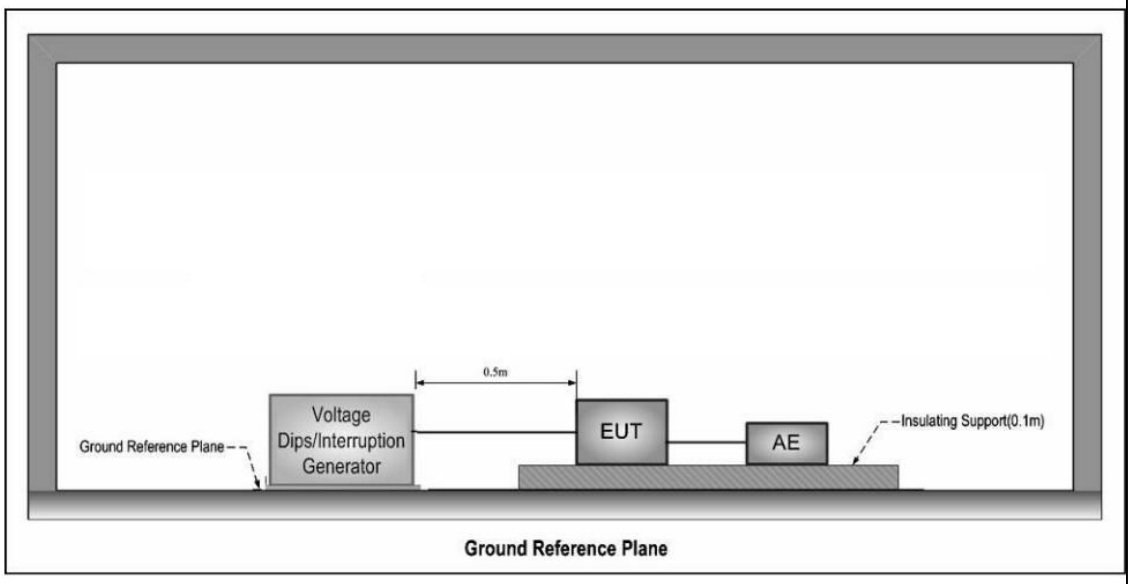7.6	Voltage Dips and Interruptions
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-11:2004 +A1:2017
	Performance Criterion: 0% of UT (Supply Voltage) for 250 Periods:C; 40% of UT for 10 Periods:C; 70% of UT for 25 Periods:C; 0% of UT for 1 Periods:B;
	No. of Dips / Interruptions: 3 per Level
	Time between dropout 10s
7.6.1	Test Setup Diagram
	
7.6.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
7.6.3	Test Results:

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0	1 Cycles	3	A
0	180°	1 Cycles	3	A
40	0	10 Cycles	3	A
40	180°	10 Cycles	3	A
70	0	25 Cycles	3	A
70	180°	25 Cycles	3	A
0	0	250 Cycles	3	B
0	180°	250 Cycles	3	B


Results:
A: No degradation in the performance of the EUT was observed.
B: During the test, EUT stop working, after the test, EUT can restart automatic.

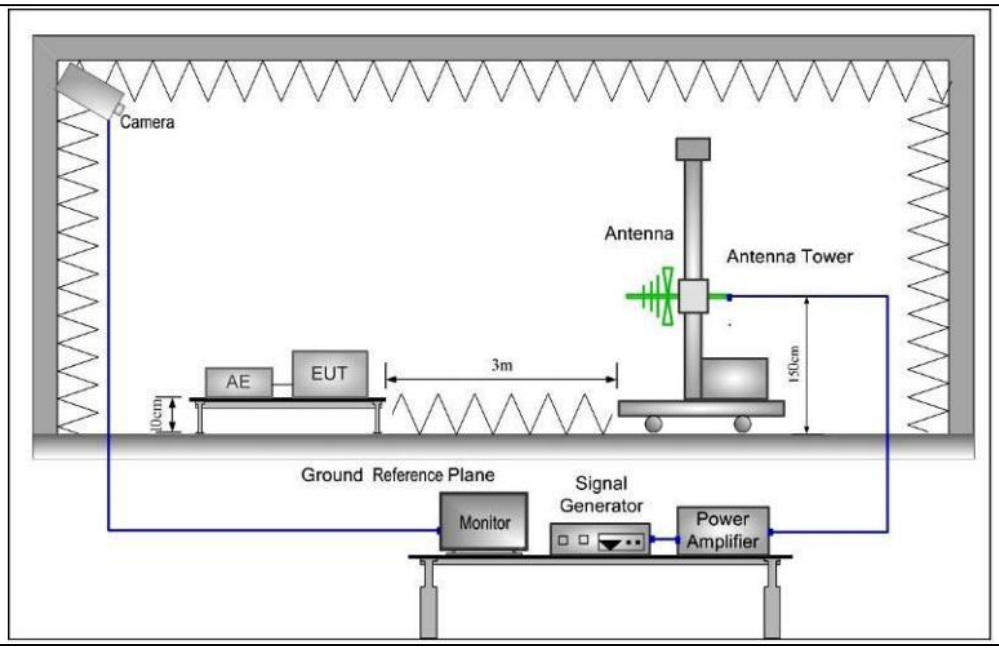7.7	Radiated Immunity (80MHz-3.6GHz)
	Test Requirement: EN IEC 61000-6-2:2019
	Test Method: EN 61000-4-3:2006 +A1:2008+A2:2010
	Performance Criterion: A
	Frequency Range: 80MHz to 3.6GHz
	Antenna Polarisation: Vertical and Horizontal
	Modulation: 1kHz,80% Amp. Mod,1% increment
7.7.1	Test Setup Diagram
	
7.7.2	E.U.T. Operation
	Operating Environment:
	Temperature: 22℃ Humidity: 51 % RH Atmospheric Pressure: 1020 mbar
	Test mode:Normal Working_keep EUT running continual .
7.7.3	Test Results:


Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	10	Front	3s	A
80MHz-1GHz	10	Back	3s	A
80MHz-1GHz	10	Left	3s	A
80MHz-1GHz	10	Right	3s	A
1GHz-3.6GHz	3	Front	3s	A
1GHz-3.6GHz	3	Back	3s	A
1GHz-3.6GHz	3	Left	3s	A
1GHz-3.6GHz	3	Right	3s	A

Results:
A: No degradation in the performance of the EUT was observed.


8	**Photographs**
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

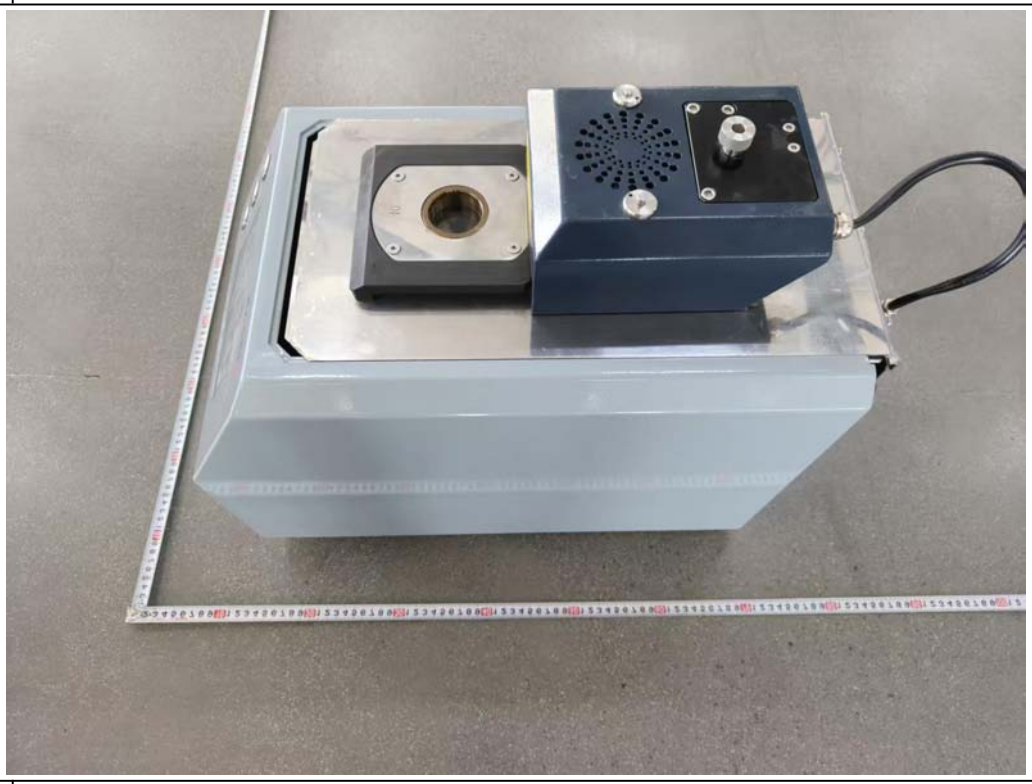

8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

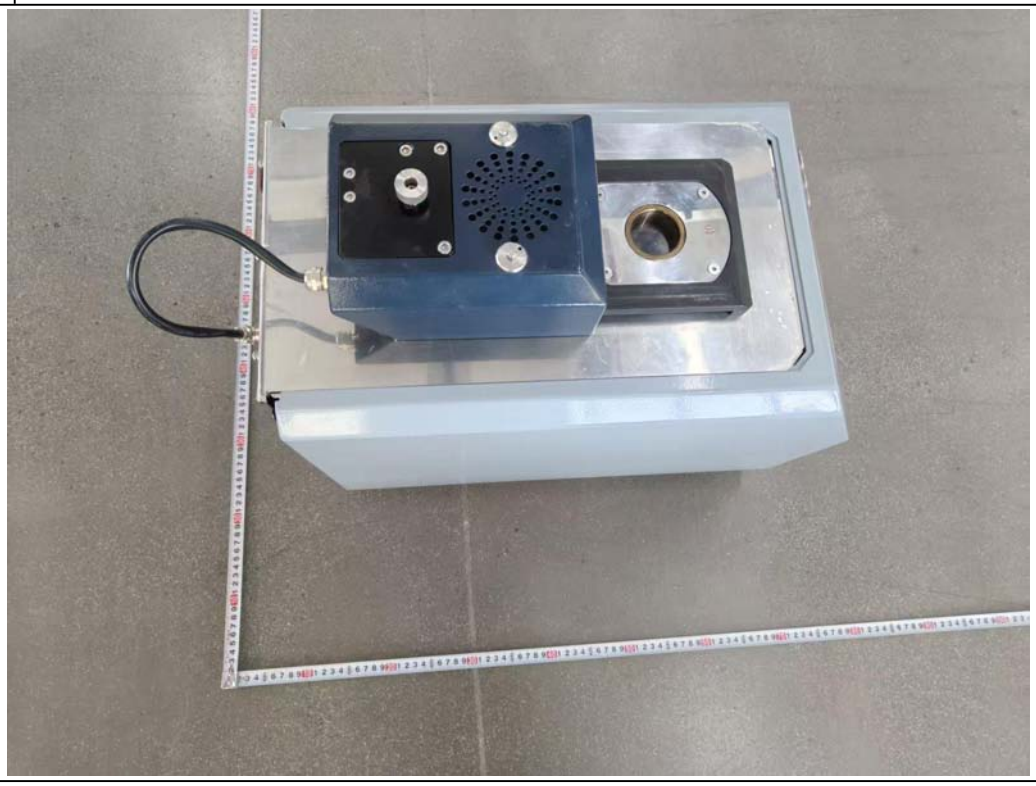


8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

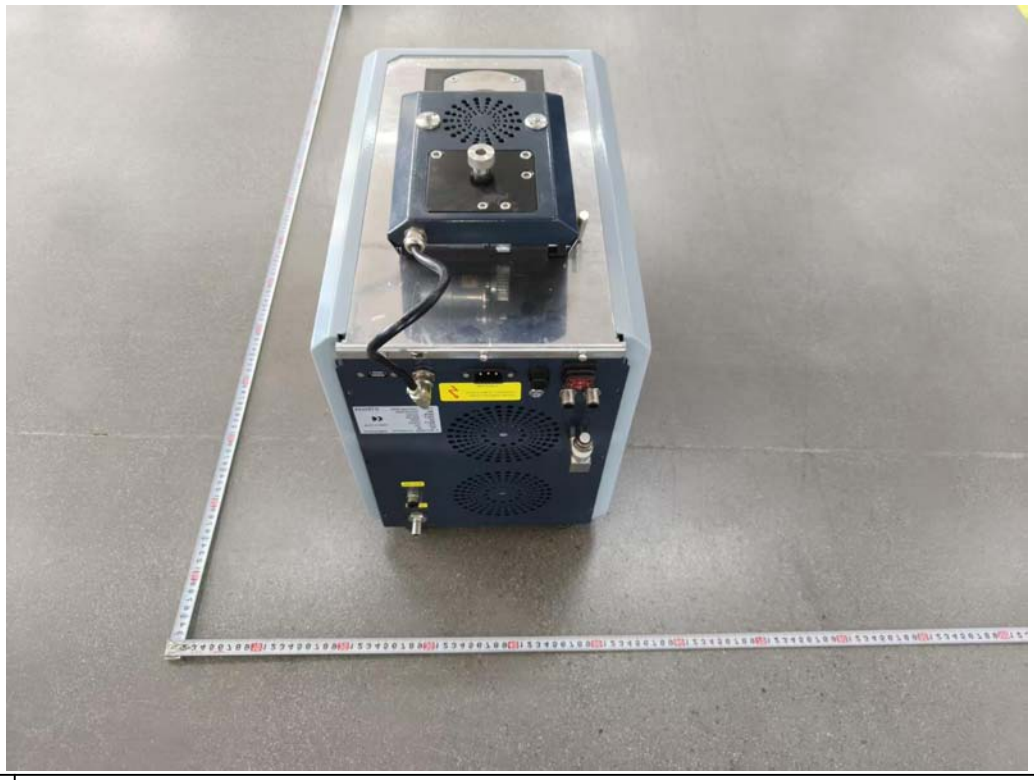

8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)




8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

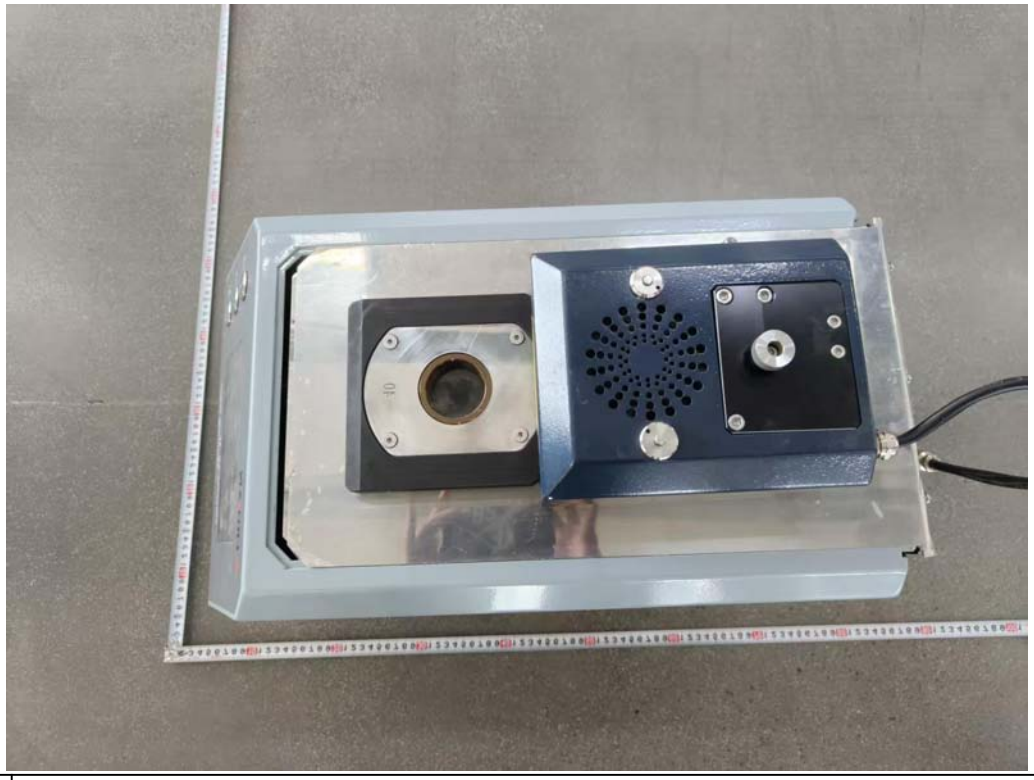


8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)




8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

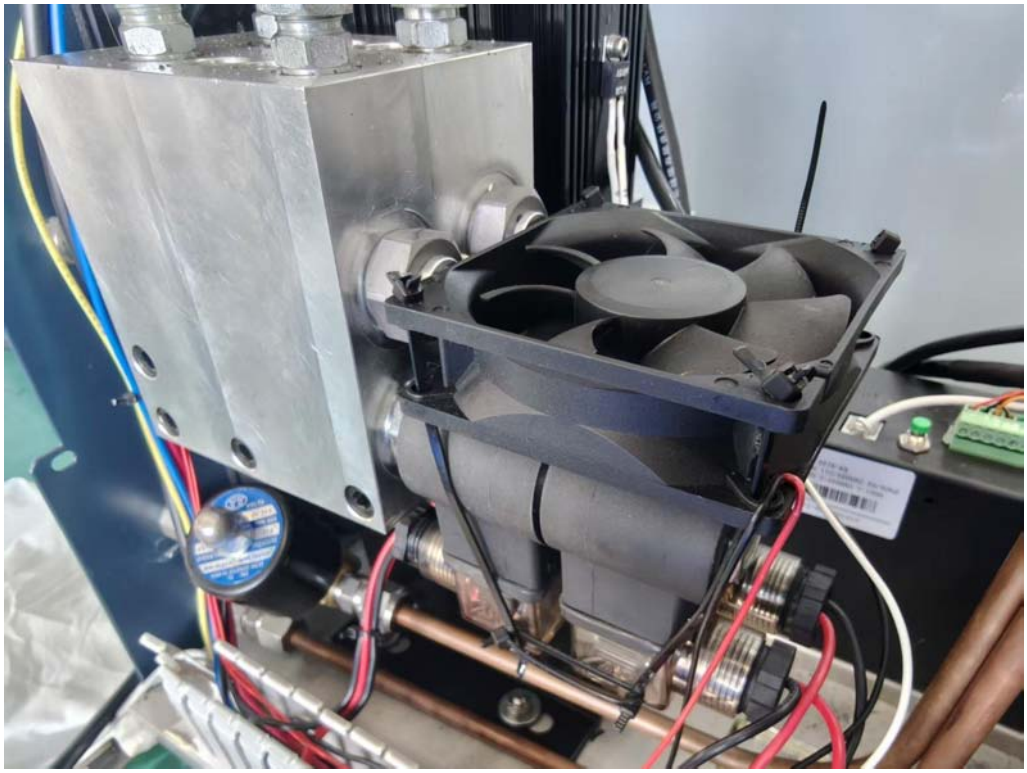

8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

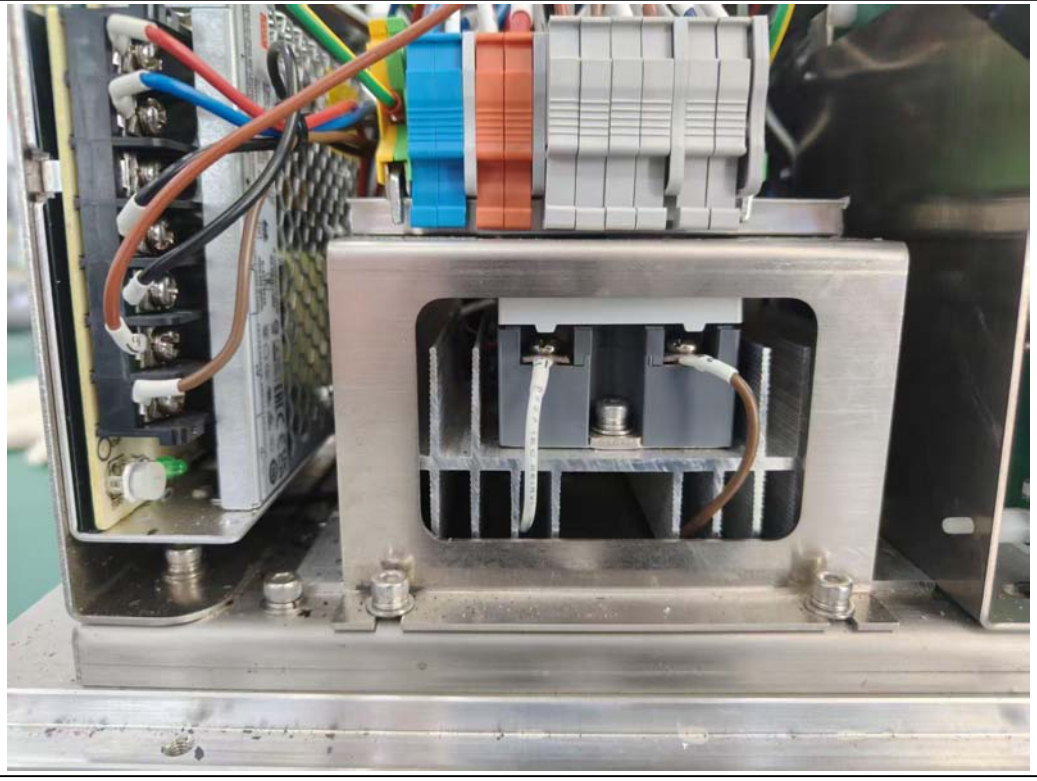

8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

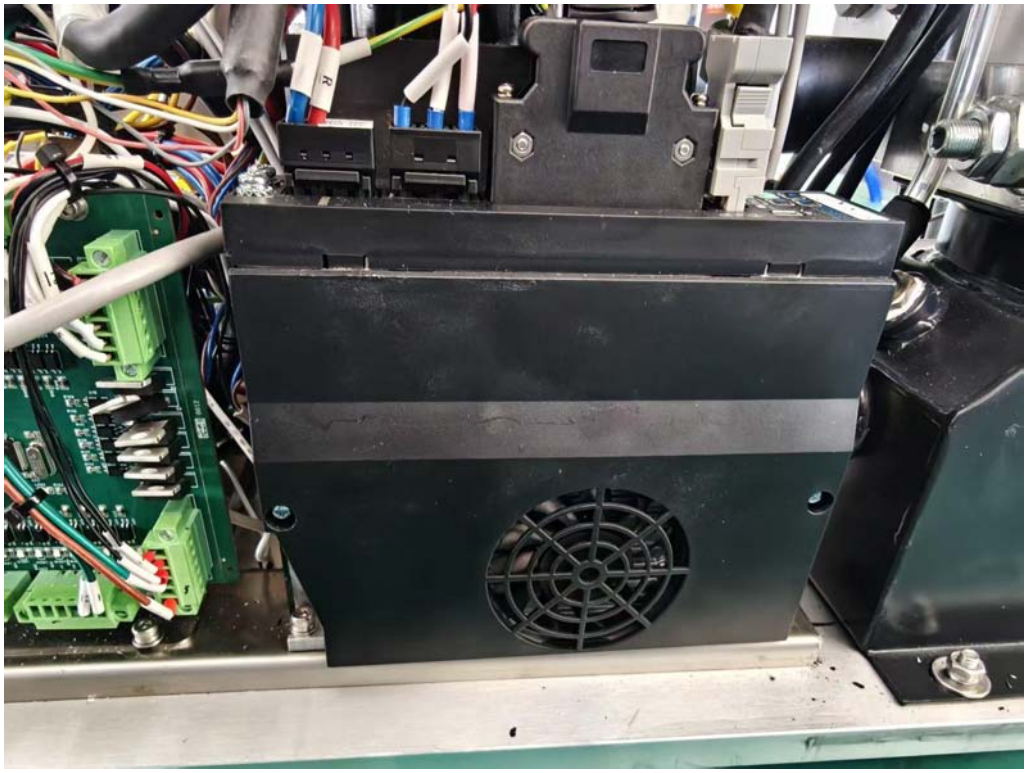

8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)

