


### Light Source Test Report

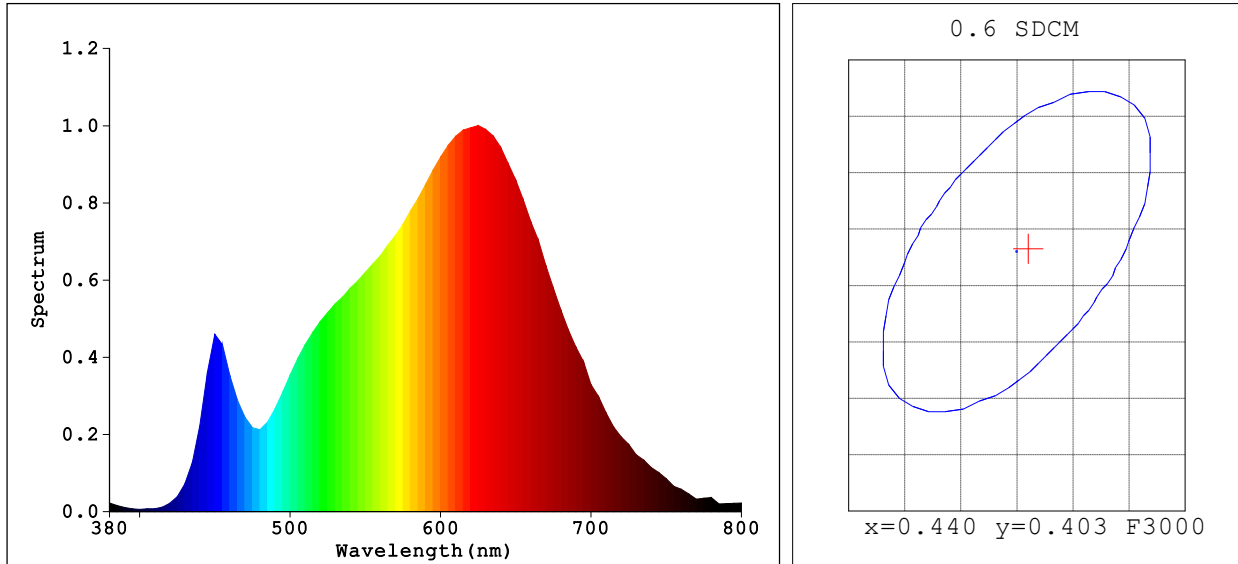

#### Color Parameters:

Chromaticity Coordinate:  $x=0.4410$   $y=0.4033$   $u'=0.2536$   $v'=0.5217$   
Tc=2926K Dominant WL:Ld=583.5nm Purity=53.4% Centroid WL:602.0nm  
Ratio:R=26.5% G=71.1% B=2.4% Peak WL:Lp=625.0nm HWL:160.4nm  
Render Index:Ra=93.4  
R1 =94 R2 =97 R3 =98 R4 =94 R5 =93 R6 =96 R7 =93  
R8 =83 R9 =62 R10=91 R11=95 R12=83 R13=95 R14=98 R15=90

#### Photo Parameters:

Flux: 587.11 lm Fe: 2.0644 W Efficacy:71.03 lm/W

#### Electrical Parameters:

Luminaire: U=219.9V I=0.07374A P=8.266W PF=0.5097 0.3

#### Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=666(G=3,D=56)  
REF=49863(R=4) %=-0.119% PMT: 28.4 centigrade [150.0]

Product Type:3000K-黑  
Number:2  
Temperature:25.3 deg  
Test Operator:2020-06-04 10:09:47  
Software:V2.00.100

Manufacturer:Pharos LED  
Test Department:Pharos LED  
Humidity:65.0%  
Test Date:2020-06-04 10:09:47  
Instrument:PMS-50SSA\_V1 (SN:912032)