



LED LINKABLE LINER LIGHT



Modular



Anti-glare



Multiple
installation methods




FEATURE 1

MODULAR SEAMLESS CONNECTION


MARKET POSITIONING : SUPERMARKET



1 Horizontal Connection

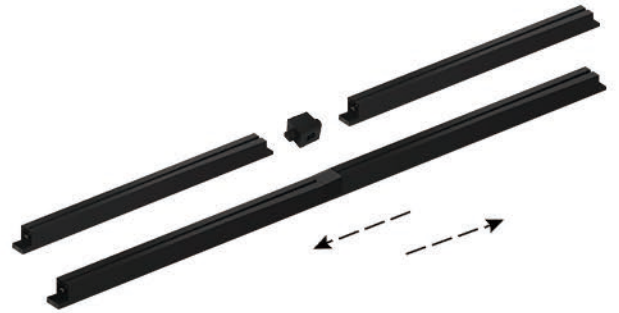

2 Vertical Connection

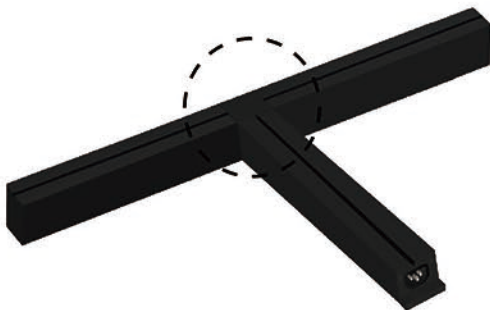

3 T Connection



4 L Connection

PATENT



Universal Connector



T-Joint



L-Joint




Connection Buckle

FEATURE 2

OPTIC LANEL, HIGH ANTI GLARE

MARKET POSITIONING : OFFICE

Anti-glare PC cover design, soft light and not irritating.
Unique construction design, take care of your eyes.

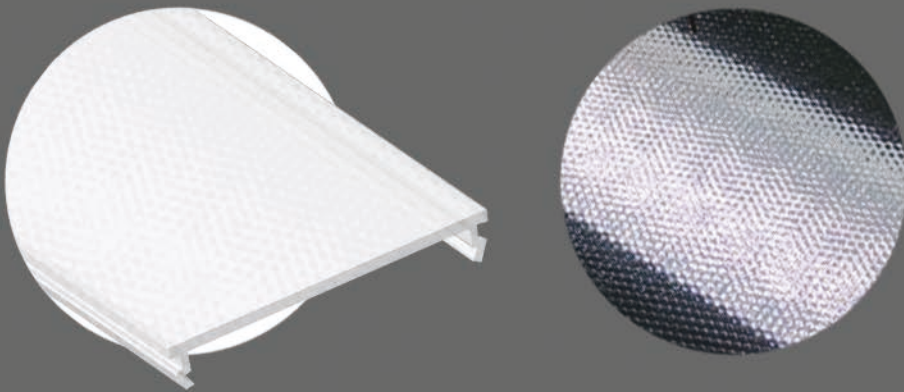

Optic panel: High anti glare-90LM/W



 Look straight not dazzling


FEATURE 3

VARIOUS INSTALLATION METHODS


MARKET POSITIONING : STORES

1.Surface mounted

Light tight, sseamless connection




2.Recessed

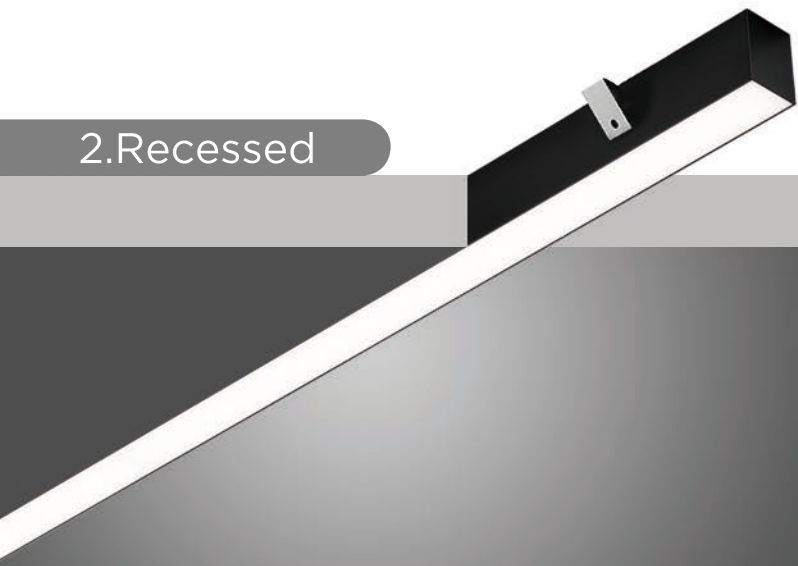

Stainless steel buckle

3.Suspended

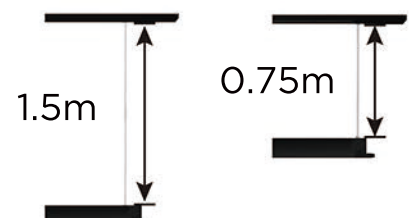

Card slot
Removable wire position

DATASHEET

GENERAL

| | |
|----------------|--|
| INSTALLATION | SURFACE MOUNTED / SUSPENDED / RECESSED |
| PRODUCT COLOUR | BLACK / GREY / WHITE |
| TYPE | LED |
| IP RATING | IP20 |
| IDENTIFICATION | CCC, CE, LVD, EMC, ROSH2.0 |

LED

| | |
|--------------------|-------------------------------|
| LIGHT COLOUR | 2700K / 3000K / 4000K / 5500K |
| LED LIFETIME | 50000H |
| COLOR RENDER INDEX | 90RA |
| DIMMABLE | DALI DIMMING |

OPTICAL


| | |
|-----|------|
| UGR | 22 |
| PF | >0.9 |

TECHNICAL DETAILS

| | |
|-------------------|-----------------|
| CONTROL | ON/OFF |
| VOLTAGE | 220-240V 50HZ |
| CONVERTER CURRENT | 0.2A |
| LUMINOUS FLUX | 3250LM / 5400LM |
| LED INSET POWER | 36W / 60W |
| SAFETY CLASS | PC V2 |

PHYSICAL

| | |
|--------|----------|
| LENGTH | 95 MM |
| WIDTH | 52 MM |
| HEIGHT | 60.7 MM |
| WEIGHT | 1.885 KG |

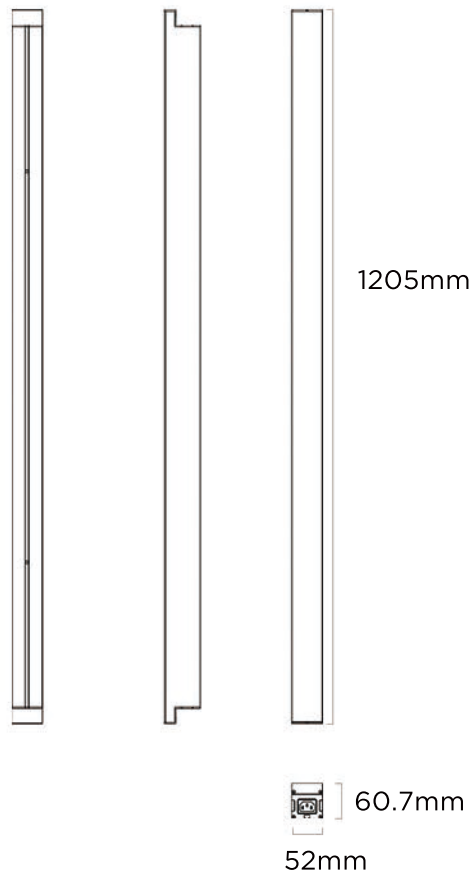

SMD LED package



Ingress Protection



Inside use



CRI



RoHS Identification



Thermal Manager



Dimmable



Voltage



PROJECTS / A SHOPPING MALLE



PROJECTS / A SUPERMARKET



PROJECTS / A CLOTHING STORE



PROJECTS / A MINIMALIST WORKPLACE