

# TRACK LIGHT

GE-07007-24W/30W-89172-L

# GREEN EARTH



## APPLICATION

This LED track light is made of high purity aluminum, cutting by CNC machine, which better heat dissipation and maintain longer. Widely used in shopping mall, retail space, or any commercial space.

## FEATURES

- \* Available Sizes :  $\phi 89 \times 172$ mm.
- \* Available Power : 15W, 24W, 30W.
- \* Different CRI :  $\geq Ra80$ ,  $\geq Ra90$ ,  $\geq Ra94$ .
- \* Light efficacy is more than 85lm/w at  $\geq Ra80$ .
- \* CNC aluminum, elegant finish.
- \* Can be 355° rotated.

## Certification

EMC/LVD/RoHS

## Warranty

Default is 3 years . 5 Years warranty is optional.

## CODE COMPLIANCE

ARRA Compliant. Manufactured and tested to UL standards No. 1598/8750.



Version No.V1.2

## SPECIFICATION

Model Number	Input Volt	Power	Luminous Flux	Beam Angle	CCT	Color Rendering	IP	Lifetime
GE-07007	AC220-240V	15W	$\geq 1900$ LM	40°	4000K	$\geq Ra.80$	IP20	50,000 hrs
		24W/30W	$\geq 1920$ LM					

1 Nominal Source Lumens at 4000K 2 Nominal Delivered Lumens at 4000K 3 Contact Factory for Additional Options

4 See Mounting Page for Details on Components and Finishes 5 Contact Factory for Special Finishes


Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specification subject to change without notice.

## ORDERING INFORMATION


GE-07007-15W/24W/30W-89172-LXXYYK80/90CC

Brand	Series	NO.	Power	Size	Voltage	Dim Type	Sensor	CCT	CRI	Finish
GE	07	007	24W	89172	L	XX	YY	27K	80	CC
GreenEarth	07:Track Light	007	15Watt 24Watt 30Watt	$\phi 89$ mm H:172mm	H: High Voltage Direct Drive AC230V L:AC220-240V M:DC24V A:AC100-120V B:AC100-240V C:AC100-277V D:AC85-265V E:AC100-305V F:AC347-480V AD:AC100-120V With Dimmable BD:AC100-120V With Dimmable CD:AC100-120V With Dimmable DD:AC85-265V With Dimmable ED:AC100-305V With Dimmable FD:AC347-480V With Dimmable	TR=Triac DX=DMX DA=DALI LV=0-10V PW=PWM N=None	V=Voice control M=Microwave Radar I=Infrared O=Other N=None	27K=2700K 30K=3000K 35K=3500K 40K=4000K 50K=5000K 57K=5700K 65K=6500K	70=CRI70 80=CRI80 90=CRI90 93=CRI93 95=CRI95 97=CRI97 98=CRI98	WH=White / BL=Black / GD=Gold SL=Silver / MW=Matte White PT=Platinum / BZ=Bronze MB=Matte Black / AO=Anodic Oxidation NI=Nickle / Nিকেলে Plated CR=Chrome/Polished Chrome MS=Matte Silver / OB=Oil Rubbed Bronze WP=White Powder Coated BP=Black Powder Coated SC=SATIN CHROME SP=Silver Powder Coated SN=SATIN NICKEL SS=Stainless Steel / PA=Polished Aluminum PBN=POLISHED BRUSHED NICKLE PBC=POLISHED BRUSHED CHROME BA=BRUSHED Aluminum BN=BRUSHED NICKEL BC=BRUSHED CHROME CC=Custom Color


## MECHANICAL DRAWING

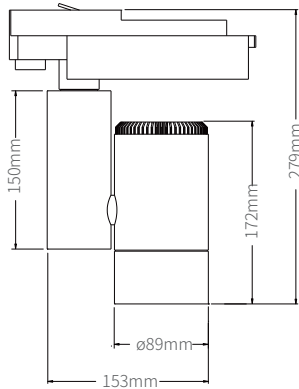

GE-07007-15W-89172-L

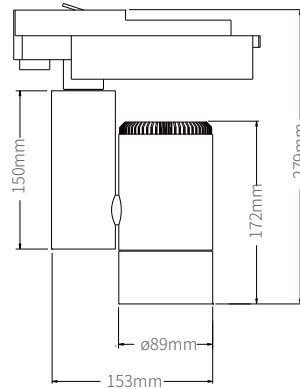

GE-07007-24W-89172-L

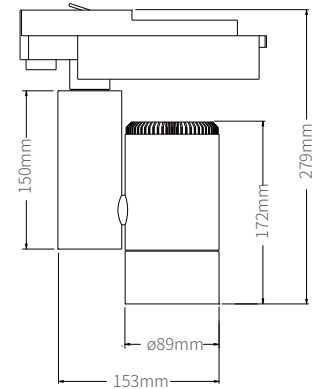

GE-07007-30W-89172-L

## FINISHING COLOR

Finishing & Color

■ Painting black +Silver ring

□ Painting white +Silver ring

■ Anodized gold +Silver ring

■ Anodized grey +Silver ring



## PACKAGE

### PACKAGE DIMENSION

Item	Size of Carton (L*W*H)(mm/in)	Net Weight/Pcs(kg/lbs)	Gross Weight/Carton(kg/lbs)
GE-07007	666*280*678 / 26.22*11.02*26.69	1.25 / 2.76	19.27 / 42.48

### PACKAGE INFORMATION

Item	Qty/Carton	Container(Pcs)		
		20'GP	40'GP	40'HQ
GE-07007	10	2430	4920	5720

1. Installed by professionals, please do not miss or replace the parts of the lamp during installation.
2. Do not get too close to the heating element, in case of dangerous.
3. Do not use chemicals to clean the lamp. Chemicals such as trichloroethylene, acetone etc. may damage the colloidal surface and cause fading.
4. Do not change the structure and parts of the lamp. If any broken, please let professionals to handle of it.