



Bobbin Cell

Primary Lithium Battery

ER26500 3.6V 9Ah

3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Energy Type



For low drain/long term operating applications requesting superior voltage response in -55°C ~+ 85°C environments

Cell size references

UM2-R14-C

Alternative models	LS26500/LST26500/LS26500C/TL4920/TL5920/SB-C02
--------------------	--

Electrical characteristics

(Typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity	9Ah
(At 2mA +20°C, 2.0V cut off. The capacity restored varies according to current, temperature, cut off)	

Open circuit voltage (At 20°C)	3.66V
--------------------------------	-------

Nominal voltage (At 2mA +20°C)	3.6 V
--------------------------------	-------

Max. continuous current (at +20°C)	200mA
------------------------------------	-------

Typical Max. Pulse current (at +20°C)	400mA
---------------------------------------	-------

Pulse capability: Typically up to 200mA (400mA/0.1second pulses drained every 2min at 20°C from cells with 50μA base current, yielding voltage readings above 3.0V. The readings may vary according to pulse characteristics, temperature and cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions.)

Storage (recommended)	+30°C Max
-----------------------	-----------

Operating temperature range

(High and low temperature will lower the capacity and load voltage.)	-55°C ~+85°C
--	--------------


Physical characteristics

Diameter(Max)	26.2mm
---------------	--------

Height(Max)	50.0mm
-------------	--------

Typical weight	53g
----------------	-----

Available terminal suffix	radial tabs, radial pins, axial leads, flying leads
---------------------------	---

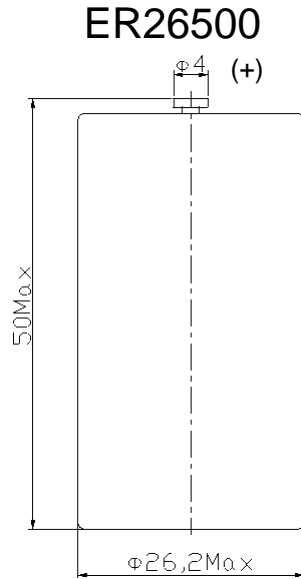

Key features

- >High and stable load voltage
- >Superior drain capacity
- >Low self-discharge rate
(less than 1% after 1 year of storage at 20°C)
- >Hermetic glass -to-metal sealing
- >Laser welding
- >Non-flammable electrolyte

Main applications

- >Radiocommunication and other similar applications
- >Alarms and security systems
- >Beacons and emergency location transmitters
- >GPS equipment
- >Metering systems
- >Led lighting applications
- >Others

- >Cells should be stored in a clean & dry (less than 30% RH) area
- >Temp. should not exceed +30°C

Warning

- >Do not use if cell casing is mangled
- >Do not use different model of cell in series
- >Soldering the tag should be finished in few seconds
- >Do not try to recharge

