

LED DOWN LIGHT

GE-05001 | 05002 | 05007 | 05007-1

GREEN EARTH



APPLICATION

LED downlight light source is energy-saving and environment-friendly, no UV light, widely used in indoor lighting of shopping malls, offices, factories, hospitals, etc.

FEATURES

- * CNC aluminum, elegant finish.
- * Reflector situated in deep position for anti-glare.
- * 05002 and 07007-1 can be rotatable 25°.
- * Dimming is optional.
- * IP20.

Certification


EMC/LVD/RoHS

Warranty

Default is 3 years . 5 Years warranty is optional.

CODE COMPLIANCE

ARRA Compliant. Manufactured and tested to UL standards No. 1598/8750.



Version NO.V1.1

SPECIFICATION

Model Number	Input Volt	Power	Luminous Flux	Beam Angle	CCT	Color Rendering	IP	Lifetime
GE-05001	AC220-240V	5/6/8/10W	350/375/600/700LM	24° 36° 45°	4000K	≥Ra.80	IP20	50,000 hrs
GE-05002								
GE-05007								
GE-05007-1								

1 Nominal Source Lumens at 4000K 2 Nominal Delivered Lumens at 4000K 3 Contact Factory for Additional Options

4 See Mounting Page for Details on Components and Finishes 5 Contact Factory for Special Finishes

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specification subject to change without notice.


ORDERING INFORMATION

GE-05001-8W-80-LXXYY27K80CC


Brand	Series	NO.	Power	Size	Voltage	Dim Type	Sensor	CCT	CRI	Finish
GE	05	001	8W	80	L	XX	YY	27K	80	CC
GreenEarth	05:Down Light	001	5Watt	ø80mm	H: High Voltage Direct Drive AC230V L:AC220-240V M:DC24V A:AC100-120V B:AC100-240V C:AC100-277V D:AC85-265V E:AC100-305V F:AC347-480V AD:AC100-120V With Dimmable BD:AC100-120V With Dimmable CD:AC100-120V With Dimmable DD:AC85-265V With Dimmable ED:AC100-305V With Dimmable FD:AC347-480V With Dimmable	TR=Triac DX=DMX DA=DALI LV=0-10V PW=PWM N=None	V=Voice control M=Microwave Radar I=Infrared O=Other N=None	27K=2700K 30K=3000K 35K=3500K 40K=4000K 50K=5000K 57K=5700K 65K=6500K	70=CR170 80=CR180 90=CR190 93=CR193 95=CR195 97=CR197 98=CR198	WH=White / BL=Black / GD=Gold SL=Silver / MW=Matte White PT=Platinum / BZ=Bronze MB=Matte Black / AO=Anodic Oxidation NI=Nickle / Nickele Plated CR=Chrome/Polished Chrome MS=Matte Silver / OB=Oil Rubbed Bronze WP=White Powder Coated BP=Black Powder Coated SC=SATIN CHROME SP=Silver Powder Coated SN=SATIN NICKEL SS=Stainless Steel / PA=Polished Aluminum PBN=POLISHED BRUSHED NICKLE PBC=POLISHED BRUSHED CHROME BA=BRUSHED Aluminum BN=BRUSHED NICKEL BC=BRUSHED CHROME CC=Custom Color




GE-05001-8W-80-L




GE-05002-8W-80-L

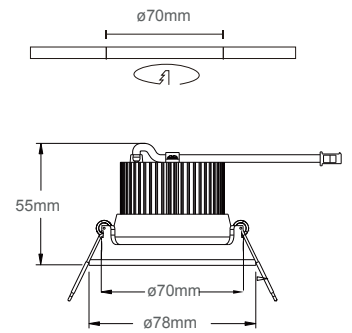

GE-05007-8W-80-L



GE-05007-1-8W-80-L

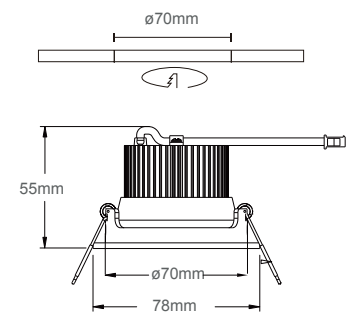

PACKAGE

PACKAGE DIMENSION

Item	Size of Carton (L*W*H)(mm/in)	Net Weight/Pcs(kg/lbs)	Gross Weight/Carton(kg/lbs)
GE-05001	530*220*575 / 20.86*8.66*22.63	0.25 / 0.55	16.85 / 37.15
GE-05002	530*220*575 / 20.86*8.66*22.63	0.24 / 0.53	16.35 / 36.05
GE-05007	530*220*575 / 20.86*8.66*22.63	0.21 / 0.46	15.35 / 33.84
GE-05007-1	530*220*575 / 20.86*8.66*22.63	0.22 / 0.48	14.85 / 32.74

1. Installed by professionals, please do not miss or replace the parts of the lamp during installation.
2. Do not get too close to the heating element, in case of dangerous.
3. Do not use chemicals to clean the lamp. Chemicals such as trichloroethylene, acetone etc. may damage the colloidal surface and cause fading.
4. Do not change the structure and parts of the lamp. If any broken, please let professionals to handle of it.