



TECH-LONG





2018 Large Bottle Water Weight Filling Machine

Filling method Parameter	Normal filling	Dosage filling			
	Mechanical valve	Weight dosage	Liquid level detect	Flow meter dosage	
				Electromagnetic flow meter	Mass flow meter
Cost	1	2	3	4	5
Filling precision	Liquid level deviation $\pm 3-5\text{mm}$	Weight deviation $\pm 3-5\text{g}$	Liquid level deviation $\pm 3-5\text{mm}$	Capacity deviation $\pm 0.1\%-0.4\%$	Capacity deviation $\pm 0.1\%-0.3\%$
Bottle neck	Contact	Non-contact	Non-contact	Non-contact	Non-contact
Hygiene		Excellent	Excellent	Excellent	Excellent
How to choose	For device operation/maintenance low requirement for staff	Need higher weight requirement Compatible cost and hygiene requirement	Compatible cost and hygiene requirement	Need higher hygiene demand	

- No backflow, more energy saving
- Normal pressure filling, more stable
- Weight dosage, more weight precision
- No lifting in filling process, more stable

Weight method is the premium solution for large bottle water filling.

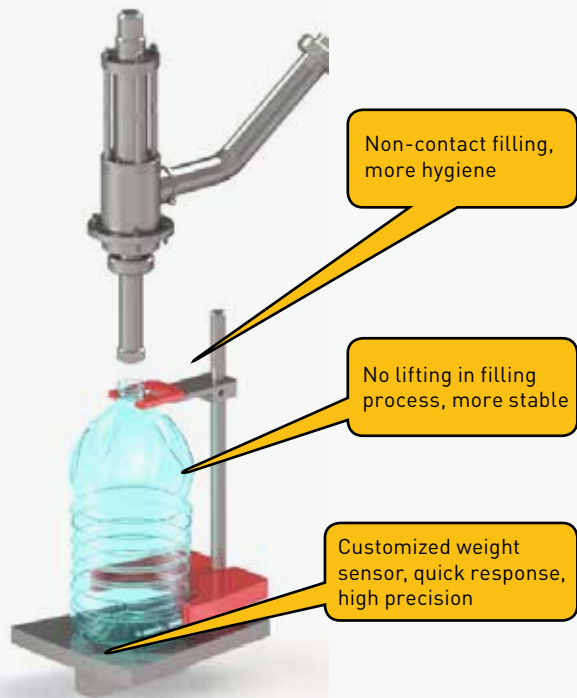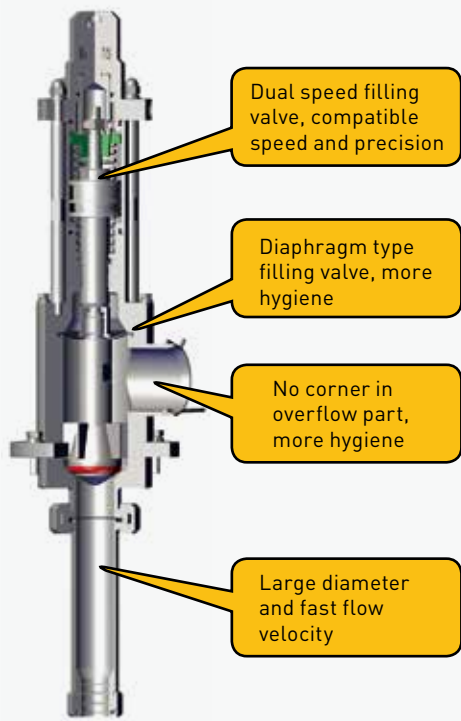

More intelligent



Data collect and analysis function



Self-optimizing function of filling weight



Recipe function, use correspondent recipe No for product change



Remote maintenance function

Wider applicability

Machine type	Blowing + filling + capping, rinsing + filling + capping, Others
Capacity	3-20L
Output	1200-18000BPH(5L)
Efficiency	99%



TECH-LONG PACKAGING MACHINERY CO., LTD.

No. 23 Yunpu 1 Road, Huangpu District, Guangzhou, 510530, China Tel: (0086 20) 62956800 E-mail: market@tech-long.com

©2018 All rights reserved. Reproduction in whole or in part is forbidden without the express permission of the publisher.

Tech-Long keeps working on further development of our products. Thus, for the latest information, please contact our sales representatives. Although information in this brochure has been updated many times for accuracy, we recommend it is used for reference purpose only. Please take the practical machines, nameplate, and operation specification as standard.