

SHKL

Bathroom Lighted mirror



FOSHAN SHKL SANITARY WARE CO.,LTD

Showroom Address: B106/B108, F1 China Ceramics City, Chancheng District, Foshan City, Guangdong Province

Tel: +86-757-82583932

E-mail: info@shklbathroom.com

Website: www.shklbathroom.com

info@shklbathroom.com www.shklbathroom.com

CONTENTS

Company Introduction	01
Certificate	03
Technology & Function	05
Package	11
New Series	13
Frameless Series	27
Acrylic Series	57
Framed Series	69


COMPANY INTRODUCTION




SHKL

Foshan SHKL Sanitary Ware Co., Ltd. was established in 2004. It is a new-type enterprise based on the bathroom vanity industry and developing into related kitchen and bathroom fields. So far, it has become a comprehensive group company integrating design, research and development, production and marketing. At present, SHKL has three big manufacturing bases which are located in Foshan city and Qingyuan city. SHKL offers exceptional LED lighting creations, representing a fusion between innovative solutions and aesthetic vision. We are proud to present you with a wide range of residential and commercial LED lighted mirrors. Our commitment to form, technology and precision defines our brand.

WORKSHOP

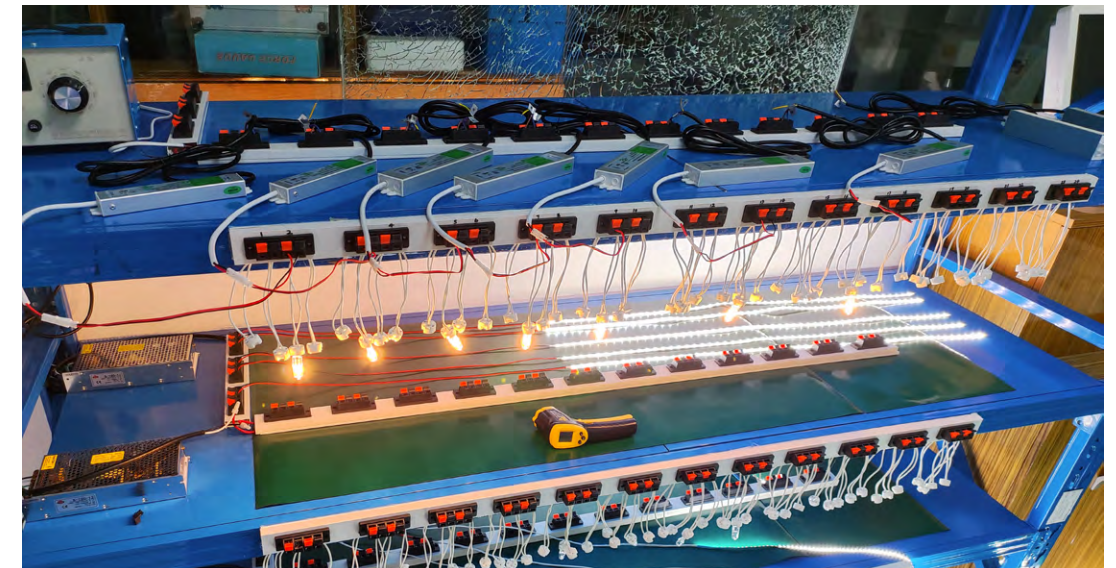

LED driver, touch switch, LED belt test machine

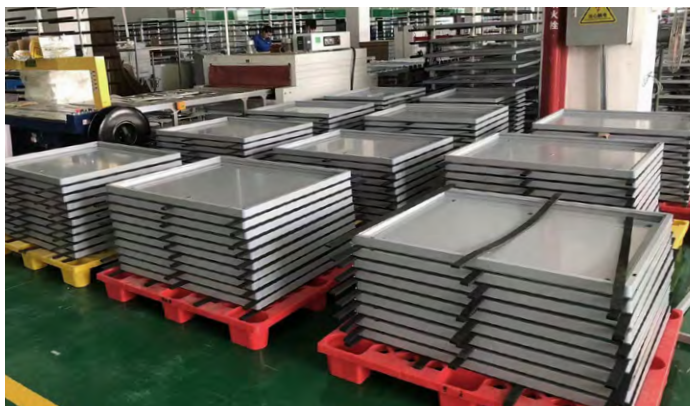

Winding Tester



Light strip flexibility test



Drop test machine



Power test, grounding safety test, dielectric strength test

03



Reference No.	WTF19F074732L
Applicant	Qingjian Jansen sanitary ware co.,Ltd
Address	No.12, heifeng road, heyun town, qingjian district, qingjian city
Manufacturer	The same as above
Address	The same as above
Product	LED mirror light
Model No.	Model test refer to test report
Technical data	Model test refer to test report

Test Standards:

EN 60581-1:2015-A1:2018
 EN 60581-2:1989
 EN 62470-2:2015
 EN 62480-2:2015

The above product has been tested by us with the listed standards and found in compliance with the European Directive LVD 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this LVD Directive.

Luminaires
Part 1: General requirements and tests
Part 2-1: Particular requirements for fixed general purpose luminaires
Photobiological safety of lamps and lamp systems
Assessment of Lighting Equipment Related to Human Exposure to Electromagnetic Fields

The referred test report(s) show that the product complies with standard(s) recognized as giving presumption of compliance with the essential requirements in the above mentioned EU Directive. Our relevant Certificate has to be submitted.

After preparation of the necessary technical documentation as well as the EU Declaration of Conformity, the CE marking as shown below can be affixed on the equipment under the sole responsibility of the manufacturer.

The statement is based on a single evaluation of the sample of above mentioned product(s). It is not an assessment of the whole production.

Walter Services (Foshan) Co., Ltd.
 Hotline: 400-840-2288 E-mail: info@waltek.com.cn
<http://www.waltek.com>



TECHNOLOGY AND FUNCTION

Touch Sensor Switch Single Button Touch Sensor

1.On/off mode

Innovative and attractive touch sensor for light
Short touch (<1s) : on/off

3.On/off + CCT adjusting mode

Adjust the light to the appropriate color temperature,
comfortable and warmly

Short touch (<1s) : on/off

Short touch (<1s) : Adjust the color Temperature

Double colors: 2800k & 6000k

Three colors: 2800K & 4000K & 6000K

2.On/off + Dimming mode

Adjust the light to the appropriate brightness,
comfortable and energy-saving

Short touch (<1s) : on/off

Long touch (>1s) : Dimming from 15% to 100% and cycle

4.On/off + CCT adjusting mode + Dimming mode

Adjust the light to the appropriate brightness and color
temperature, humanized and convenient

Short touch (<1s) : on/off

Short touch (<1s) : Adjust the color Temperature

(2800k & 6000k; 2800K & 4000K & 6000K)

Long touch (>1s) : Dimming from 15% to 100% and cycle

Two Button Touch Sensor

Innovative and attractive touch sensor for light and defogger

1.One button turn the light on and off

2.One button turn the defogger on and off

Motion Sensor Switch

Smart and convenient motion sensor for light

1.On/off mode: (on the side of mirror)

Move hand over the sensor, the light will be turned on/off

2.On/off mode: (on the front of mirror)

Move hand over the sensor, the light will be turned on/off

LED Digital Clock

Bright digital clock face, 12/24 hour mode optional, with battery backup.

1.On/off + clock mode:

Short touch (<1s) : Light on/off

Long touch: Adjust the hour and minute

2.On/off + defogger + clock mode:


Short touch (<1s) : on/off (left side button)

Short touch (<1s): Defogger on/off (right side button)

Long touch: Adjust the hour and minute

Magnifier

3X, 5X or 10X magnifying for easier make-up.



Muti-function Display with Touch Sensor (Bluetooth speaker function)

Date/Time/Temperature/Touch sensor

Six button: Light on/off+Defogger+Volume adjusting+Date/Time adjusting+Temperature
adjusting+Bluetooth connection(Connect with your mobile phone)



Bluetooth Speaker


Searching the mirror's Bluetooth No. and
connecting it with your phone, then you can play
the music in your phone.

Defogger System

Electrical defogger heated pad system
help you to clear the steam on the mirror
in 15 seconds.



THE LED STRIP TECHNOLOGY

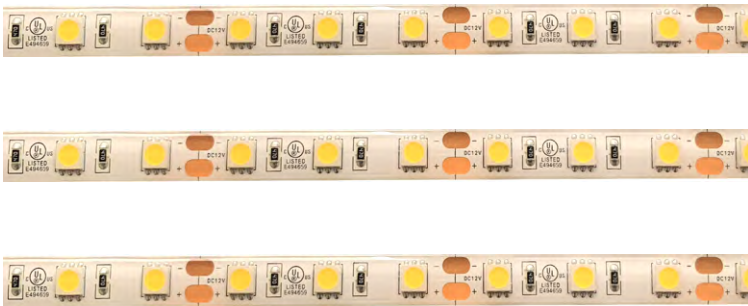

Our Standard LED Strip

Led strip high quality 2835 & 5050 chips, UL & CE listed
 CRI > 80 / CRI > 90
 CCT:2700K to 6000K
 Life time 50000 hours

More Option


Adopt different certifications and suitable for different markets.

SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>90	920±100Lm	3LED/Cut	IP65	8mmPCB	M灯珠	挤出空
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>90	920±100Lm	3LED/Cut	IP65	8mmPCB	M灯珠	PU胶3
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	M灯珠	挤出空
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	M灯珠	空心硅
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	M灯珠	PU胶3
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	C灯珠	挤出空
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	C灯珠	空心硅
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	C灯珠	PU胶3
SMD2835	60LED/M	DC12V	9±0.5W/M	Ra>80	920±100Lm	3LED/Cut	IP65	8mmPCB	C灯珠	PU胶70

THE DRIVE & MIRROR TECHNOLOGY

LED Driver

Adopt famous brand high quality LED driver with different certifications

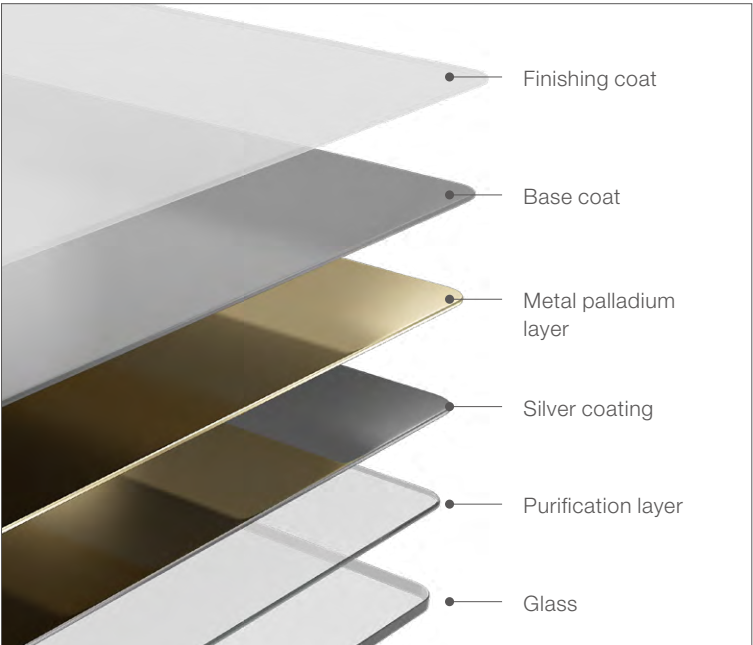

Mirror Technology

Environmentally friendly, without heavy metal primer with good protective effect. Prevent oxidation and rust, improve the mirror definition.

MOUNTING WAY

TECHNOLOGY




Type A

Economy design and easy hanging, can be used on the product with backboard or without backboard



Type B

Elegant design and easy hanging, can be used on the product with backboard or without backboard

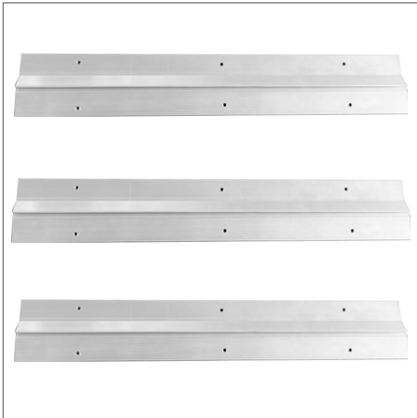


Type C

Aluminum strip design easy installation and level adjustment, can be used on the product with backboard or without backboard

STRUCTURE OF BACK SIDE

TECHNOLOGY

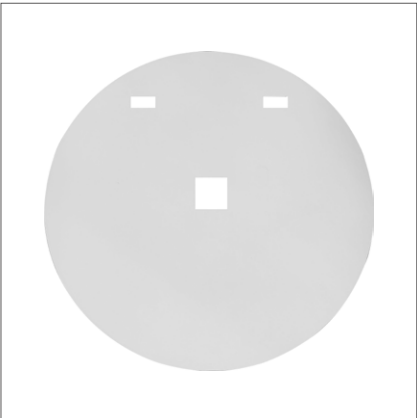

Type A

PVC backboard, luxury and safe design



Type B

Waterproof box, beautiful and safe design



Type C

Economy type design with competitive price

ABOUT THE
PACKING


OPTION A



Step 1



Step 2

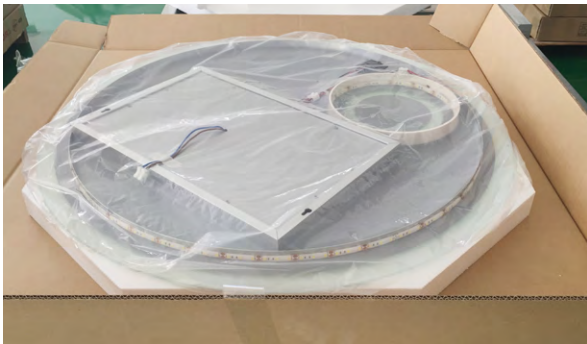

Step 3



Step 4



Step 5



Step 6

OPTION B



Step 1




Step 2



Step 3



Step 4

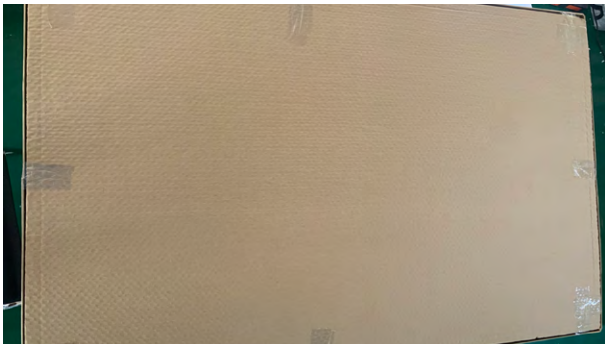

Step 5




Step 6




NEW SERIES





CE IP44

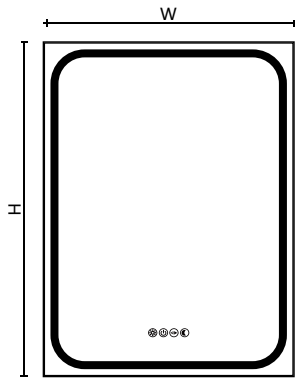

KL910881A
600*800*35mm
(24"*32"*1.38")

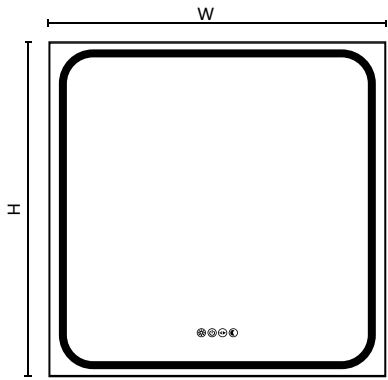

KL910881B
800*800*35mm
(32"*32"*1.38")

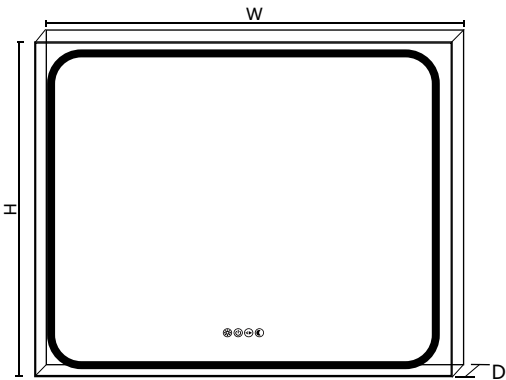

KL910881C
1000*800*35mm
(40"*32"*1.38")

KL910881D
1200*800*35mm
(48"*32"*1.38")



NEW SERIES




CE IP44

Description

Item No: KL910881

Features:

- Four Touch switch: Three light temperature switch / Night light On / Off / Light On/Off / Dimming
- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Super slim Anodized aluminum frame

Size:


Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Magnifier · Bluetooth speaker
- LED digital clock



Switch light intensity:

- Level 1
- Level 2
- Level 3
- Level 4



on/off:

- By short - press



Switch light temperature:

- Cold
- Intermediate
- Warm




Night light on/off:



- By short - press





NEW SERIES

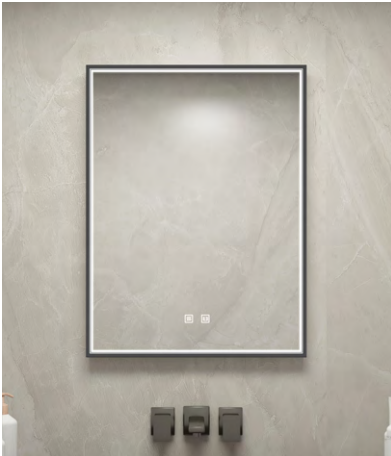


KL910865A
600*800*45mm
(24"*32"*1.77")

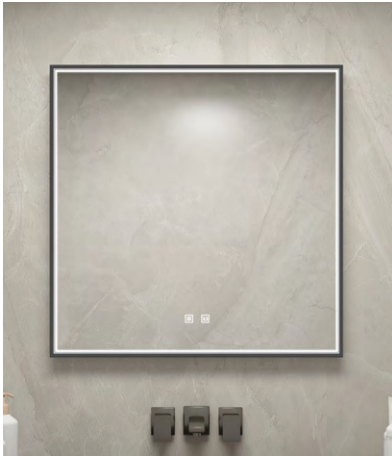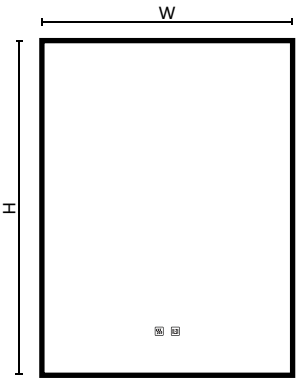

KL910865B
800*800*45mm
(32"*32"*1.77")

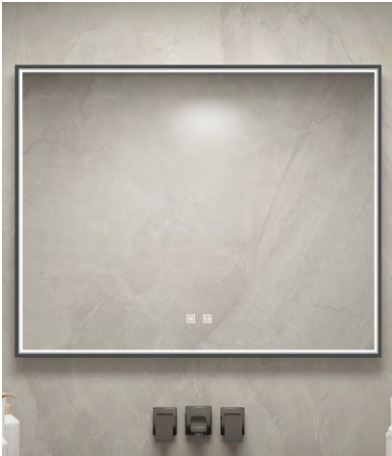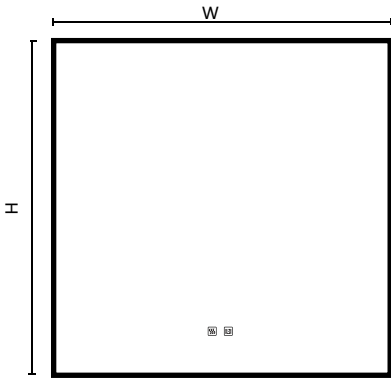

KL910865C
1000*800*45mm
(40"*32"*1.77")

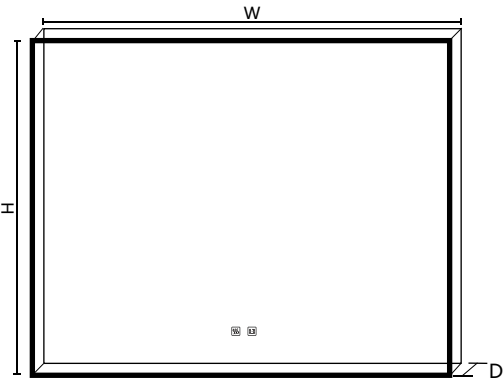

Description

Item No: KL910865

Features:

- COB light belt : has a high density of light flux, less dazzling light and soft light, and emits a uniform distribution of light
- Light emits from the frame, not from mirror
- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- COB light belt, 336 chips per meter
- CRI:80+
- Three Color temperature available: White, warm white and yellow

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- Motion sensor switch/touch sensor
- LED digital clock




KL910896D

1200*800*39mm
(48"*32"*1.54")




NEW SERIES

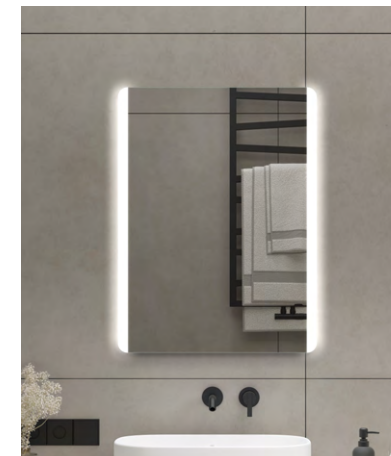



KL910896A

600*800*39mm
(24"*32"*1.54")

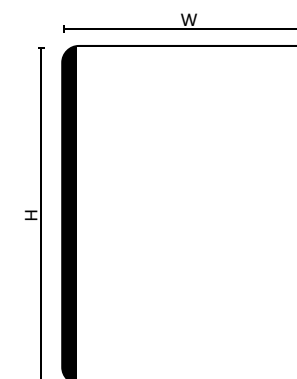


KL910896B

700*900*39mm
(28"*36"*1.54")

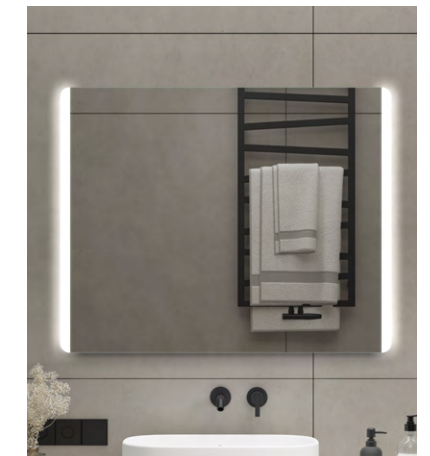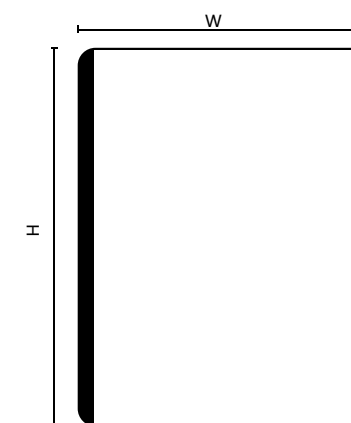

KL910896C

1000*800*39mm
(40"*32"*1.54")

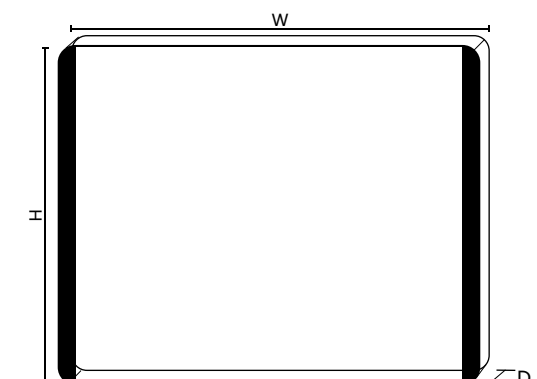

Description

Item No: KL910896

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Sensor switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock




KL910897*80

φ800*34mm
(φ32"*1.34")




NEW SERIES

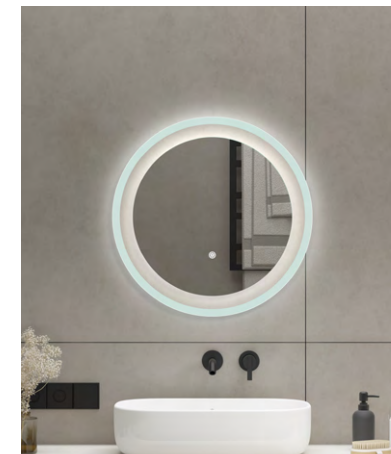


KL910897*60

φ600*34mm
(φ24"*1.34")




KL910897*80

φ800*34mm
(φ32"*1.34")

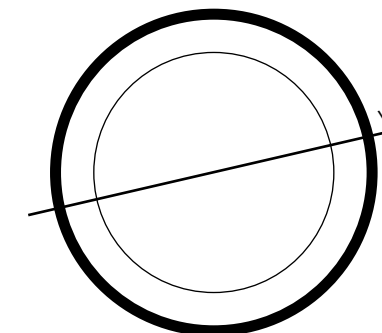

KL910897A

800*800*34mm
(32"*32"*1.34")

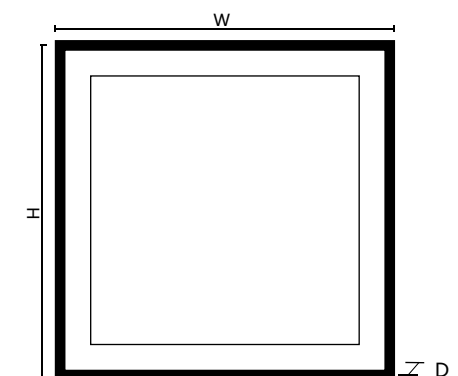

Description

Item No: KL910897

Features:

- 5mm copper free silver mirror corrosion resistant + White glass
- Hard wired or 3-pin plug optional
- Three color temperature available
- Touch switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock




NEW SERIES


CE IP44




KL910898*75B
 φ750mm
 (φ30")




KL910898*75C
 φ750mm
 (φ30")



KL910898*75D
 φ750mm
 (φ30")



KL910898*75A
φ750mm
(φ30")

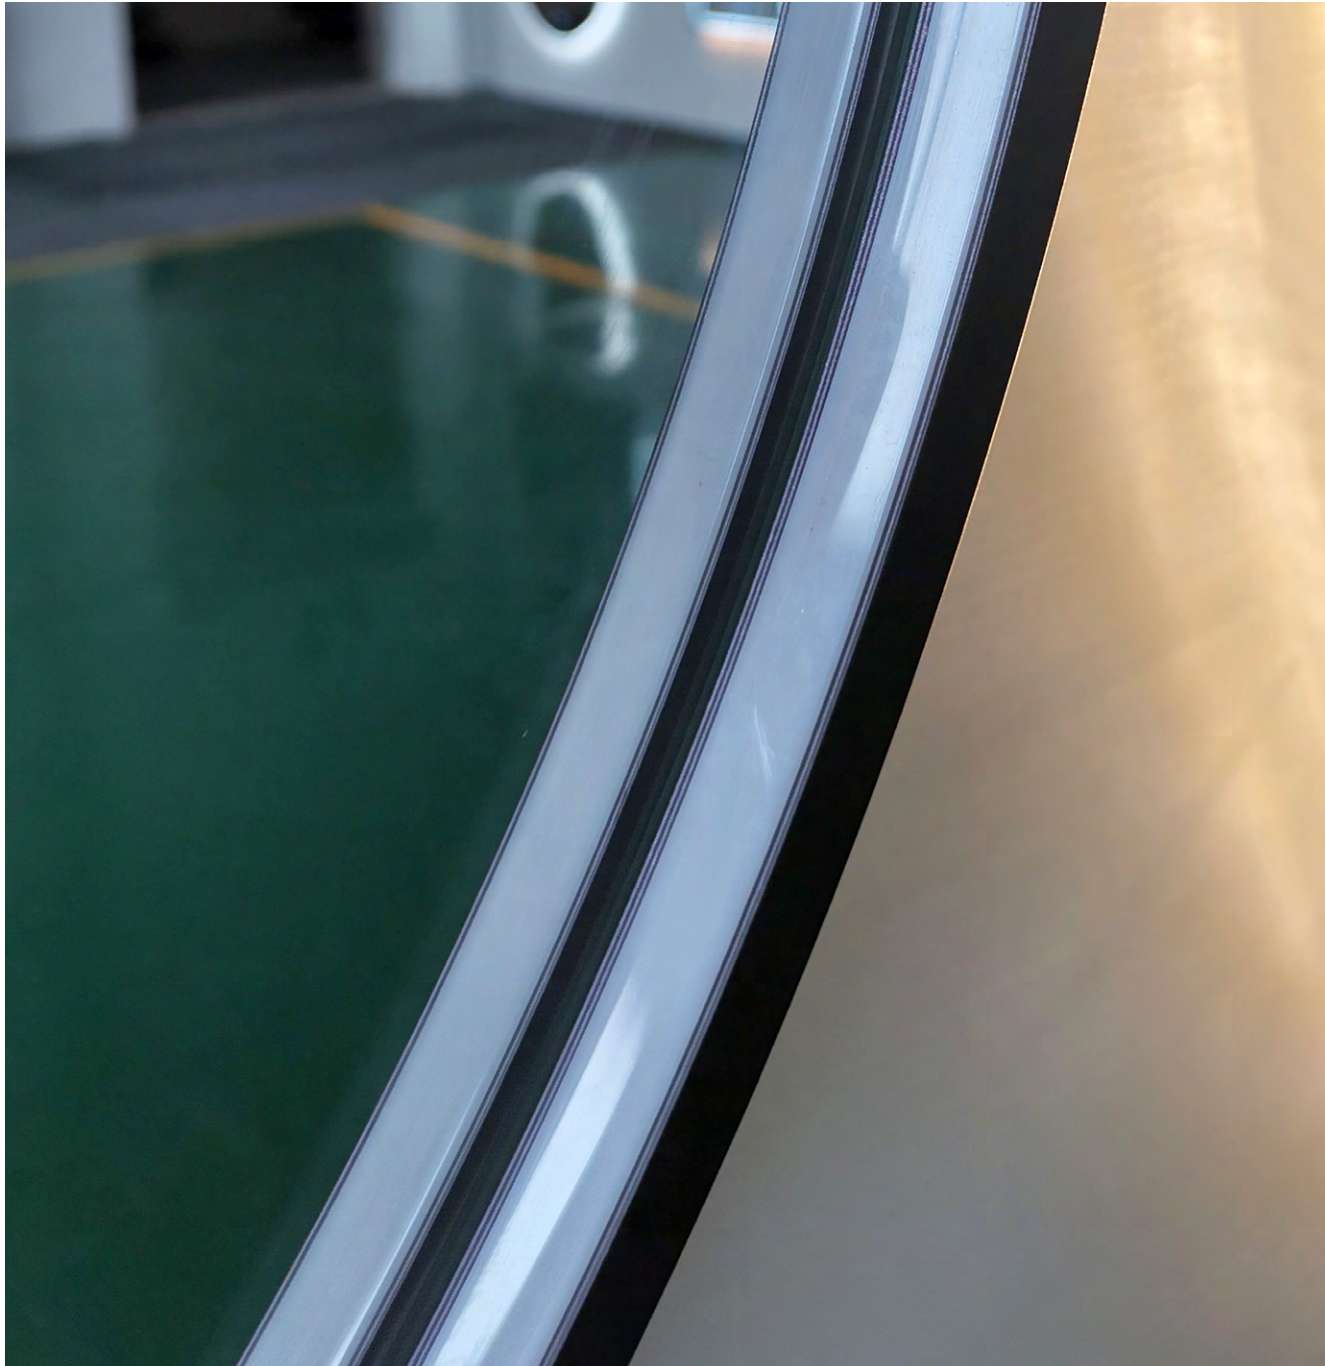

NEW SERIES



Description

Item No: KL910898

Features:

- Customized picture can be painted on the mirror
- COB light belt : has a high density of light flux, less dazzling light and soft light, and emits a uniform distribution of light
- Light emits from the frame, not from mirror
- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- COB light belt, 336 chips per meter
- CRI:80+
- Three Color temperature available: White, warm white and yellow

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock



on/off:

- By short - press



Switch light intensity:


- Level 1
- Level 2
- Level 3
- Level 4



Switch light temperature:

- Cold
- Intermediate
- Warm

FRAMELESS SERIES

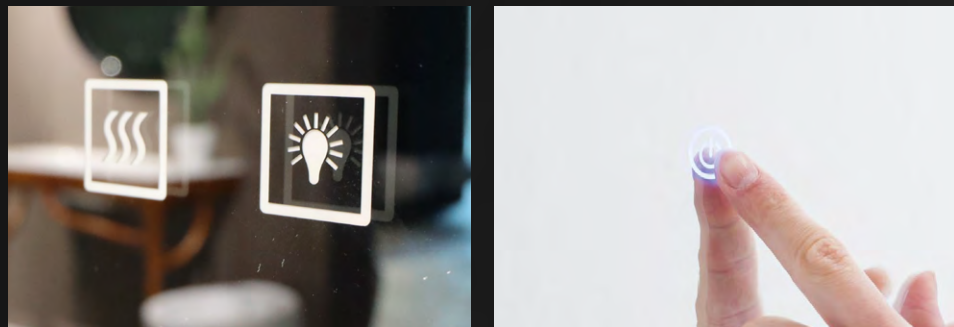






FRAMELESS SERIES





CE IP44

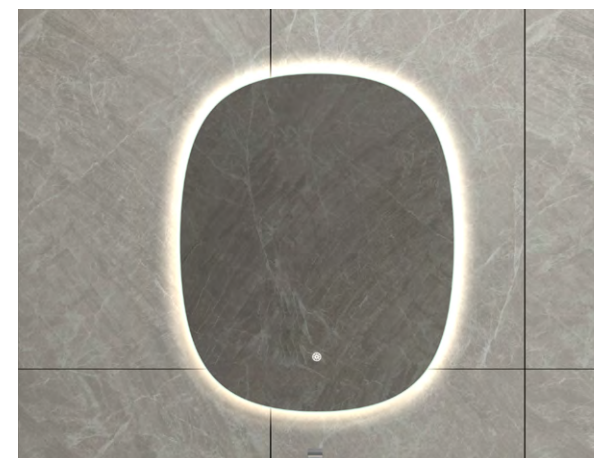

KL910899A
 650*800*30mm
 (26"*32"*1.18")

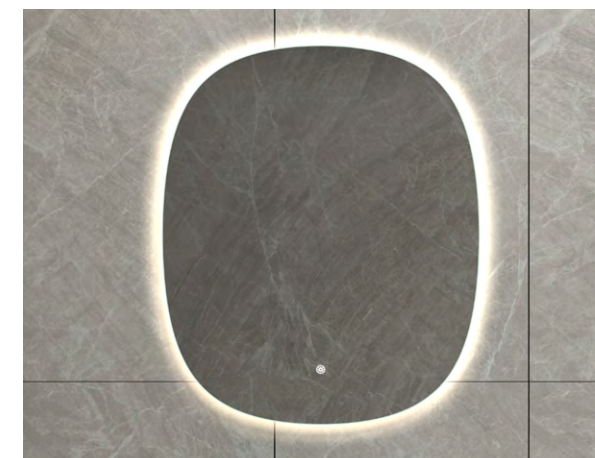

KL910899B
 750*900*30mm
 (30"*36"*1.18")

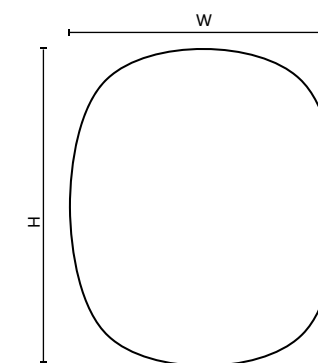

Description

Item No: KL910899

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum back frame
- Touch switch
- Waterproof box

Size:

Customize acceptable

Lighting:


- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock





FRAMELESS SERIES

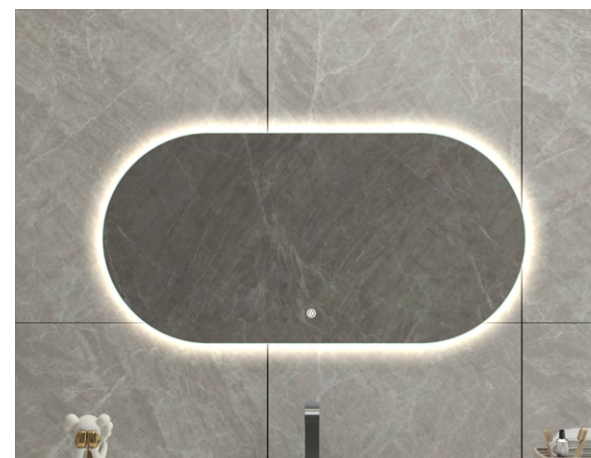


KL910900A

500*1000*30mm
(20"*40"*1.18")

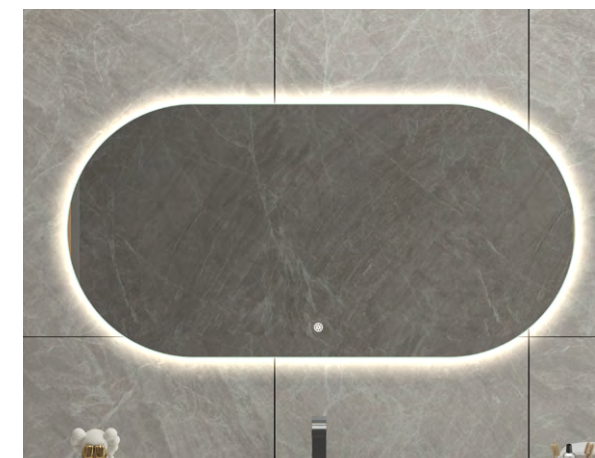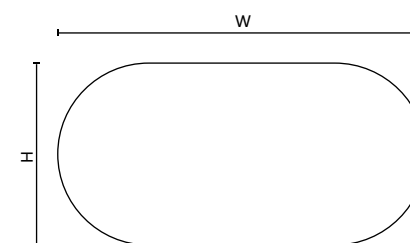

KL910900B

600*1200*30mm
(24"*48"*1.18")

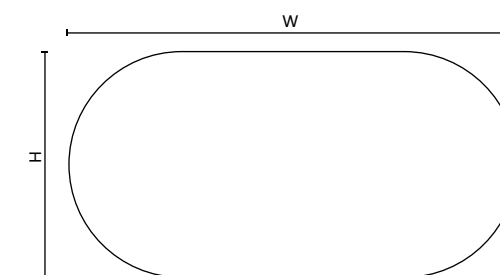

Description

Item No: KL910900

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Anodized aluminum back frame
- Touch switch
- Waterproof box

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function :


- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock



FRAMELESS SERIES





CE IP44

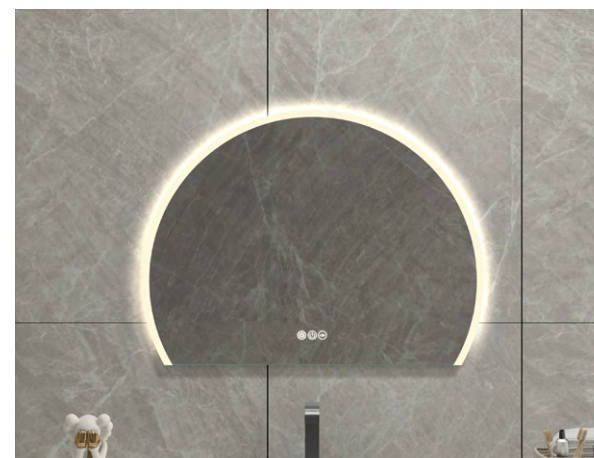


KL910901A

800*600*30mm
(32"*24"*2")



KL910901B

1000*750*30mm
(40"*30"*2")

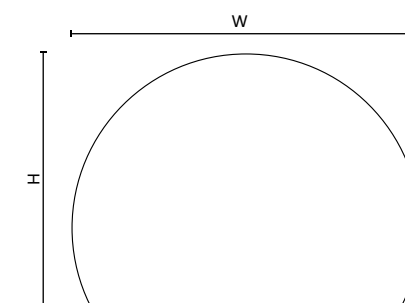

Description

Item No: KL910901

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Anodized aluminum baack frame
- Touch switch
- Waterproof box

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock



Description
Item No: **KL910697**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable


Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

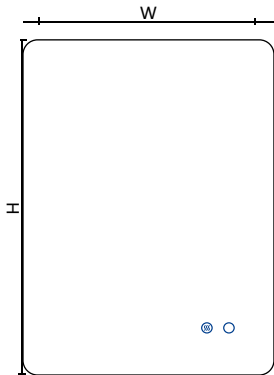


KL910697I
500*700mm
(20"*28")


KL910697A
600*800mm
(24"*32")

KL910697B
600*900mm
(24"*36")

KL910697C
750*900mm
(30"*36")

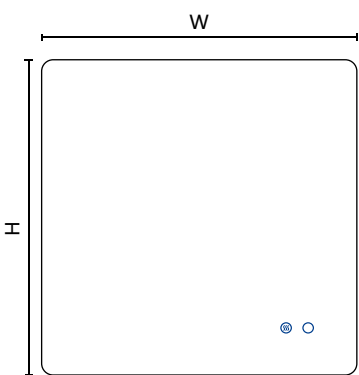

KL910697D
900*900mm
(36"*36")

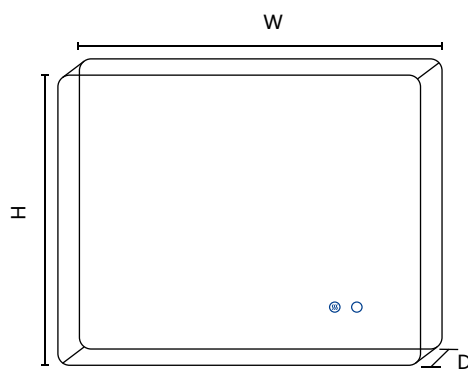

KL910697E
1000*800mm
(40"*32")

KL910697F
1200*750mm
(48"*30")

KL910697G
1200*900mm
(48"*36")

KL910697H
1500*900mm
(60"*36")



Description

Item No: **KL910698**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable



Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

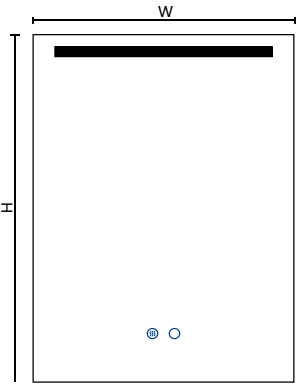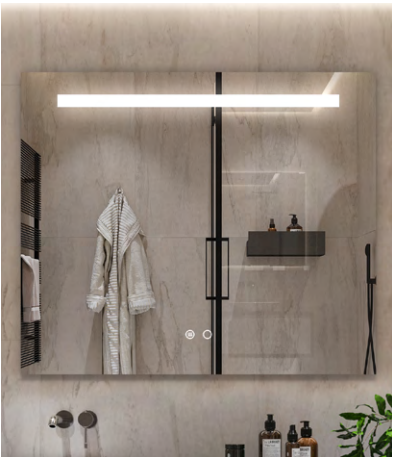

KL910698I

500*700mm
(20"*28")

KL910698A


600*800mm
(24"*32")

KL910698B

600*900mm
(24"*36")


KL910698C

750*900mm
(30"*36")

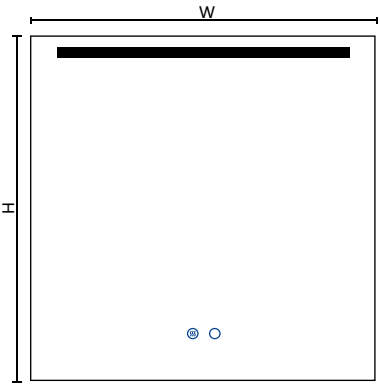

KL910698D

900*900mm
(36"*36")

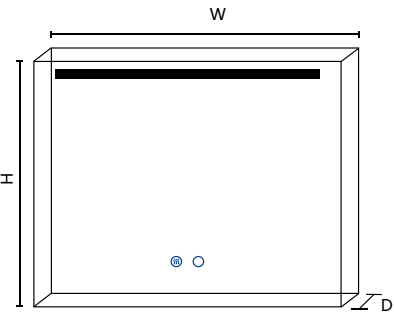

KL910698E

1000*800mm
(40"*32")

KL910698F

1200*750mm
(48"*30")

KL910698G

1200*900mm
(48"*36")

KL910698H

1500*900mm
(60"*36")



Description

Item No: **KL910699**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable




Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

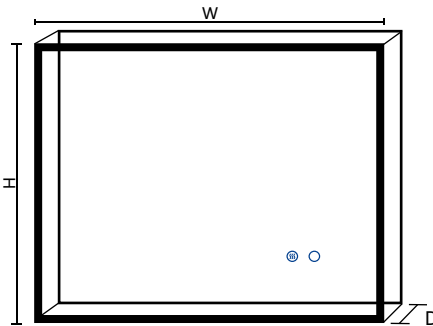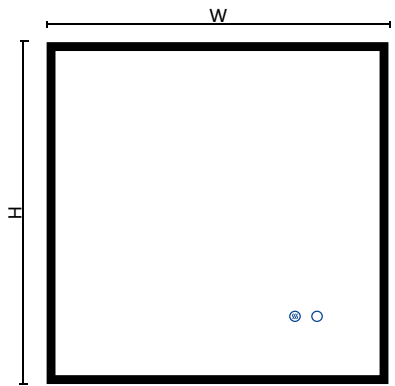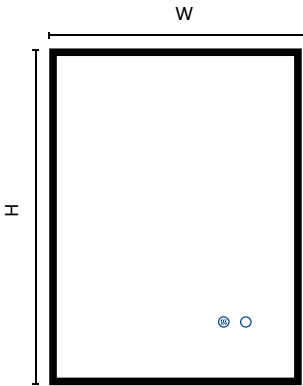

KL910699I

500*700mm
(20"*28")

KL910699A

600*800mm
(24"*32")

KL910699B

600*900mm
(24"*36")

KL910699C

750*900mm
(30"*36")

KL910699D

900*900mm
(36"*36")

KL910699E

1000*800mm
(40"*32")

KL910699F

1200*750mm
(48"*30")

KL910699G

1200*900mm
(48"*36")

KL910699H

1500*900mm
(60"*36")



Description

Item No: **KL910700**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable


Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

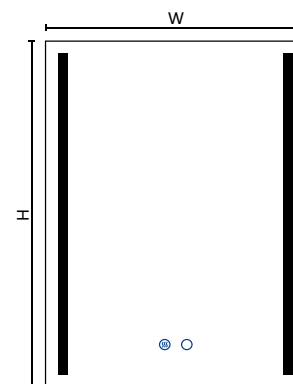

KL910700I

500*700mm
(20"*28")

KL910700A


600*800mm
(24"*32")

KL910700B

600*900mm
(24"*36")


KL910700C

750*900mm
(30"*36")

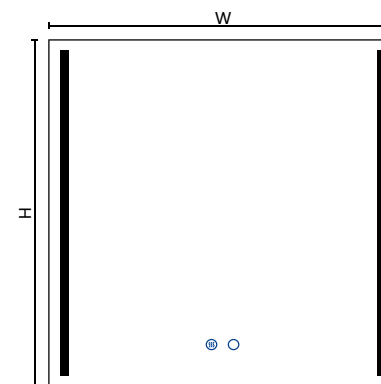

KL910700D

900*900mm
(36"*36")

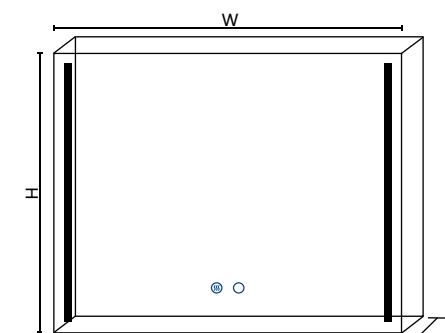

KL910700E

1000*800mm
(40"*32")

KL910700F

1200*750mm
(48"*30")

KL910700G

1200*900mm
(48"*36")

KL910700H

1500*900mm
(60"*36")



Description

Item No: **KL910701**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K


Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES





CE IP44

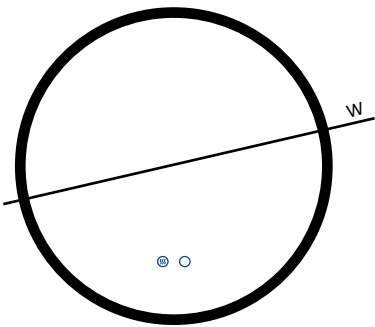


KL910701D

500*500mm
(20"*20")

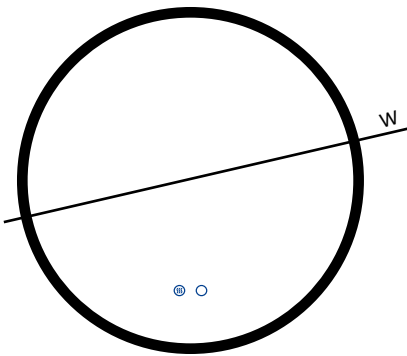

KL910701A

600*600mm
(24"*24")

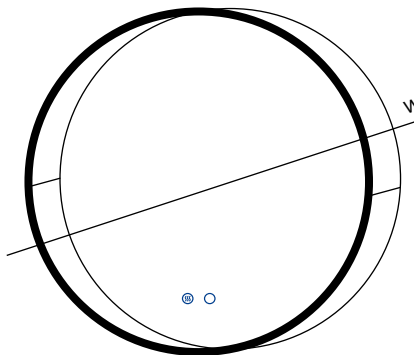

KL910701B

750*750mm
(30"*30")

KL910701C

900*900mm
(36"*36")



Description

Item No: KL910702

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable




Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

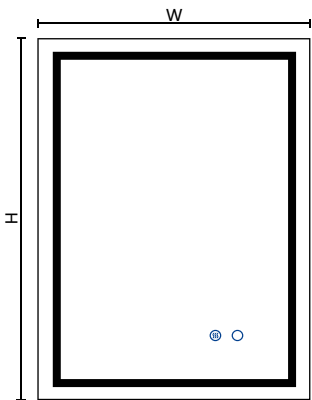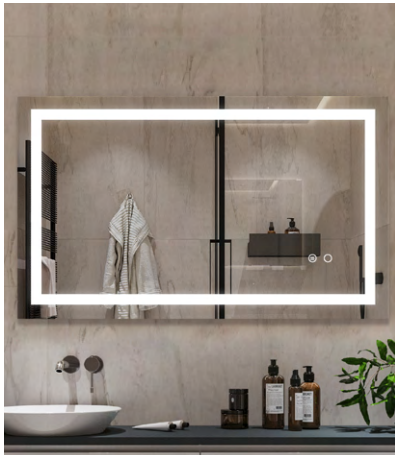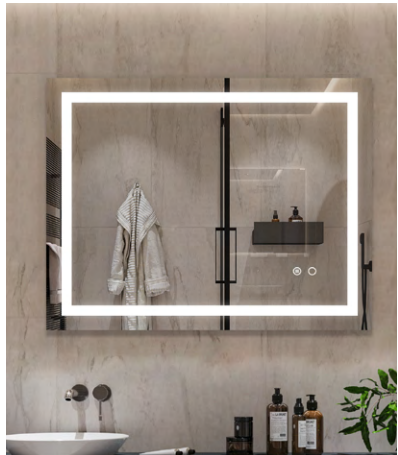

KL910702I

500*700mm
(20"*28")

KL910702A


600*800mm
(24"*32")

KL910702B

600*900mm
(24"*36")


KL910702C

750*900mm
(30"*36")

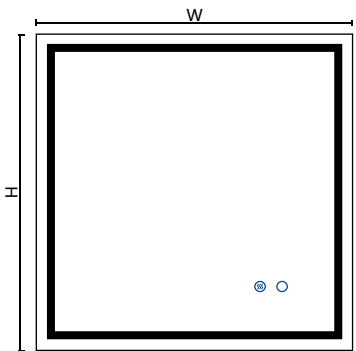

KL910702D

900*900mm
(36"*36")

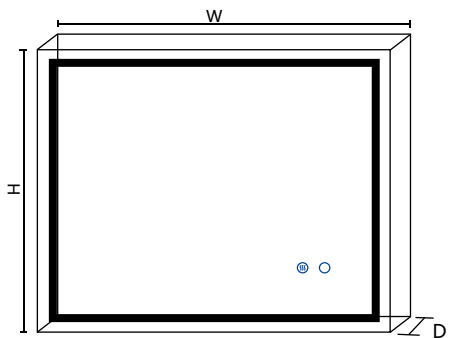

KL910702E

1000*800mm
(40"*32")

KL910702F

1200*750mm
(48"*30")

KL910702G

1200*900mm
(48"*36")

KL910702H

1500*900mm
(60"*36")



Description

Item No: KL910769

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K


Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES





CE IP44

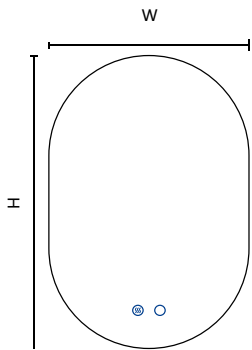


KL910769A

500*700mm
(20"*28")

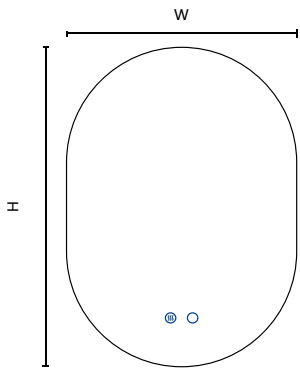

KL910769B

600*800mm
(24"*32")

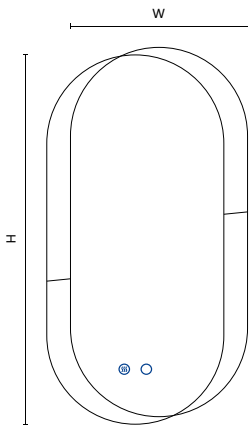

KL910769C

600*1000mm
(24"*40")



Description

Item No: KL910770

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :


- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES






IP44

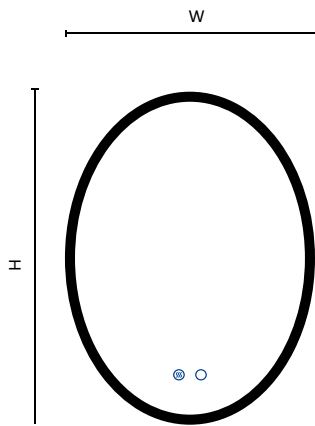


KL910770A

400*600mm
(16"*24")

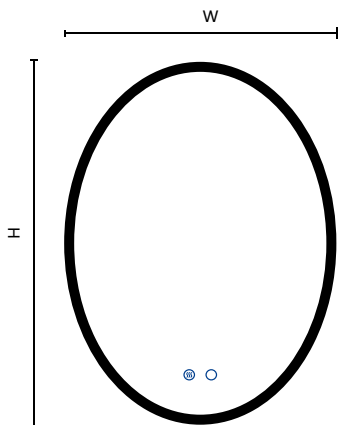

KL910770B

500*700mm
(20"*28")

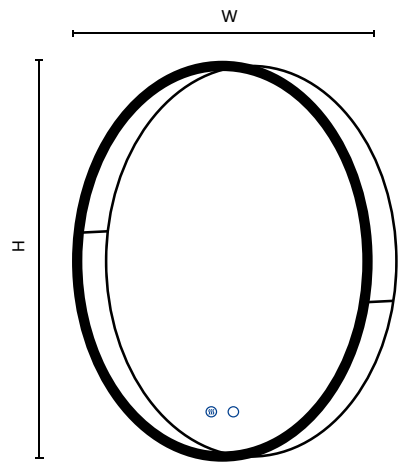

KL910770C

600*800mm
(24"*32")



Description

Item No: KL910771

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K


Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES





CE IP44

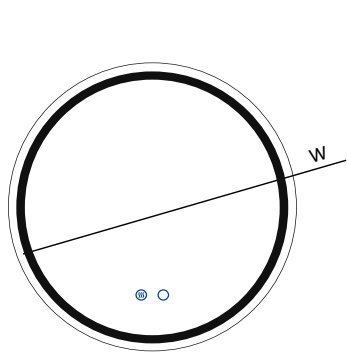


KL910771A

600*600mm
(24"*24")

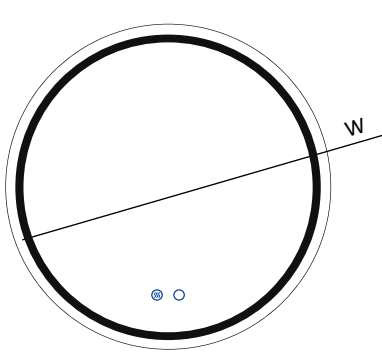

KL910771B

700*700mm
(28"*28")

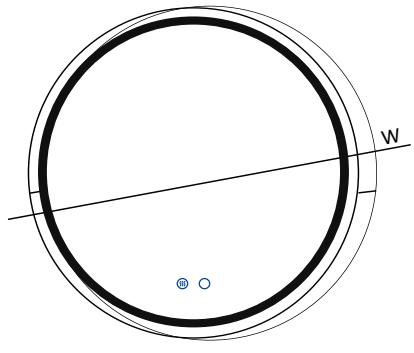

KL910771C

800*800mm
(32"*32")



Description
Item No: KL910772

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:

Customize acceptable


Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

FRAMELESS SERIES

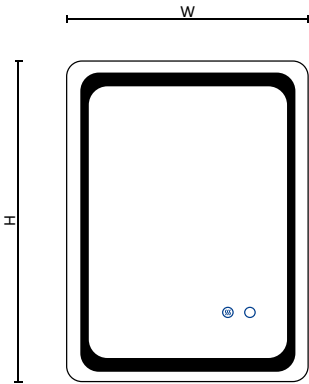


KL910772I
500*700mm
(20"*28")


KL910772A
600*800mm
(24"*32")

KL910772B
600*900mm
(24"*36")

KL910772C
750*900mm
(30"*36")



KL910772D
900*900mm
(36"*36")

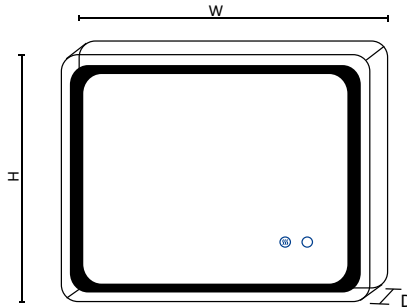

KL910772E
1000*800mm
(40"*32")

KL910772F
1200*750mm
(48"*30")

KL910772G
1200*900mm
(48"*36")

KL910772H
1500*900mm
(60"*36")

FRAMELESS SERIES

ETL Intertek UL LISTED SAA APPROVAL CE IP44

Description

Item No: KL910776

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch

Size:


Customize acceptable

Lighting:


- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock


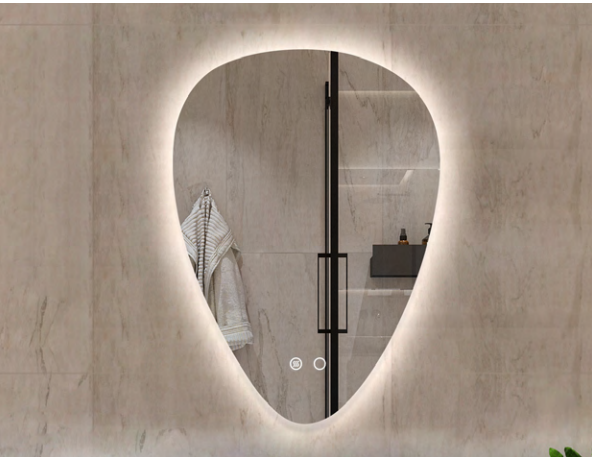


KL910776A
500*700mm
(20"*28")

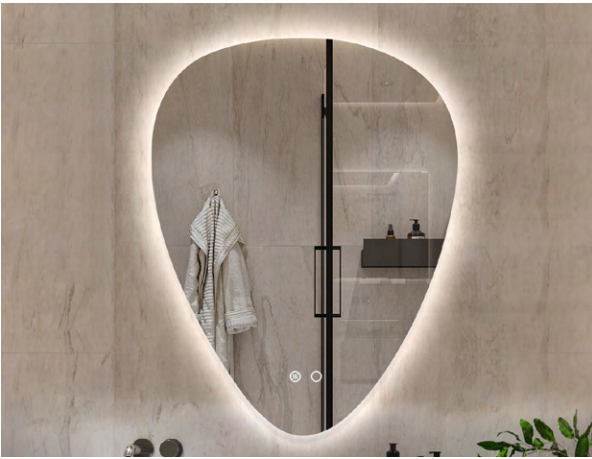

KL910776B
650*850mm
(26"*34")

ACRYLIC SERIES

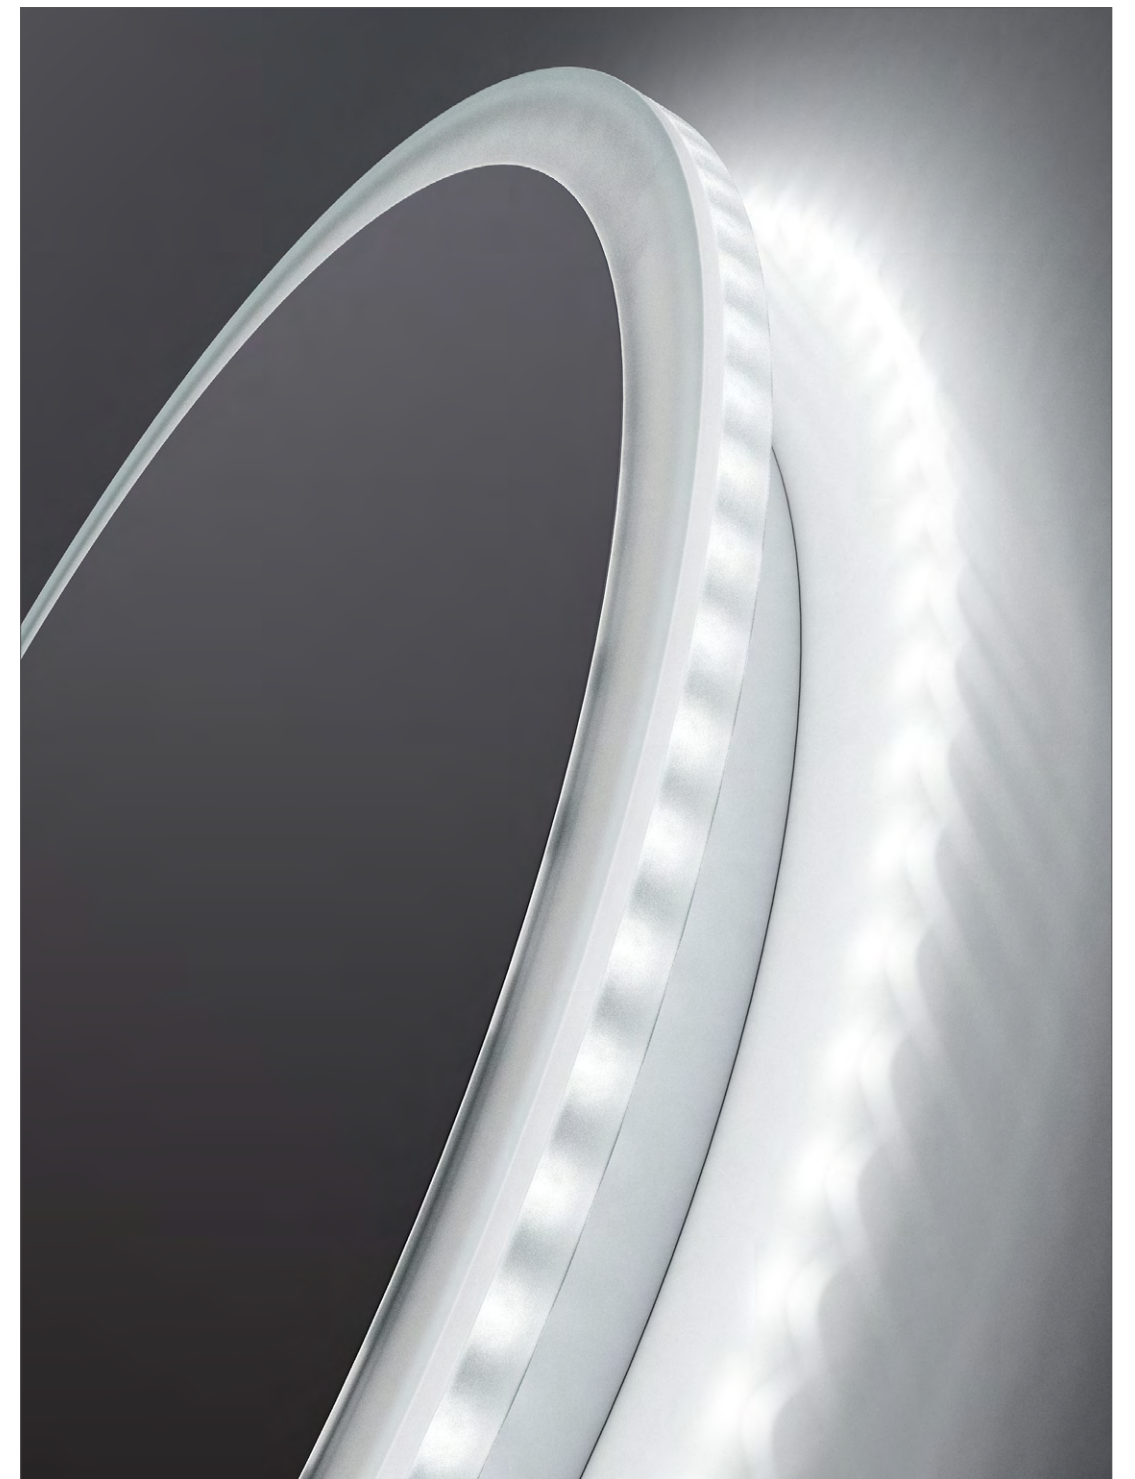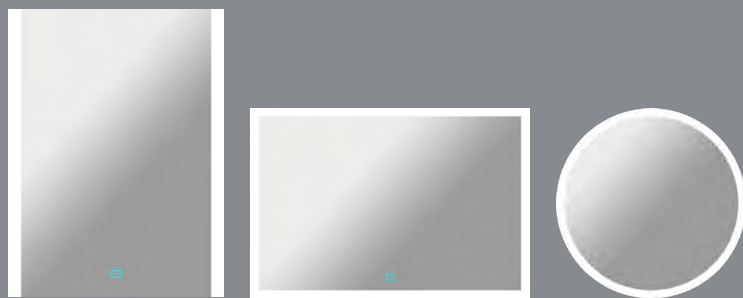



Description

Item No: KL910760

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Acrylic design

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K







Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

ACRYLIC SERIES




CE IP44

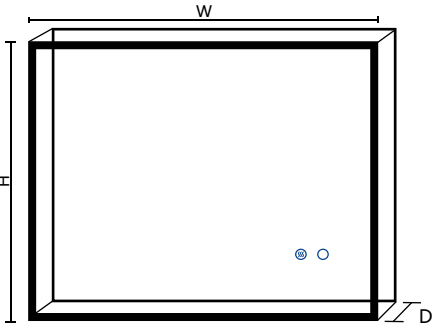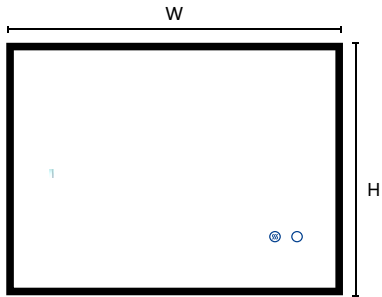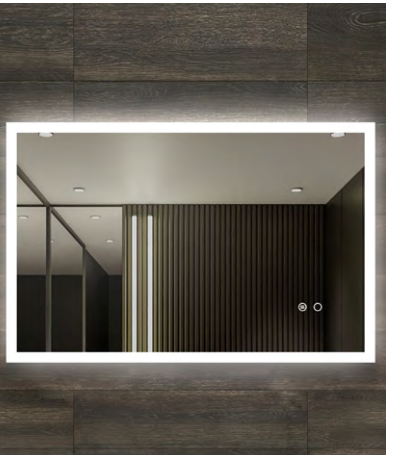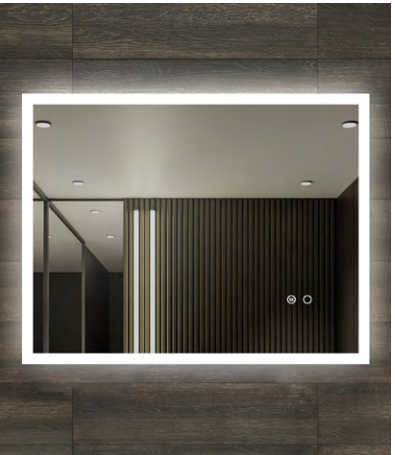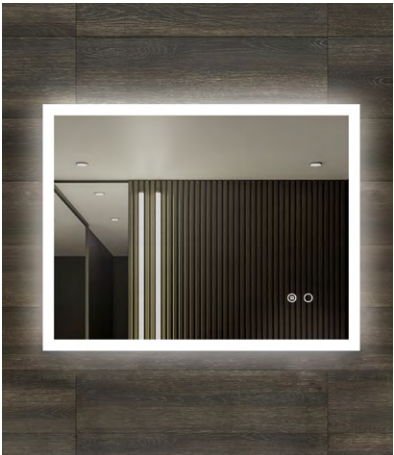

KL910760A

800*600mm
(32"*24")

KL910760B

900*700mm
(36"*28")

KL910760C

1000*750mm
(40"*30")



Description

Item No: KL910761

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Acrylic design

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K




Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

ACRYLIC SERIES





CE IP44

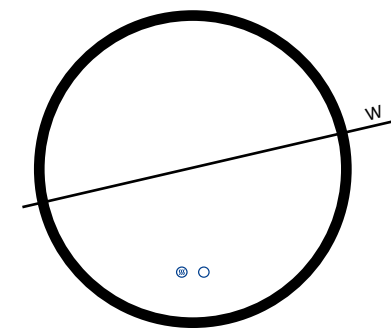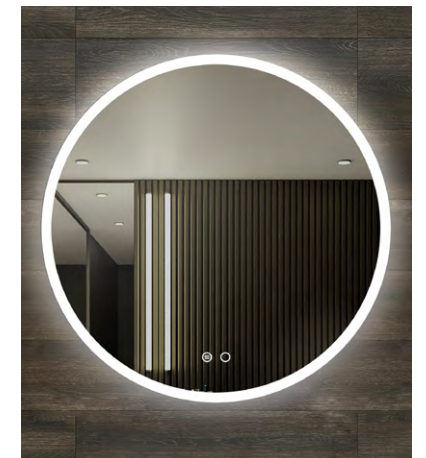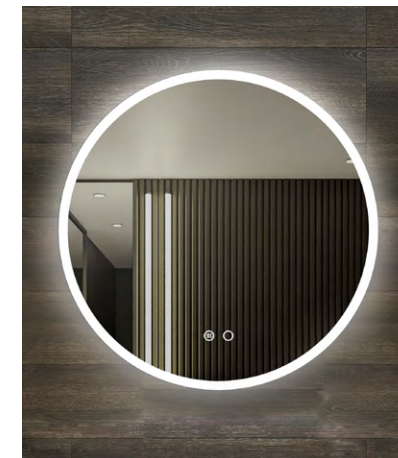


KL910761A

600*600mm
(24"*24")

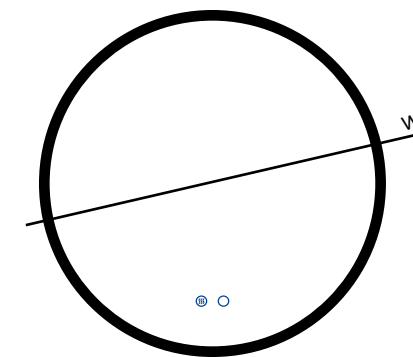

KL910761B

700*700mm
(28"*28")

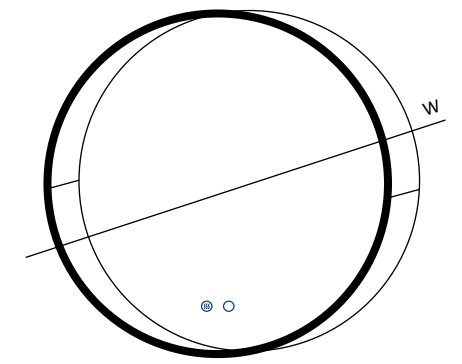

KL910761C

800*800mm
(32"*32")



Description

Item No: **KL910762**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Acrylic design

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K


Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock

ACRYLIC SERIES






CE IP44

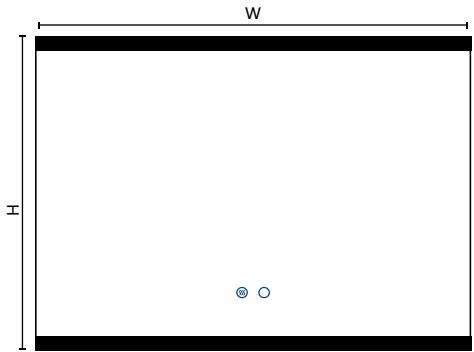

KL910762A

1000*750mm
(40"*30")

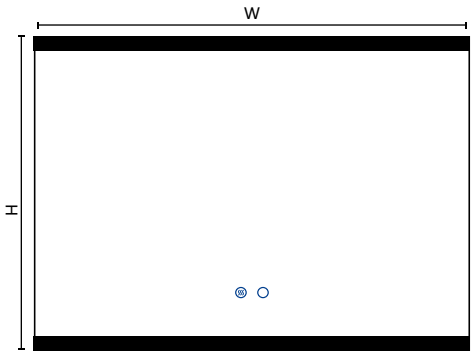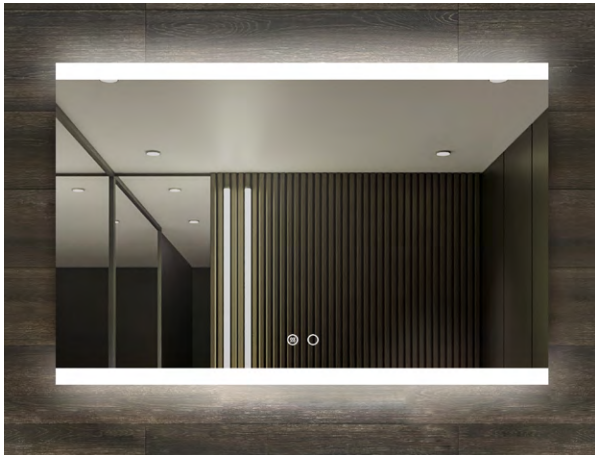

KL910762B


1200*800mm
(48"*32")




ACRYLIC SERIES






CE IP44

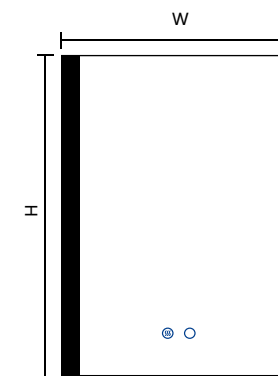

KL910763A
 600*800mm
 (24"*32")

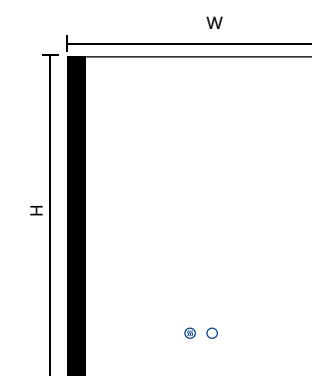

KL910763B
 700*900mm
 (28"*36")

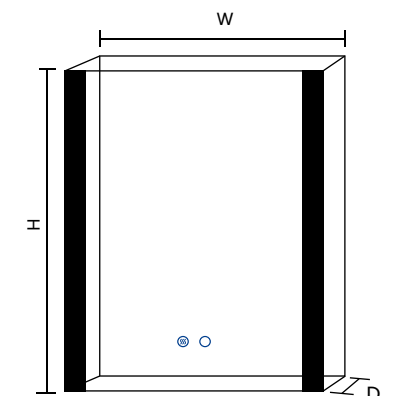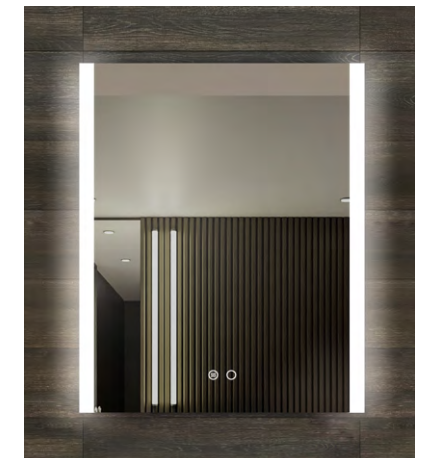

KL910763C
 750*1000mm
 (30"*40")

Description

Item No: **KL910763**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Acrylic design

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock



Description

Item No: **KL910764**

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Acrylic design

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K



Optional Function: :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock



ACRYLIC SERIES





CE IP44

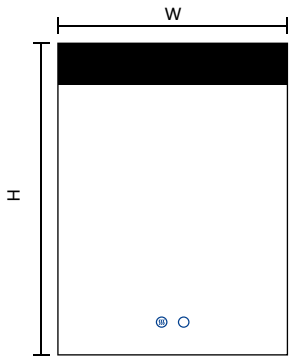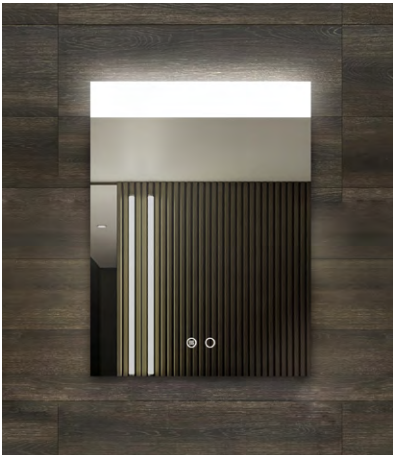

KL910764A
600*800mm
(24"*32")

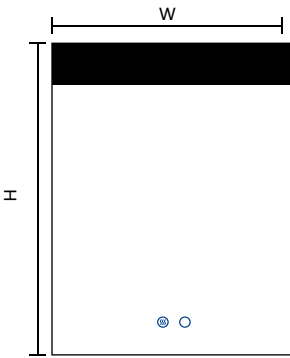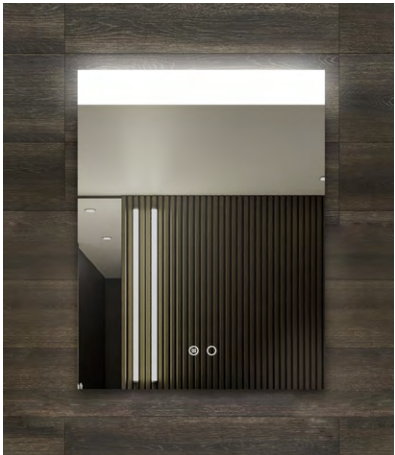




KL910764B
700*900mm
(28"*36")

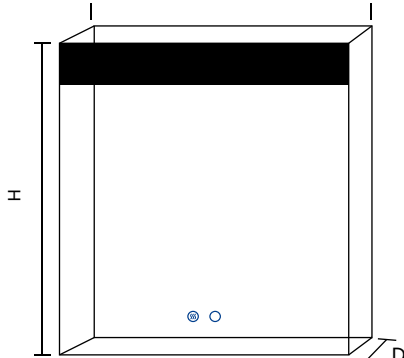

KL910764C
750*1000mm
(30"*40")

FRAMED SERIES


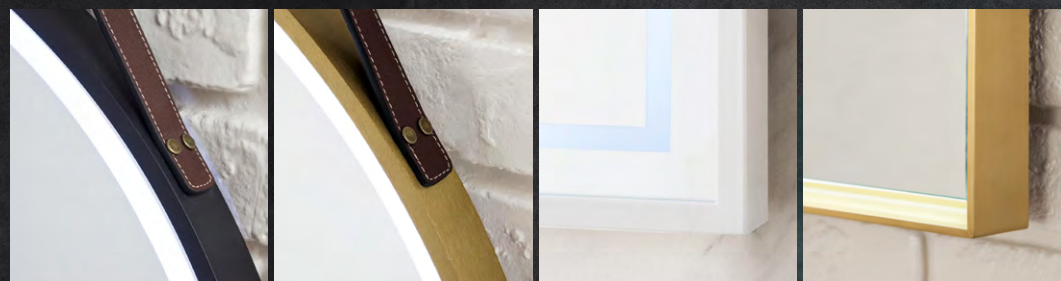


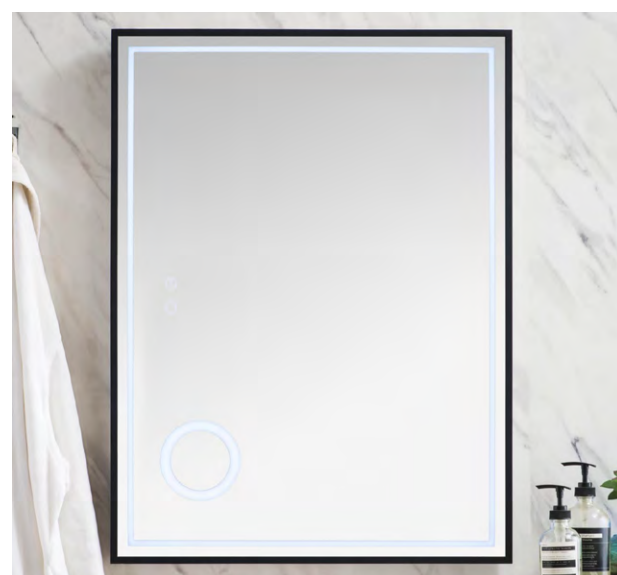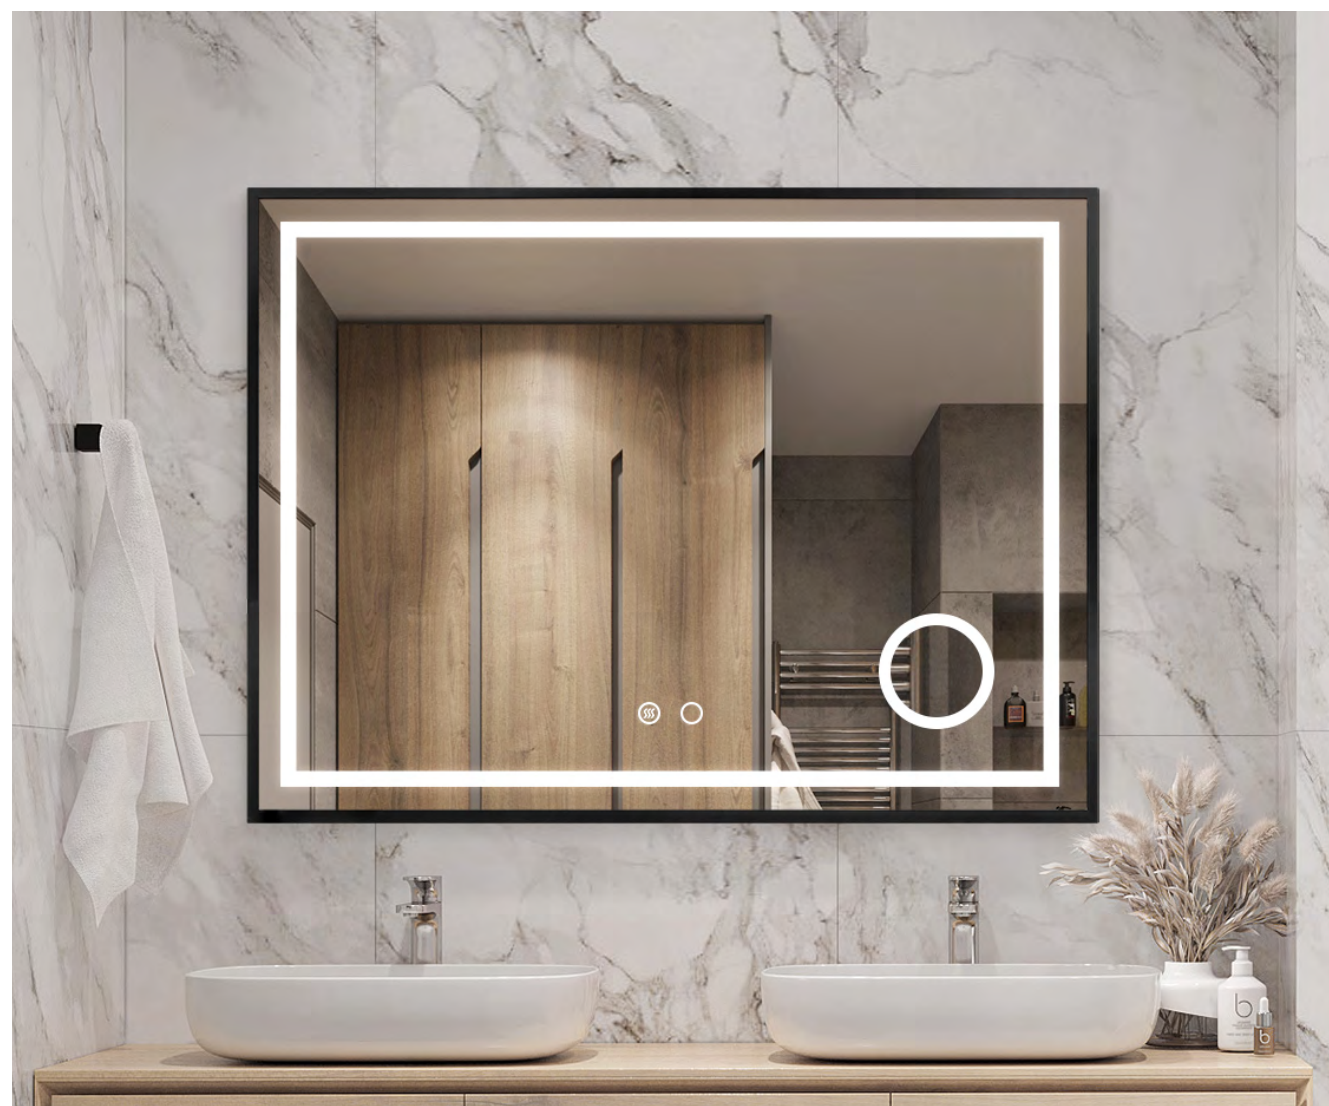

FRAMED SERIES





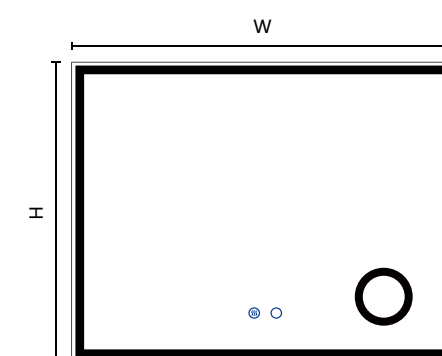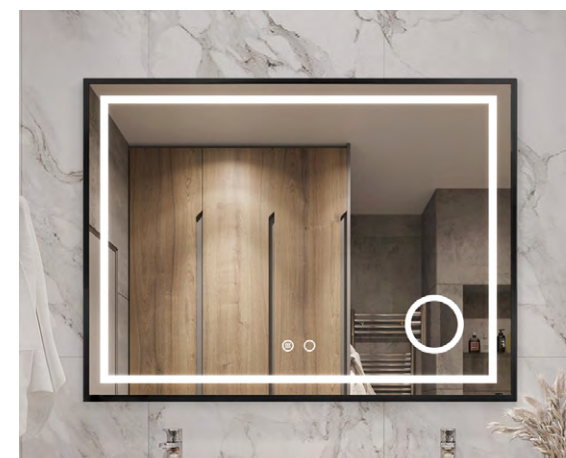

KL910765A
 800*600mm
 (32"*24")

KL910765B
 900*700mm
 (36"*28")

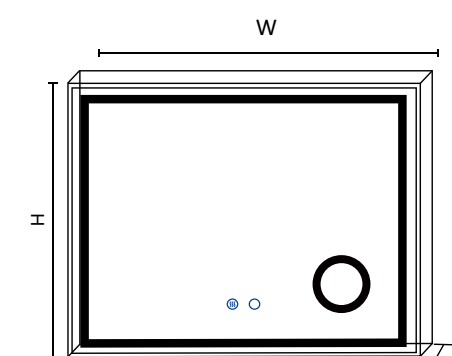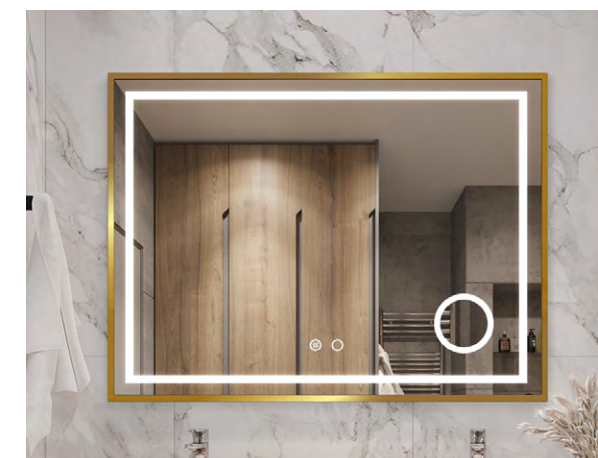

KL910765C
 1000*750mm
 (40"*30")

KL910765D
 1200*800mm
 (48"*32")

Description

Item No: **KL910765** (Matt black aluminum frame; 3X magnifying)

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Multiple color aluminum & stainless steel frame

Size:

Customize acceptable

Lighting:



- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function :



- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock




FRAMED SERIES

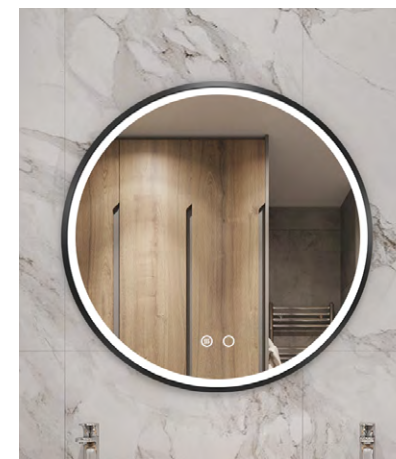

KL910767A
500*500mm
(20"*20")

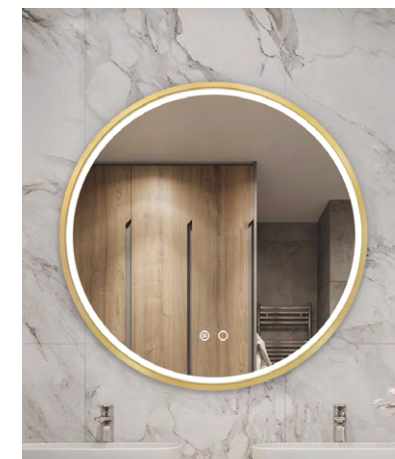

KL910767B
600*600mm
(24"*24")

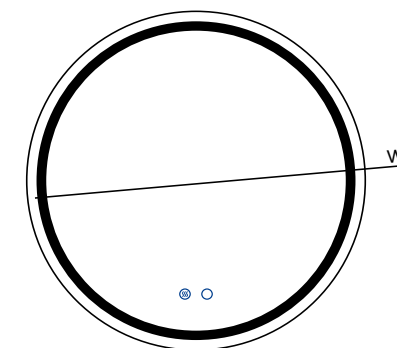

KL910767C
700*700mm
(28"*28")

KL910767D
750*750mm
(30"*30")

Description

Item No: KL910767 (Brushed gold aluminum frame)

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Multiple color aluminum & stainless steel frame

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function :

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock






FRAMED SERIES






IP44

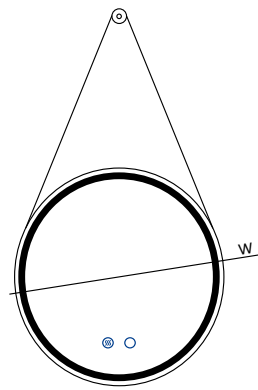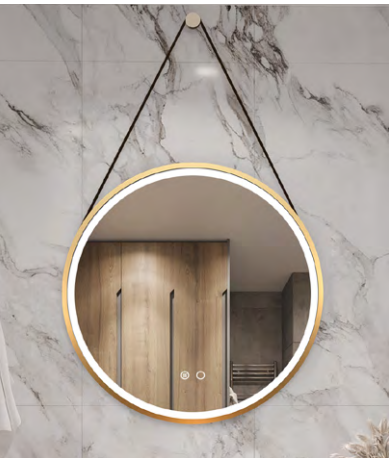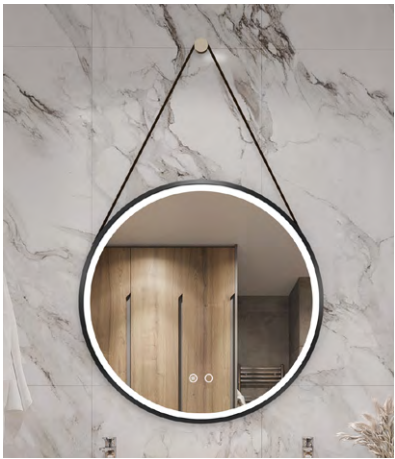


KL910779A

500*500mm
(20"*20")

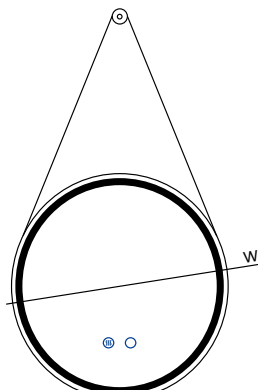

KL910779B

600*600mm
(24"*24")

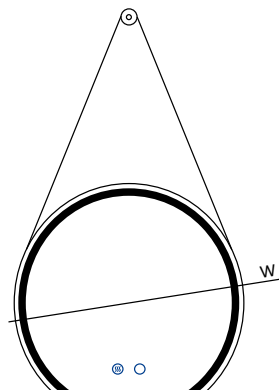

KL910779C

700*700mm
(28"*28")

Description

Item No: KL910779 (Matt black frame + brown belt)

Features:

- 5mm copper free silver mirror corrosion resistant
- Hard wired or 3-pin plug optional
- Horizontal or vertical installation optional
- Anodized aluminum frame
- Touch switch
- Multiple color aluminum & stainless steel frame

Size:

Customize acceptable

Lighting:

- Replaceable LED strip, UL&CE listed
- 2835/5050 SMD led, 60/120 chips per meter
- CRI:80+/90+
- Color temperature:2700K-6000K

Optional Function:

- Defogger · Dimming · Magnifier · Bluetooth speaker
- CCT adjusting · Motion sensor switch/touch sensor
- LED digital clock