


### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:


### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- 1.To avoid the possibility of electrical shock, turn off power supply before installation or servicing. Installation and servicing should be performed by qualified personnel.
- 2.When closing cover of fixture, be sure all wires are inside housing to avoid pinching wires.
- 3.If Photo Receptacle is installed refer to "Photo Control" section for instructions.
- 4.Product must be installed in accordance with your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
- 5.Do not change the structure or any components of the fixture to ensure safety.

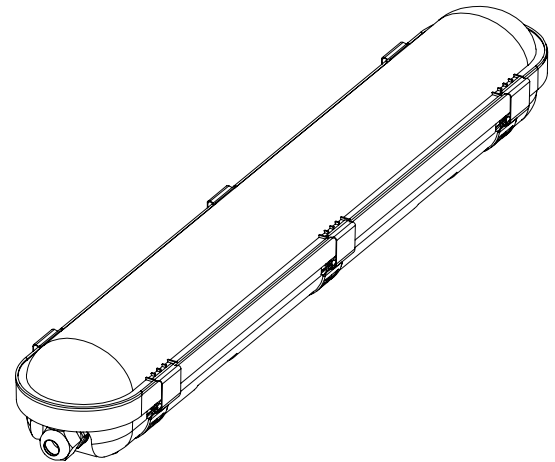

### Optical Parameters

Model No.	Rate Power	Input Voltage	PF	CT	IP	Single Piece		Carton Package			Working Temp(°C)	Working Humidity
						Product (MM)	N.W (KG)	Package (cm)	Qty/ctn	G.W (KG)		
SF04-600-N2-20W	20W	AC160-240V	>0.90	3000~6500K	IP65	600x95x80	1.2	68x32x29	6 pcs	11.5	-35~ +50	10%~90%
SF04-1200-N2-40W	40W	AC160-240V	>0.90	3000~6500K	IP65	1200x95x80	2	128x32x29	10 pcs	19.5	-35~ +50	10%~90%
SF04-1500-N2-50W	50W	AC160-240V	>0.90	3000~6500K	IP65	1500x95x80	2.2	158x32x29	12 pcs	21.0	-35~ +50	10%~90%
SF04-1500-N2-60W	60W	AC160-240V	>0.90	3000~6500K	IP65	1500x95x80	2.2	158x32x29	12 pcs	21.0	-35~ +50	10%~90%
SF04-600-W3-30W	30W	AC160-240V	>0.90	3000~6500K	IP65	600x125x88	1.3	68x28x31	6 pcs	8.5	-35~ +50	10%~90%
SF04-1200-W3-60W	60W	AC160-240V	>0.90	3000~6500K	IP65	1200x125x88	2.2	128x28x31	10 pcs	14.6	-35~ +50	10%~90%
SF04-1500-W3-70W	70W	AC160-240V	>0.90	3000~6500K	IP65	1500x125x88	2.5	158x28x31	12 pcs	17.0	-35~ +50	10%~90%
SF04-1500-W3-80W	80W	AC160-240V	>0.90	3000~6500K	IP65	1500x125x88	2.5	158x28x31	12 pcs	17.0	-35~ +50	10%~90%

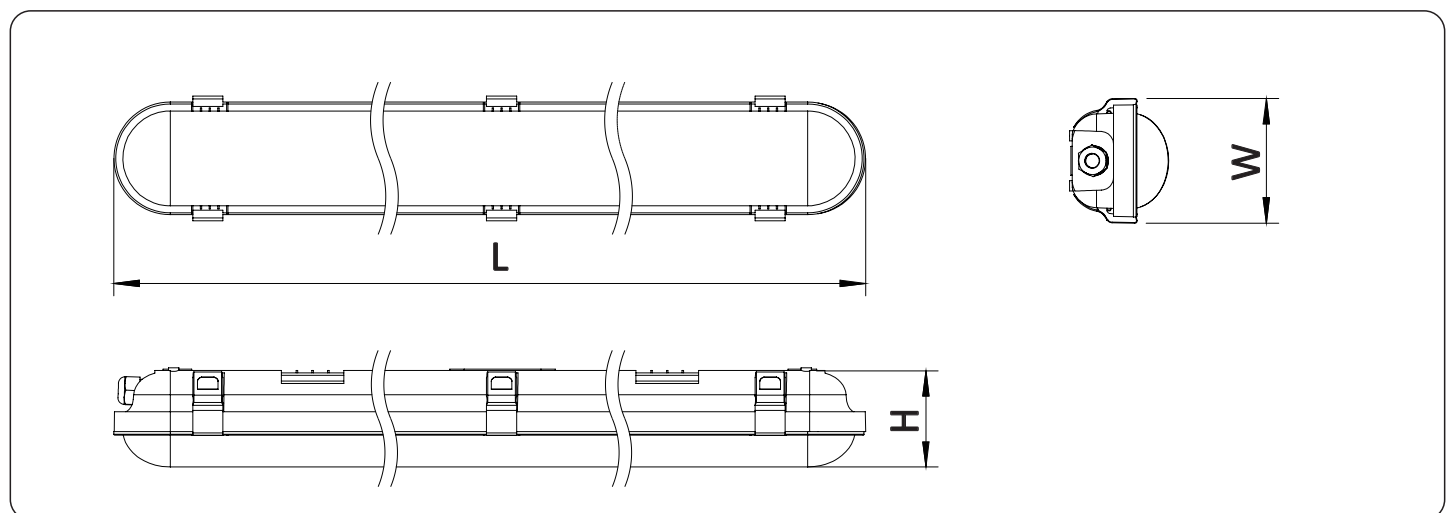


### SHANGHAI CHZ LIGHTING CO., LTD.

No. 518, Xiangjiang Road, Shanghai, CHINA  
+ 86 159 2122 3752 (English)  
+ 34 615 734 994 (Español)  
www.chz-lighting.com  
service@chz-lighting.com


© 2019 SHANGHAI CHZ LIGHTING CO LTD All rights reserved. For informational purpose Content is subject to change. See www.chz-lighting.com for warranty and specifications and CHZ logo are registered trademarks.

## SAVE THIS INSTRUCTIONS FOR FUTURE REFERENCE TO INSTALL:


### Surface-mounted Installation:

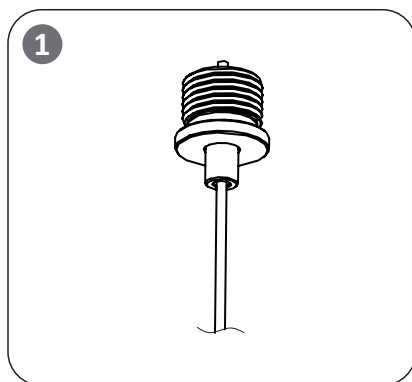


Pass the hanging rope through the wire buckle and lock it tightly

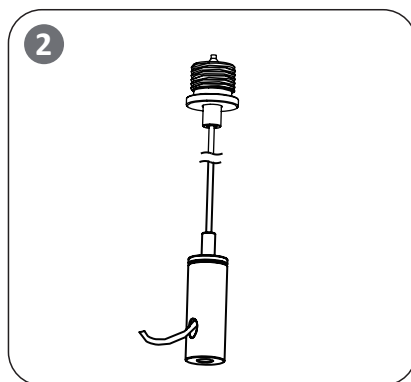


Connect the other end of the hanging rope to the buckle through a nut

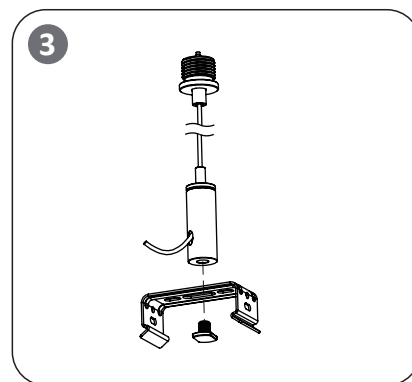


Press the buckle tightly on the back of the lamp

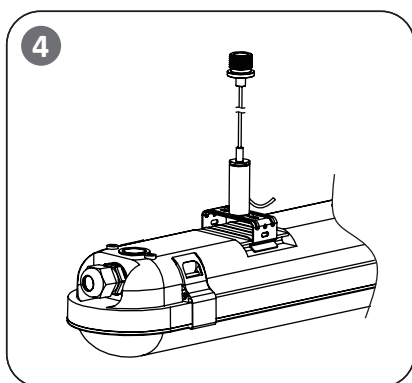

Fix the expansion screw and the female buckle on the ceiling by screws

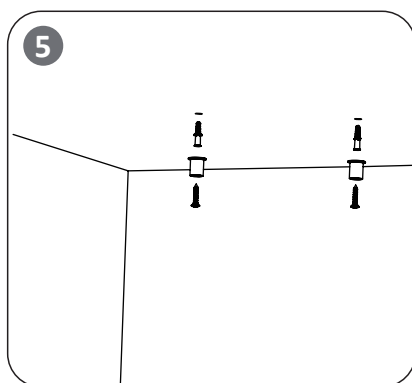


Screw the male end of the wire buckle into the female end of the ceiling

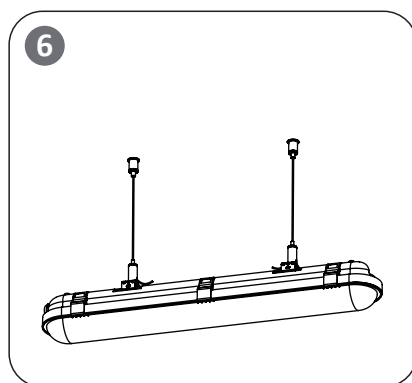


Loosen the lamps and complete the installation


### Surface-mounted Installation:

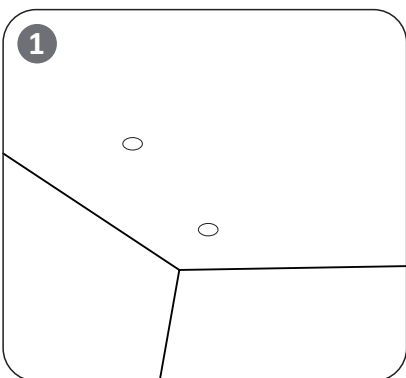


Make a hole in the ceiling

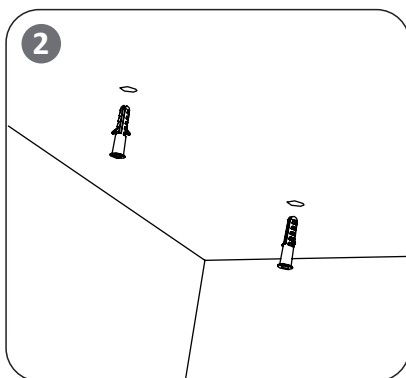


Drive the expansion screw into the drilled hole

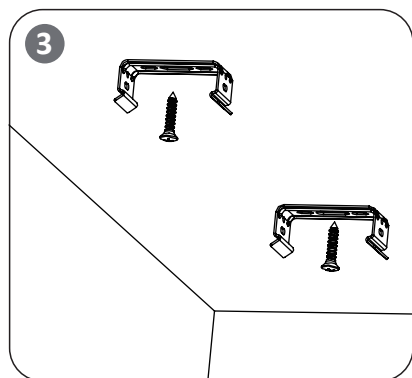


Fix the buckle in the expansion screw with screws

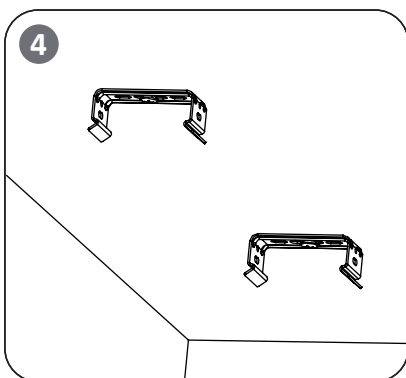

The installation is as shown above

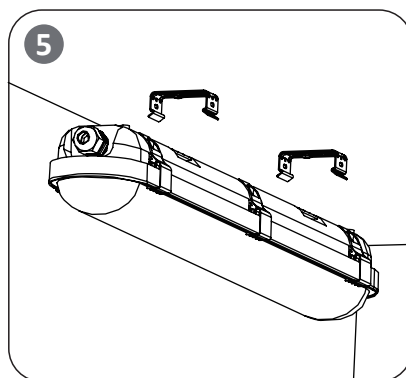

Hold the lamp and press it into the fastened buckle

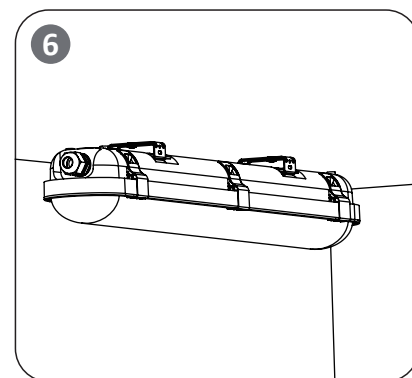

Installation is complete, as shown above