BRIGHT

VH LIGHTING

BRIGHT TECHNOLOGY INDUSTRIAL LTD

深圳必锐科技有限公司

2/0/2/3

ABOUT US

COMPANY PROFILE

Shenzhen Bright Technology Industrial Limited is an innovative enterprise established in 2010. Our factory is 3000 square meters with more than 150 employees.

We are specialized in R&D, producing, selling and after-sell service of flexible LED strip, LED grow light, LED neon light, LED UV light, LED bar light, etc.

We are located in Longhua district, the center of Shenzhen city, which has very strong infrastructure for raw material supply, factory production, technical consulting and logistics service.

Our staff are all good trained and have rich experience in LED business. We are dedicated in providing "professional, high quality, innovative and perfect" products and one-stop customer service, and available to offer products according to the customers' requirements at any time to ensure superior customer satisfaction.

We have obtained a serial certificate for our products and company, including CE, RoHS, TUV, UL, BIS, ISO9001, etc. A variety of payment methods and shipping methods are available to meet different demands of customers all over the world. We are highly trusted and praised by our customers.

In addition to the regular products, we also provide OEM and ODM service. Besides selling the products in our catalog, we are looking forward to your good new idea and expecting jointly developing new products with you.

We sincerely hope that with our good reputation at home and abroad, we can establish long-term partner relation and mutually beneficial cooperation, and achieve substantial development with you. Looking forward to your visit at any time.

公司介绍

深圳必锐科技有限公司是专业从事新型半导体LED电光源与LED照明应用相结合的高新技术企业，集研发、生产、销售、服务为一体。公司拥有一批专业、精干、务实、精通LED半导体新光源的一流技术开发团队和国际视野市场的开拓人才。公司秉承“诚信、创新、共赢”的经营理念，积极进取，稳步发展，为用户提供高品质的LED照明产品和优质的售后服务。

实现节能降耗，技术进步是关键。目前必锐仍在不懈的努力，以诚信、务实、创新的精神不断的研发适用各种场所的LED系列新产品。公司依照ISO9001国际质量标准体系管理运作，建立了一套严谨的品质管理和保证体系。为国内外客商提供技术支持、产品配套、备品配件及相关服务。

必锐科技有限公司在LED半导体照明领域内拥有多项自主知识产权的技术，结合最新的电子科技推出了一系列的LED照明产品，功率从1W-200W广泛用于城市景观、公司办公楼、工业厂房、机场、车站、地铁、学校、医院、商场、超市、居民小区、街道、园林公园、消防警示、户外旅游等各种场合中使用。目前公司的核心产品主要是植物灯、线条灯、灯带、杀菌灯、智能化LED照明等产品，该系列产品已经在国内外广泛应用，并得到一致的好评。

必锐科技季承着技术是生命、质量是市场、交期是信用、成本是能力、服务是绩效的经营理念。用优质的产品满足社会对绿色节能光电产品的新需求，立志成为中国LED照明产业的领跑者。我们热切希望与国内外伙伴建立长期合作的伙伴关系，共创多赢市场。

ABOUT US

CE RoHS ISO9001:2015 SGS

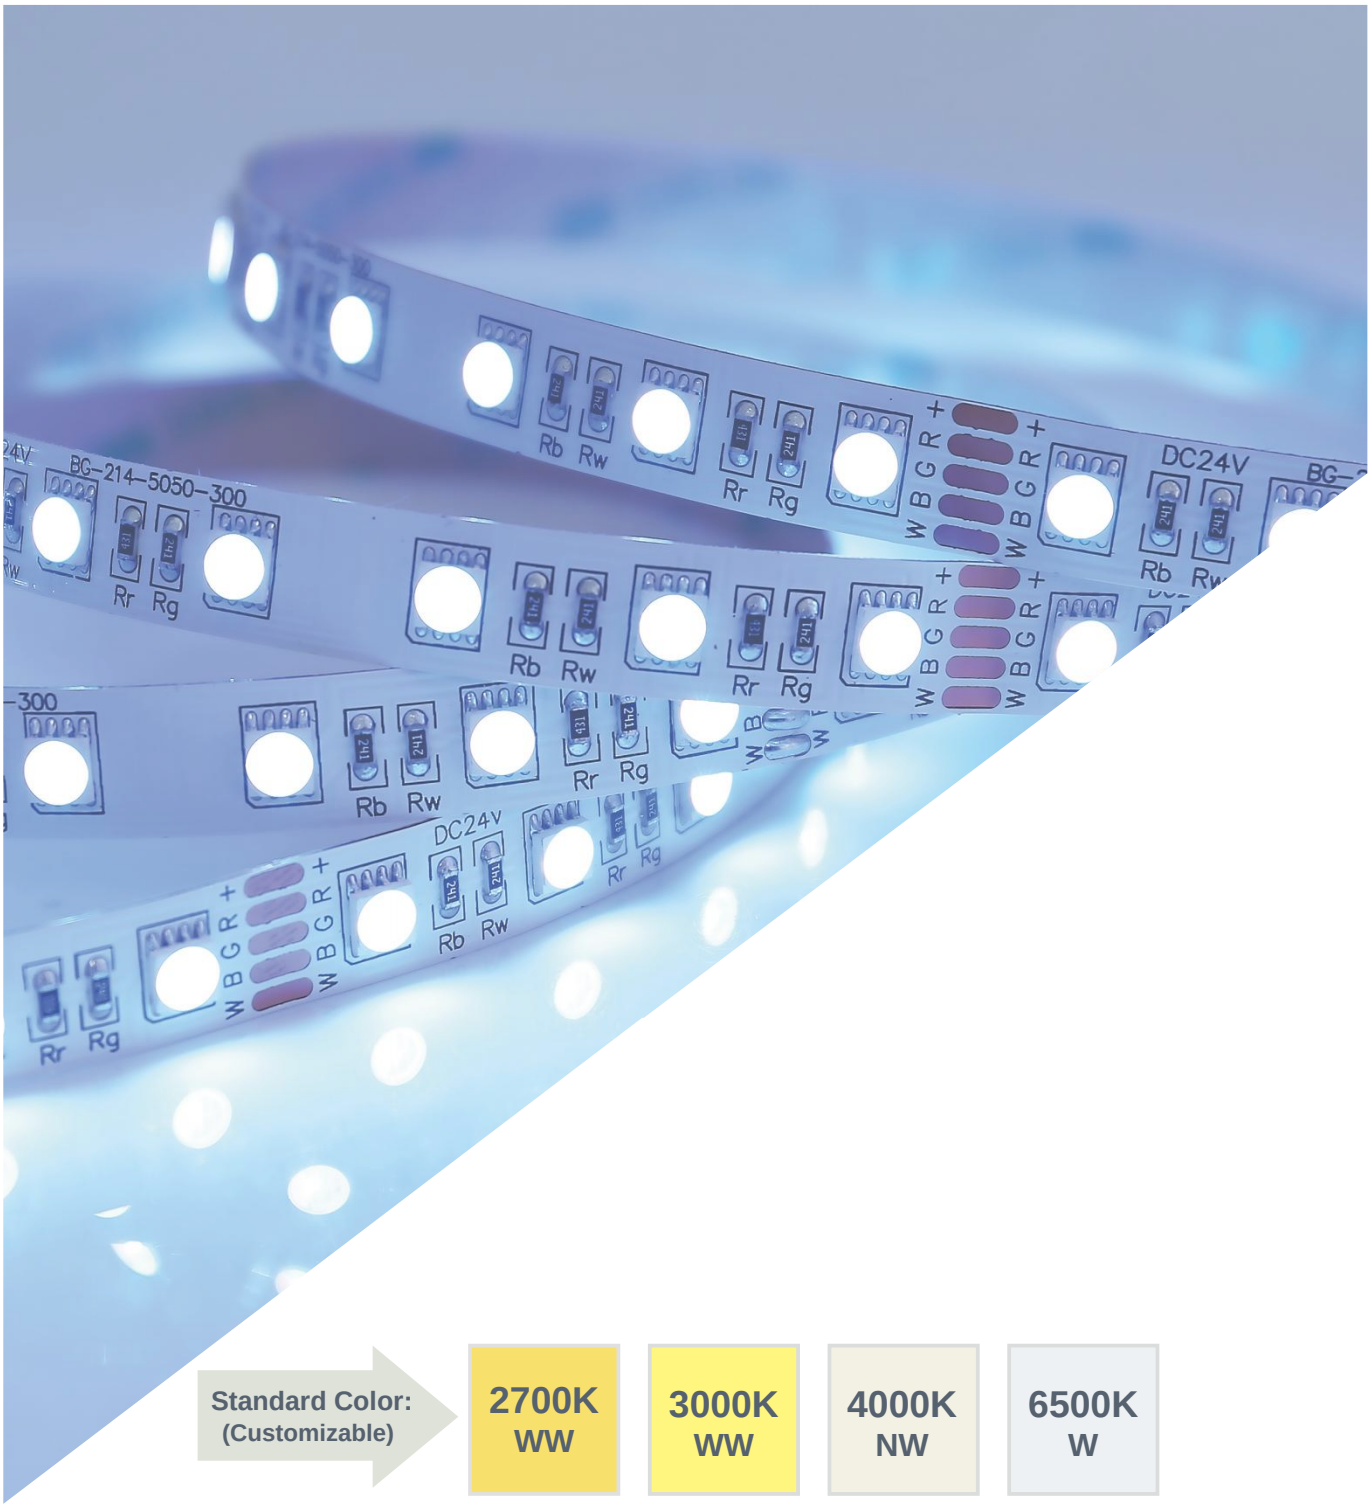

Standard Color: (Customizable)	2700K WW	3000K WW	4000K NW	6500K W
	CCT	RGB	RGBW	RGB CCT
IP Grade:	IP20	IP65	IP66	IP68

CONTENTS/目录

LED Strip
- High Efficiency 01–02
- SMD2835 03–04
- SMD5050 05–06
- RGB(W/WW) 07–08
- SMD3014 09–10
- SMD3528 11–12
- SMD2220 13–14
- SMD2110 15–16
- SMD3535 17–18
- Addressable 19–20
- DMX512 21–22
- Constant Current 23–24
- Narrow 25–26
- High Voltage 27–28
- Kit 29–30

COB Strip
- Roll To Roll 31–32
- Narrow 33–34
- Single Color 35–36
- Tunable White 37–38
- RGB(W/WW) 39–40
- Constant Current 41–42
- Free Cutting 43–44
- Addressable 45–46
- High Voltage 47–48

UV LED Strip 49–50

Neon Strip
- Side View 51–52
- Top View 53–54
- Round View 55–56
- Free Style 57–58

Flex LED Wall Wash Light 59–60

Accessories 61–64

High Efficiency

High Efficiency LED Strip/高光效灯条

High Efficiency/最高光效
– 184Lm/w –

PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:
Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围

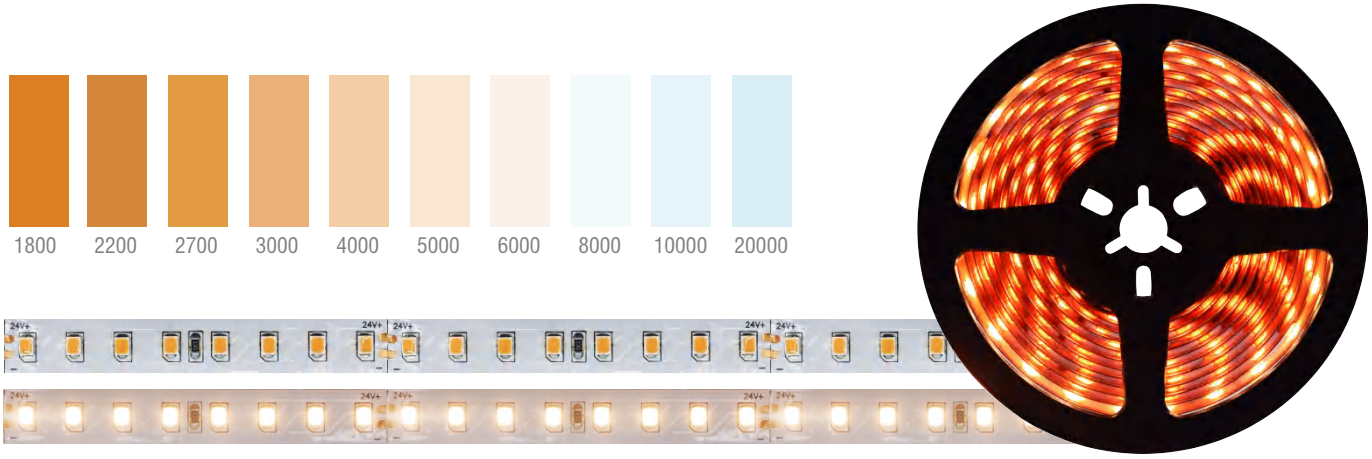

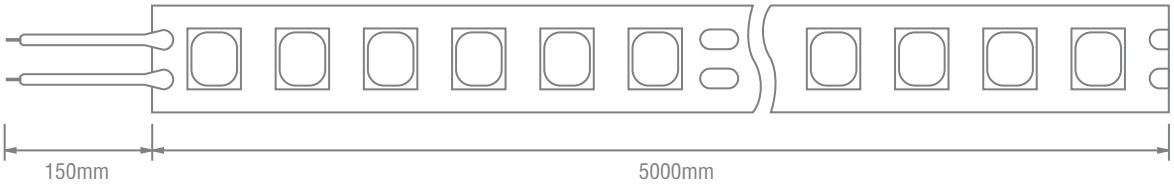

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-246-2835-112	24V	14 W	112 pcs/m	10mm	>80	2548 Lm	182 Lm/w	24V 71.4mm
BG-247-2835-160	24V	18 W	160 pcs/m	10mm	>80	3310 Lm	184 Lm/w	24V 50mm
BG-310-2835-70	24V	12 W	70 pcs/m	8mm	>80	1650 Lm	138 Lm/w	24V 100mm
BG-311-2835-140	24V	18 W	140 pcs/m	8mm	>80	2570 Lm	143 Lm/w	24V 50mm
BG-312-2835-210	24V	20 W	210 pcs/m	10mm	>80	2960 Lm	148 Lm/w	24V 33.3mm

SMD2835

- 1800
- 2200
- 2700
- 3000
- 4000
- 5000
- 6000
- 8000
- 10000
- 20000
- Red
- Green
- Blue

SMD2835 LED STRIP/2835软灯条

LED: 0.8mm Strong base/厚度加强

CRI: >90/95/97

PCB material: FPC double sides copper

PCB材质：FPC双面铜

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Display design /展示设计

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-240-2835-300-S	12V	7.2 W	60 pcs/m	6mm	>90	590 Lm	86 Lm/w	12V 50mm
BG-240-2835-300	12V/24V	14.4 W	60 pcs/m	8mm	>90	1150 Lm	86 Lm/w	24V 100mm 12V 50mm
BG-241-2835-600	12V/24V	19.2 W	120 pcs/m	10mm	>90	1570 Lm	86 Lm/w	24V 50mm 12V 25mm
BG-256-2835-600	12V/24V	14.4 W	120 pcs/m	8mm	>90	1180 Lm	86 Lm/w	24V 50mm 12V 25mm
BG-257-2835-600	24V	7.2 W	120 pcs/m	6mm	>90	610 Lm	86 Lm/w	24V 50mm
BG-242-2835-300-CCT	12V/24V	14.4 W	60 pcs/m	10mm	>90	1150 Lm	86 Lm/w	24V 200mm 12V 100mm
BG-244-2835-600-CCT	12V/24V	19.2 W	120 pcs/m	12mm	>90	1570 Lm	86 Lm/w	24V 100mm 12V 50mm
BG-224-2835-300	24V	12W	60 pcs/m	10mm	>90	1080 Lm	90 Lm/w	24V 100mm
BG-225-2835-600	12V	9W	120 pcs/m	6mm	>90	855 Lm	95 Lm/w	24V 25mm
BG-226-2835-600	12V	12W	120 pcs/m	8mm	>90	1080 Lm	90 Lm/w	24V 25mm
BG-227-2835-600	24V	18 W	120 pcs/m	10mm	>90	1550 Lm	85 Lm/w	24V 50mm
BG-267-2835-900	24V	20W	180 pcs/m	10mm	>90	1800 Lm	90 Lm/w	24V 33.3mm
BG-268-2835-1200	24/48V	20W	240 pcs/m	10mm	>90	1900 Lm	95 Lm/w	48V 50mm 24V 25mm
BG-243-2835-1200	24V	24 W	240 pcs/m	12mm	>90	1920 Lm	86 Lm/w	24V 50mm
BG-245-2835-1200	24V	24 W	240 pcs/m	12mm	>90	1920 Lm	86 Lm/w	24V 25mm
BG-228-2835-500	12V	12W	100 pcs/m	8mm	>90	1032 Lm	86 Lm/w	12V 10mm
BG-229-2835-500	24V	12W	100 pcs/m	8mm	>90	1032 Lm	86 Lm/w	24V 10mm
BG-254-2835-600	12V	14.4 W	120 pcs/m	8mm	>90	1220 Lm	86 Lm/w	12V 8.3mm
BG-255-2835-600	24V	14.4 W	120 pcs/m	8mm	>90	1220 Lm	86 Lm/w	24V 8.3mm
BG-291-2835-600-RGB	24V	18 W	120 pcs/m	10mm	/	/	/	24V 50mm

SMD5050

SMD5050 LED STRIP/5050软灯条

Dimensions：5m/roll
产品尺寸：5米/卷
Led type: SMD5050, high brightness led
灯珠型号：SMD5050，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围

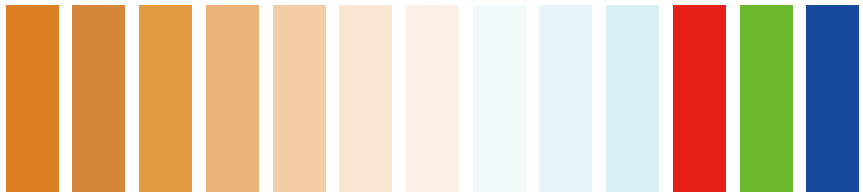

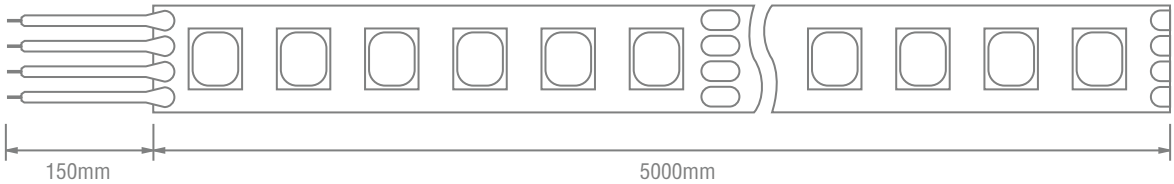

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-112-5050-150	12V/24V	7.2 W	30 pcs/m	10mm	>80	650 Lm	90 Lm/w	24V 200mm 12V 100mm
BG-113-5050-300	12V/24V	14.4 W	60 pcs/m	10mm	>80	1300 Lm	90 Lm/w	24V 100mm 12V 50mm
BG-278-5050-300-CCT	12V	12W	60 pcs/m	8mm	>80	1080 Lm	90 Lm/w	12V 50mm
BG-115-5050-300-CCT	12V/24V	14.4W	60 pcs/m	10mm	>80	1300 Lm	90 Lm/w	24V 100mm 12V 50mm
BG-119-5050-480	12V/24V	18 W	96 pcs/m	10mm	/	/	/	24V 62.5mm 12V 31.2mm
BG-114-5050-600	12V/24V	24 W	120 pcs/m	15mm	>80	2160 Lm	90 Lm/w	12V/24V 50mm
BG-279-5050-600	12V/24V	18W	120 pcs/m	10mm	>80	/	/	24V 50mm 12V 25mm

RGB(W/WW)

RGBW/RGBWW LED Strip/RGBW/RGBWW灯 条

LED Color/灯珠颜色

– RGBW/WW –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

Underwater lighting engineering /水下照明工程

Car decoration /汽车装饰

CCT Range/色温范围

1800 2200 2700 3000 4000 5000 6000 8000 10000 20000 Red Green Blue

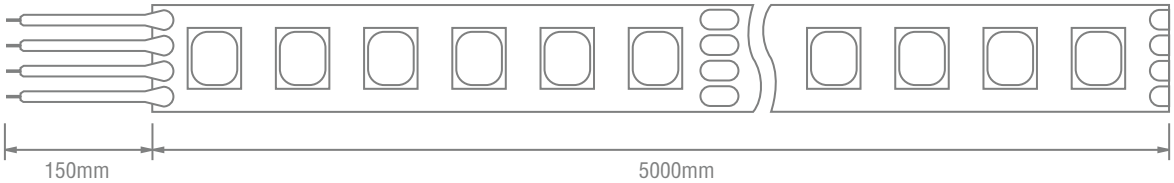

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-213-5050-300-RGB+W	24V	12 W	60 pcs/m	12mm	>80	85 Lm/w	24V 200mm
BG-214-5050-300	12V/24V	15 W	60 pcs/m	12mm	>80	85 Lm/w	24V 100mm 12V 50mm
BG-215-5050-480	24V	20 W	96 pcs/m	12mm	>80	85 Lm/w	24V 63mm
BG-216-5050-150	24V	7.2 W	30 pcs/m	12mm	>80	85 Lm/w	24V 200mm
BG-217-5050-360	24V	17 W	72 pcs/m	12mm	>80	85 Lm/w	24V 83mm
BG-218-5050-180	24V	9 W	36 pcs/m	12mm	>80	85 Lm/w	24V 166mm
BG-219-5050-600	24V	24 W	120 pcs/m	15mm	>80	85 Lm/w	24V 50mm
BG-276-5050-300	12V/24V	12 W	60 pcs/m	10mm	>80	85 Lm/w	24V 100mm 12V 50mm
BG-277-5050-360	12V/24V	17 W	72 pcs/m	10mm	>80	85 Lm/w	24V 83.3mm 12V 41.6mm
BG-220-4040-600	24V	20 W	120 pcs/m	10mm	>80	/	24V 50mm
BG-270-5050-300-RGBWW	12V/24V	18 W	60 pcs/m	12mm	>80	80 Lm/w	24V 100mm 12V 50mm
BG-274-5050-480-RGBWW	12V/24V	22 W	96 pcs/m	12mm	>80	80 Lm/w	24V 62.5mm 12V 31.3mm

SMD3014

SMD3014 LED STRIP/3014软灯条

Dimensions：5m/roll
产品尺寸：5米/卷
Led type: SMD3014, high brightness led
灯珠型号：SMD3014，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围

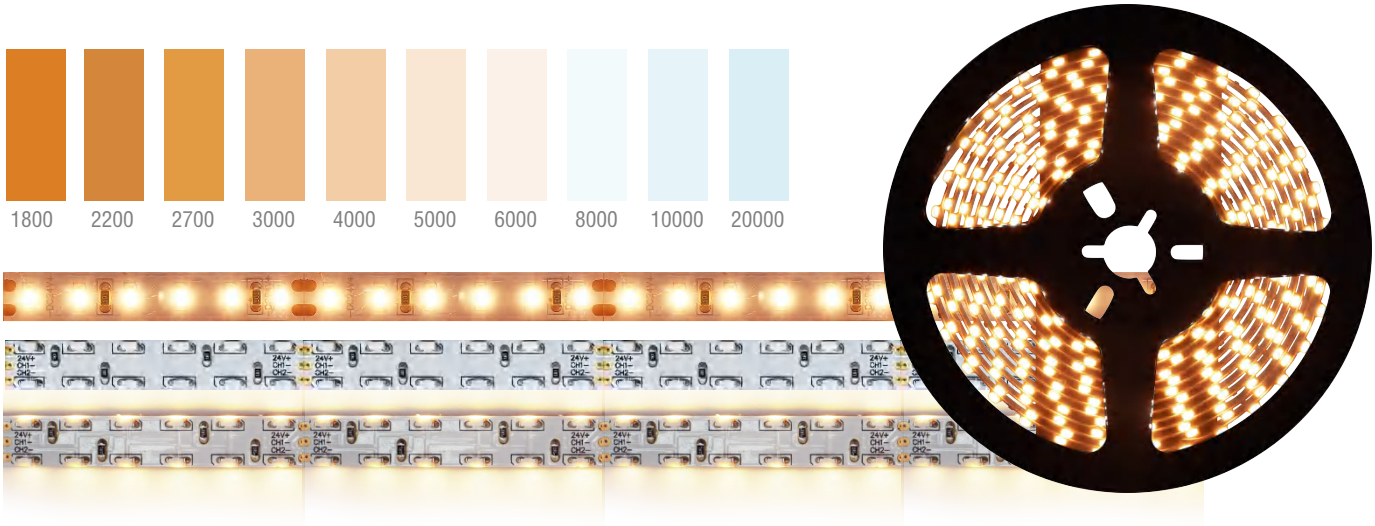

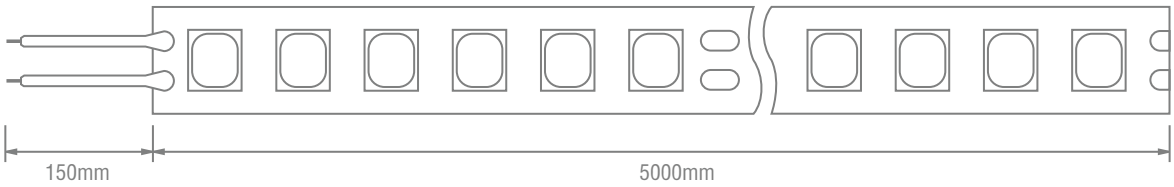

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-251-3014-300	12V/24V	6 W	60 pcs/m	8mm	>80	550 Lm	92 Lm/w	24V 100mm 12V 50mm
BG-252-3014-600	12V/24V	12 W	120 pcs/m	8mm	>80	1100Lm	92 Lm/w	24V 50mm 12V 25mm

Side View:

BG-253-3014-600	12V	10 W	120 pcs/m	8mm	>80	920 Lm	92 Lm/w	12V 25mm
BG-253-3014-1200	12V	15 W	240 pcs/m	8mm	>80	1420 Lm	95 Lm/w	12V 25mm

SMD3528

SMD3528 LED STRIP/3528软灯条

Dimensions：5m/roll
产品尺寸：5米/卷
Led type: SMD3528, high brightness led
灯珠型号：SMD3528，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围

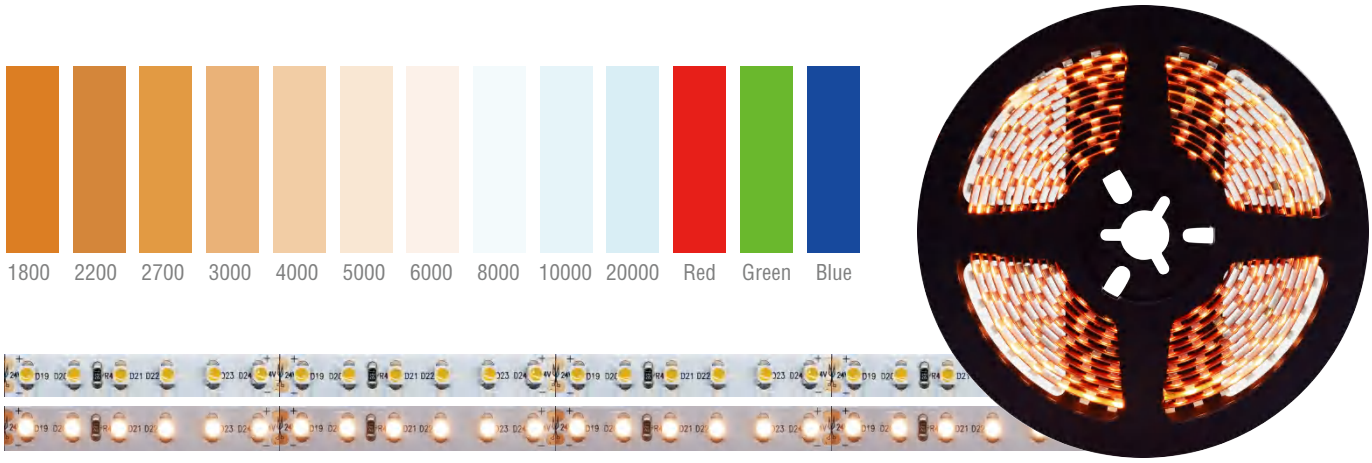

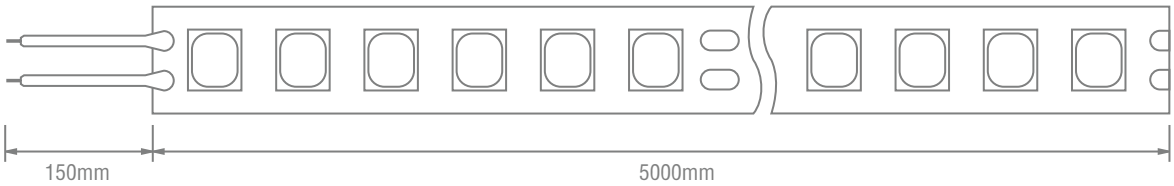

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-106-3528-300	12V/24V	4.8 W	60 pcs/m	8mm	>80	460 Lm	95 Lm/w	24V 100mm 12V 50mm
BG-107-3528-600	12V/24V	9.6 W	120 pcs/m	8mm	>80	910 Lm	95 Lm/w	24V 50mm 12V 25mm
BG-110-3528-900	24V	14.4 W	180 pcs/m	10mm	>80	1440 Lm	100 Lm/w	24V 33.3mm
BG-108-3528-1200	12V/24V	19.2 W	240 pcs/m	14mm	>80	1820 Lm	95 Lm/w	24V 50mm 12V 25mm
BG-109-3528-1200	12V/24V	19.2 W	240 pcs/m	10mm	>80	1820 Lm	95 Lm/w	24V 25mm 12V 12.5mm

SMD2220

SMD2220 LED STRIP/2220软灯条

– 2220 (2216 Plus) –

Led type: SMD2220, high brightness led
灯珠型号：SMD2220，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围



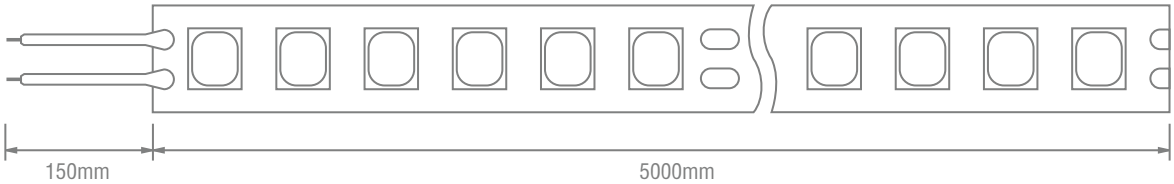

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-260-2220-1200	24V	18 W	240 pcs/m	10mm	>90	1650 Lm	92 Lm/w	24V 25mm
BG-261-2220-1750	24V	24 W	350 pcs/m	12mm	>90	2400 Lm	100 Lm/w	24V 20mm
BG-266-2220-1120-DTW	24V	15 W	224 pcs/m	10mm	>90	1350 Lm	100 Lm/w	24V 62.5mm

SMD2110

SMD2110 LED STRIP/2110软灯条

Dimensions：5m/roll
产品尺寸：5米/卷
Led type: SMD2110, high brightness led
灯珠型号：SMD2110，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围

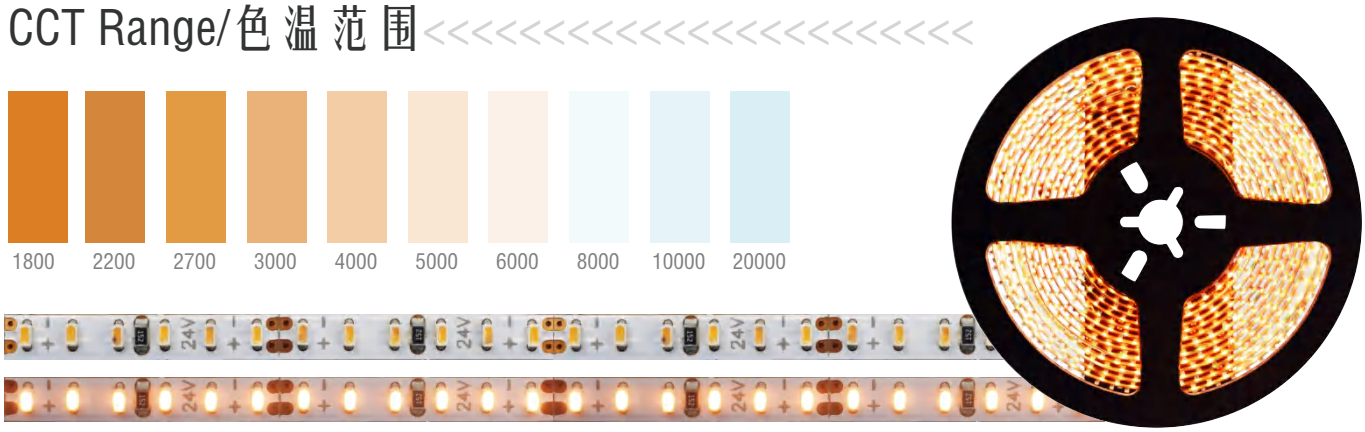



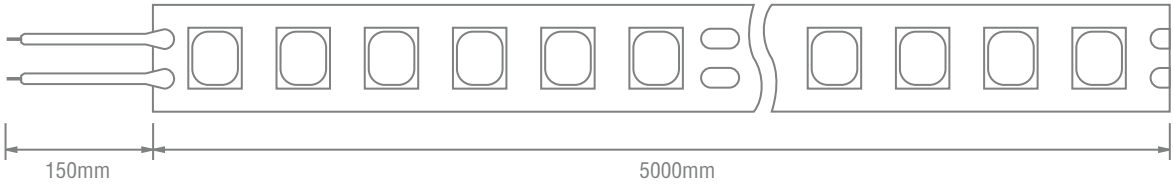

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-283-2110-1400 CCT	24V	14.4 W	280 pcs/m	8mm	>90	1220 Lm	85 Lm/w	24V 50mm
BG-282-2110-2800	24V	19.2 W	560 pcs/m	10mm	>90	1720 Lm	90 Lm/w	24V 25mm
BG-281-2110-3500	24V	19.2 W	700 pcs/m	10mm	>90	1720 Lm	90 Lm/w	24V 20mm

SMD3535

SMD3535 LED STRIP/3535软灯条

Dimensions：5m/roll
产品尺寸：5米/卷
Led type: SMD3535, high brightness led
灯珠型号：SMD3535，高亮LED
PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

Physical Map/实物图

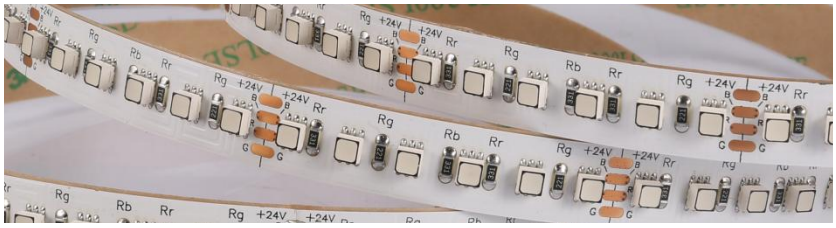



Adjustable Color/颜色调节

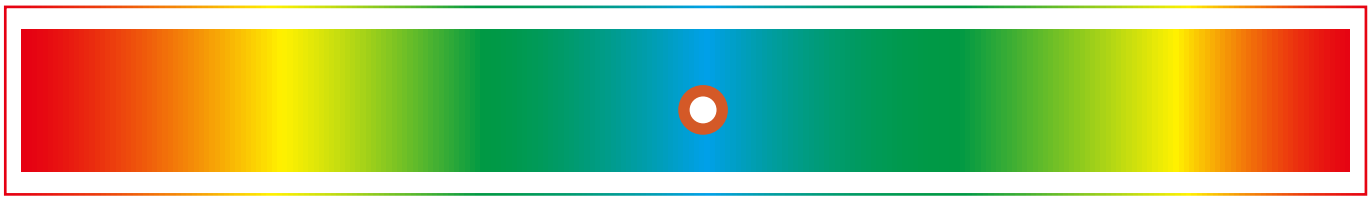



NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-290-3535-600	24V	24 W	120 pcs/m	12mm	/	/	/	24V 50mm

Addressable

Digital LED Strip/幻彩点控灯条

Addressable

– 可寻址 –

PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Underwater lighting engineering /水下照明工程
Car decoration /汽车装饰

CCT Range/色温范围



NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	IC TYPE IC型号	Pixel Per Meter 每米像素	DIMENSIONS 剪切长度
BG-210B-5050-150-IC	12V	7.2 W	30 pcs/m	10mm	WS2811	10 Pixels	12V 100mm
BG-210B-5050-210-IC	12V	9.6 W	42 pcs/m	12mm	WS2811	14 Pixels	12V 71.4mm
BG-285B-5050-300-IC	12V	14.4 W	60 pcs/m	12mm	WS2811	20 Pixels	12V 50mm
BG-235B-5050-300-IC	24V	14.4 W	60 pcs/m	12mm	WS2811	10 Pixels	24V 100mm
BG-230C-5050-150-IC	5V	6 W	30 pcs/m	10mm	BG6812	30 Pixels	5V 33.3mm
BG-230B-5050-150-IC	12V	3.6 W	30 pcs/m	10mm	BG6811	30 Pixels	12V 33.3mm
BG-231C-5050-300-IC	5V	12 W	60 pcs/m	12mm	BG6812	60 Pixels	5V 16.7mm
BG-231B-5050-300-IC	12V	7.2 W	60 pcs/m	12mm	BG6811	60 Pixels	12V 16.7mm
BG-232B-5050-150-IC	12V	3.6 W	30 pcs/m	10mm	BG6815	30 Pixels	12V 33.3mm
BG-233B-5050-300-IC	12V	7.2 W	60 pcs/m	10mm	BG6815	60 Pixels	12V 16.7mm
BG-234A-5050-300-IC RGBW	12V	16.8 W	60 pcs/m	12mm	WS2814	20 Pixels	12V 50mm
BG-234B-5050-300-IC RGBW	12V	16.8 W	60 pcs/m	12mm	UCS2904	20 Pixels	12V 50mm
BG-236A-5050-300-IC RGBW	24V	16.8 W	60 pcs/m	12mm	WS2814	10 Pixels	24V 100mm
BG-236B-5050-300-IC RGBW	24V	16.8 W	60 pcs/m	12mm	UCS2904	10 Pixels	24V 100mm
BG-280-2835-600-IC White	24V	18 W	120 pcs/m	10mm	SM16703	20 Pixels	24V 50mm

DMX512

DMX512 LED Strip/DMX512灯 条

DMX512 standard protocol
– DMX512标 准 协 议 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

Underwater lighting engineering /水下照明工程

Car decoration /汽车装饰

CCT Range/色温范围

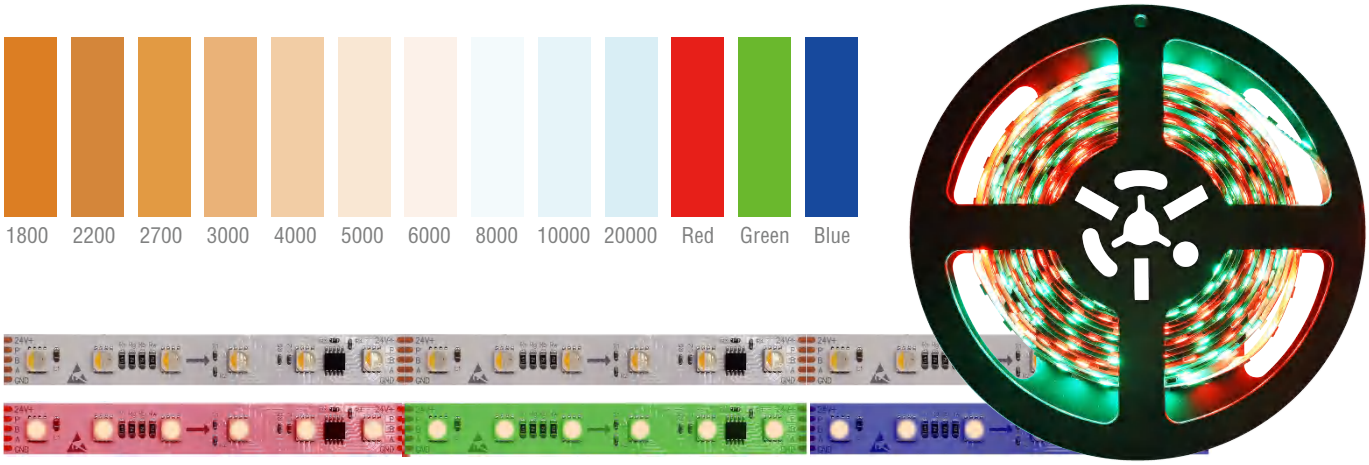

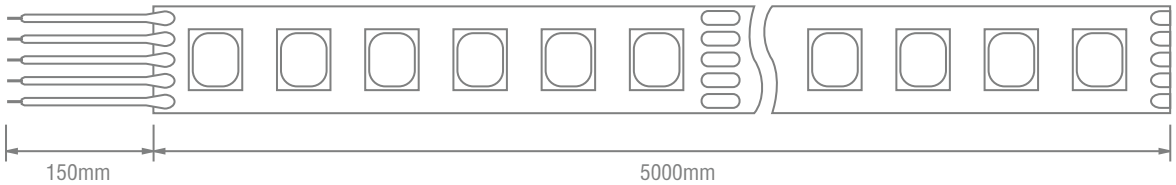

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	IC TYPE IC型号	Pixel Per Meter 每米像素	DIMENSIONS 剪切长度
BG-237-5050-300-DMX RGBW (Pouer adjustable)	24V	17 W	60 pcs/m	12mm	UCS512	10 Pixels	24V 100mm
BG-238-5050-300-DMX RGB	24V	13 W	60 pcs/m	12mm	UCS512	10 Pixels	24V 100mm
BG-239-5050-300-DMX RGBW	24V	17 W	60 pcs/m	12mm	UCS512	10 Pixels	24V 100mm
BG-286-2835-350-DMX White	24V	17W	70 pcs/m	10mm	UCS512	10 Pixels	24V 100mm

Constant Current

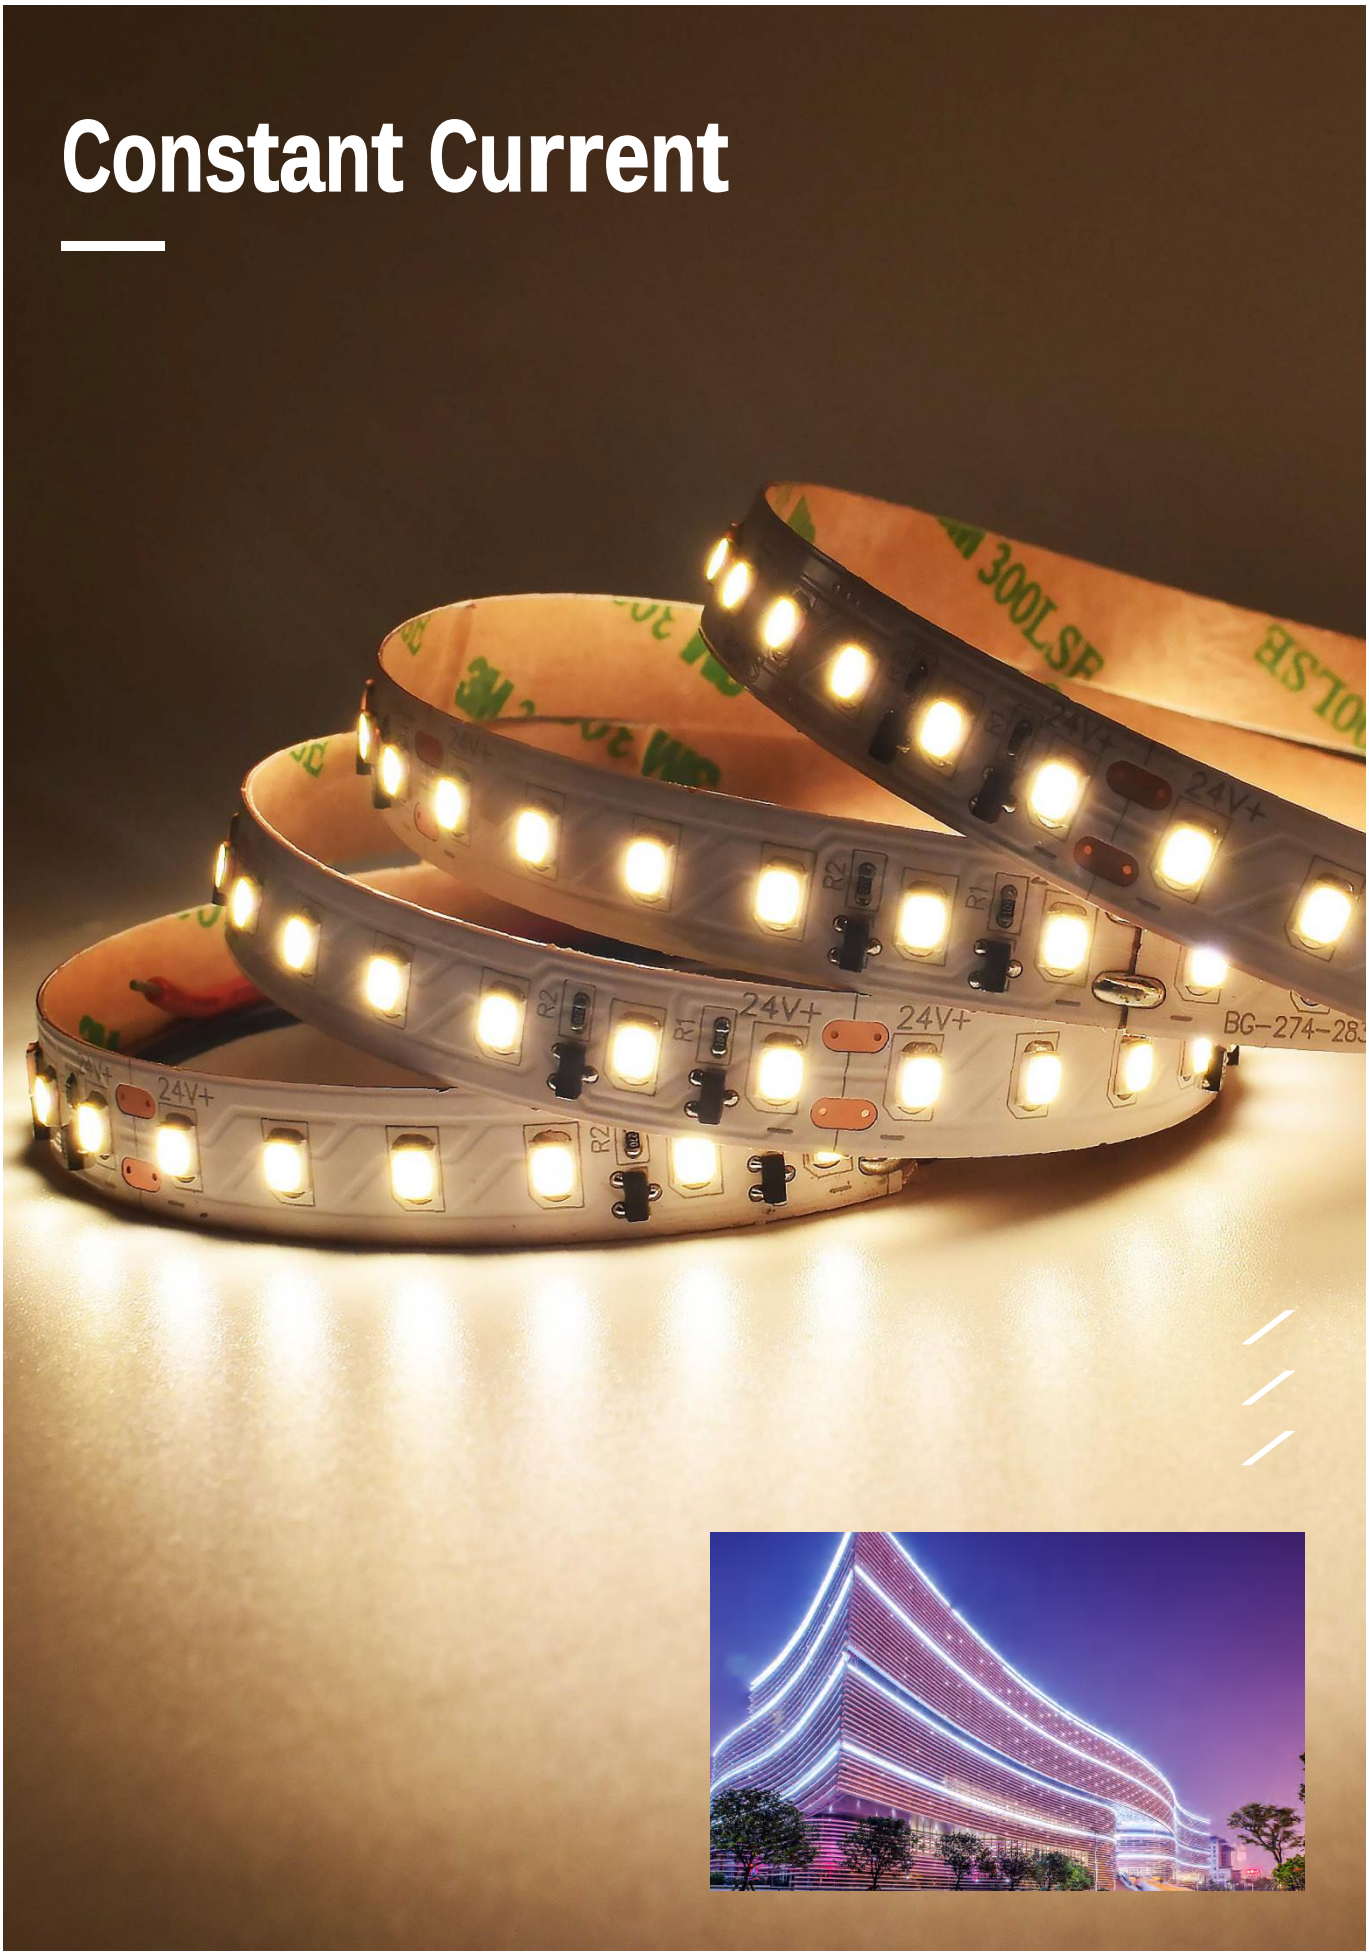

Constant current LED strip/恒流灯条

Extra long/超长
Less voltage drop/压降小

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

Underwater lighting engineering /水下照明工程

Car decoration /汽车装饰

CCT Range/色温范围

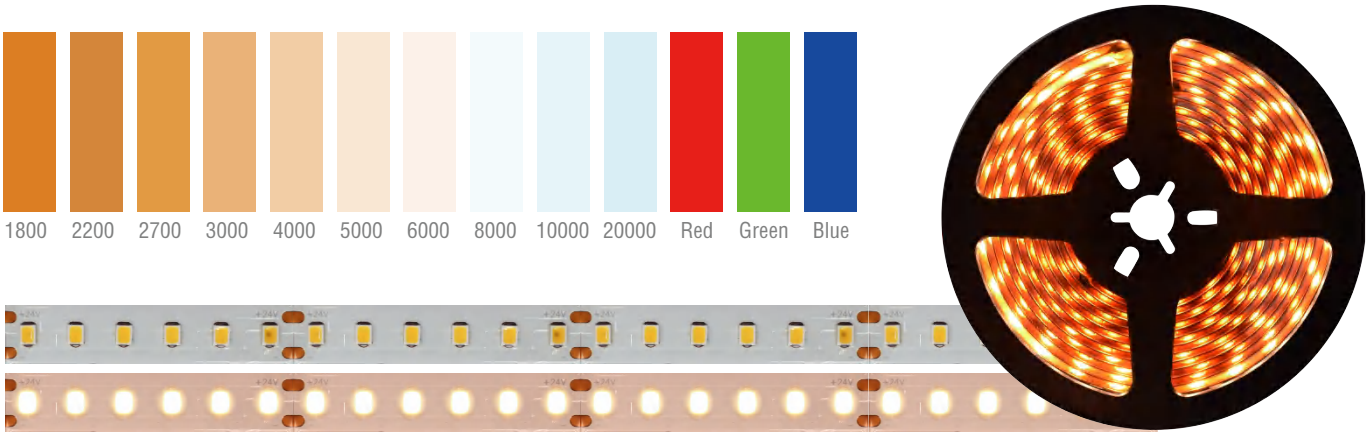

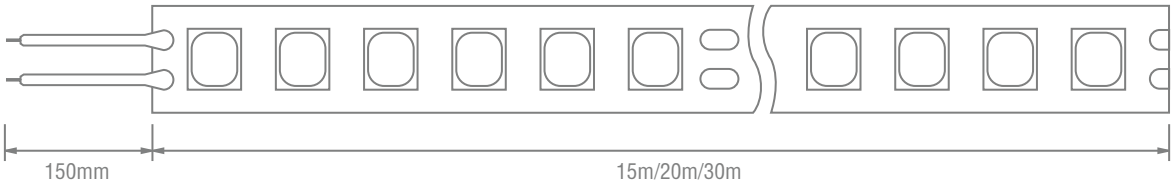

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-116-5050-300-CC RGB	24V	8 W	60 pcs/m	10mm	/	/	/	24V 100mm
BG-118-5050-300-CC CCT	24V	10 W	60 pcs/m	10mm	>80	950 Lm	95 Lm/w	24V 100mm
BG-211-5050-300-CC RGBW	24V	10 W	60 pcs/m	12mm	/	/	/	24V 100mm
BG-272-2835-300-CC	24V	6 W	60 pcs/m	10mm	>80	600 Lm	100 Lm/w	24V 100mm
BG-273-2835-600-CC	36V	8 W	120 pcs/m	10mm	>80	800 Lm	100 Lm/w	24V 83.3mm
BG-275-2835-600-CC	24V	9.6 W	120 pcs/m	10mm	>80	960 Lm	100 Lm/w	24V 50mm

Narrow

Narrow LED Strip/超窄灯条

PCB Width: 3mm
– 最窄板宽3mm –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

Underwater lighting engineering /水下照明工程

Car decoration /汽车装饰

CCT Range/色温范围

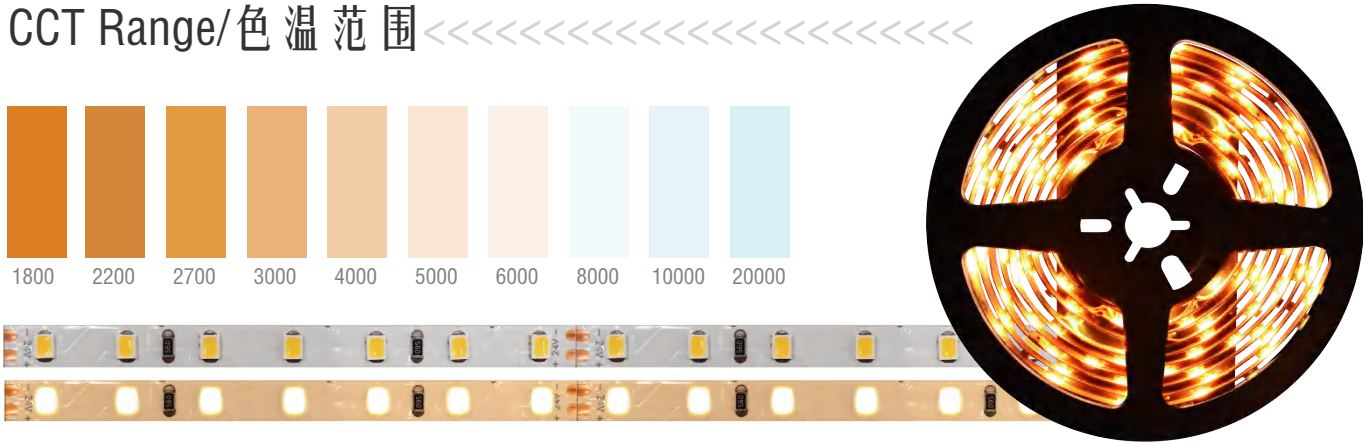

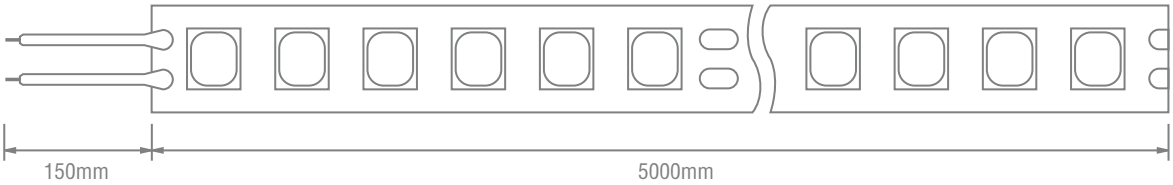

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-259-2835-600	12V/24V	6 W	120 pcs/m	3mm	>90	600 Lm	100 Lm/w	24V 50mm 12V 25mm
BG-262-2220-600	24V	6 W	120 pcs/m	4mm	>90	600 Lm	100 Lm/w	24V 50mm
BG-264-2220-1200	24V	7.2 W	240 pcs/m	4mm	>90	720 Lm	100 Lm/w	24V 25mm
BG-284-2110-1200	24V	7.2 W	240 pcs/m	4mm	>90	720 Lm	100 Lm/w	24V 25mm
BG-120-3528-300	12V/24V	4.8 W	60 pcs/m	5mm	>80	960 Lm	100 Lm/w	24V 100mm 12V 50mm
BG-121-3528-600	12V/24V	9.6 W	120 pcs/m	5mm	>80	960 Lm	100 Lm/w	24V 50mm 12V 25mm
BG-252-3014-600	12V/24V	9.6 W	120 pcs/m	5mm	>80	960 Lm	100 Lm/w	24V 50mm 12V 25mm
BG-258-2835-600	12V	9.6 W	120 pcs/m	5mm	>90	960 Lm	100 Lm/w	12V 8.3mm

High Voltage

High Voltage LED Strip/高压灯条

Voltage/电压

– AC110V/230V –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP66/IP68

防水等级：IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

Underwater lighting engineering /水下照明工程

Car decoration /汽车装饰

CCT Range/色温范围

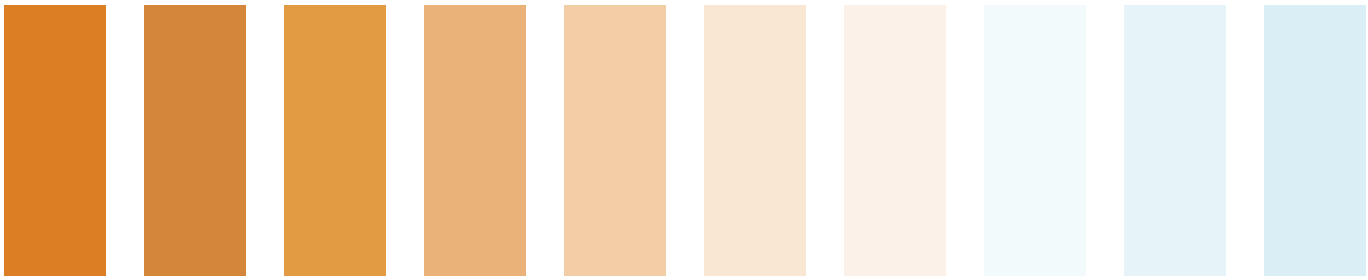

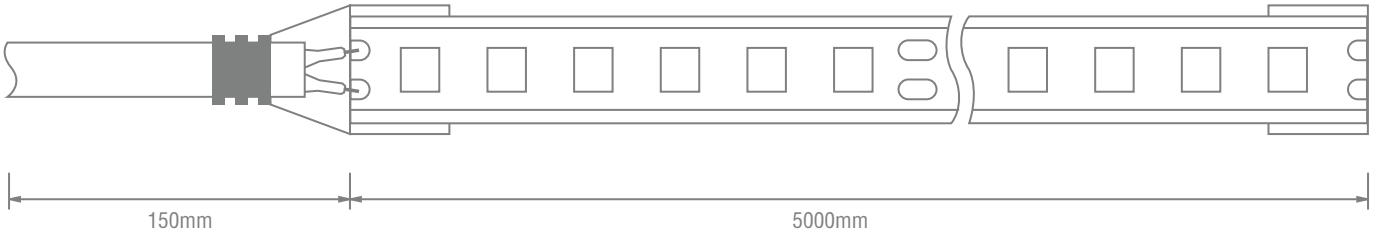

NO. 型号	VOLTAGE 电压(AC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Light Efficiency 光效	DIMENSIONS 剪切长度
BG-400-2835-300	110V/230V	10 W	60 pcs/m	10mm	>80	900 Lm	90 Lm/w	AC110V/230V 200mm
BG-401-2835-600	110V/230V	18 W	120 pcs/m	10mm	>80	1620 Lm	90 Lm/w	AC110V/230V 100mm

Kit

LED STRIP
Smart Bluetooth
Remote Control
Timing
DIY
OFF
ON
W

Kit LED Strip/套装灯条

Box/盒子
DC connector/连接器
5m led strip/5米灯带
Power supply/电源

PCB material: FPC double sides copper
PCB材质：FPC双面铜
Life Span: >36000hours
产品寿命：>36000小时
IP grade：IP20/IP65/IP66/IP68
防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计
Architectural design /建筑设计
Advertisement project /广告项目
Outdoor illuminated signs /户外照明标志
Billboard decoration /广告牌装饰
Display design /展示设计
Car decoration /汽车装饰

Connection Diagram/连接图

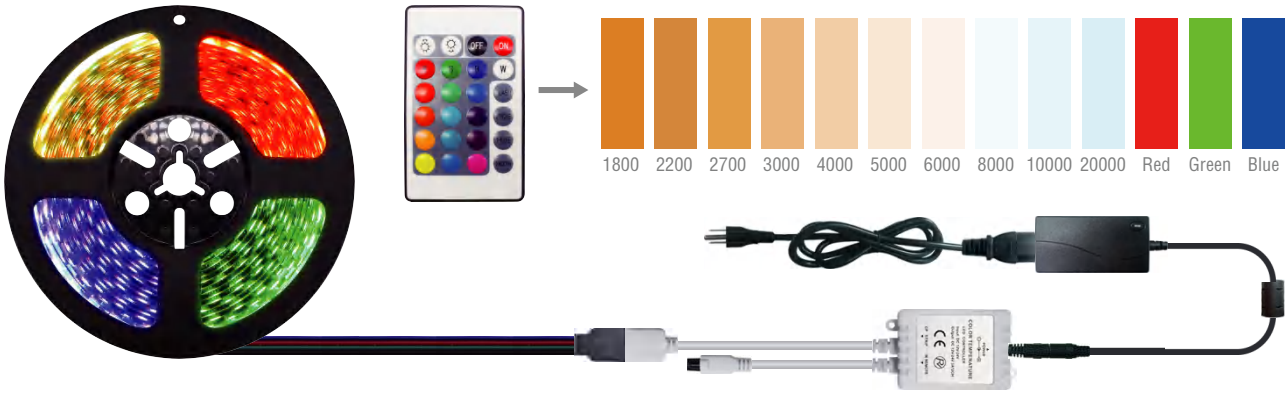

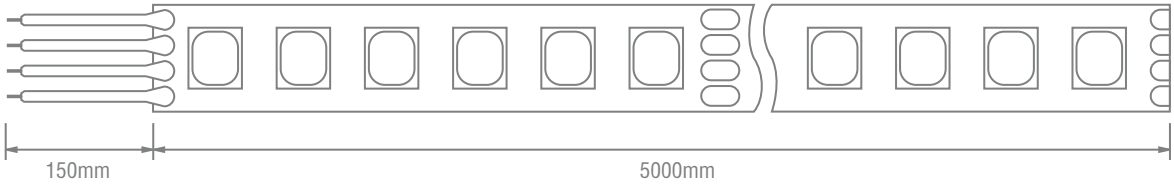

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	CRI 显指	DIMENSIONS 剪切长度
BG-240-2835-300-K	12V/24V	14.4 W	60 pcs/m	10mm	>80	24V 100mm / 12V 50mm
BG-112-5050-150-K	12V/24V	7.2 W	30 pcs/m	10mm	>80	24V 200mm / 12V 100mm
BG-113-5050-300-K	12V/24V	14.4 W	60 pcs/m	10mm	>80	24V 100mm / 12V 50mm
BG-112-5050-150-RGB-K	12V/24V	7.2 W	30 pcs/m	10mm	/	24V 200mm / 12V 100mm
BG-113-5050-300-RGB-K	12V/24V	14.4 W	60 pcs/m	10mm	/	24V 100mm / 12V 50mm
BG-213-5050-300-RGB+W-K	24V	14.4 W	60 pcs/m	10mm	/	24V 100mm
BG-216-5050-150-RGBW-K	24V	8 W	30 pcs/m	12mm	/	24V 200mm
BG-214-5050-300-RGBW-K	12V/24V	16 W	60 pcs/m	12mm	/	24V 100mm / 12V 50mm

COB LED STRIP

Roll To Roll

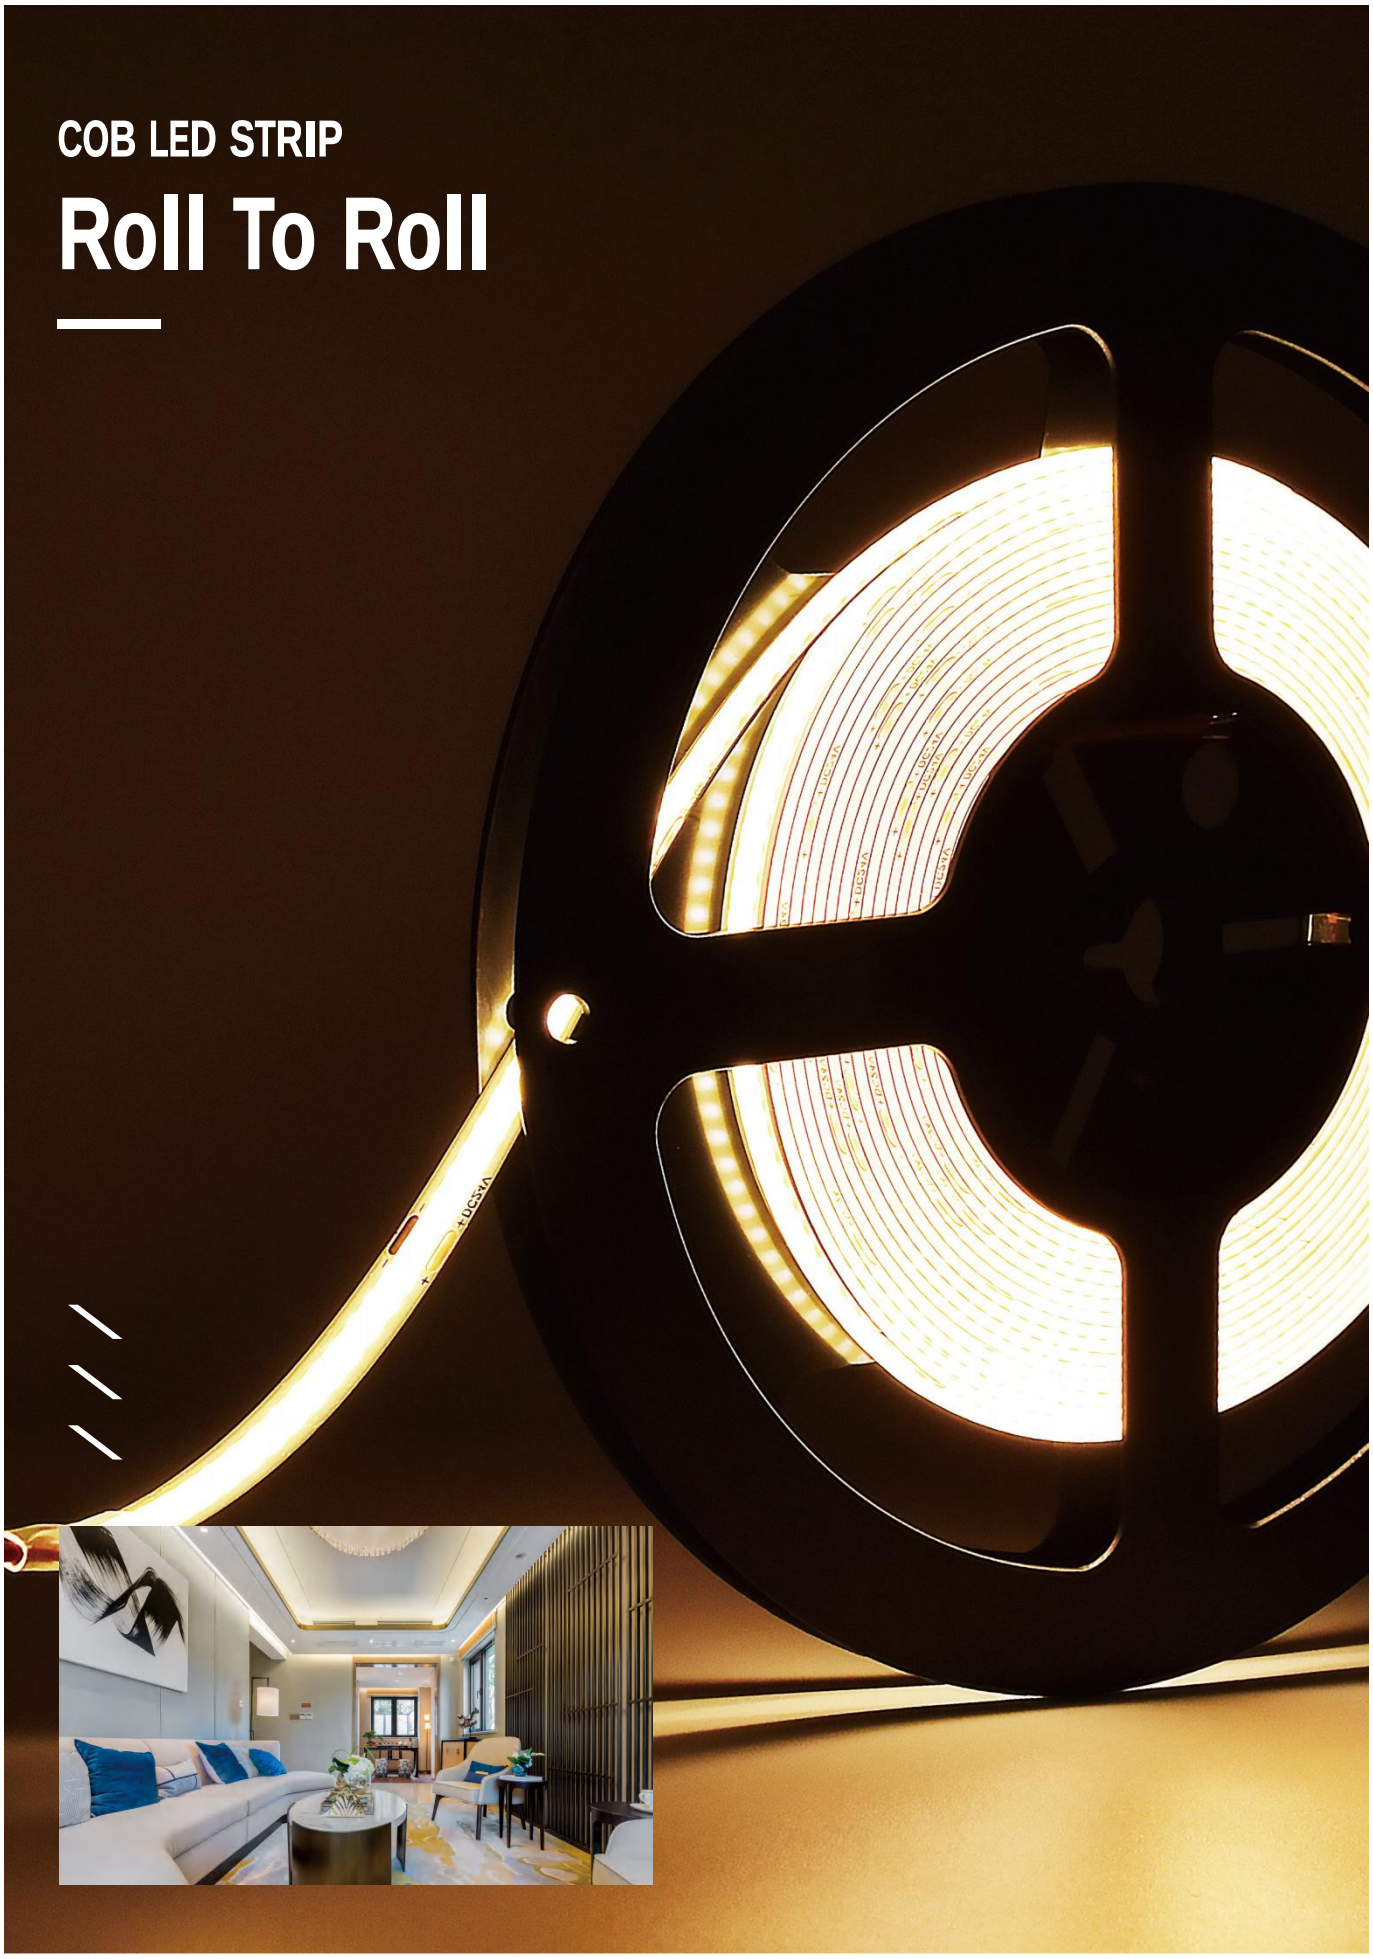

Roll To Roll COB Strip/卷对卷COB灯条

No weld Point

– 无焊接点 –

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Standard/标准色温

2700	3000	4000	6000

CCT Range/色温范围(Customizable/可定制)

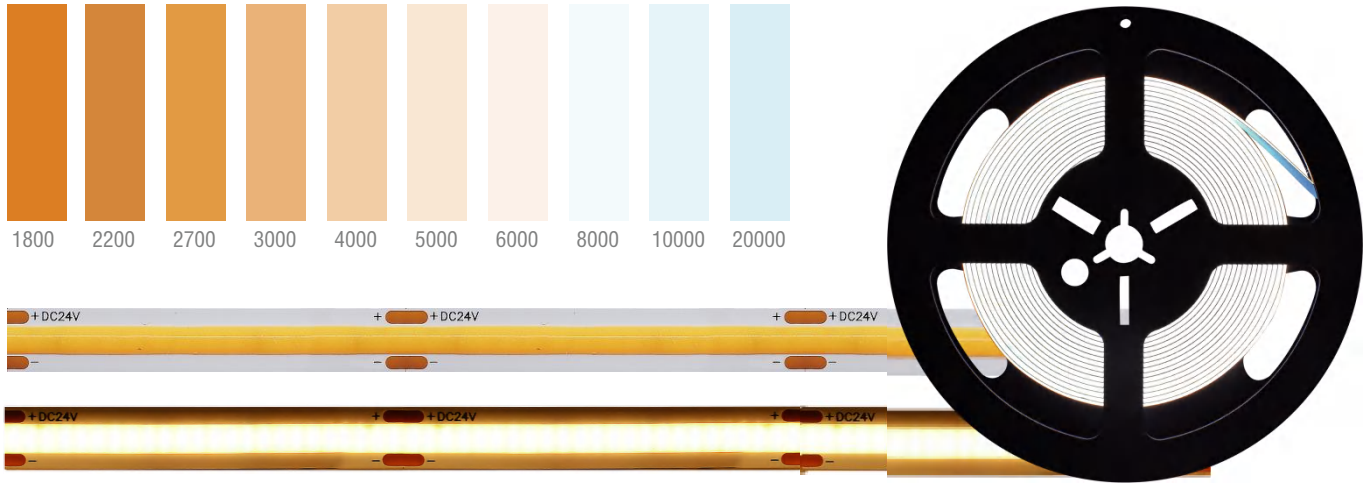

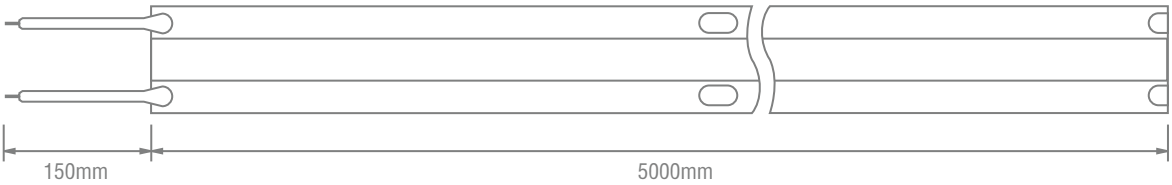

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3001-A	12V/24V	9 W	320 Chip/m	8 mm	>90	990 Lm/m	110 Lm/w	24V 50mm 12V 25mm
BG-3001-B	12V/24V	9 W	480 Chip/m	8 mm	>90	990 Lm/m	110 Lm/w	24V 50mm 12V 25mm

COB LED STRIP

Narrow

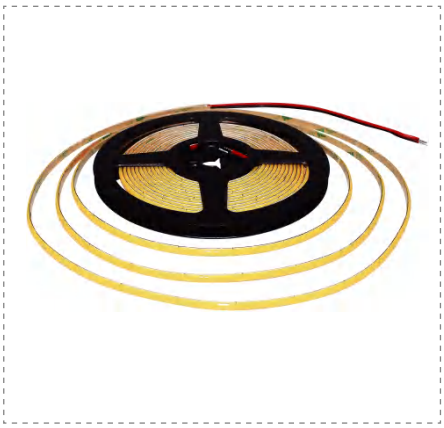

Narrow COB Strip/超窄COB灯条

PCB Width/最窄板宽
– 3 / 4 / 5mm –

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Standard/标准色温

2700	3000	4000	6000

CCT Range/色温范围(Customizable/可定制)

1800	2200	2700	3000	4000	5000	6000	8000	10000	20000

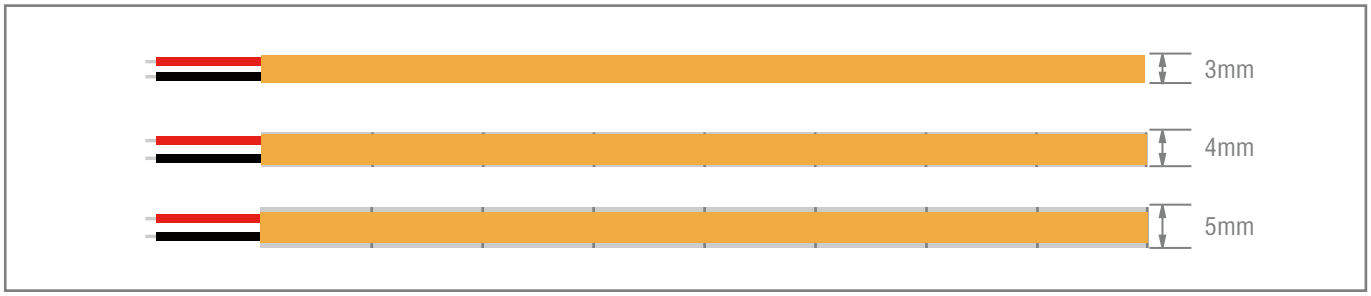

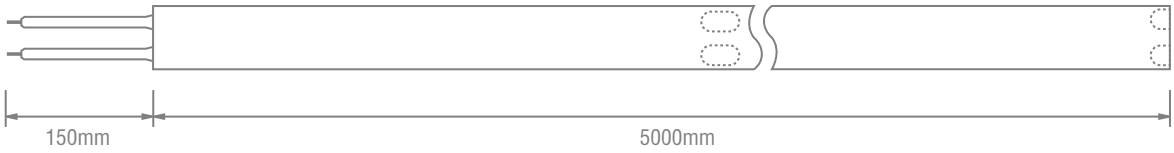

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3024-480	24V	5 W	480 Chip/m	3 mm	>90	425 Lm/m	85 Lm/w	24V 33.3mm
BG-3025-480	12V/24V	6 W	480 Chip/m	4 mm	>90	510 Lm/m	85 Lm/w	24V 33.3mm 12V 16.6mm
BG-3018-480-A	12V/24V	7 W	480 Chip/m	5 mm	>90	595 Lm/m	85 Lm/w	24V 33.3mm 12V 16.6mm

COB LED STRIP

Single Color

Single COB Strip/单色COB灯条

Single color series

– 单色系列 –

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Standard/标准色温

2700	3000	4000	6000

CCT Range/色温范围(Customizable/可定制)

1800	2200	2700	3000	4000	5000	6000	8000	10000	20000

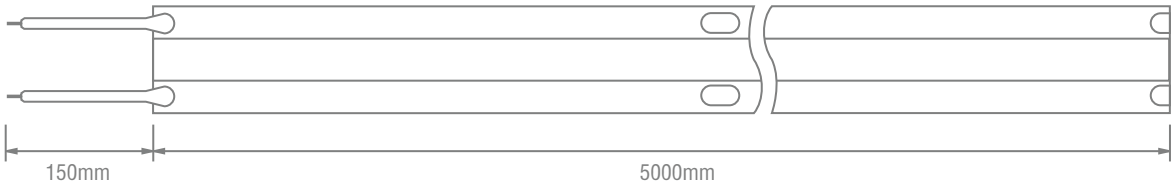

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3013-384-A	24V	8 W	384 Chip/m	8 mm	>90	960 Lm/m	120 Lm/w	24V 83mm
BG-3014-384-A	12V/24V	12 W	384 Chip/m	10 mm	>90	1440 Lm/m	120 Lm/w	24V 83mm 12V 42mm
BG-3019-480-A	12V/24V	9 W	480 Chip/m	8 mm	>90	1080 Lm/m	120 Lm/w	24V 50mm 12V 25mm
BG-3021-480-A	12V/24V	12 W	480 Chip/m	10 mm	>90	1440 Lm/m	120 Lm/w	24V 50mm 12V 25mm
BG-3022-480-A	24V	14 W	480 Chip/m	10 mm	>90	1820 Lm/m	130 Lm/w	24V 50mm
BG-3023-528-A	12V/24V	15 W	528 Chip/m	12V-8 mm 24V-10 mm	>90	1560 Lm/m	110 Lm/w	24V 45.5mm
BG-3040-528-A	24V	15 W	528 Chip/m	10 mm	>90	1950 Lm/m	130 Lm/w	24V 45.5mm

COB LED STRIP

Tunable White

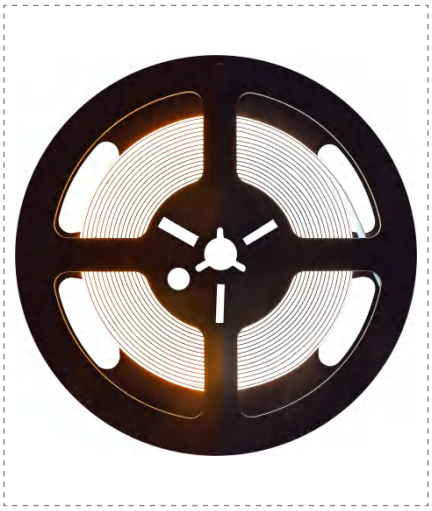

CCT COB Strip/双色COB灯条

Tunable White series

– 白光可调系列 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

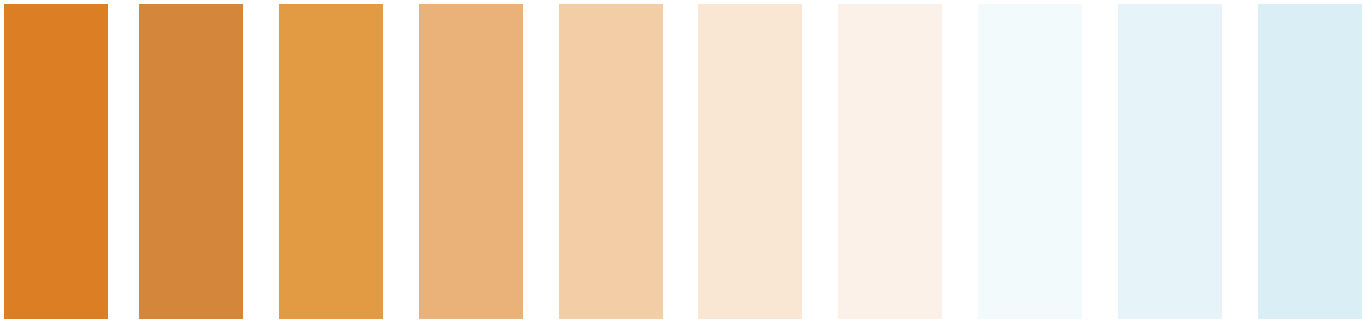

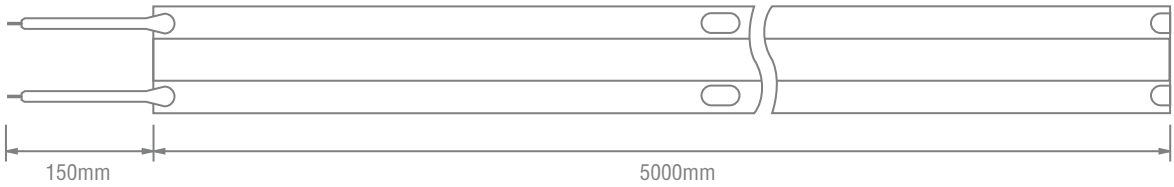

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3050-600-A	24V	14 W	600 Chip/m	5 mm	>90	1190 Lm/m	85 Lm/w	24V 20mm
BG-3051-512-A	24V	18 W	512 Chip/m	8 mm	>90	2160 Lm/m	120 Lm/w	24V 31.3mm
BG-3052-608-A	12V/24V	22 W	608 Chip/m	10 mm	>90	2640 Lm/m	120 Lm/w	24V 26.3mm 12V 13.2mm
BG-3025-640-A	24V	22 W	640 Chip/m	10 mm	>90	2640 Lm/m	120 Lm/w	24V 50mm

COB LED STRIP

RGB(W/WW)

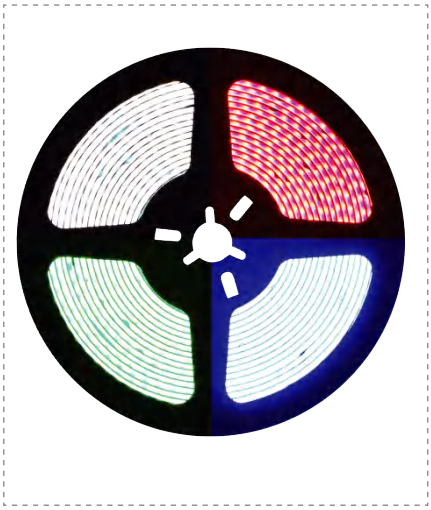

RGB COB Strip/RGB COB灯 条

RGB/RGBW/RGBWW

– RGB系 列 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

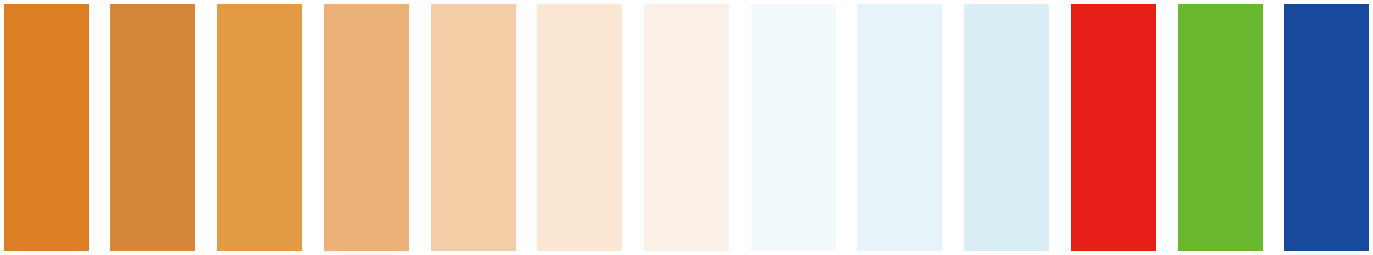

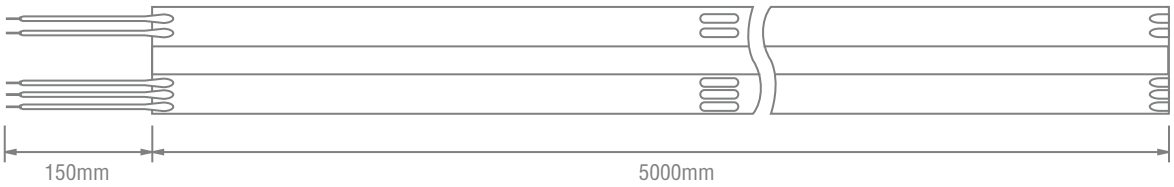

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	DIMENSIONS 剪切长度
BG-3061-450	12V	15 W	450 Chip/m	10 mm	/	12V 20mm
BG-3062-480	24V	15 W	480 Chip/m	10 mm	/	24V 50mm
BG-3026-810	12V	15 W	810 Chip/m	10 mm	/	12V 11mm
BG-3027-840	24V	15 W	840 Chip/m	10 mm	/	24V 25mm
BG-3029-896-A RGBW	24V	16 W	896 Chip/m	12 mm	>90	24V 31.3mm
BG-3028-840-A RGB+CCT	24V	16 W	840 Chip/m	12 mm	>90	24V 41.6mm

COB LED STRIP

Constant Current

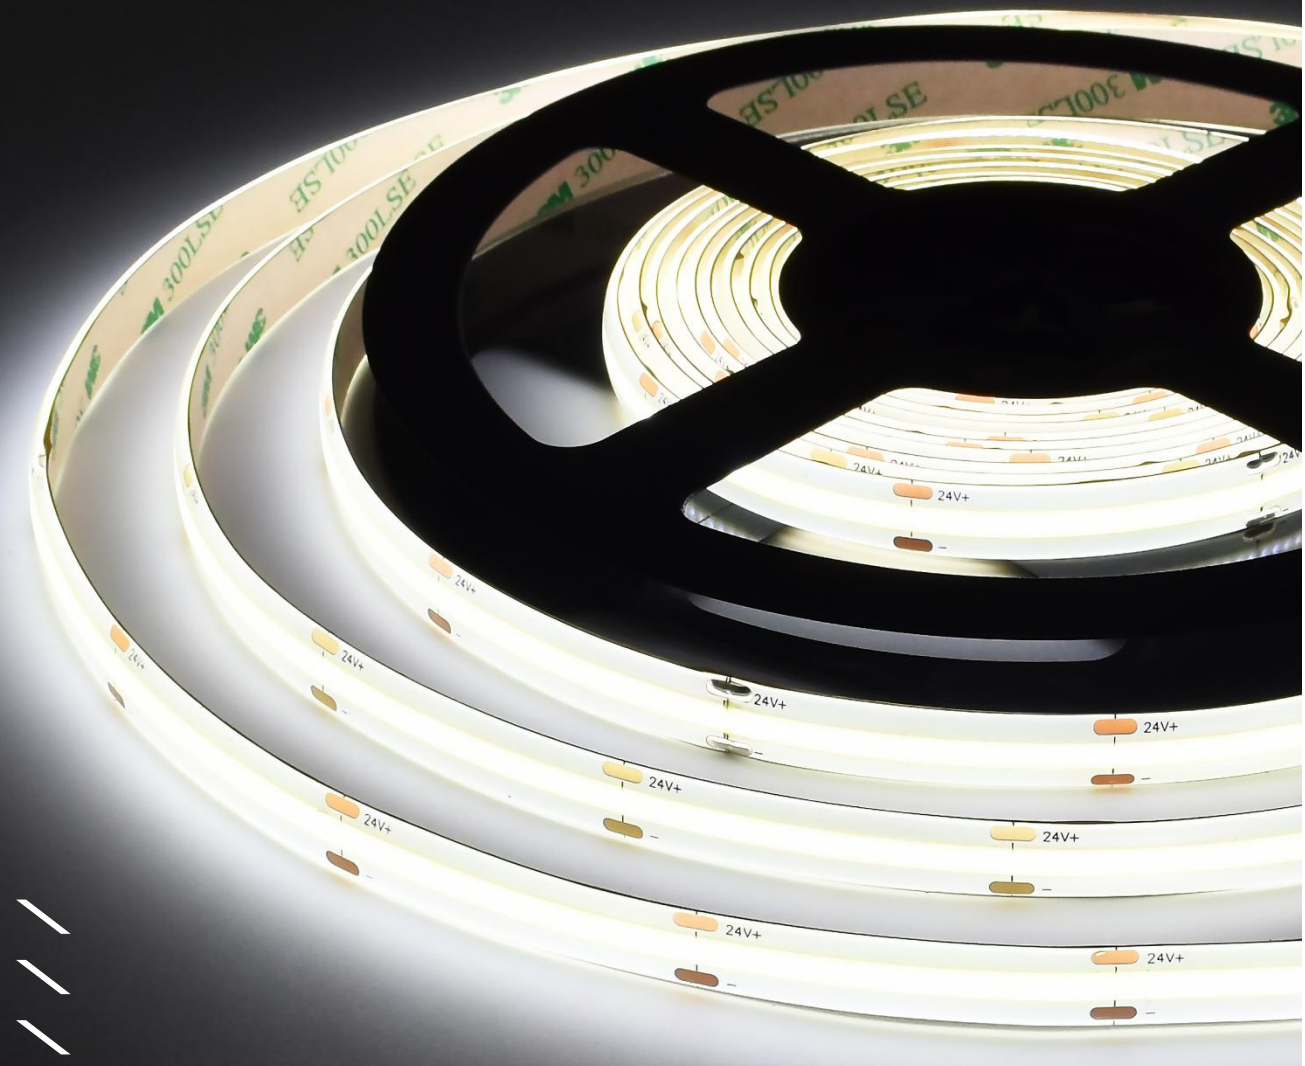

Constant Current COB Strip/恒流COB灯条

Extra Long/超长
Less voltage drop/压降小

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

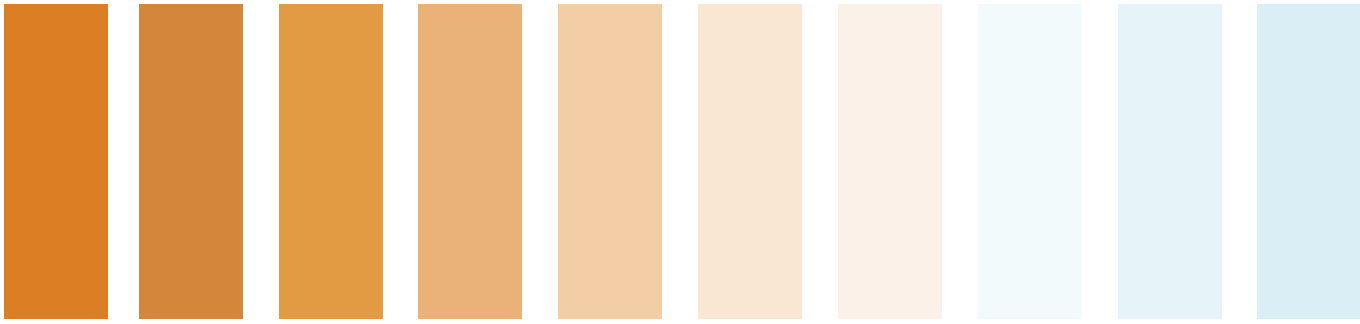

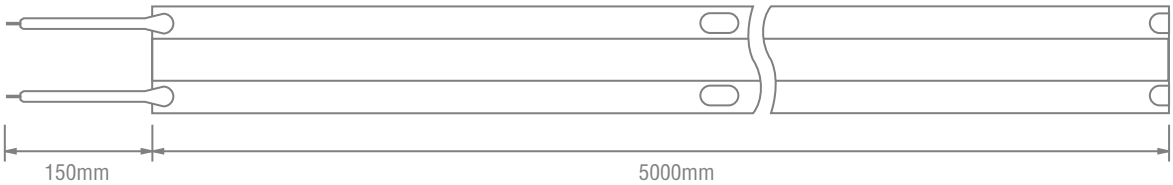

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3030-360	24V	10 W	360 Chip/m	10 mm	>90	850 Lm/m	85 Lm/w	24V 50mm
BG-3033-480	24V	10 W	480 Chip/m	10 mm	>90	1100 Lm/m	110 Lm/w	24V 50mm
BG-3034-480	48V	10 W	480 Chip/m	10 mm	>90	1100 Lm/m	110 Lm/w	24V 50mm

COB LED STRIP

Free Cutting

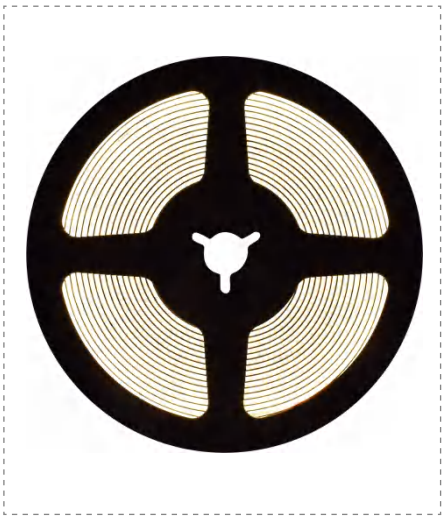

COB Strip/COB灯 条

Free Cutting Series

– 自由剪切系列 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

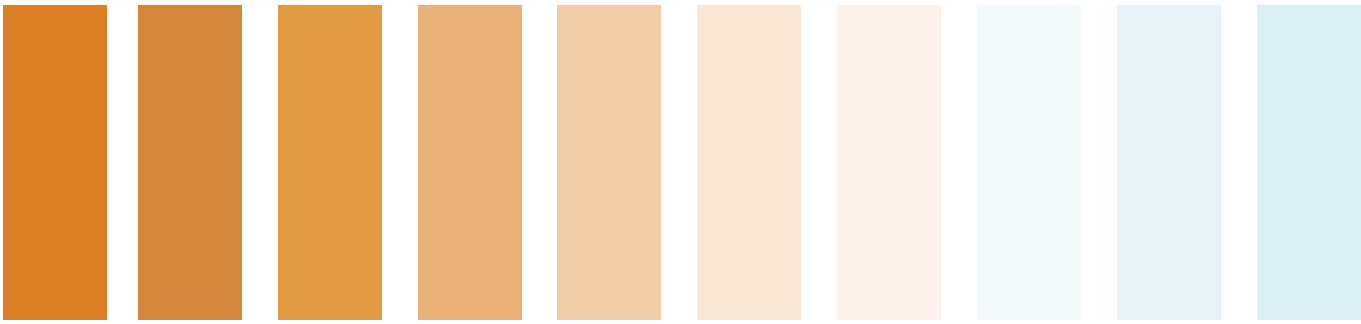

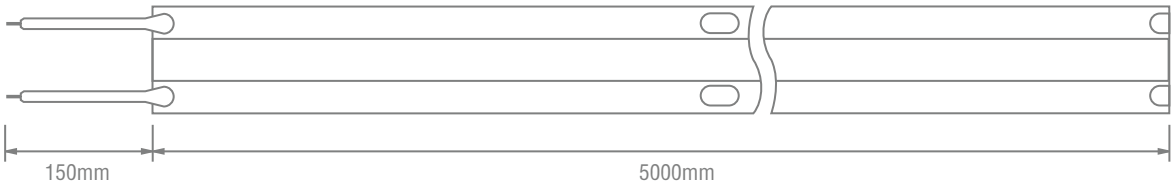

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3017-480-A	5V	5 W	480 Chip/m	4 mm	>90	350 Lm/m	70 Lm/w	5V 12.5mm
BG-3017-480-B	5V	5 W	480 Chip/m	8 mm	>90	350 Lm/m	70 Lm/w	5V 10.5mm
BG-3017-480-C	12V/24V	9 W	480 Chip/m	8 mm	>90	630 Lm/m	70 Lm/w	24V 16.6mm 12V 8.3mm
BG-3017-480-D	24V	12 W	480 Chip/m	10 mm	>90	840 Lm/m	70 Lm/w	24V 16.6mm

COB LED STRIP

Addressable

Digital COB Strip/幻彩COB灯条

Addressable

– 可寻址 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

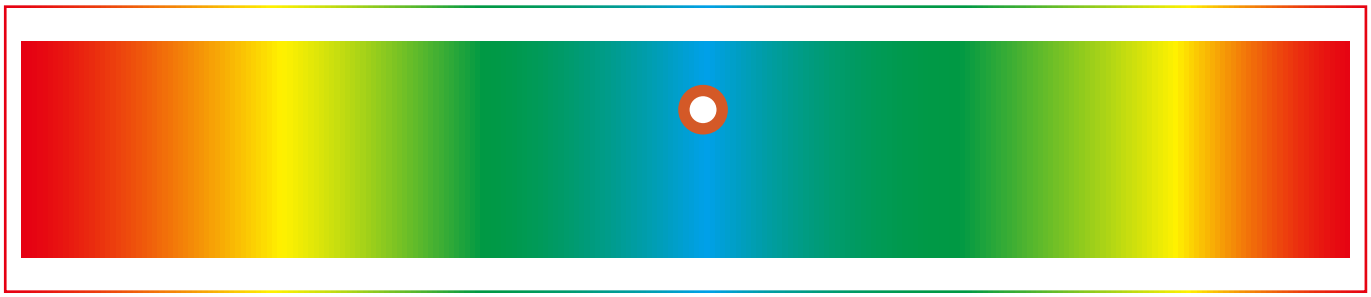

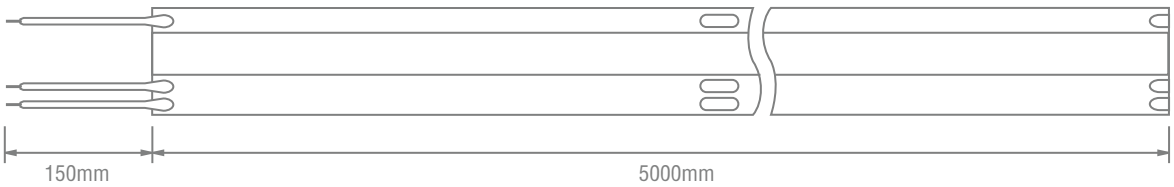

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	Pixels Per Meter 像素	DIMENSIONS 剪切长度
BG-3091-420 RGB	24V	15 W	420 Chip/m	10 mm	10 Pixels	24V 100mm
BG-3092-420 White	24v	15W	420 Chip/m	10 mm	10 Pixels	24V 100mm

COB LED STRIP

High Voltage

High Voltage COB Strip/高压COB灯条

Voltage/电压

– AC110V/230V -

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

IP grade：IP20/IP65/IP66/IP68

防水等级：IP20 / IP65 / IP66 / IP68

Application:

Interior design /室内设计

Architectural design /建筑设计

Advertisement project /广告项目

Outdoor illuminated signs /户外照明标志

Billboard decoration /广告牌装饰

Display design /展示设计

CCT Range/色温范围

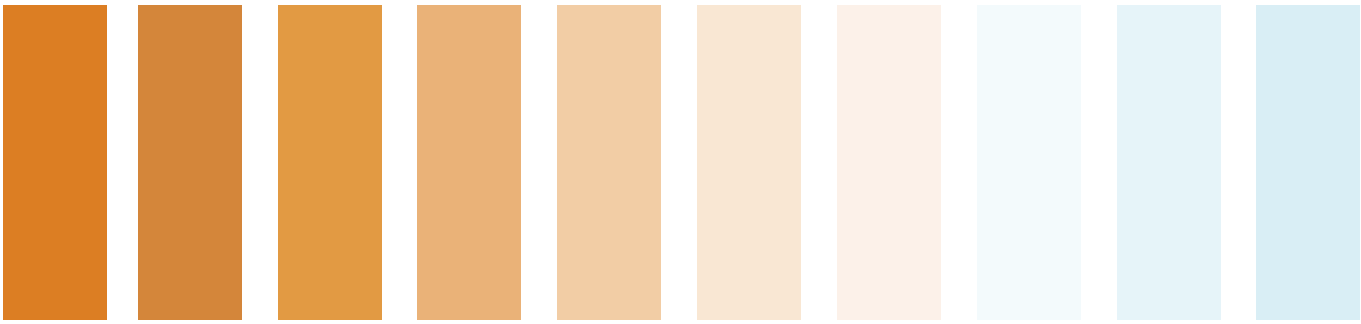

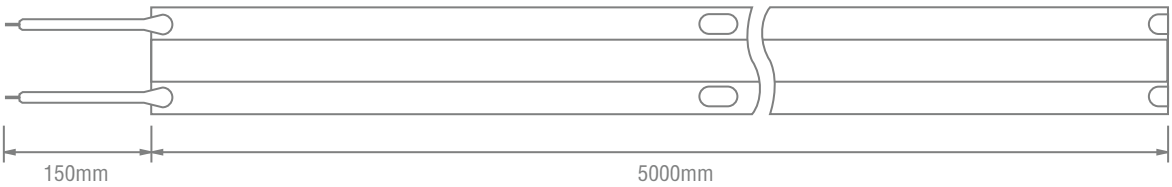

NO. 型号	VOLTAGE 电压(AC)	POWER 功率	Chip QTY. 灯数	PCB Width 板宽	CRI 显指	LUMEN FLUX 流明	Efficiency 光效	DIMENSIONS 剪切长度
BG-3081-400	AC 110V	12 W	400 Chip/m	10 mm	>90	1080 Lm/m	90 Lm/w	110V 100mm
BG-3082-432	AC 230V	12 W	432 Chip/m	10 mm	>90	1080 Lm/m	90 Lm/w	230V 166.5mm

UV LED Strip

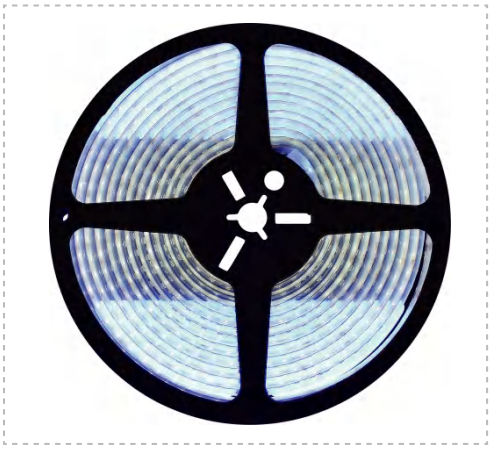

UV LED STRIP/UV软灯条

Dimensions：5m/roll

产品尺寸：5米/卷

PCB material: FPC double sides copper

PCB材质：FPC双面铜

IP grade：IP20

防水等级：IP20

Application:

Welding

固化

Disinfection

消毒杀菌

Anti-counterfeiting verification

防伪验证

Health
健康

Environmental Protection
环保

Sterilization
杀菌

Energy Saving
节能

Convenient
便携

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	PCB Width 板宽	Wave length 波长	DIMENSIONS 剪切长度
SMD2835 UVA LED Strip						
BG-240-2835-300	12V/24V	10 W	60 pcs/m	8mm	365-375nm 380-390nm	
BG-241-2835-600	12V/24V	15 W	120 pcs/m	10mm	390-400nm 400-410nm	

NO. 型号	LED TYPE 灯珠型号	VOLTAGE 电压(DC)	POWER 功率	Padiant Power 辐射功率	LED QTY. 灯珠数量	PCB Width 板宽	Wave length 波长	DIMENSIONS 剪切长度
SMD3535 UVC LED Strip								
BG-302-3535-120-UVC-A	3535+2835	12V	6 W	30 mW	UVC 12 pcs UVA 12 pcs	8mm	UVC 270-280 NM UVA 395-405 NM	
BG-304-3535-150-UVC-A	3535	12V	10 W	160 mW	UVC 30 pcs (2 in 1)	8mm	UVC 270-280 NM UVA 395-405 NM	
SMD3535 UVC LED Bar Light								
BG-1732C-3535-12-A	3535	12V	6 W	30 mW	UVC 12 pcs (2 in 1)	12mm	UVC: 270-280 NM UVA: 395-405 NM	
BG-1732A-3535-12-A	3535	24V	6 W	30 mW	UVC 12 pcs	12mm	270-280 NM	
BG-1732B-3535-12-A	3535	24V	10W	80 mW	UVC 12 pcs	12mm	270-280 NM	
UVC Sterilize Lamp								
BG-DN-3535-UVC-20W-A	3535+2835	24V	20W	120 mW	UVC 18 pcs UVA 18 pcs	29mm	270-280 NM 395-405 NM	500x35x14mm

LED NEON STRIP

Side View

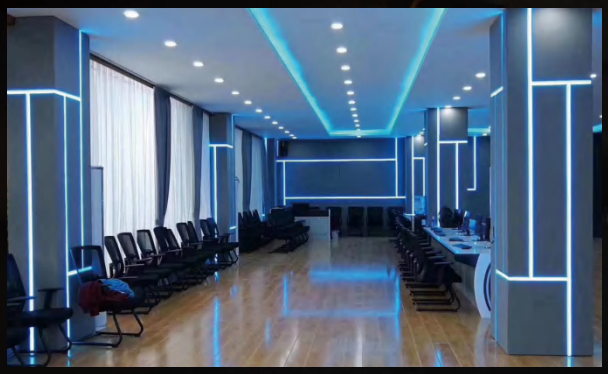

CCT Range/色温范围

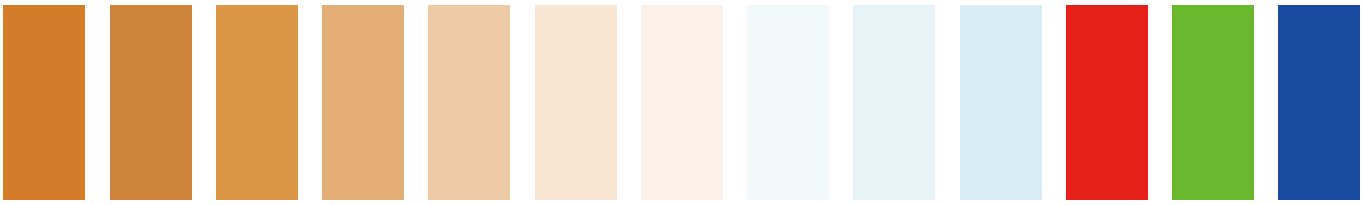

2200 2700 3000 4000 5000 6000 7000 8000 9000 10000 red green blue

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TA-0408	5mm	120 pcs/m
	BG-02TA-0410	5mm	120 pcs/m
	BG-02TA-0612	8mm	120 pcs/m
	BG-02TA-0613	8mm	120 pcs/m
	BG-02EA-0714	5mm	120 pcs/m
	BG-02TA-0815	5mm	120 pcs/m
	BG-02TA1-0815	10mm	120 pcs/m
	BG-02TA-0816	10mm	120 pcs/m
	BG-02EA-1010	5mm	120 pcs/m
	BG-02TA-1018	10mm	120 pcs/m
		10mm	60 pcs/m

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TA-1020	10/12mm	120 pcs/m
		10mm	60 pcs/m
		12mm	72 pcs/m
	BG-02EA-1022	10mm	60 pcs/m
		12mm	60 pcs/m
	BG-02TA-1220	10mm	120 pcs/m
	BG-02TA 1023	10mm	120 pcs/m
	BG-02TA-1225	10/12mm	120 pcs/m
	BG-02EA-1515	10mm	120 pcs/m
	BG-02TA-1616	12mm	120 pcs/m
	BG-02TA-2020	10/12/15mm	120 pcs/m

LED NEON STRIP

Top View

CCT Range/色温范围

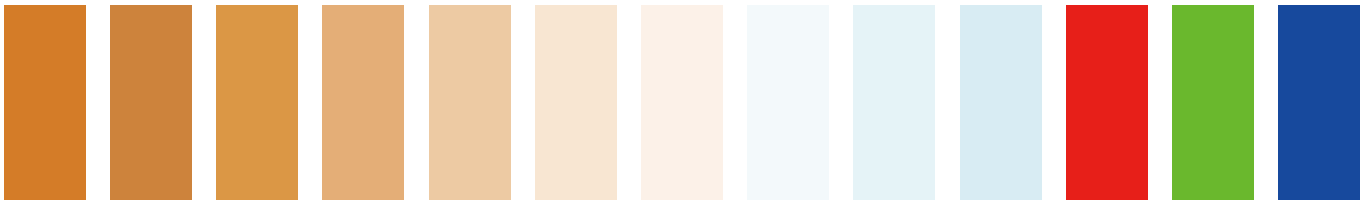

2200 2700 3000 4000 5000 6000 7000 8000 9000 10000 red green blue

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TB-0606	4mm	120 pcs/m
	BG-02TB-1010	5mm	120 pcs/m
	BG-02TB1-1010	5mm	120 pcs/m
	BG-02TB-1212	8mm	120 pcs/m
	BG-02TB1-1212	8mm	120 pcs/m
	BG-02TB-1414	10mm	120 pcs/m
	BG-02TB-1515	10mm	120 pcs/m
	BG-02TB-1616	10mm	120 pcs/m

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TB1-1616	10/12mm	120 pcs/m
	BG-02TB-2014	10/12mm	120 pcs/m
	BG-02TB-2020	10mm	120 pcs/m
	BG-02TB-2517	10mm	120 pcs/m
	BG-02TB-3020	15mm	240 pcs/m
	BG-02TB-5025	20mm	240 pcs/m
	BG-02TB-10030	20mm	240 pcs/m

LED NEON STRIP

Round View

Product picture/产品图片

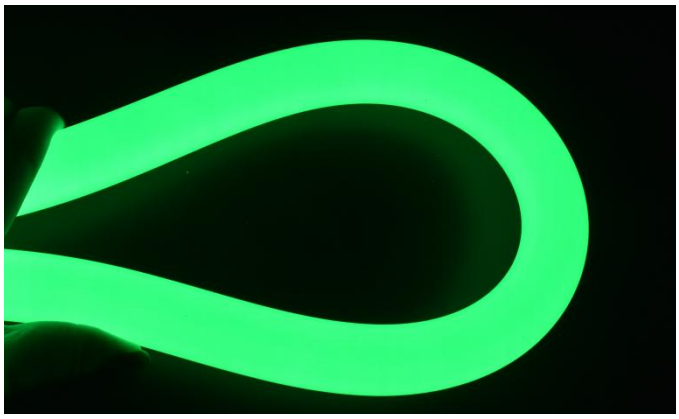

CCT Range/色温范围

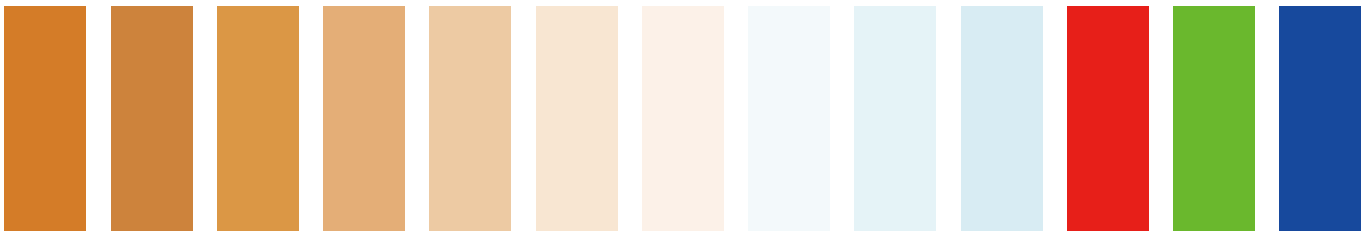

2200 2700 3000 4000 5000 6000 7000 8000 9000 10000 red green blue

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TD-1313	8mm	120 pcs/m
	BG-02TD-1513	10mm	120 pcs/m
	BG-02TD-1614	8mm	120 pcs/m
	BG-02TD-1716	10mm	120 pcs/m
	BG-02TD-2222	5mm	120 pcs/m

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02TD-D20	10mm	120 pcs/m
	BG-02TD-D16	8mm	240 pcs/m
	BG-02TD-D22	8mm	240 pcs/m
	BG-02TD-D25	10mm	240 pcs/m
	BG-02TD-D40	10mm	240 pcs/m

LED NEON STRIP

Free Style

Product picture/产品图片

DIMENSIONS 尺寸	NO. 型号	PCB Width 板宽	LED QTY. 灯珠数量
	BG-02HD2-D25	8/10mm	240 pcs/m
	BG-02HD3-D25	8/10mm	240 pcs/m

CCT Range/色温范围

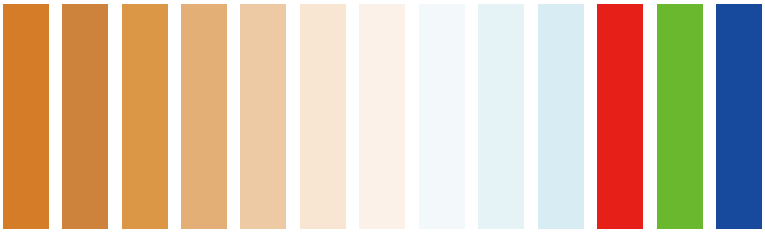

2200 2700 3000 4000 5000 6000 7000 8000 9000 10000 red green blue

Mounting /安装

Ceiling Mounting A
天花板安装A



Ceiling Mounting B
天花板安装B



Ceiling Mounting B
天花板安装B

Mounting Clip
安装卡扣

Hanging Wire Joint Connect
吊线接头连接

Hanging Wire With Hook
带钩吊线

Hanging Wire With End Cap
带端盖的吊线

PCB Tube
PCB管

Telescopic Pole Joint Connect
伸缩杆接头

Telescopic Pole With Hook
带挂钩的伸缩杆

Telescopic Pole With End Cap
带端盖的伸缩杆

Telescopic Pole Joint Connect
伸缩杆接头

Flex Wall Washer light

Flex LED Wall Wash Light/柔性洗墙灯

Multi–angle lens optional

– 多角度透镜可选 –

PCB material: FPC double sides copper

PCB材质：FPC双面铜

Life Span: >36000hours

产品寿命：>36000小时

Warranty: 3 years

质保时间：3年

Application:

Interior design

室内设计

Architectural decoration

建筑装饰

Billboard decoration

广告牌装饰

Display design

展示设计

CCT Range/色温范围

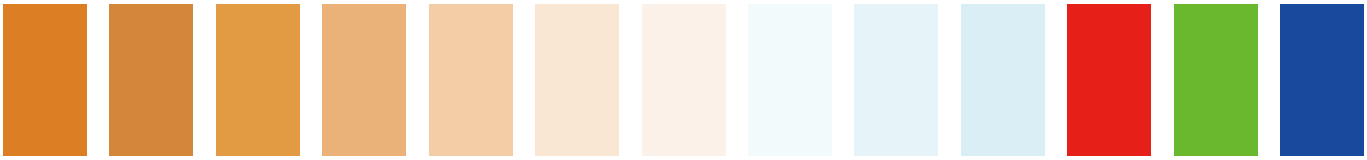

1800 2200 2700 3000 4000 5000 6000 8000 10000 20000 Red Green Blue



BG–1351–450



BG–1311/1321/1331–210



BG–1361/1362/1363–300

NO. 型号	VOLTAGE 电压(DC)	POWER 功率	LED QTY. 灯珠数量	SIZE 尺寸	CRI 显指	Color 颜色	Illuminated Height 照射高度	Beam Angle 光束角度	IP Grade 防水等级	DIMENSIONS 剪切长度
BG–1351–450	24V	18 W	90 pcs/m	12x12mm	>80	2700K/3000K 4000K/6000K	≤3M	30°	IP 67	24V 66.7mm
BG–1311–210	24V	18 W	42 pcs/m	23x11mm	>80	1800–10000K	≤4M	15°/20°/30°/60°	IP 67	24V 167mm
BG–1321–210	24V	18 W	42 pcs/m	23x11mm	>80	CCT 2700+6500K	≤4M	15°/20°/30°/60°	IP 67	24V 167mm
BG–1331–210	24V	18 W	42 pcs/m	23x11mm	/	RGB	≤4M	15°/20°/30°/60°	IP 67	24V 167mm
BG–1361–300	12/24V	18 W	60 pcs/m	14x14mm	>80	2700K/3000K 4000K/6000K	≤3M	30°	IP 66	24V 100mm 12V 50mm
BG–1362–300	12/24V	18 W	60 pcs/m	14x14mm	>80	RGB	≤3M	45°	IP 66	24V 100mm 12V 50mm
BG–1363–300	12/24V	14 W	60 pcs/m	14x14mm	>80	SPI RGB	≤3M	45°	IP 66	24V 100mm 12V 50mm

POWER SUPPLY

—— 电 源 ——

120W

240W

320W

480W

640W

960W

CONNECTOR/连 接 器
–
CONTROLLER/控 制 器

2PIN

3PIN

4PIN

5PIN

6PIN

2PIN

3PIN

4PIN

5PIN

6PIN

2PIN

3PIN

4PIN

5PIN

6PIN

IR Controller/IR控 制 器

RF Controller/RF控 制 器

Wifi/Bluetooth Controller/Wifi/蓝 牙 控 制 器

Aluminium Profiles/铝 型 材



BG-0806



BG-0808



BG-0809



BG-0812B



BG-1207



BG-1220



BG-1215



BG-1010



BG-1510



BG-1606



BG-1606C



BG-1607



BG-1612B



BG-1612C



BG-1613



BG-1614



BG-1706



BG-1706D



BG-1714B



BG-1813



BG-1809



BG-1909A



BG-1911A



BG-2011A



BG-2015



BG-2020



BG-2310



BG-2320



BG-2328B



BG-2525A



BG-2525B



BG-3030



BG-3030C



BG-3535A



BG-3535B



BG-4035A



BG-1815



BG-2014



BG-1616B



BG-1616C



BG-1818



BG-1919



BG-3030A



BG-3030E



BG-3909



BG-1213D



BG-1515C


BG-2814A

www.bright–est.com

Bright Technology Industrial Limited

Professional LED strip designer and manufacturer

Tel: (+86)755 3689 2679/(+86)755 3686 2182

Fax: (+86)755 3686 2183

E–mail: info@bright–est.com

Add: Building A, Baifuli Industrial Area, Huahui Road, Dalang, Longhua District,

Shenzhen City, Guangdong Province, China