


### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:


### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- 1.To avoid the possibility of electrical shock, turn off power supply before installation or servicing. Installation and servicing should be performed by qualified personnel.
- 2.When closing cover of fixture, be sure all wires are inside housing to avoid pinching wires.
- 3.If Photo Receptacle is installed refer to "Photo Control" section for instructions.
- 4.Product must be installed in accordance with your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
- 5.Do not change the structure or any components of the fixture to ensure safety.

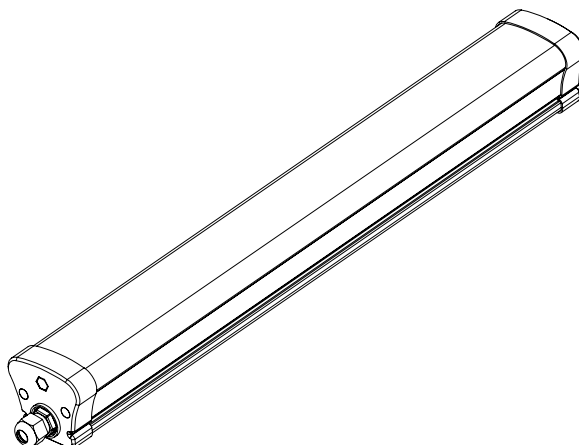


### Optical Parameters

Model No.	Rate Power	Input Voltage (flicker free)	Power Factor	CCT	IP Degree	Single Piece		Carton Package			Working Temp( °C )	Working Humidity
						Product(MM)	N.W (KG)	Qty/Ctn	G.W (KG)	Package (MM)		
SF02-600-18WS	18W	AC160-240V	>0.90	3000~6500K	IP65	600x79x73	0.6	9 pcs	6.3	720x270x240	-35~ +50	10%~90%
SF02-600-20WS	20W	AC160-240V	>0.90	3000 — 6500K	IP65	600x79x73	0.6	9 pcs	6.3	720x270x240	-35~ +50	10%~90%
SF02-1200-36WS	36W	AC160-240V	>0.90	3000 — 6500K	IP65	1200x79x73	1	9 pcs	11.4	1320x270x240	-35~ +50	10%~90%
SF02-1200-40WS	40W	AC160-240V	>0.90	3000 — 6500K	IP65	1200x79x73	1	9 pcs	11.4	1320x270x240	-35~ +50	10%~90%
SF02-1500-54WS	54W	AC160-240V	>0.90	3000 — 6500K	IP65	1500x79x73	1.2	9 pcs	12.5	1620x270x240	-35~ +50	10%~90%
SF02-1500-60WS	60W	AC160-240V	>0.90	3000 — 6500K	IP65	1500x79x73	1.2	9 pcs	12.5	1620x270x240	-35~ +50	10%~90%

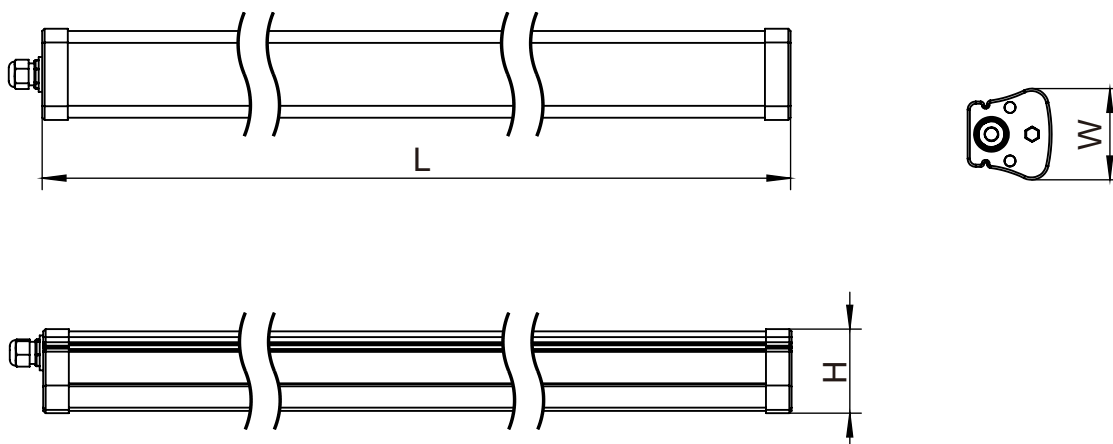


**SAVE THIS INSTRUCTIONS FOR FUTURE REFERENCE TO INSTALL:**


**Surface-mounted Installation:**

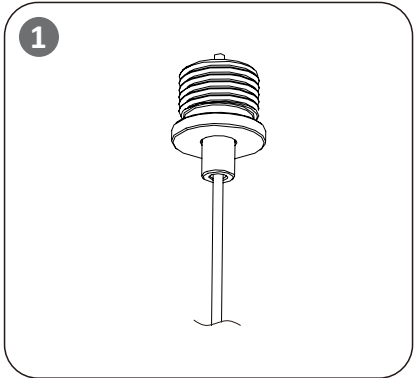


Pass the hanging rope through the wire buckle and lock it tightly

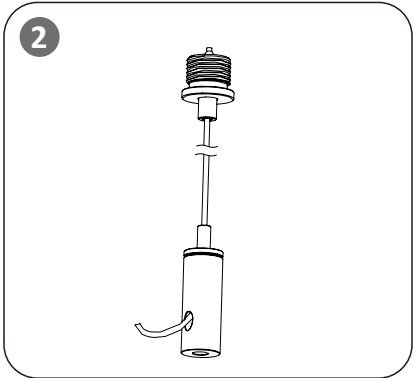


Connect the other end of the hanging rope to the buckle through a nut

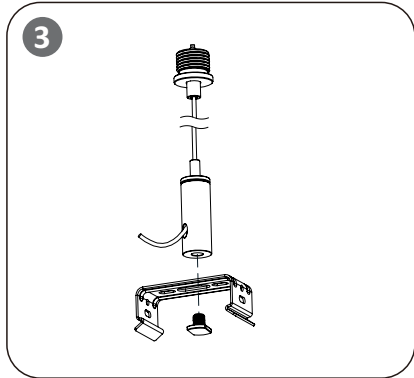


Press the buckle tightly on the back of the lamp

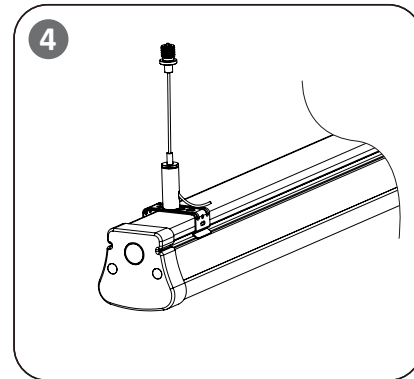

Fix the expansion screw and the female buckle on the ceiling by screws

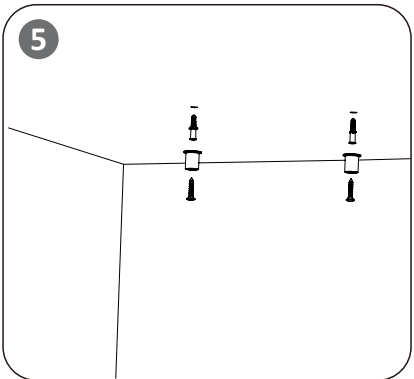


Screw the male end of the wire buckle into the female end of the ceiling

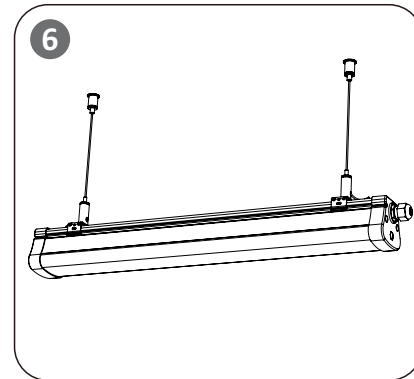


Loosen the lamps and complete the installation


**Surface-mounted Installation:**

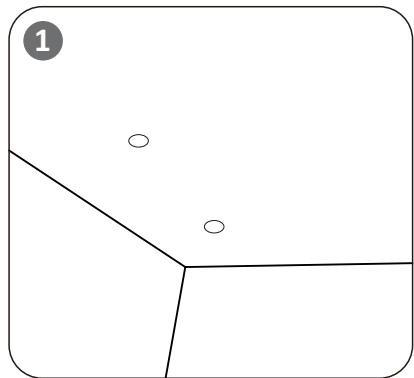


Make a hole in the ceiling

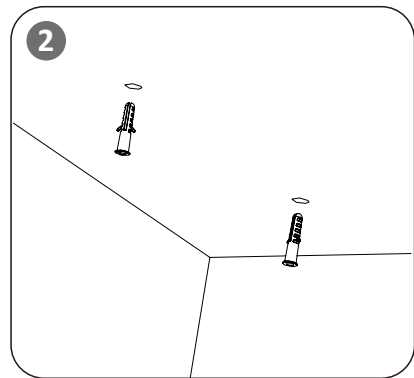


Drive the expansion screw into the drilled hole

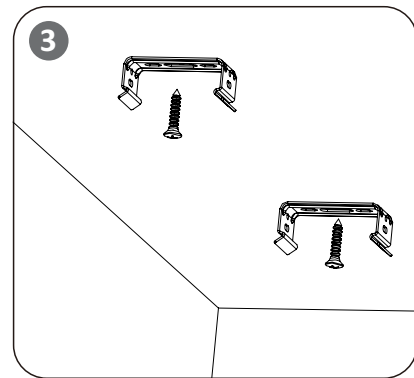


Fix the buckle in the expansion screw with screws

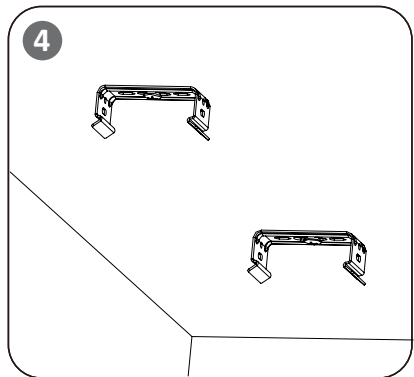

The installation is as shown above

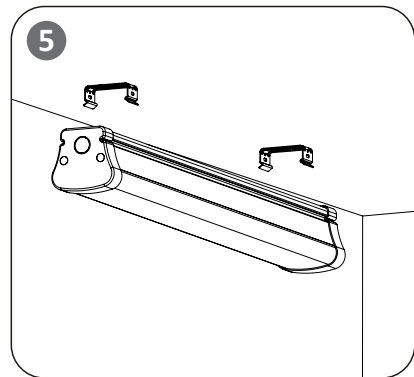

Hold the lamp and press it into the fastened buckle

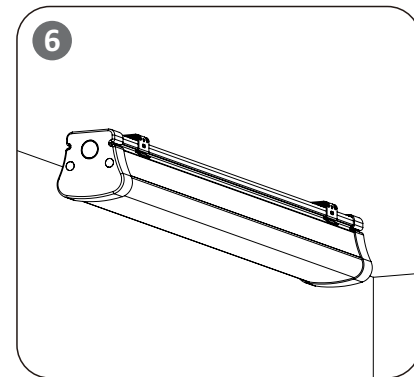

Installation is complete, as shown above