




**Wall Mounted Battery Series**  
**48V 200Ah/9.6KWH**  
**51.2V 100Ah/10.24KWH**

▲ This picture is for reference only, subject to the real thing !

Wall Mount & Stackable Battery Series		
Model	TH-482000-W	TH-512000-W
Nominal Voltage	48V	51.2V
Capacity(Ah)	200AH	
Rated Energy(KWH)	9.6KWH	10.24KWH
Max.Charge/Discharge Current(A)	100A/100A	100A/100A
Communieation	RS232-PC,RS485(B)-BATRS485(A)-Inverter,Canbus-Inverter	
Cycle Life	≥6000cycles@25°C,80%DOD,60%EOL	
Design Life	≥15Years(25°C )	
Weight(Approx) (KG)	92kg	96kg
Dimension (W/D/H)(mm)	485*690*186(226 Including hanger)mm	
Installation Mode	Wall mounted	Stackable&Wall mounted
IP Grade	Ip20	Ip65
Safety (Pack)	UL9540,UL1973,CEC,IEC62619,CE-EMC,UN38.3,MSDS	
Safety(Cell)	UN38.3,MSDS,IEC62619,CE,UL1973,UL2054	
Protection	BMS, Breaker	
Operating Temperature(°C )	Charge:0°C~50°C ; Discharge : -20°C~50°C	

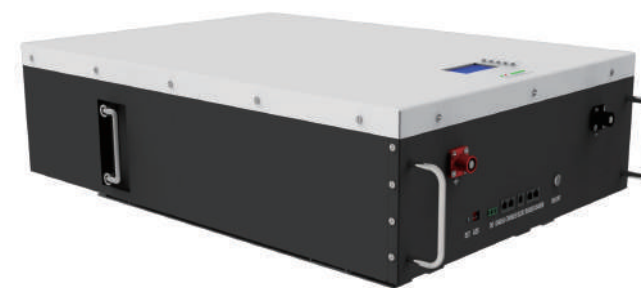

Popular Product : Hot sale with 100,000+ units sold.



Authoritative Certification: IEC62619,CE,CE-C,UL1973,UL9540.



Cost Advantage: Utilizing annual procurement and own factory casing production for cost advantages .



Proven Performance: Over 5 years of usage validation with excellent operation, safety , stability , and reliability



Multiple Choice: Avariety of energy (from 4.8kwh to 10.24kwh), sizes, design are available for selection.



IP65andIP20available.

