

INKËIANT

BF-60E4-UV-G Hot Stamping Solution

INKGIANT PRINTING

EQUIPMENT AND SOLUTION PROVIDER

Web: www.inkgiant.com.cn Email: info@inkgiant.com.cn

Tel:: 86-0371-5596-0872

ZHENGZHOU BIGFOOT DIGITAL TECHNOLOGY CO., LTD

BF-60E4-UV-G UV DTF PRINTER





UV DTF flexible application


Epson I 3200



White circulation system



White ink stirring

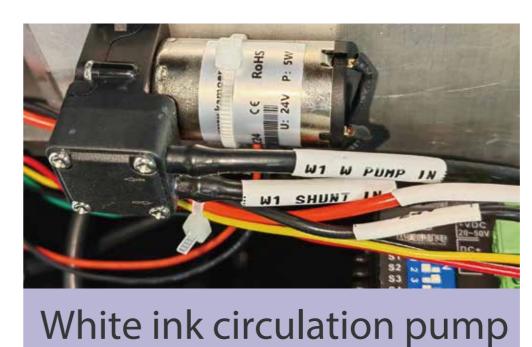



White ink shunt

Important accessories



Honson board with stable performance and powerful functions







Widely apply on glass/plastic/paper etc.



















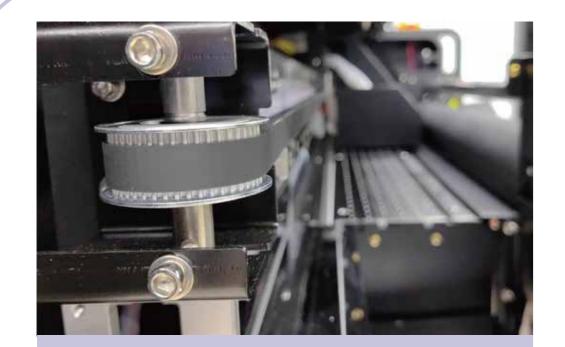

High quality driven aluminum wheel

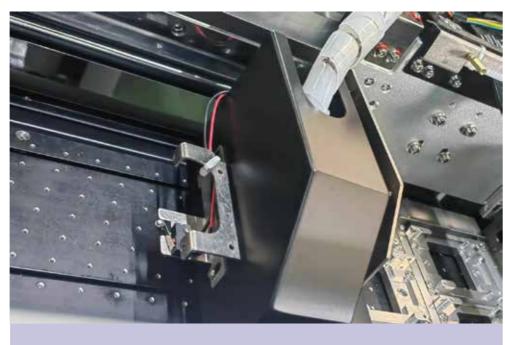


Head carriage anti-collision function



High-power deceleration stepping motor for stable operation



HIWIN high-precision linear guide, print more smoothly

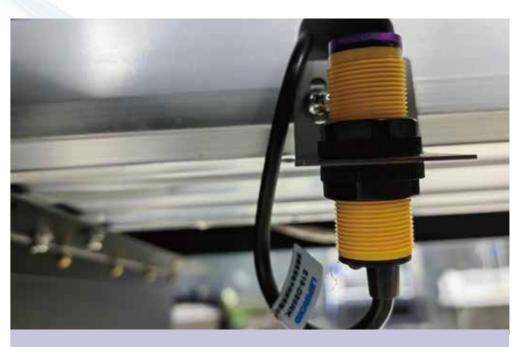

Photoelectric sensor



4-head ink stack configuration, flexible solution




Integrated trolley base plate, higher precision



High-quality ink stack components, more stable lifting and lowering



Thickened laminating rubber roller

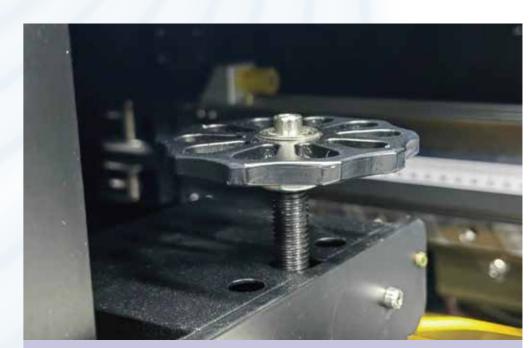

Rubber roller pressure knob, can flexibly adjust the pressure on both sides

BF-60E4-UV-G



1 Super high appearance value: The surface has a very high three-dimensional gloss and a beautiful appearance





2 Printing gold/silver and other special color





3 Using much softer glue, which can be applied to the surface of paper products such as gift boxes, cartons, envelopes, etc.







Meet different needs



Integral gold solution



Integral silver solution



Partial gold solution



Partial silver solution

PRODUCT PARAMETER





Humanized design of left and right double emergency stops



Flexiprint rip Advanced colour management features of Flexiprint rip softwar



Simple and clear key board



Model Type	BF-60E4-UV-G	
Print head	4 epson head	
RIP software	FLEXIPRINT	
	4Pass: 720*1200DPI	
Resolution	6Pass: 720*1800DPI	
	8Pass: 720*2400DPI	
Speed	8-10m ² /h	
Color	CMYK+W+Varnish+Glue	
Print width	600mm	
Ink	UV ink	
Operation	Temperature 15°C-30°C	
Environment	Humidity 50%-75%	
Power	220V 10A 1700W	
System	Windows7 or Above	
Image format	Bitmap,Tiff,Jpeg,Eps,Pdf	
Color control	ICC color profile with adjust function	
	Machine size:1962*900*1385mm(L*W*H)	
Printer	Packing size:2590*760*870mm(L*W*H)	
	Net weight:250KG Gross weight:350KG	

HOT STAMPING SOLUTION









laminator machine for laminating clear flm for hot stamping solution

Model Number	Special laminating	Speed Gear Controling	Variable
	machine for crystal mark	Maximum roll film OD	130mm
Nominal Voltage	110V/220V	The diameter specification	3 inches
Power	90w	of Roll film	
Laminating Width	<650 mm	The raise height of roller	30mm
Frequency Respons	50HZ-60HZ	Method of roller up-down	Pneumatic
Laminating speed	0-13 m/Min	Automatically uncovering film	linkage
Scope of Suitable Film Thickness	10-250 μ m	and rolling body paper equipment	
Laminating Thickness	28mm	Foot-propelled switch	Yes
Product Size	980 x570x1240(mm)	Diameter of roller	130mm
Packing Size	1030x630x680(mm)	Weight	110kg

UVINK




Colour:	W BK C M Y 1G 4G VG VN
Shelf life:	color ink 12months, white ink 9 months
Optional packing:	5Kg/bot,1KG/bot,500ml/bot,100ml/bot etc.
Storage temperature:	5°C-35°C
Recommended	
temperature(printing):	15°C-25°C
Humidity(printing):	45%-75%
Packing size:	460*370*240mm,1KG/BOT, 20BOT/carton
Gross weight:	23KG/carton
Net weight:	20KG/carton





Much softer glue, special varnish







DTF UV normal Vanish DTF UV gold Vanish




Different ink tank configuration



UV Gold/Silver Film



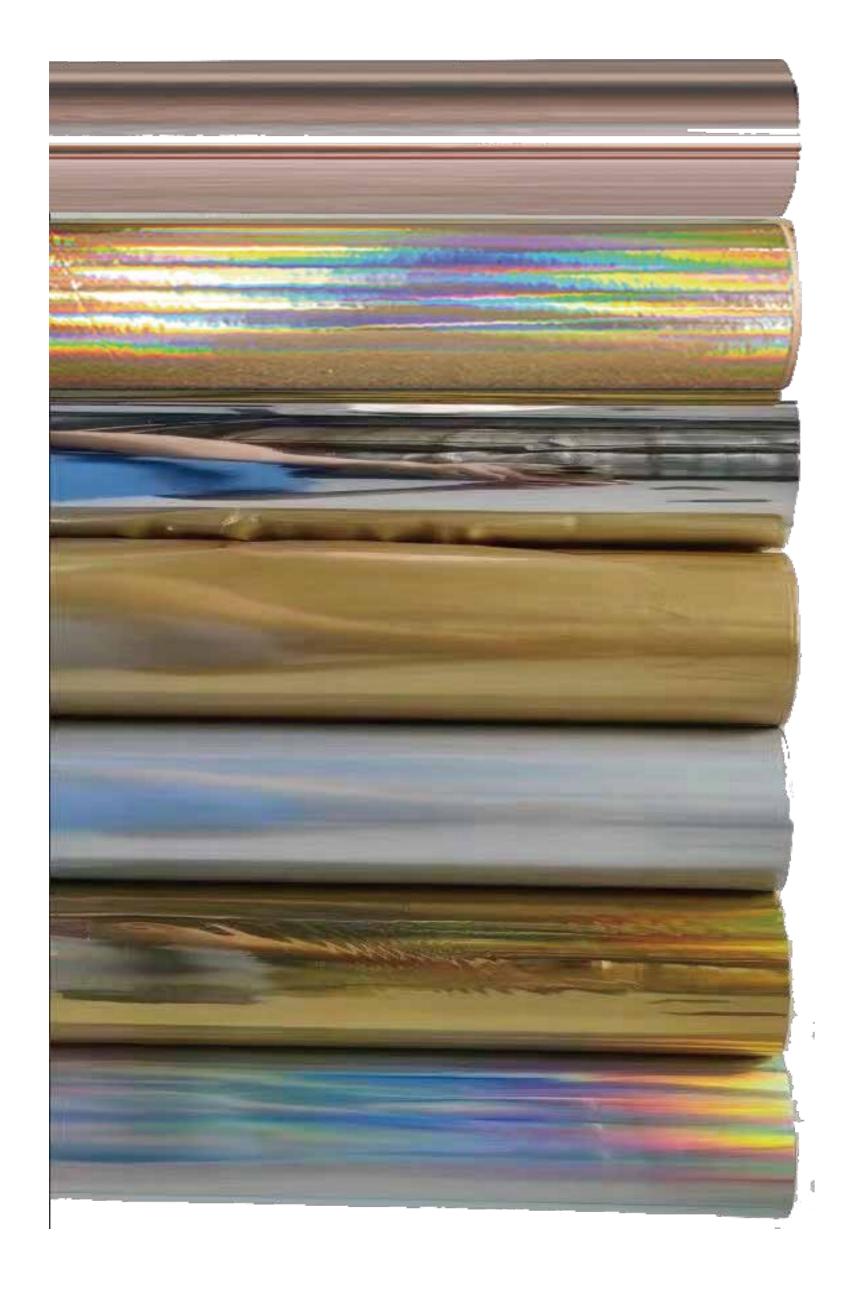

rose gold

laser gold


sliver

matt gold

matt silver

gold

laser silver

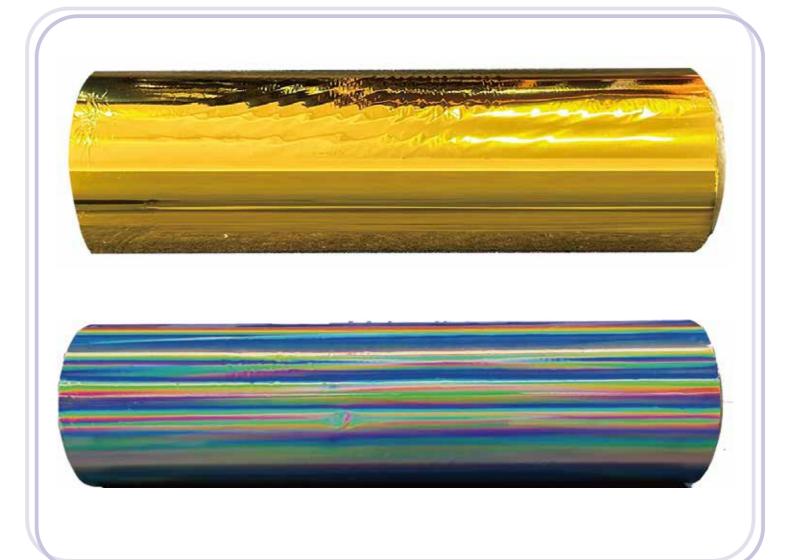

UV DTF gold/silver film 62cm*200m/roll



UV DTF clear flm 62cm*100m/roll



UV DTF release paper 62cm*100m/roll





