

薄膜专用接线盒 BIPV Junction Box

产品规格


Product Specifications

接线盒本体材料 BOX Material	PPE	阻燃等级 Flame Class	UL94-V0
额定电流 Rated current	A:14A(20A diode) B:18A(25A diode)	环境温度范围 Ambient temperature range	-40℃...+85℃(IEC)
额定电压 Rated voltage	1500VDC	适配电线规格 Suitable cable cross sections	4.0mm ²
测试电压 Test voltage	8kV(50Hz,1min)	二极管数量 Diode Number	Each 1PC
连接器接触电阻 Typical contact resistance	≤5mΩ	温度上限 Upper limiting temperature	110℃(IEC)
金属导体材料 Contact material	Terminal:Copper with Tin plated Clip:SUS304	电缆外径 Range of cable gland(mm)	O.D.:5.5
保护等级 Degree of protection	IP68(In potting)	汇流条尺寸 Ribbons size(mm)	6(W)*0.2-0.4(T)
安全等级 Safety degree	II	汇流条连接 Connection of bus ribbons	Clamp/Soldering


图示

Drawing


Mid Box JBBM01-**

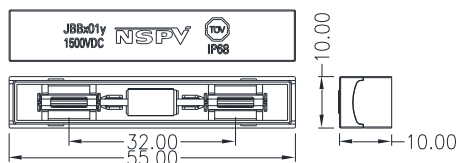


Negative Box JBBN01-**

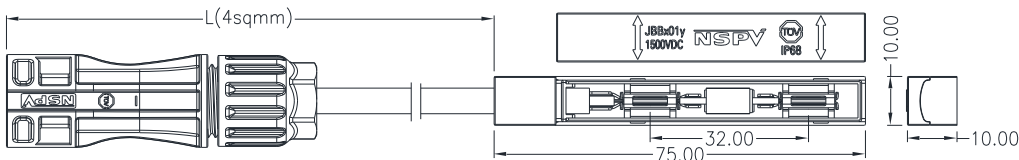

Positive Box JBBP01-**

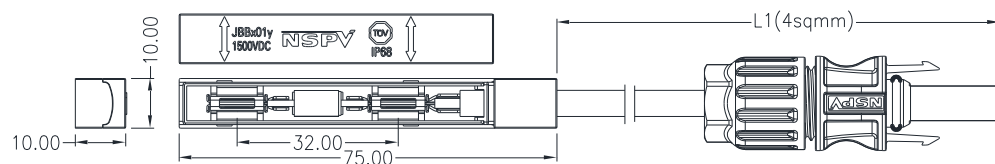

Twin Box JBBT01-**

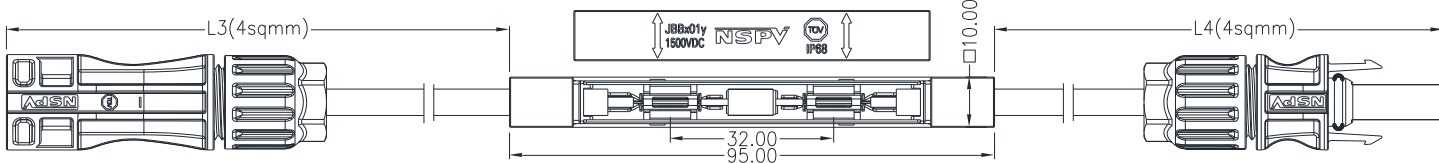

料号

Part Number:

JBB x 01 y

- Y=A 14A(With 20A diode)
- Y=B 18A(With 25A diode)
- Serial number
- x=M(Middle type)
- x=P(Positive type)
- x=N(Negative type)
- Junction box for BIPV

薄膜专用接线盒 BIPV Junction Box


产品应用

Production Application


1:0:1(Negative : Middle : Positive)




1:1:1(Negative : Middle : Positive)

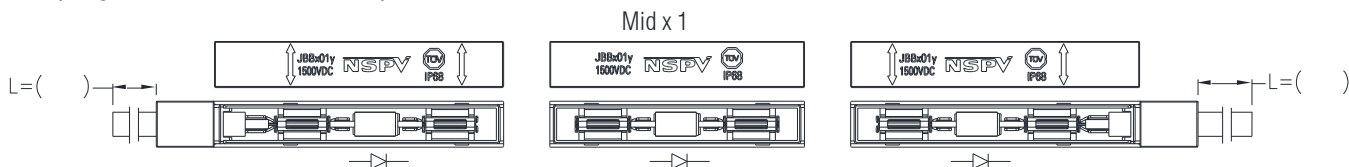


1:2:1(Negative : Middle : Positive)

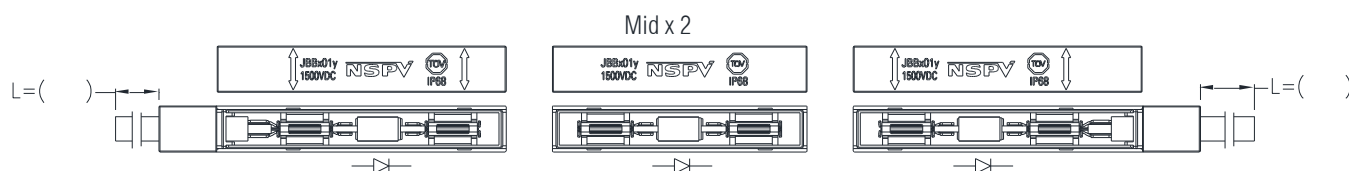


1:3:1(Negative : Middle : Positive)

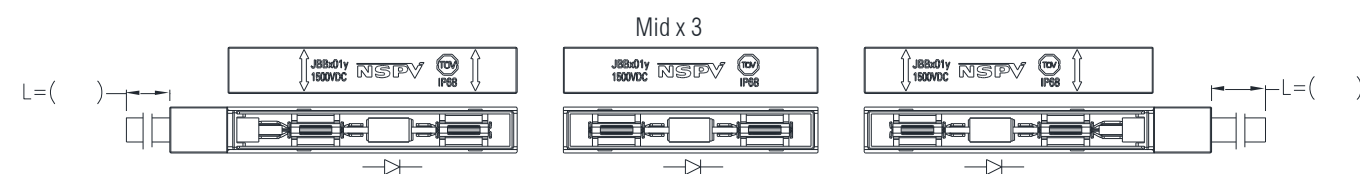

1:4:1(Negative : Middle : Positive)

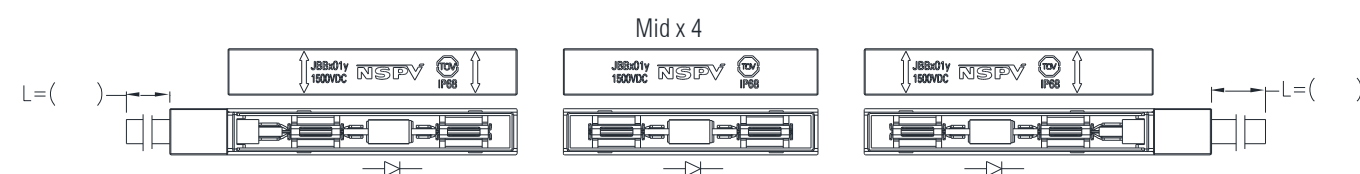

1:5:1(Negative : Middle : Positive)


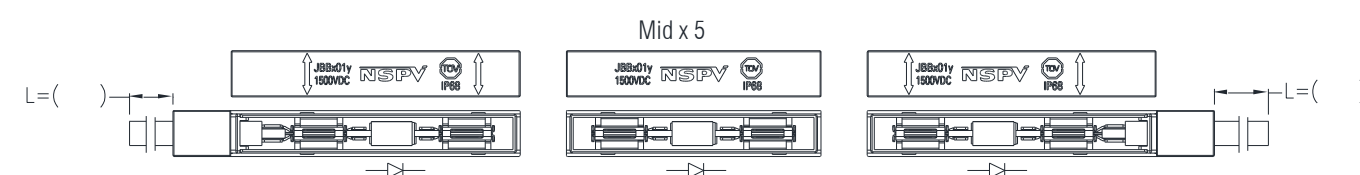


安装参考位置

Installation reference location

Side of module

Back of module

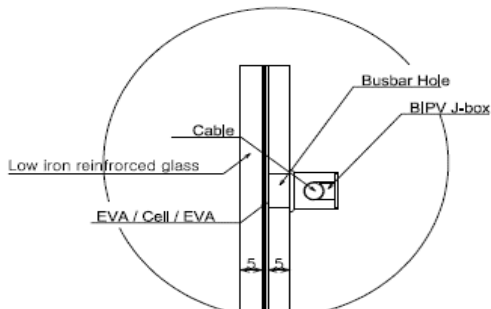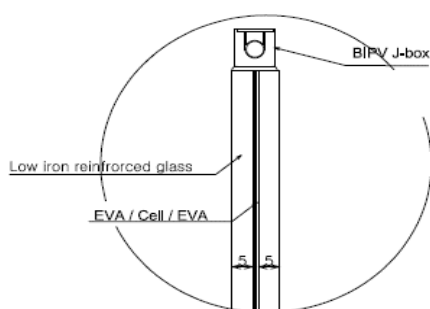


Remark: Ensure that the junction box and photovoltaic panel are firmly bonded.

薄膜专用接线盒 BIPV Junction Box


连接器的搭配

Connector Selection


Newsun 1000VDC cable connector:

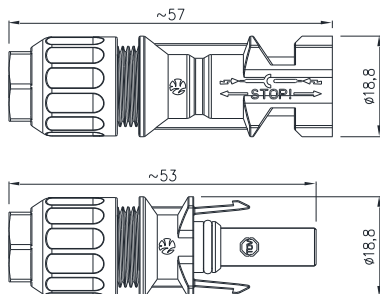


Newsun 1500VDC cable connector:

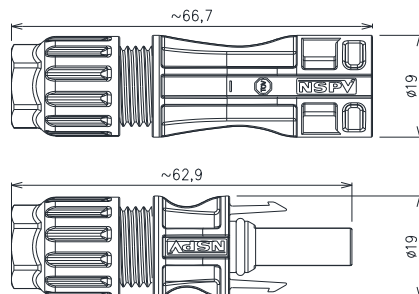


Newsun 1000VDC PV3.0 cable connector:

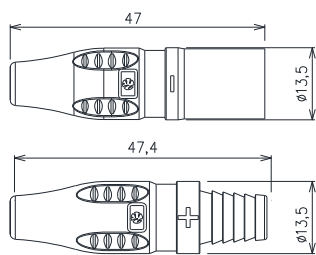

Newsun 1000VDC Mini cable connector:

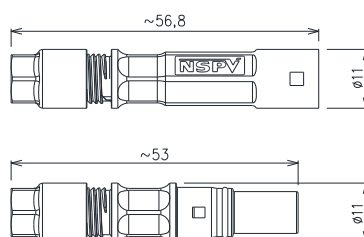

MC4 cable connector

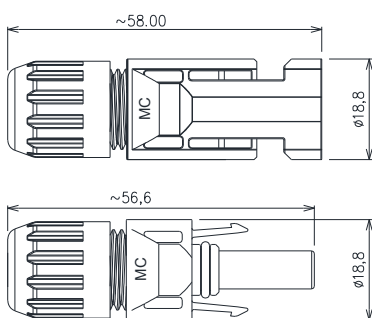

MC4_EVO cable connector

