

山东鸿源润通节水灌溉有限公司  
SHANDONG HYRT WATER-SAVING IRRIGATION CO., LTD.

地址：山东省济南市莱芜区凤城工业园物华街2号  
NO.2 WUHUA STREET, LAIWU DISTRICT, JINAN CITY, SHANDONG PROVINCE, CHINA

0531-76130108

18606348185@lwhyrt.com  
13561700816@lwhyrt.com

<http://www.lwhyrt.com> <http://www.hyrt.net>  
<https://hyrt.en.alibaba.com> <https://hyrtrade.en.alibaba.com>

**HYRT**  
**鸿源润通**  
(2026.1)

**HYRT**  
**WATER-SAVING**  
**IRRIGATION**

**灌溉万水千山 成就绿水青山**

山东鸿源润通节水灌溉有限公司  
SHANDONG HYRT WATER-SAVING IRRIGATION CO., LTD.

精益求精 客户至上；  
团结协作 持续成长！



(部分展会现场图片)  
Some exhibition site pictures


## 企业简介 COMPANY PROFILE

山东鸿源润通节水灌溉有限公司是一家注重新型灌溉器材研发的科技创新型企业。公司通过了 ISO9001 质量管理体系认证，是中国最为专业的灌溉器材生产厂商之一，产品远销一百多个国家及地区。公司主要产品为微喷、滴头、滴灌管带及配套管件、阀门和过滤器施肥器等，目前产品涵盖农田灌溉、园林绿化、畜牧养殖降温消毒等领域。公司获得 20 余项实用新型及外观专利，最新研发的压力补偿微喷头、比例泵等产品技术先进，品质优良，深受用户好评。灌溉万水千山，成就绿水青山，公司将不断砥砺前行，勇创行业标杆！

Shandong HYRT Water-saving Irrigation Co., Ltd. is a technology-driven company focused on the research and development of new irrigation equipment. The company has passed ISO 9001 quality management system certification and is one of the most professional irrigation equipment manufacturers in China, with products exported to over 100 countries and regions. The company's main products include micro-sprinklers, drip emitters, drip irrigation tapes and supporting fittings, valves, filters, and fertilizing devices. Currently, the product range covers fields such as farmland irrigation, landscaping, and livestock cooling and disinfection. The company holds more than 20 utility model and appearance patents. Its latest products, including pressure-compensating micro-sprinklers and proportional fertilizer pumps, are technologically advanced, of high quality, and highly praised by customers. Irrigating countless landscapes, fostering a greener Earth. The company will continue to strive forward, aiming to set industry benchmarks!



# 用权威说话 品质保证 值得信赖

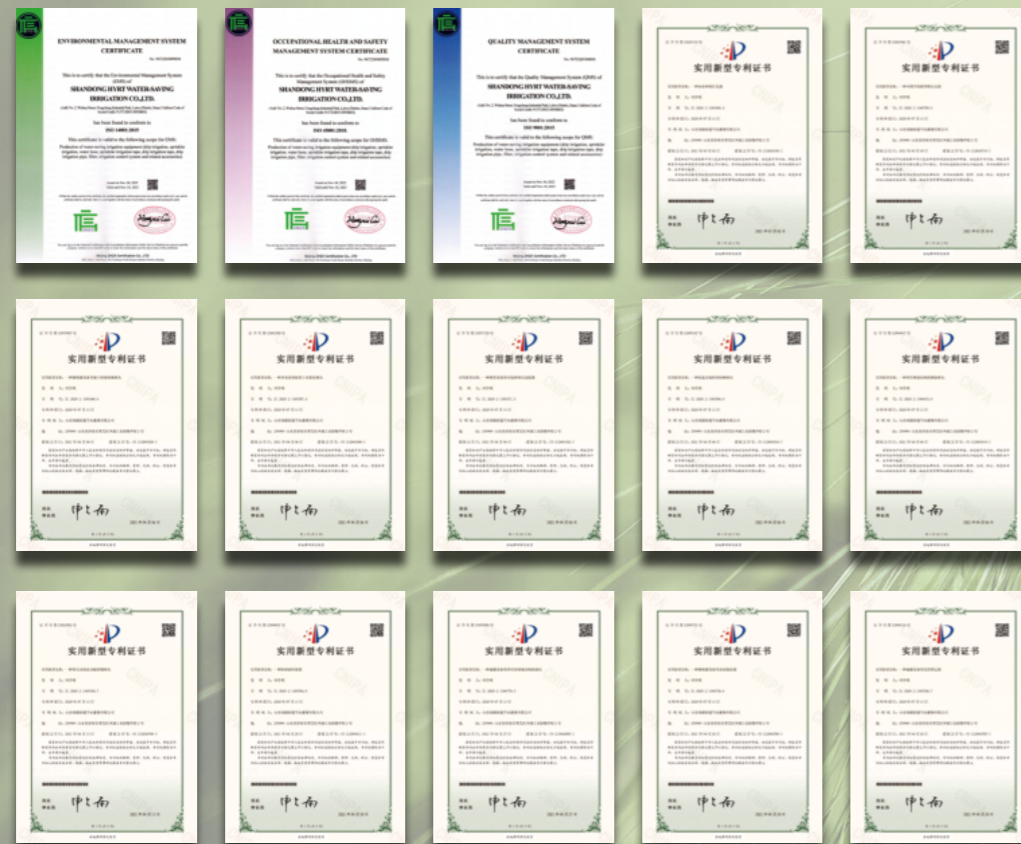

环境管理体系认证、质量管理体系认证、设计专利证书、职业健康安全管理体系认证、领航商家 .....

Environmental management system certification, Quality Management system certification, Design patent certificate, Occupational health and safety management system certification, pilot business.....

## 产品目录 PRODUCT CATALOG

- 01-05** 微喷系列 / Micro Sprinkler
- 06** 中型喷头 / Midsize Sprinkler
- 07-08** 扇形喷头 / Flat Fan Nozzle
- 09-12** 滴头系列 / Dripper
- 13-18** 摇臂喷头 / 压力补偿喷头 / Impact Sprinkler
  
- 19-20** 阀门系列 / Valve
- 21-24** 管件系列 / Fitting
- 25-26** 迷你管件 / Mini Fitting
- 27-28** 小阀门系列 / Mini Valve
- 31-32** 重型快接管件 / H-Compression Fitting
  
- 33-34** 轻型快接管件 / L-Compression Fitting
- 35-36** 过滤器 / Filter
- 37-38** 排气阀 / 施肥器 / Air Release Valve / Fertilizer
- 39** 鞍座 / Saddle Clamp
- 40** 打孔器 / Hole Punch
  
- 41-42** 地埋喷头 / 取水阀  
Lawn Sprinkler / Water Take Valve
- 43-48** 管材系列 / Pipe&Tape
- 49-50** 电脑控制器 / Smart Controller

# HYRT

Striving for excellence, putting customers first;  
working in solidarity, growing together continuously!

精益求精 客户至上;  
团结协作 持续成长!

## MICRO SPRINKLER

微喷灌溉系列

### 251T 系列微喷头


251T SERIES MICRO-SPRINKLERS

#### 特点

- 适用于温室大棚，园林，绿地，果树。
- 产品齐全，喷洒均匀，覆盖范围广。
- 设计合理，安装简便，美观实用。

#### FEATURES

- It is suitable for greenhouses, gardens, green spaces and fruit trees.
- This product has even spraying, wide coverage and are ready-to-use.
- Compact & beautiful design, simple installation and high practicality.

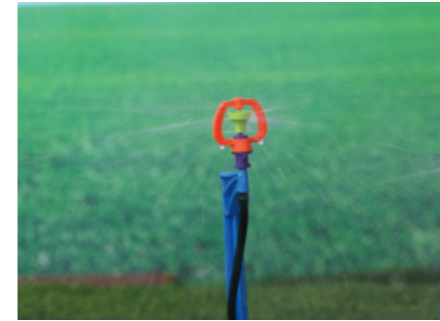

#### 251T 小苹果喷头 (框转无死角) 360° Degree Rotating Sprinkler

图片 Picture							
货号 Item No.	XPGPT085	XPGPT100	XPGPT120	XPGPT140	XPGPT160	XPGPT180	XPGPT200
口径 (mm) Diameter	0.85	1.0	1.2	1.4	1.6	1.8	2.0
流量 (L/h) Discharge	40	50	70	95	120	140	160
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3-4	3-4	3-4	4-5	4-5	4-5	5-6


#### 251T 旋转吊挂微喷头 251T Rotary Micro Sprinkler Hanging Type

图片 Picture							
货号 Item No.	251TDG085	251TDG100	251TDG120	251TDG140	251TDG160	251TDG180	251TDG200
口径 (mm) Diameter	0.85	1.0	1.2	1.4	1.6	1.8	2.0
流量 (L/h) Discharge	40	50	75	100	130	170	200
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3	3-4	3-4	4	4-5	4-5	4-5

#### 251T 旋转地插微喷头 251T Rotary Micro sprinkler standing Type

图片 Picture							
货号 Item No.	251TDC085	251TDC100	251TDC120	251TDC140	251TDC160	251TDC180	251TDC200
口径 (mm) Diameter	0.85	1.0	1.2	1.4	1.6	1.8	2.0
流量 (L/h) Discharge	40	50	75	100	130	170	200
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3	3-4	3-4	4	4-5	4-5	4-5

0.2Mpa 离地 2 米，无风条件下测量  
0.2 mpa at 2 meters above the ground in windless condition

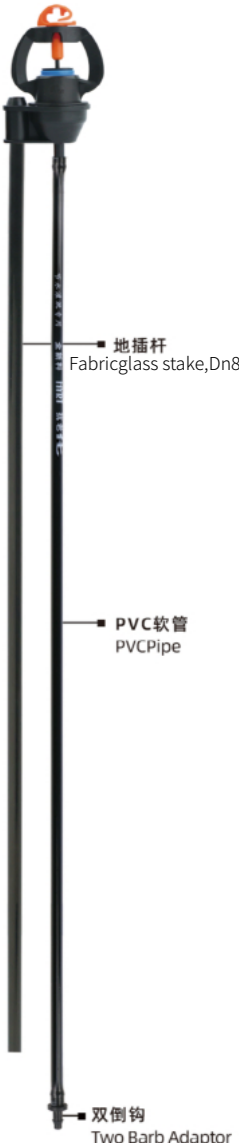

## 251T 旋转吊挂、地插微喷头

251T Rotary Micro Sprinkler Hanging, Standing Type


货号 Item No.	251T085	251T100	251T120	251T140	251T160	251T180	251T200
口径 (mm) Diameter	0.85	1.0	1.2	1.4	1.6	1.8	2.0
流量 (L/h) Discharge	40	50	75	100	130	170	200
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3	3.5	3.5	3.5	4	4	4



## 251T 折射雾化微喷头

251T Refraction Mist Micro Sprinkler

货号 Item No.	251TZS085	251TZS100	251TZS120	251TZS140	251TZS160	251TZS180	251TZS200
口径 (mm) Diameter	0.85	1.0	1.2	1.4	1.6	1.8	2.0
流量 (L/h) Discharge	40	50	75	100	130	170	200
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	1	1	1	1	1	1	1



## 241T 系列微喷头

241T SERIES MICRO SPRINKLERS


241T 系列微喷头主要用于大田灌溉、温室大棚灌溉、降温、防霜冻、加湿、花园灌溉等。241T 系列微喷头采用无桥架结构，喷洒均匀度高。

Mainly used for field + garden + greenhouse irrigation, cooling, anti-frost and humidification. No bridge structure to ensure a high spray uniformity.

### 241T 旋转吊挂微喷头

241T Rotary Micro Sprinkler Hanging Type

货号 Item No.	241TDG085	241TDG120	241TDG140	241TDG160
口径 (mm) Diameter	0.85	1.2	1.4	1.6
流量 (L/h) Discharge	40	75	100	130
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3	3-4	4	4

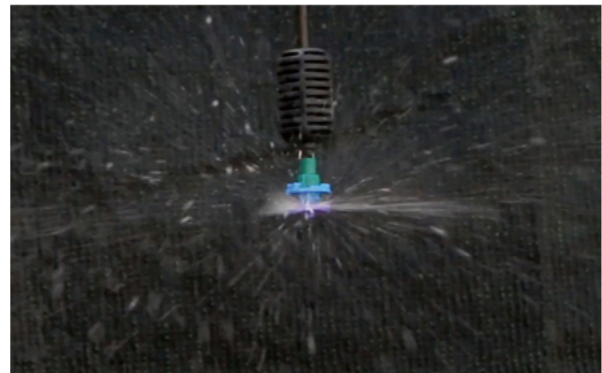

### 241T 旋转地插微喷头

241T Rotary Micro Sprinkler Standing Type

货号 Item No.	241TDC085	241TDC120	241TDC140	241TDC160
口径 (mm) Diameter	0.85	1.2	1.4	1.6
流量 (L/h) Discharge	40	75	100	130
工作压力 (Bar) Working Pressure	2.0	2.0	2.0	2.0
喷洒半径 (m) Spraying Radius	3	3-4	4	4



0.2Mpa 离地 2 米, 无风条件下测量  
0.2 Mpa 2meters up ground, windless condition

## 雾化喷头

MIST nozzles

### 单出口雾化喷头

Single Outlet Mist Nozzle

货号 Item No.	口径 Diameter	流量 (L/h) Discharge	工作压力 (Bar) Working Pressure	喷洒半径 (m) Spraying Radius
MJ10A	0.8	12	2-3	1
MJ10B	0.6	8	2-3	1
MJ10C	0.5	7	2-3	1

### 四出口雾化喷头

Four Outlets Mist Nozzle

货号 Item No.	口径 Diameter	流量 (L/h) Discharge	工作压力 (Bar) Working Pressure	喷洒半径 (m) Spraying Radius
MJ40A	0.8	48	2-3	1
MJ40B	0.6	32	2-3	1
MJ40C	0.5	27	2-3	1

### 五出口雾化喷头

Five Outlets Mist Nozzle

货号 Item No.	口径 Diameter	流量 (L/h) Discharge	工作压力 (Bar) Working Pressure	喷洒半径 (m) Spraying Radius
MJ50A	0.8	60	2-3	1
MJ50B	0.6	40	2-3	1
MJ50C	0.5	35	2-3	1



## G 型系列微喷头

G Series Micro Sprinklers

### G 型折射雾化式喷头

G Style Refracting Mist Type 360°

货号 Item No.	GZS085	ZGS120	ZGS140
口径 (mm) Diameter	0.85	1.2	1.4
流量 (L/h) Discharge	40	75	100
工作压力 (Bar) Working Pressure	2	2	2
喷洒半径 (m) Spraying Radius	1	1	1

### 180 度 G 型折射喷头

180°G Style Refraction Mist Type 180°

货号 Item No.	GXZS180D	/	/
口径 (mm) Diameter	1.6	/	/
流量 (L/h) Discharge	130	/	/
工作压力 (Bar) Working Pressure	2	/	/
喷洒半径 (m) Spraying Radius	3	/	/



0.2Mpa 离地 2 米, 无风条件下测量  
0.2 Mpa 2meters up ground, windless condition



### G 型小旋转式微喷头

G Style Rotary Wheel Type

货号 Item No.	GXXL120	GXXL160
口径 (mm) Diameter	1.2	1.6
流量 (L/h) Discharge	75	130
工作压力 (Bar) Working Pressure	2	2
喷洒半径 (m) Spraying Radius	3	3

### G 型单侧轮式微喷头

G-Style Side Wheel Type

货号 Item No.	GDC120	GDC160
口径 (mm) Diameter	1.2	1.6
流量 (L/h) Discharge	75	130
工作压力 (Bar) Working Pressure	2	2
喷洒半径 (m) Spraying Radius	4	4

## 其它微喷头 Other Micro Sprinklers

### 六水型喷头 Six-Channel Sprinkler



货号 Item No.	SW090360
口径 (mm) Diameter	1.2
流量 (L/h) Discharge	75
工作压力 (Bar) Working Pressure	1.5-2.5
喷洒半径 (m) Spraying Radius	2.4-3.8

### 宾耐特喷头 Spinnet Sprinkler



货号 Item No.	SPNT180
口径 (mm) Diameter	1.8
流量 (L/h) Discharge	170
工作压力 (Bar) Working Pressure	1.5-2.5
喷洒半径 (m) Spraying Radius	4-5



### 八孔可调喷头 Eight-Hole Sprinkler



货号 Item No.	AESP
流量 (L/h) Discharge	0-90
工作压力 (Bar) Working Pressure	1-3
喷洒半径 (m) Spraying Radius	0-0.4

### 涡旋可调喷头 Turbo Sprinkler



货号 Item No.	ASPR
流量 (L/h) Discharge	0-90
工作压力 (Bar) Working Pressure	1-3
喷洒半径 (m) Spraying Radius	0-1.5

### 单孔雾化喷头 Single Outlet Mist Nozzle



货号 Item No.	MJ10C
口径 (mm) Diameter	0.5
流量 (L/h) Discharge	15
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	1

### 防虫喷头 Anti Insect Sprinkler



货号 Item No.	FC00100	FC00120	FC00180
口径 (mm) Diameter	1.0	1.2	1.8
流量 (L/h) Discharge	50	75	170
工作压力 (Bar) Working Pressure	2	2	2
喷洒半径 (m) Spraying Radius	4-5	4-5	4-5



## 顶帽折射微喷头 On Line Refraction Mist Nozzle



货号 Item No.	DMZS085A
口径 (mm) Diameter	0.85
流量 (L/h) Discharge	40
工作压力 (Bar) Working Pressure	1.5-2.5
喷洒半径 (m) Spraying Radius	1



货号 Item No.	DMZS100A
口径 (mm) Diameter	1.0
流量 (L/h) Discharge	50
工作压力 (Bar) Working Pressure	1.5-2.5
喷洒半径 (m) Spraying Radius	1



货号 Item No.	DMZS160A
口径 (mm) Diameter	1.6
流量 (L/h) Discharge	70-145
工作压力 (Bar) Working Pressure	1-3.5
喷洒半径 (m) Spraying Radius	0.7



货号 Item No.	DMZS085B
口径 (mm) Diameter	0.85
流量 (L/h) Discharge	40
工作压力 (Bar) Working Pressure	1.5-2.5
喷洒半径 (m) Spraying Radius	1



货号 Item No.	180°ZS086
口径 (mm) Diameter	6
流量 (L/h) Discharge	80-120
工作压力 (Bar) Working Pressure	1.5-3
喷洒半径 (m) Spraying Radius	0.4-0.8



货号 Item No.	TSWH01
口径 (mm) Diameter	1/2"
流量 (L/h) Discharge	140-280
工作压力 (Bar) Working Pressure	1.5-3
喷洒半径 (m) Spraying Radius	2.5-3



0.2Mpa 离地 2 米, 无风条件下测量  
0.2 Mpa 2meters up ground ,windless condition

### 迷你摇摆喷头 Mini Swing Sprinkler



货号 Item No.	口径 Diameter	流量 (L/h) Discharge	工作压力 (Bar) Working Pressure	喷洒半径 (m) Spraying Radius
MSW01-1.6	M1/2"	123-220	1.5-4	5
MSW01-2.0	M1/2"	190-310	1.5-4	6.3
MSW01-2.4	M1/2"	287-490	1.5-4	6.3
MSW01-2.8	M1/2"	360-610	1.5-4	6.4
MSW01-3.2	M1/2"	460-800	1.5-4	6.5

### 大摇摆喷头 Big Swing Sprinkler



货号 Item No.	口径 Diameter	流量 (L/h) Discharge	工作压力 (Bar) Working Pressure	喷洒半径 (m) Spraying Radius
SW02-2.4	M1/2" & 3/4"	254-430	1.5-4	6.5
SW02-2.8	M1/2" & 3/4"	360-610	1.5-4	6.7
SW02-3.2	M1/2" & 3/4"	444-750	1.5-4	6.9
SW02-3.6	M1/2" & 3/4"	595-1010	1.5-4	7
SW02-4.0	M1/2" & 3/4"	717-1210	1.5-4	8
SW02-4.4	M1/2" & 3/4"	860-1460	1.5-4	8

## 蝶形喷头 Butterfly Series Sprinkler

### 蝶形圆轮喷头 内丝 Wheel Sprinkler Female Thread



货号 Item No.	DXSPR01-1
口径 (mm) Diameter	F1/2"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 蝶形圆轮喷头 外丝 Wheel Sprinkler Male Thread



货号 Item No.	DXSPR01-2
口径 (mm) Diameter	M1/2"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 蝶形圆轮喷头 外丝 Wheel Sprinkler Male Thread



货号 Item No.	DXSPR01-3
口径 (mm) Diameter	M1/2" & 3/4"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 蝶形旋转喷头 内丝 Spinning Sprinkler Female Thread



货号 Item No.	DXSPR02-1
口径 (mm) Diameter	F1/2"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 蝶形旋转喷头 外丝 Spinning Sprinkler Male Thread



货号 Item No.	DXSPR02-2
口径 (mm) Diameter	M1/2"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 蝶形旋转喷头 外丝 Spinning Sprinkler Male Thread



货号 Item No.	DXSPR02-3
口径 (mm) Diameter	M1/2" & 3/4"
流量 (L/h) Discharge	500-800
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	3-6

### 麦格喷头 Mn Sprinkler



货号 Item No.	R10PROB	R10PROC
口径 (mm) Diameter	M1/2"	M3/4"
流量 (L/h) Discharge	550	1100
工作压力 (Bar) Working Pressure	2-3	2-3
喷洒半径 (m) Spraying Radius	7-9	7-9



0.2Mpa 离地 2 米, 无风条件下测量  
0.2 Mpa 2meters up ground ,windless condition

### R10 喷头 R10 Rotating



货号 Item No.	R10PRO01
口径 (mm) Diameter	M1/2"
流量 (L/h) Discharge	500-700
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	7-8

### 小麦格喷头 Mini Mn Sprinkler



货号 Item No.	R10PRO
口径 (mm) Diameter	M1/2"
流量 (L/h) Discharge	200
工作压力 (Bar) Working Pressure	2-3
喷洒半径 (m) Spraying Radius	7-8



# 扇形喷头

## Flat Fan Nozzle



### 特点

- 优良材质，结实耐用，防晒抗冻，使用寿命长。
- 结构精简，设计合理，使用简便。
- 喷洒均匀，应用广泛，规格齐全，品质保障。

### FEATURES

- Excellent material, strong and durable, sunscreen and anti-freezing, long service life.
- The structure is simple, the design is reasonable and the use is simple.
- Spray evenly, widely used, complete specifications, quality assurance.

### 结构图

#### Structure



货号 model	压力 bar	流量 /min	喷体间距50厘米时喷洒量 (升/公顷)								
			7km/h	8km/h	10km/h	12km/h	15km/h	20km/h	25km/h	30km/h	
01	2	0.33	57	50	40	33	26	20	16	13	
	2.5	0.37	63	56	44	37	30	22	18	15	
	3	0.40	69	60	48	40	32	24	19	16	
	4	0.46	79	69	55	46	37	28	22	18	
015	2	0.49	84	74	59	49	39	29	24	20	
	2.5	0.55	94	83	66	55	44	33	26	22	
	3	0.60	103	90	72	60	48	36	29	24	
	4	0.69	118	104	83	69	55	41	33	28	
02	2	0.65	111	98	78	65	52	39	31	26	
	2.5	0.73	125	110	88	73	58	44	35	29	
	3	0.80	137	120	96	80	64	48	38	32	
	4	0.92	158	138	110	92	74	55	44	37	
03	2	0.98	168	147	118	98	78	59	47	39	
	2.5	1.10	189	165	132	110	88	66	53	44	
	3	1.20	206	180	144	120	96	72	58	48	
	4	1.39	238	209	167	139	111	83	67	56	
04	2	1.31	225	197	157	131	105	79	63	52	
	2.5	1.46	250	219	175	146	117	88	70	58	
	3	1.60	274	240	192	160	128	96	77	64	
	4	1.85	317	278	222	185	148	111	89	74	
05	2	1.63	279	245	196	163	130	98	78	65	
	2.5	1.83	314	275	220	183	146	110	88	73	
	3	2.00	343	300	240	200	160	120	96	80	
	4	2.31	396	347	277	231	185	139	111	92	
06	2	1.96	336	294	235	196	157	118	94	78	
	2.5	2.19	375	329	263	219	175	131	105	88	
	3	2.40	411	360	288	240	192	144	115	96	
	4	2.77	475	416	332	277	222	166	133	111	
08	2	2.61	447	392	313	261	209	157	125	104	
	2.5	2.92	501	438	350	292	234	175	140	117	
	3	3.20	549	480	384	320	256	192	154	128	
	4	3.70	634	555	444	370	296	222	178	148	
10	2	3.27	561	491	392	327	262	196	157	131	
	2.5	3.65	626	548	438	365	292	219	175	146	
	3	4.00	686	600	480	400	320	240	192	160	
	4	4.62	792	693	554	462	370	277	222	185	
15	2	4.90	840	735	588	490	392	294	235	196	
	2.5	5.48	939	822	658	548	438	329	263	219	
	3	6.00	1029	900	720	600	480	360	288	240	
	4	6.93	1188	1040	832	693	554	416	333	277	
20	2	6.53	1119	980	784	653	522	392	313	261	
	2.5	7.30	1251	1095	876	730	584	438	350	292	
	3	8.00	1371	1200	960	800	640	480	384	320	
	4	9.24	1584	1386	1109	924	739	554	444	370	


### 详情

#### Details



### 扇形喷头

#### Fan Nozzle

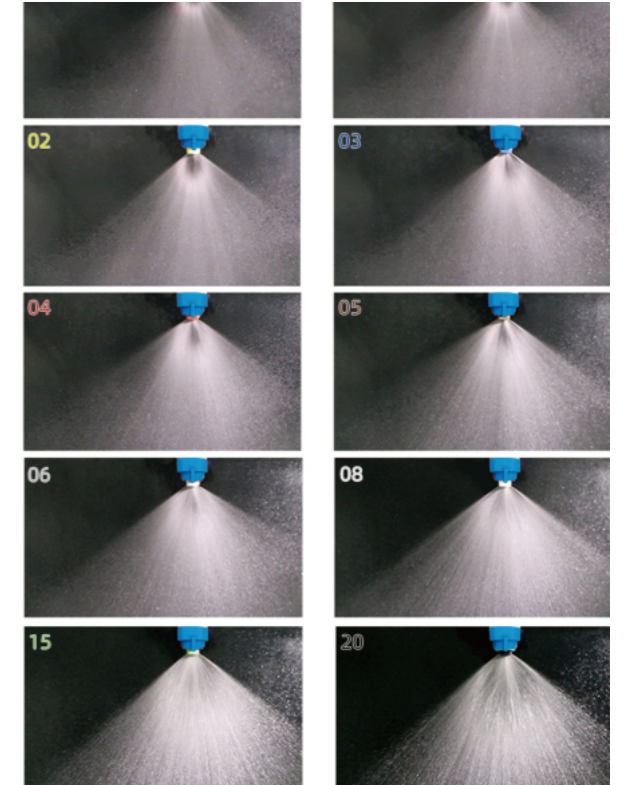

### 水车喷头

#### Water Wheel Nozzle



适用场所: 末端喷杆、温室大棚、洗车、畜牧家禽饲养  
最大工作压力: 20bar

特点: 喷洒均匀、快捷高效; 适配性强, 适用范围广

Applicable places: end spray bar, greenhouse, car wash, animal & poultry breeding  
maximum working pressure: 20bar

Pros: Uniform spraying, fast & efficient, high adaptability and wide-range application

# HYRT

Striving for excellence, putting customers first;  
working in solidarity, growing together continuously!

精益求精 客户至上;  
团结协作 持续成长!

## DROPPER SERIES

滴头灌溉系列

### 滴头 DRIPPER



#### 压力补偿滴头 Pressure Compensation Dripper



货号 Item No.	TANDPCD02
流量 (L/h) Discharge	2

#### 压力补偿滴头 Pressure Compensation Dripper



货号 Item No.	TANDPCD04
流量 (L/h) Discharge	4

#### 压力补偿滴头 Pressure Compensation Dripper



货号 Item No.	TANDPCD08
流量 (L/h) Discharge	8

#### 涡旋可调滴头 Turbo Dripper



货号 Item No.	ASPR2
流量 (L/h) Discharge	0-80

#### 流量可调滴头 Adjustable Dripper



货号 Item No.	AOD0170
流量 (L/h) Discharge	0-70

#### 流量可调滴头 Adjustable Dripper



货号 Item No.	AOD0190
流量 (L/h) Discharge	4-90

#### 稳流器 On Line Dripper



货号 Item No.	PCD104
流量 (L/h) Discharge	4

#### 稳流器 On Line Dripper



货号 Item No.	PCD108
流量 (L/h) Discharge	8

#### 稳流器 On Line Dripper



货号 Item No.	PCD320
流量 (L/h) Discharge	20

#### 稳流器 On Line Dripper



货号 Item No.	PCD330
流量 (L/h) Discharge	30



#### 红旗滴头 Flag Dripper



货号 Item No.	流量 (L/h) Discharge
FD16	16
FD08	8
FD04	4

#### 插尖涡旋喷头 Turbo Sprinkler on Stake




货号 Item No.	ATS13	ATS28
杆长 (cm) Stake length	13	28
流量 (L/h) Discharge	0-90	0-90
工作压力 (Bar) Working Pressure	1-3	1-3
喷洒半径 (m) Spraying Radius	0-3	0-3

#### 插尖八孔喷头 Eight-Hole Sprinkler on Stake



货号 Item No.	AES13	AES28
杆长 (cm) Stake length	13	28
流量 (L/h) Discharge	0-70	0-70
工作压力 (Bar) Working Pressure	1-3	1-3
喷洒半径 (m) Spraying Radius	0-0.7	0-0.7

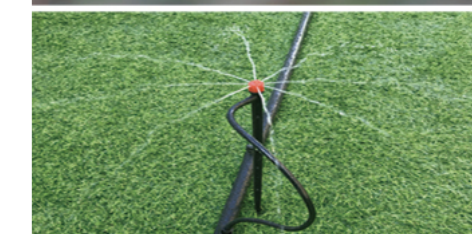

# 滴箭 ARROW DRIPPER

## 直滴箭 Straight Arrow



货号 Item No.	2101
流量 (L/h) Discharge	2

## 弯滴箭 Bent Arrow



货号 Item No.	2102
流量 (L/h) Discharge	2

## 二出弯滴箭 Two-branch Bent Arrow with 4L /H Dripper



货号 Item No.	2122AD
流量 (L/h) Discharge	2*2

## 四出直滴箭 Four-branch Straight Arrow with 8L /H Dripper



货号 Item No.	2141AD
流量 (L/h) Discharge	4*2

## 二出直滴箭 Two-branch Straight Arrow with 4L /H Dripper



货号 Item No.	2121AD
流量 (L/h) Discharge	2*2

## 四出弯滴箭 Four-branch Bent Arrow with 8L /H Dripper



货号 Item No.	2142AD
流量 (L/h) Discharge	4*2



● 毛管长度可定制 The tube length is customizable

## 弯滴箭 Bent Arrow



货号 Item No.	2402
流量 (L/h) Discharge	2

## 二出弯滴箭 Two-branch Bent Arrow with 4L /H Dripper



货号 Item No.	2422
流量 (L/h) Discharge	2*2

## 四出弯滴箭 Four-branch Bent Arrow with 8L /H Dripper



货号 Item No.	2442
流量 (L/h) Discharge	4*2



# 吊挂 Accessory



毛管长度可定制  
The tube length is customizable

# 地插 Stake



# HYRT

Striving for excellence, putting customers first;  
working in solidarity, growing together continuously!

精益求精 客户至上  
团结协作 持续成长!

## IMPACT SPRINKLER

喷枪摇臂系列



**HYRT-S50 1''F**

压力 (Pressure)	2.0-5.0bar
喷射半径 (Range)	15-17m
流量 (Flux)	3.7-5.0m <sup>3</sup> /h



**HYRT-9703K 1/2''M**

喷嘴直径 (Nozzle Diameter)	4.0×1.8mm
压力 (Pressure)	1.5-3.0bar
喷射半径 (Range)	6-7m
流量 (Flux)	1.1-1.3m <sup>3</sup> /h



**HYRT-S52 1''F**

三嘴喷头 (Three Way Sprinkler)	
四嘴喷头 (Four Way Sprinkler)	
五嘴喷头 (Five Way Sprinkler)	
压力 (Pressure)	2.0-5.0bar
喷射半径 (Range)	15-17m
流量 (Flux)	3.7-5.0m <sup>3</sup> /h



**HYRT-S49 3/4''M**

喷嘴直径 (Nozzle Diameter)	5.0x3.8mm 3.8x2.3mm
压力 (Pressure)	1.5-3.5bar
喷射半径 (Range)	12-14m
流量 (Flux)	1.3-1.7m <sup>3</sup> /h



**HYRT-S130 1''F**

喷嘴直径 (Nozzle Diameter)	3.5x2.0mm
压力 (Pressure)	2.0-3.0bar
喷射半径 (Range)	14-16m
流量 (Flux)	2.6-3.5m <sup>3</sup> /h

- 喷洒距离可调, 应用广泛。优选材质, 使用寿命长。
- 旋转丝滑, 不卡顿。多种接口, 应用广泛。
- Adjustable spraying distance, widely used. Preferred material, long service life.
- Spinning silky smooth, not stuck. A variety of interfaces, widely used.





**HYRT-S2 1/2''M**

喷嘴直径 (Nozzle Diameter)	4mm
压力 (Pressure)	0.5-2.5bar
喷射半径 (Range)	5-10m
流量 (Flux)	14.8-28L/min



**HYRT-S2-1 3/4''M**

喷嘴直径 (Nozzle Diameter)	4mm
压力 (Pressure)	0.5-2.5bar
喷射半径 (Range)	5-10m
流量 (Flux)	14.8-28L/min



**HYRT-S2-2 3/4''M**

喷嘴直径 (Nozzle Diameter)	4mm
压力 (Pressure)	0.5-2.5bar
喷射半径 (Range)	5-10m
流量 (Flux)	14.8-28L/min



**HYRT-HS25 1''**

喷嘴直径 (Nozzle Diameter)	压力 (Pressure)	喷射半径 (Range)	流量 (Flux)
16×24mm	2-4bar	12-20m	2-6.5m³/h



**HYRT-HS30 1.5'' 360° Big Gun Sprinkler**

喷嘴直径 (Nozzle Diameter)	压力 (Pressure)	喷射半径 (Range)	流量 (Flux)
8×18mm	2-6bar	15-30m	5-25m³/h



**HYRT-S35-5022 1/2''M**

喷嘴直径 (Nozzle Diameter)	3.5×2.0mm
压力 (Pressure)	2.0-4.0bar
喷射半径 (Range)	10-11m
流量 (Flux)	14-20.2L/min



**HYRT-5035 3/4''M**

喷嘴直径 (Nozzle Diameter)	5.0×2.5mm
压力 (Pressure)	1.5-3.0bar
喷射半径 (Range)	10-12m
流量 (Flux)	23.3-30L/min



**HYRT-S1160 3/4''F**

喷嘴直径 (Nozzle Diameter)	3.5×2.0mm
压力 (Pressure)	2.0-4.0bar
喷射半径 (Range)	7-10m
流量 (Flux)	18-25L/min



**HYRT-P40 1.5''**

喷嘴直径 (Nozzle Diameter)	压力 (Pressure)	喷射半径 (Range)	流量 (Flux)
12×20mm	2-5bar	22-41m	9.5-37m³/h



**HYRT-P50 2''**

喷嘴直径 (Nozzle Diameter)	压力 (Pressure)	喷射半径 (Range)	流量 (Flux)
16×26mm	2-7bar	26-53m	17.8-75m³/h



**HYRT-S6-R 3/4''F**

喷嘴直径 (Nozzle Diameter)	4mm
压力 (Pressure)	2.0-3.5bar
喷射半径 (Range)	7-10m
流量 (Flux)	7.2-19.4L/min




**HYRT-S30-1 3/4''M**

喷嘴直径 (Nozzle Diameter)	5.0×2.5mm
压力 (Pressure)	2.0-5.0bar
喷射半径 (Range)	13-18m
流量 (Flux)	11.6-41L/min



**HYRT-S30-2 3/4''M**

喷嘴直径 (Nozzle Diameter)	5.0×2.5mm
压力 (Pressure)	2.0-5.0bar
喷射半径 (Range)	13-18m
流量 (Flux)	11.6-41L/min

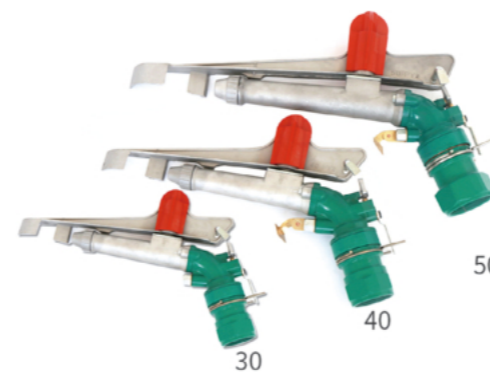

**HYRT-S20 3/4''M**

喷嘴直径 (Nozzle Diameter)	4.5×2.1mm
压力 (Pressure)	2.0-3.0bar
喷射半径 (Range)	13.1-15m
流量 (Flux)	23-28L/min



**HYRT-S22 3/4''M**

喷嘴直径 (Nozzle Diameter)	4.5×2.1mm
压力 (Pressure)	2.0-3.0bar
喷射半径 (Range)	13.1-15m
流量 (Flux)	23-28L/min



**HYRT-5020 3/4''M**

喷嘴直径 (Nozzle Diameter)	5.0×3.3mm
压力 (Pressure)	1.0-2.0bar
喷射半径 (Range)	9-10m
流量 (Flux)	23.3-30.3L/min

接口 (Connectoin)	货号 (Type)	喷嘴直径 (Nozzle Diameter)	流量 (Flow)	半径 (Radius)	重量 (Weight (g))	尺寸 (Size)	工作压力 (Working Pressure)
Internal Thread 1.5"	30PY22H-27°	10*3.5mm	7-9m³/h	23-25m	1119	42*29*6	0.3-0.45MPA
Internal Thread 2"	40PY22H-27°	14*7.5mm	17-20m³/h	23-30m	2197	47*31*7	0.3-0.4MPA
Internal Thread 2.5"	50PY22H-27°	20*3.5mm	30-35m³/h	30-40m	2850	63*37*8	0.4-0.5MPA



- 两个出水口，远近都可覆盖，实现全面灌溉。
- 360°旋转，定位可调，旋转丝滑，防沙防漏。
- Adjustable spraying distance, widely used. Preferred material, long service life.
- Spinning silky smooth, not stuck. A variety of interfaces, widely used.



<b>HYRT-ZY-2-1</b>	<b>1"</b>		
喷嘴直径 Nozzle Diameter	压力 Pressure	喷射半径 Range	流量 Flux
7mm	0.2-0.35bar	15-19m	3-36L/min



<b>HYRT-ZY-2</b>	<b>1"</b>		
喷嘴直径 Nozzle Diameter	压力 Pressure	喷射半径 Range	流量 Flux
7mm	0.2-0.35bar	15-19m	3-36L/min




<b>HYRT-S24</b>	<b>3/4" M</b>		
喷嘴直径 Nozzle Diameter	压力 Pressure	喷射半径 Range	流量 Flux
5.0x2.5mm	0.5-4.0bar	3.0-16.5m	6.8-32.4L/min




<b>HYRT-S23</b>	<b>3/4" F</b>		
喷嘴直径 Nozzle diameter	压力 Pressure	喷射半径 Range	流量 Flux
5.0-2.5mm	0.5-4.0bar	3.0-16.5m	6.8-32.4L/min



<b>HYRT-S4</b>	<b>1/2" 3/4"</b>		
喷嘴直径 Nozzle Diameter	压力 Pressure	喷射半径 Range	流量 Flux
4mm	1.3-3.0bar	6.0-13.0m	14.8-28L/min

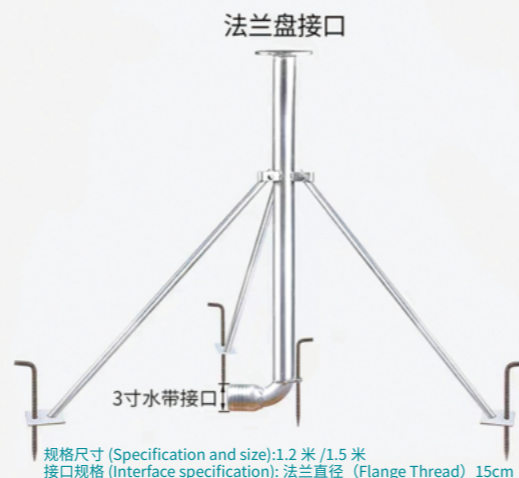

### LG001

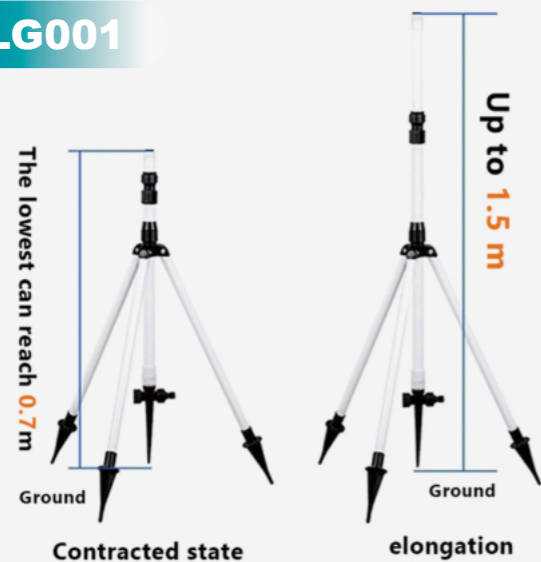

### LG002



## 压力补偿喷头 Pressure compensated sprinkler

### 特点:

- 压力补偿喷头适用各种地形条件，流量稳定。
- 防虫式设计，避免堵塞。
- 采用优质工程塑料，抗 UV，耐候性好，耐腐蚀，经久耐用。
- 独特的设计流道，抗堵塞能力强，使用寿命长。
- 结构牢固紧凑，同时也易于拆装，方便清洗。
- 有外丝接头、倒钩接头、内六接头三种连接方式，满足不同安装需求。
- 双射程叶轮设计，带限流条时喷洒范围小，减掉限流条时，射程远，喷洒范围大。

This Pressure Compensated sprinkler works effectively on all types of terrain, delivering a consistent water flow. Its insect-proof design prevents clogging, ensuring smooth operation. Made from premium engineering plastic, it offers excellent UV resistance, weather durability, and corrosion protection for long-lasting use. The uniquely designed flow path boosts anti-clogging performance and extends the sprinkler's lifespan. Built with a sturdy, compact structure, it's easy to assemble, disassemble, and clean. It comes with three connection options—male thread, barb, and 6mm female thread connector—providing flexibility for various installation needs. The dual-range impeller design allows for a shorter spray range with the break-off deflector in place, and a wider spray range when removed.




喷嘴颜色 Nozzle Color	货号 Item No	流量 Flux	工作压力 Working Pressure	喷洒半径 Spraying Radius
	PCS01A/B/C	45	1.5-4	1.8-3
	PCS02A/B/C	60	1.5-4	1.8-3
	PCS03A/B/C	95	1.5-4	1.8-3

注: 01 代表绿色、02 代表蓝色、03 代表红色，A 代表内六、B 代表外丝、C 代表倒插。  
Note: 01 represents for green, 02 for blue, 03 for red; A refers to 6mm female thread connector, B represents male threads, and C is for barb.



### 技术参数:

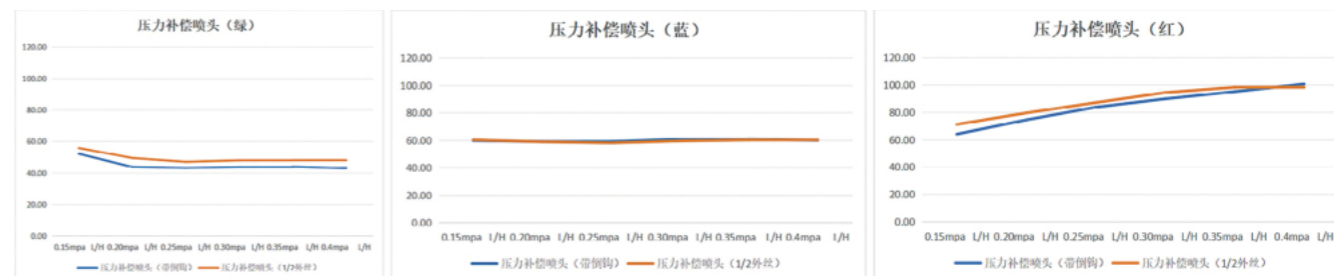

(限流效果)  
With Deflector



(掰掉限流条效果)  
Without Deflector





承插直通阀  
Maxi Valve

货号 Item No.	规格 (mm) Size
V16A	16
V20A	20
V25A	25
N31573232	32



承插旁通阀  
Barb Offtake Valve

货号 Item No.	规格 (mm) Size
V16D	16
V20D	20
V25D	25



双阳直阀  
Double Male Thread Valve

货号 Item No.	规格 (mm) Size
V20E	1/2"×1/2"
V25C	3/4"×3/4"



锁母旁通阀 (大体)  
Lock Offtake Valve for Tape

货号 Item No.	规格 (mm) Size
V16E1	16
V20E1	20



锁母旁通阀 (小体)  
Lock Offtake Valve for Tape

货号 Item No.	规格 (mm) Size
V16AE2	16



定位反锁母旁通阀 (小体)  
Offtake Valve for Tape

货号 Item No.	规格 (mm) Size
V16F2	16



软带旁通阀 (分体)  
Tape Valve for Layflat Hose

货号 Item No.	规格 (mm) Size
V16J3	16



拉环旁通阀  
Start Offtake Valve

货号 Item No.	规格 (mm) Size
V16E3	16



双锁母直通阀  
Lock Tape Coupler Valve

货号 Item No.	规格 (mm) Size
V16	16*16
V20	20*20



管带直通阀  
Lock Pipe and Tape Valve

货号 Item No.	规格 (mm) Size
V16K	16*16
V2016K	20*16



定位反锁母旁通阀  
Offtake Valve for Tape

货号 Item No.	规格 (mm) Size
V16F1	16



锁母阳直阀  
Lock Male Thread Valve for Tape

货号 Item No.	规格 (mm) Size
V16G	16*1/2"
V16H	16*3/4"
V20G	20*1/2"
V20H	20*3/4"



承插旁通阀  
Barb Offtake Valve

货号 Item No.	规格 (mm) Size
V16D1	16
V20D1	20



承插直通阀  
Maxi Valve

货号 Item No.	规格 (mm) Size
V16A1	16
V20A1	20



锁母阳直阀  
Lock Male Thread Valve for Tape

货号 Item No.	规格 (mm) Size
V16G1	16*1/2"
V16H1	16*3/4"



承插阳直阀  
Barb Male Thread Valve

货号 Item No.	规格 (mm) Size
V16B1	16*1/2"
V16C1	16*3/4"
V20B1	20*1/2"
V20C1	20*3/4"



软带旁通阀  
Tape Valve for Layflat Hose

货号 Item No.	规格 (mm) Size
V16J1B	16
V20J1B	20



锁母内丝阀  
Lock Female Valve

货号 Item No.	规格 (mm) Size
V16M	16*3/4"



锁母旁通三通阀  
Lock Offtake Tee Valve

货号 Item No.	规格 (mm) Size
V16T1	16



锁母外丝三通阀  
Male Lock Tee Valve

货号 Item No.	规格 (mm) Size
V16T2	16*1/2"×16




锁母直通阀  
Lock Tape Coupler Valve

货号 Item No.	规格 (mm) Size
V161	16*16



管带直通阀  
Lock Pipe and Tape Valve

货号 Item No.	规格 (mm) Size
V16K1	16*16



软带锁母直通阀  
Lock Tape Coupler Valve

货号 Item No.	规格 (mm) Size
V20L	20



软带锁母旁通阀  
Start Valve

货号 Item No.	规格 (mm) Size
V20J1	20



软带旁通阀  
Tape Valve for Layflat Hose

货号 Item No.	规格 (mm) Size
V16Y	16*1/2"
V20Y	20*1/2"



承插阳直阀  
Barb Male Thread valve

货号 Item No.	规格 (mm) Size
V16B	16*1/2"
V16C	16*3/4"
V20B	20*1/2"
V20C	20*3/4"
V25B	25*3/4"
N31610332	32*1"



软带拉环旁通阀  
Lock Ring Offtake Valve

货号 Item No.	规格 (mm) Size
V25L1	25
V28L1	28
V32L1	32



软带拉环旁通阀  
Lock Ring Offtake Valve

货号 Item No.	规格 (mm) Size
V40LHYRT	40
V50LHYRT	50
V60LHYRT	63



拉环四通阀  
Lock Ring Cross Valve

货号 Item No.	规格 (mm) Size
V5028A	50*28
V6328C1	63*28




拉环三通阀  
Lock Ring Tee Valve

货号 Item No.	规格 (mm) Size
V5028B	50*28
V6328T	63*28



硬管拉环旁通阀  
Offtake Valve For PE Pipe

货号 Item No.	规格 (mm) Size
V25E	25
V28E	28
V32E	32

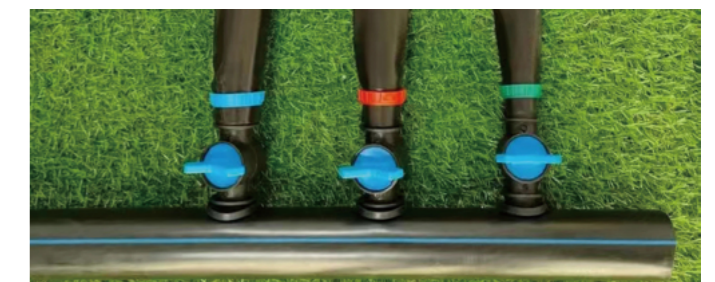

# 锁母管件

Lock Nut Fitting Connector



锁母直接  
Coupling

货号 Item No.	规格 (mm) Size
LC0117	16
LC0120	20



锁母旁通  
Start Offtake

货号 Item No.	规格 (mm) Size
LCO0016	16
LCO0020	20



锁母弯头  
Elbow

货号 Item No.	规格 (mm) Size
TB0117	16
TB0120	20



锁母堵头  
End Cap

货号 Item No.	规格 (mm) Size
TP0117	16
TP0120	20



锁母外丝  
Lock Male Thread

货号 Item No.	规格 (mm) Size
LMC1620	16*1/2"M
LMC1625	16*3/4"M
LMC2020	20*1/2"M



软带旁通 (分体)  
Offtake for Hose

货号 Item No.	规格 (mm) Size
CT0317A	16



软带旁通 (鸭嘴)  
Offtake for Hose[D]

货号 Item No.	规格 (mm) Size
CT0317B	16
CT0320B	20



锁母三通  
Lock Thread Tee

货号 Item No.	规格 (mm) Size
TT0117	16
TT0120	20



定位反锁母旁通  
Start Offtake

货号 Item No.	规格 (mm) Size
LO0117	16



软带锁母旁通 (螺旋体)  
Offtake for Hose

货号 Item No.	规格 (mm) Size
CT0316A	16
CT0320A	20



锁母内丝  
Lock Female Thread

货号 Item No.	规格 (mm) Size
LFC1625	16*3/4"F



锁母按扣三通  
Lock Tee for Pipe

货号 Item No.	规格 (mm) Size
BT031710	16



拉环直接  
Lock Ring Coupling

货号 Item No.	规格 (mm) Size
LC0217	16



管带拉环直接  
Barb Lock Ring Coupling

货号 Item No.	规格 (mm) Size
LC031716	16



拉环旁通  
Lock Ring Start Offtake

货号 Item No.	规格 (mm) Size
T0021712	16



拉环堵头  
Lock Ring end Cap

货号 Item No.	规格 (mm) Size
LE027	16



外丝拉环三通  
Lock Ring Male Tee

货号 Item No.	规格 (mm) Size
LT020A	16*1/2*16



软带拉环三通 (小体)  
Lock Ring Tee for Hose[S]

货号 Item No.	规格 (mm) Size
LT0217S	16



软带拉环三通 (大体)  
Lock Ring Tee for Hose [B]

货号 Item No.	规格 (mm) Size
LT0217B	16



软带拉环三通 (鸭嘴)  
Lock Ring oftake Tee

货号 Item No.	规格 (mm) Size
LT0217C	16



外丝拉环弯头  
Lock Ring Male Elbow

货号 Item No.	规格 (mm) Size
LT01620	16*1/2"



按扣拉环三通  
Lock Ring Tee

货号 Item No.	规格 (mm) Size
BT031710	16



外丝末端冲洗阀  
Male Flush Valve

货号 Item No.	规格 (mm) Size
EFV1/2M	1/2"M



末端冲洗阀  
Flush Valve

货号 Item No.	规格 (mm) Size
EFV16	16
EFV20	16



外丝锁母三通  
Lock Male Thread Tee

货号 Item No.	规格 (mm) Size
BT0217	16*1/2"M
BT0220	20*1/2"M



软带锁母三通 (螺旋体)  
Lock Tee for Hose

货号 Item No.	规格 (mm) Size
LT0316A	16
LT0320A	20



软带锁母三通 (鸭嘴)  
Lock Tee for Hose[D]

货号 Item No.	规格 (mm) Size
LT0316B	16
LT0320B	20



内插锁母三通  
Barb and Lock Tee

货号 Item No.	规格 (mm) Size
BT011720	16*20*16



拉环直接  
Lock Ring Coupling

货号 Item No.	规格 (mm) Size
LC0225	25
LC0228	28
LC0232	32
LC0240	40
LC0250	50
LC0263	63



内丝末端冲洗阀  
Female Flush Valve

货号 Item No.	规格 (mm) Size
EFV3/4F	3/4"F



减压阀  
Pressure Regulator

货号 Item No.	规格 (mm) Size
PRO134 15/20/25/30	F3/4"*M3/4"



锁母三通  
Lock Tee

货号 Item No.	规格 (mm) Size
BT011706	16*6*16



管带锁母直通  
Lock Barb Coupling

货号 Item No.	规格 (mm) Size
LC031616	16*16
LC031620	16*20
LC032016	20*16
LC032020	20*20



变径锁母直通  
Reducing Coupling

货号 Item No.	规格 (mm) Size
LC16S20S	20*16



外丝锁母弯头  
Lock Nut Male Elbow

货号 Item No.	规格 (mm) Size
TB01620	16*1/2"
TB01620	20*1/2"

管道末端冲洗阀  
Flush Valve



# 承插管件

Barb Fitting Connector



简易直接  
Barb Coupling

货号 Item No.	规格 (mm) Size
SC0116	16
SC0120	20
SC0125	25
SC0132	32



简易弯头  
Barb Elbow

货号 Item No.	规格 (mm) Size
EC0116	16
EC0120	20
EC0125	25
EC0132	32



简易三通  
Barb Tee

货号 Item No.	规格 (mm) Size
TC0116	16
TC0120	20
TC0125	25
TC0132	32



简易堵头  
Barb End Cap

货号 Item No.	规格 (mm) Size
EL0116	16
EL0120	20
EL0125	25
EL0132	32



简易旁通  
Barb Offtake

货号 Item No.	规格 (mm) Size
OP0116	16
OP0120	20
OP0125	25



旁直通  
Start offtake

货号 Item No.	规格 (mm) Size
OP0120A	20
OP0125A	25



旁直通  
Start offtake

货号 Item No.	规格 (mm) Size
OP0116A	16



内丝活接  
Female Adaptor

货号 Item No.	规格 (mm) Size
F609216	16*1/2"F
F609316	16*3/4"F
F609220	20*1/2"F
F609320	20*3/4"F



简易外丝  
Barb Male thread Adaptor

货号 Item No.	规格 (mm) Size
MC011612	16*1/2"
MC012012	20*1/2"
MC012034	20*3/4"
MC012534	25*3/4"
MC013201	32*1"



塑料卡  
Plastic Clip

货号 Item No.	规格 (mm) Size
SR0110	10
SR0116	16
SR0120	20
SR0125	25
SR0132	32



橡胶圈  
Rubber Ring

货号 Item No.	规格 (mm) Size
RR0116	16
RR0120	20
RR0125	25



折堵  
End Line

货号 Item No.	规格 (mm) Size
EL0216	16
EL0220	20
EL0225	25



简易外丝三通  
Barb Male Thread Tee

货号 Item No.	规格 (mm) Size
M609216	16*1/2**16
M609316	16*3/4**16
609220	20*1/2**20
609320	20*3/4**20
609325	25*3/4**25



对丝  
Nipple

货号 Item No.	规格 (mm) Size
2502020	G1/2"
2502030	G3/4"
2502040	G1"
2502050	G1.1/4"
2502060	G1.1/2"
2502070	G2"



挂钩  
Hook

货号 Item No.	规格 (mm) Size
HCO112	12
HCO112	16
HCO112	20
HCO112	25
HCO112	32



补芯  
Bushing

货号 Item No.	规格 (mm) Size
215032	M3/4**F1/2"
215042	M1**F1/2"
215043	M1**F3/4"
215062	M1.1/2**F1/2"
215063	M1.1/2**F3/4"
215020	M1.1/2**F1"
215026	M2**F1/2"
215027	M2**F3/4"
215028	M2**F1"
215030	M2**F1.1/2"

# 水带管件

Fitting Connector For Hose&Tape



直接  
Coupling

货号 Item No.	规格 (mm) Size
790032	32
790040	40
790050	50
790063	63
790075	75
790090	90
7900110	110



弯头  
Elbow

货号 Item No.	规格 (mm) Size
791032	32
791040	40
791050	50
791063	63
791075	75
791090	90
7910110	110



三通  
Tee

货号 Item No.	规格 (mm) Size
792032	32
792040	40
792050	50
792063	63
792075	75
792090	90
7920110	110



堵头  
End Cap

货号 Item No.	规格 (mm) Size
794050	50
794063	63
794075	75
794090	90
7940110	110



四通  
Cross Connector

货号 Item No.	规格 (mm) Size
793050	50
793063	63
793075	75
793090	90
7930110	110



内丝接头  
Female Thread Adaptor

货号 Item No.	规格 (mm) Size
7950321	32*1"
79504012	40*1 1/4"
79505015	50*1 1/2"
7950632	63*2"
79507525	75*2 1/2"
7950903	90*3"
7950110	110*4"



变径接头  
Reducing Adaptor

货号 Item No.	规格 (mm) Size
79407563	75*63
79409075	90*75
79409063	90*63
794011063	110*63
79402521	2.5*2"
79402522	2.5*2"



外丝接头  
Male Thread Adaptor

货号 Item No.	规格 (mm) Size
7960321	32
79604012	40
79605015	50
7960632	63
7960752	75*2"
79607525	75*2.5"
7960903	90
7960110	110



中间外丝四通  
Cross with Middle Male Thread

货号 Item No.	规格 (mm) Size
79315015	50*1.5"
7931631	63*1"
79316312	63*1.2"
79316315	63*1.5"
7931632	63*2"
7931751	75*1"
79317515	75*1.5"
7931752	75*2"



中间外丝三通  
Tee with Middle Male Thread

货号 Item No.	规格 (mm) Size
7921321	32*1**32
7921501	50*1**50
79215015	50*1.5**50
7921631	63*1**63
79216312	63*1.2**63
79216315	63*1.5"
7921632	63*2**63
7921751	75*1**75



变径三通  
Reducing tee

货号 Item No.	规格 (mm) Size
79206332	63*32*63
79206350	63*50*63
79206375	63*75*63
79207563	75*63*75
79207590	75*90*75
79209063	90*63*90
79209075	90*75*90
792011090	110*75*110



钢丝卡  
Steel Clip

货号 Item No.	规格 (mm) Size
790232	32
790240	40
790250	50
790263	63
790275	75
790290	90
7902110	110

橡胶圈  
Rubber Ring

名称 Name	图片 Picture	货号 Item No.	尺寸 (mm) Size
防滴器 Mini Anti-drainage valve		4101	Dn6*Dn6
平口防滴器 Mini Anti-drainage valve		4103	Dn6*ID6、Dn7*ID6
快接四件套 Quick connector set		KJ004	Dn6
快接二件套 Quick connector set		KJ002	Dn6
单倒刺接头 One Barb Adaptor		5141、5132	Dn3、DN6
双倒刺接头 Two Barb Adaptor		5142、5131	Dn3、DN6
带丝双倒钩 Two Barb Adaptor Male Thread		5143	Dn6
带丝单倒钩 One Barb Adaptor Male Thread		5144、5151A	Dn6、Dn7
堵头 Barb End Plug		5145	Dn6
接头 One Inside Bard Adaptor		5146	ID6
山字架 Micro Spray Adapor		5151B	Dn7
双倒刺三通 Two Branches For Micro Tube		5133	Dn3
四倒刺五通 Four Branches For Micro Tube		5134	Dn3
迷你小阀门 Mini Valve		4382	Dn6
旁通接头 Offtake Start		5191	Dn10*8
承插接头 Barb Coupling		5192	Dn12*8
承插接头 Barb Coupling		CT0306	Dn12*6
软带旁通+承插接头 Tape Offtake+Barb Start		CT0308	Dn12*8
堵头 End Plug		5194A	Dn8
倒钩堵头 Barb End Plug		5194B	Dn10
转接头 Reducing Adaptor With Male Thread		5195A	ID6*1/2 "
转接头 Reducing Adaptor With Male Thread		5195B	Dn7*1/2 "
转接头 Reducing Adaptor With Male Thread		5195C	Dn6*1/2 "
120°小三通 120° Tee For Micro Tube		5147A	Dn4
倒刺正三通 Barb Tee For Micro Tube		5147B	Dn5
转接头 Support With Female Thread		5193	Dn12*1/2 "
挂钩 Hook			
挂钩 Hook			
防滴器 Mini Anti-drainage valve		4201	Dn6*Dn7
防滴器 Mini Anti-drainage valve		4202	Dn6*Dn7

## 工具、配件 TOOL AND ACCESSORY



地布地钉  
Ground Nail

货号 Item No.	规格 (mm) Size
GN020	16



地钉  
Ground Nail

货号 Item No.	规格 (mm) Size
HS1620	16、20



地钉  
Ground Nail

货号 Item No.	规格 (mm) Size
HS030516	3/5、4/7、16



地钉  
Ground Nail

货号 Item No.	规格 (mm) Size
HS3547	3/5、4/7



压枝器 (极易调节 按压定形)  
Branch Bender

货号 Item No.	规格 (mm) Size
YZ001010	360°



压枝器  
Limb Spreader

货号 Item No.	规格 (mm) Size
YZ001013	13
YZ001015	15



## 毛管 MICRO TUBE



3/5 mm  
4/7 mm  
8/11 mm




3/5mm  
4/7mm  
8/11mm



# IRRIGATION SYSTEM FITTING

农业灌溉/花园灌溉  
Agricultural Irrigation/  
Garden Irrigation

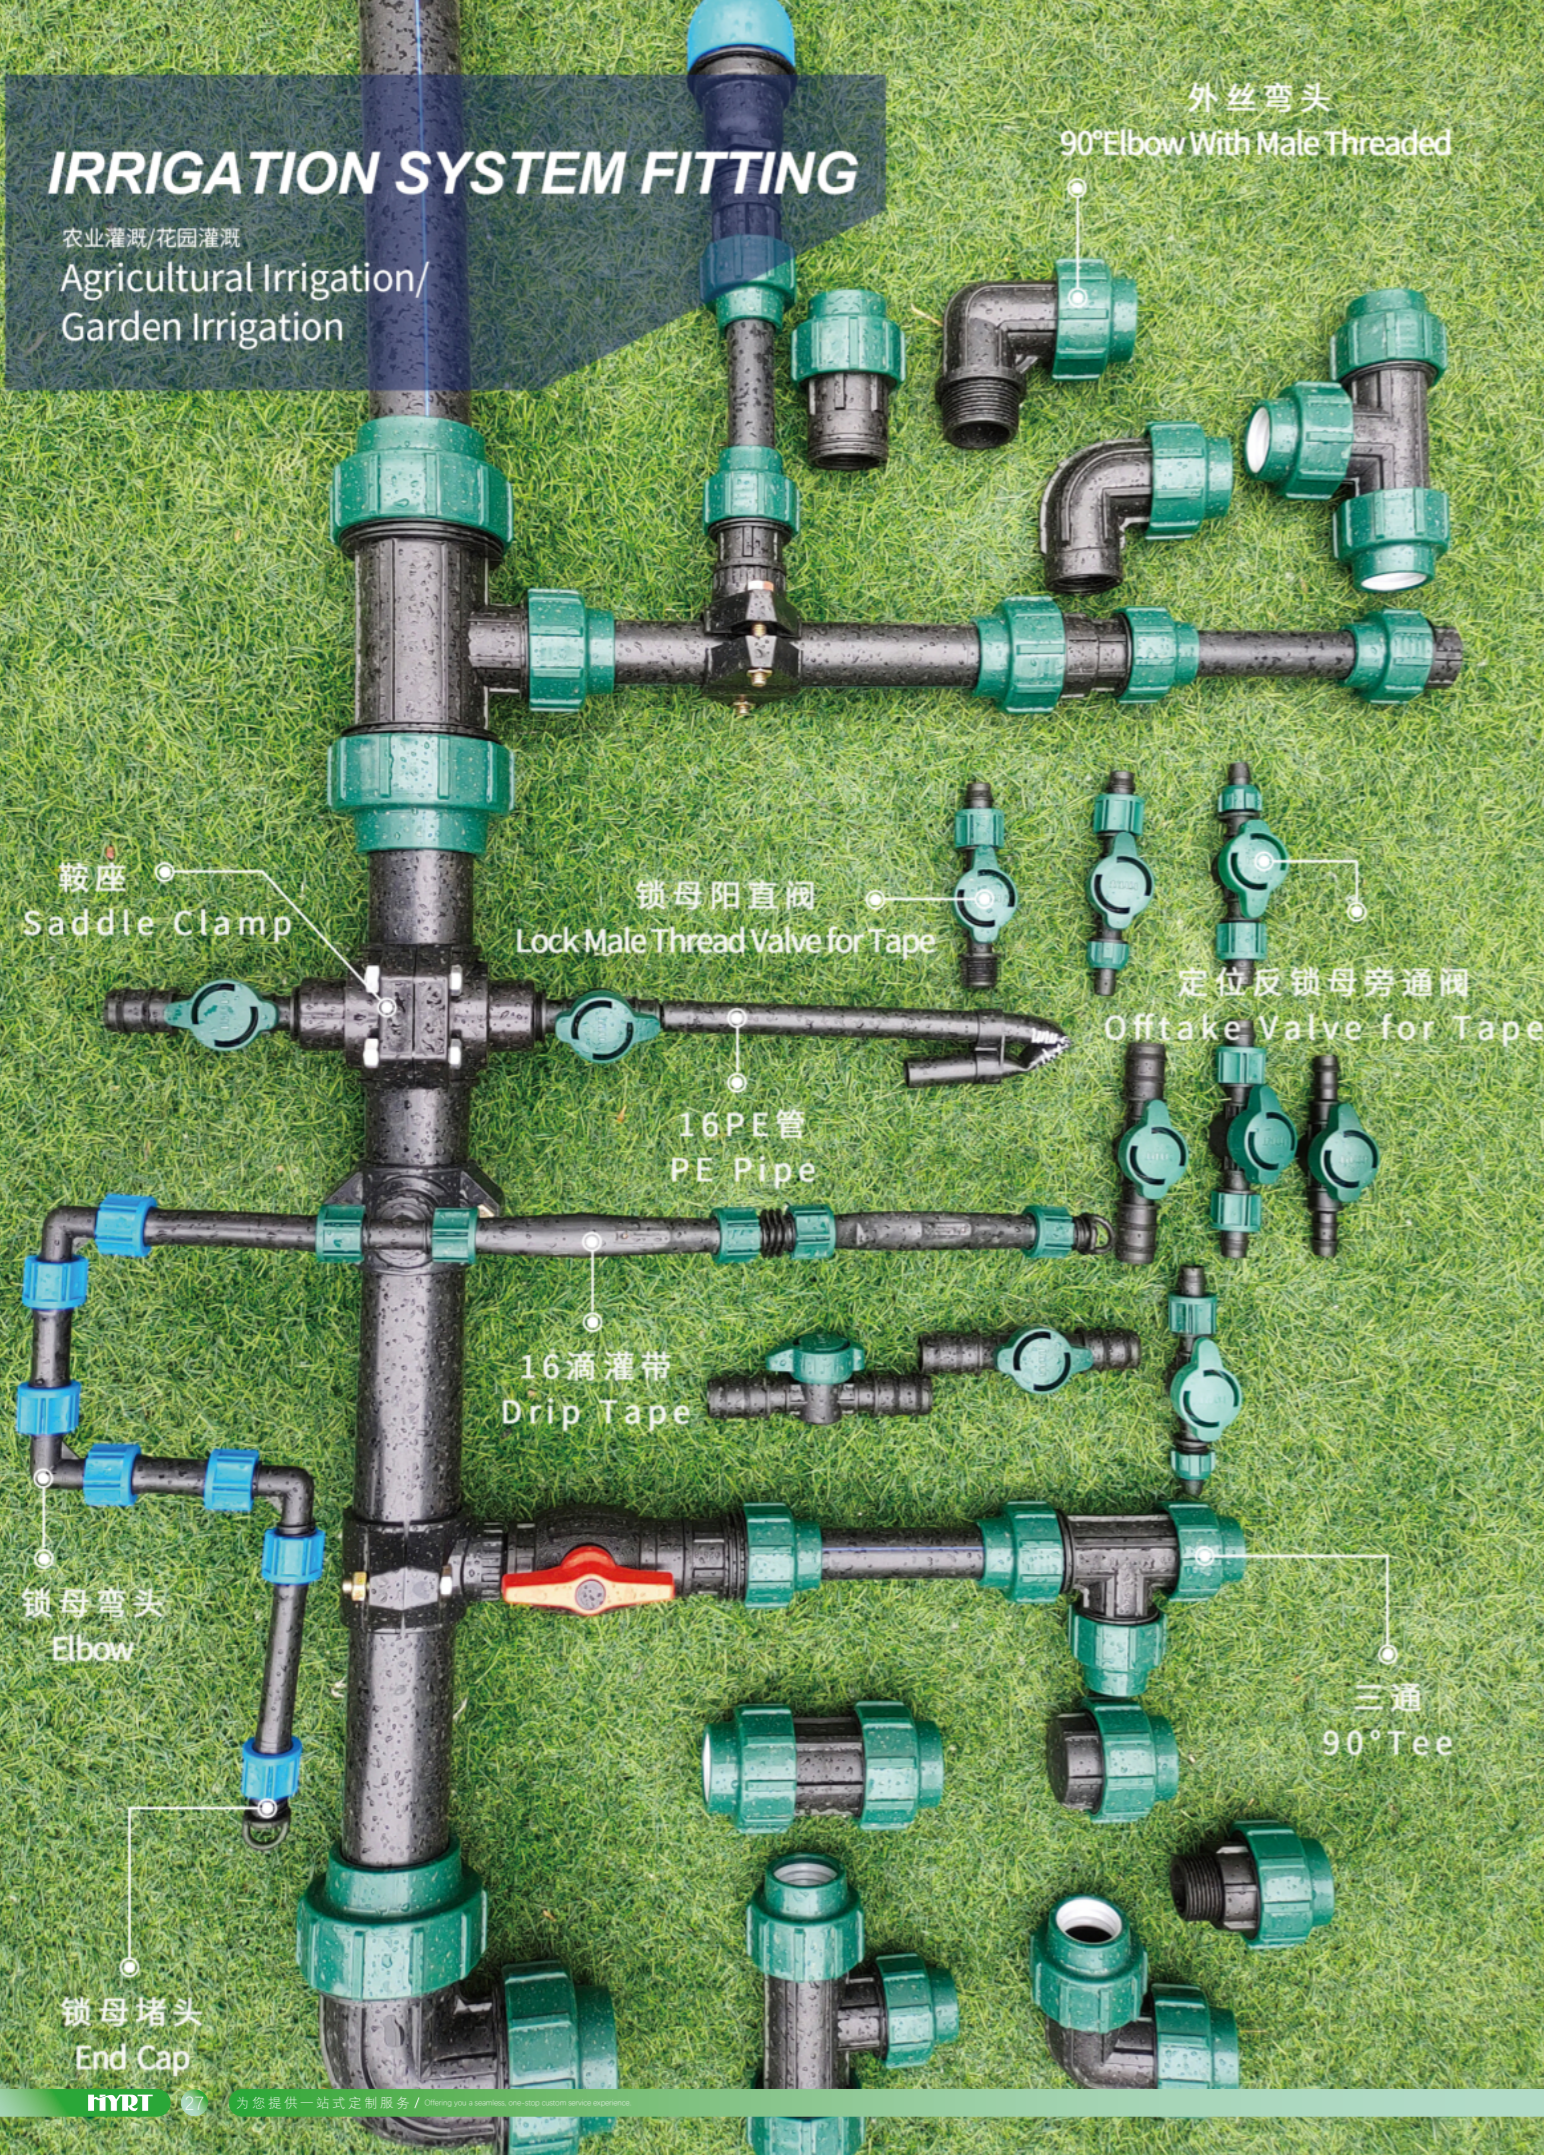

外丝弯头  
90° Elbow With Male Threaded

鞍座  
Saddle Clamp

锁母阳直阀  
Lock Male Thread Valve for Tape

定位反锁母旁通阀  
Offtake Valve for Tape

16PE管  
PE Pipe

16滴灌带  
Drip Tape

锁母弯头  
Elbow

三通  
90° Tee

锁母堵头  
End Cap

## 小阀门 Mini Valves



双锁母直通阀

Lock Tape Coupler with Valve

货号 Item No.	HYRTV16I	HYRTV20I
规格 (mm) Size	16	20



承插直通阀

Maxi Valve

货号 Item No.	HYRTV16A	HYRTV20A	HYRTV25A
规格 (mm) Size	16	20	25



单锁母旁通阀

Lock Offtake Valve for Tape

货号 Item No.	HYRTV16E1	HYRTV20E1
规格 (mm) Size	16	20



承插旁通阀

Barb Offtake Valve

货号 Item No.	HYRTV16D	HYRTV20D	HYRTV25D
规格 (mm) Size	16	20	25



定位反锁母旁通阀

Offtake Valve for Tape

货号 Item No.	HYRTV16F1	HYRTV20F1
规格 (mm) Size	16	20



锁母阳直阀

Lock-Male Thread Valve for Tape

货号 Item No.	HYRTV20F1	HYRTV16H	HYRTV20G	HYRTV20H
规格 (mm) Size	16x1/2"	16x3/4"	20x1/2"	20x3/4"



软带锁母旁通阀 (分体)

Tape Valve for Layflat Hose

货号 Item No.	HYRTV16J1
规格 (mm) Size	16



承插阳直阀

Barb Male Thread valve

货号 Item No.	HYRTV16B	HYRTV16C	HYRTV20B	HYRTV20C	HYRTV25B
规格 (mm) Size	16x1/2"	16x3/4"	20x1/2"	20x3/4"	25x3/4"



软带锁母旁通阀 (鸭嘴)

Tape Valve for Layflat Hose

货号 Item No.	HYRTV16J2	HYRTV20J2
规格 (mm) Size	16	20



管带锁母直通阀

Lock Pipe and Tape Valve

货号 Item No.	HYRTV16K
规格 (mm) Size	16

精益求精 客户至上；

团结协作 持续成长！

# COMPRESSION FITTING

快接管件



## 参数标准 Reference Standards

### 工作压力

Working Pressures

UNI9561-2, DIN 8076, ISO14236, BRL-K03

### PE 管

Polyethylene(PE)Pipes:

UNI7611, UNI7990, DIN9072,  
DIN8074, UIN10910, EN12201

### 螺纹

Threads:

ISO7, ANSIASME B1-20

### 法兰

Flanges:

ISO2084, DIN2501, UN17442



**E. 主体 Body**  
PP 材质, 高温条件下性状稳定不易变形  
Heterophasic block polypropylene(PP-B) of exceptional mechanical properties even at high temperature

**D.O 形圈 O Ring gasket**  
三元乙丙材质  
EPDM

**C.T 型环**  
Blocking bush  
PP 材质 Polypropylene

**B. 开口卡 Clinching ring**  
POM 材质, 坚硬耐磨  
Polyacetal resin(POM) of high mechanical resistance and hardness

**A. 螺帽 Nut**  
PP 材质, 抗热抗紫外线性能好  
Polypropylene with dye master of high stability to UV rays and solidity to heat

快接管件, 主要用于高压输送液体管道中, 广泛用于水流传输、饮用水以及液压行业中产品可广泛应用于各种水管的连接, 机械性能卓著, 质量符合各项国际先进标准。可承载压力与持续受压时间和环境温度有关, 在常温 20 摄氏度下, 直径为 20-63mm 产品可承载 16bar 最大工作压力, 直径 75-110mm 产品可承载 10bar 最大工作压力

The compression fittings line is crafted to excel in fluid conveyance under high pressure, specifically designed for applications in the water distribution sector. Engineered to meet rigorous international standards for mechanical performance and compatibility. Allows the maximum working pressure(PN-PFA) 16 bar(UNI9561-2) for diameters from 20 to 63mm and PN 10 bar for diameters from 75 to 110mm. at the temperature of 20 °C. Maximum allowable working pressure related to the duration of pressure and temperature.



壁板弯头  
Wall Plate Elbow

COD.	D(mm)	F(BSP)	📦
712020	20	G1/2(F)	192
701025	25	G3/4(F)	100



90 度弯头内丝  
90°Elbow For Pop-up

COD.	D(mm)	D(mm)	📦
715020	20	G1/2(F)	
715025	25	G3/4(F)	
715031	32	G3/4(F)	
715032	32	G1(F)	



法兰适配器  
Flanged Adaptor

COD.	D(mm)	📦
714040	40	20
714050	50	16
714063	63	12
714075	75	8
714090	90	6
714110	110	3



扳手  
Wrench

COD.	Size(mm)	📦
SP202532	20 — 32	350



扳手  
Wrench

COD.	Size(mm)	📦
SP405063	40 — 63	220



扳手  
Wrench

COD.	Size(mm)	📦
SP75125	75 — 125	40



快接阀门  
Compression PP-PP

COD.	D(mm)	📦
131020	20	120
131025	25	70
131032	32	50
131040	40	23
131050	50	16
131063	63	10



快接内丝阀门  
PP Compression X Female BSP Thread

COD.	D(mm)	📦
133020	20×1/2"F	180
133025	25×3/4"F	100
133032	32×1"F	80
133040	40×1 1/4"F	33
133050	50×1 1/2"F	16
133063	63×2"F	12



快接外丝阀门  
PP Compression X Male BSP Thread

COD.	D(mm)	📦
134020	20×1/2"M	180
134025	25×3/4"M	100
134032	32×1"M	80
134040	40×1 1/4"M	33
134050	50×1 1/2"M	16
134063	63×2"M	12

# 重型快接管件

## H-Compression Fitting



直接  
Coupling

COD.	D(MM)	D(MM)	☐
701020	20	20	300
701025	25	25	200
701032	32	32	140
701040	40	40	70
701050	50	50	50
701063	63	63	28
701075	75	75	16
701090	90	90	6
701110	110	110	4



弯头  
90° Elbow

COD.	D(MM)	D(MM)	☐
706020	20	20	260
706025	25	25	160
706032	32	32	120
706040	40	40	70
706050	50	50	40
706063	63	63	22
706075	75	75	12
706090	90	90	6
706110	110	110	4



三通  
Tee

COD.	D(MM)	D(MM)	☐
709020	20	20	160
709025	25	25	120
709032	32	32	80
709040	40	40	40
709050	50	50	24
709063	63	63	14
709075	75	75	8
709090	90	90	2
709110	110	110	2



外丝  
Male Adaptor

COD.	D(MM)	D(MM)	☐
704020	20	1/2"	600
704021	20	3/4"	600
704024	25	1/2"	350
704025	25	3/4"	350
704026	25	1"	350
704030	32	1/2"	220
704031	32	3/4"	220
704032	32	1"	220
704039	40	1"	140
704040	40	1.1/4"	140
704041	40	1.1/2"	140
704050	50	1.1/2"	70
704051	50	2"	70
704063	63	2"	50
704075	75	2.1/2"	28
704090	90	3"	
704110	110	4"	8



内丝  
Female Adaptor

COD.	D(MM)	D(MM)	☐
703020	20	1/2"	600
703022	20	3/4"	600
703024	25	1/2"	320
703025	25	3/4"	320
703027	25	1"	320
703030	32	1/2"	200
703031	32	3/4"	200
703032	32	1"	200
703039	40	1"	110
703040	40	1.1/4"	70
703050	50	1.1/2"	40
703063	63	2"	28
703075	75	2.1/2"	28
703090	90	3"	
703110	110	4"	



内丝弯头  
90° Elbow With Female Thread

COD.	D(MM)	D(MM)	☐
708020	20	1/2"	300
708021	20	3/4"	
708024	25	1/2"	
708025	25	3/4"	
708030	32	1/2"	
708031	32	3/4"	
708032	32	1"	
708040	40	1.1/4"	
708050	50	1.1/2"	
708063	63	2"	
708075	75	2.1/2"	
708090	90	3"	
708110	110	4"	



变径直接  
Reducing Coupling

COD.	D(MM)	D(MM)	☐
702025	25	20	240
702031	32	20	160
702032	32	25	140
702038	40	20	120
702039	40	25	120
702040	40	32	90
702047	50	20	90
702048	50	25	70
702049	50	32	60
702050	50	40	60
702059	63	20	45
702060	63	25	45
702061	63	32	45
702062	63	40	40
702063	63	50	36
702073	75	40	24
702074	75	50	22
702075	75	63	20
702089	90	63	
702090	90	75	
702091	110	75	
702110	110	90	



变径三通  
Reducing Tee

COD.	D(MM)	D(MM)	☐
713025	25	20	120
713031	32	20	90
713032	32	25	80
713038	40	20	60
713039	40	25	50
713040	40	32	50
713047	50	20	40
713048	50	25	36
713049	50	32	36
713050	50	40	36
713059	63	20	22
713060	63	25	22
713061	63	32	20
713062	63	40	18
713063	63	50	18
713075	75	63	10
713076	75	50	10
713077	75	40	12



堵头  
End Cap

COD.	D(MM)	D(MM)	☐
705020	20	20	700
705025	25	25	400
705032	32	32	240
705040	40	40	140
705050	50	50	80
705063	63	63	50
705075	75	75	28
705090	90	90	6
705110	110	110	4



内丝三通  
Tee With Female Thread

COD.	D(MM)	D(MM)	☐
710020	20	1/2"	
710024	25	1/2"	
710025	25	3/4"	
710031	32	3/4"	
710032	32	1"	
710039	40	1"	
710040	40	1.1/4"	
710050	50	1.1/2"	
710063	63	2"	
710075	75	2.1/2"	
710090	90	3"	
710110	110	4"	



外丝三通  
Tee With Male Thread

COD.	D(MM)	D(MM)	☐
711020	20	1/2"	
711021	20	3/4"	
711024	25	1/2"	
711025	25	3/4"	
711026	25	1"	
711030	32	1/2"	
711031	32	3/4"	
711032	32	1"	
711140	40	1.1/4"	
711050	50	1.1/2"	
711063	63	2"	
711075	75	2.1/2"	
711090	90	3"	
711110	110	4"	



外丝弯头  
90° Elbow With Male Thread

COD.	D(MM)	D(MM)	☐
707020	20	1/2"	
707021	20	3/4"	
707024	25	1/2"	
707025	25	3/4"	
707026	25	1"	
707030	32	1/2"	
707031	32	3/4"	
707032	32	1"	
707033	32	1.1/4"	
711040	40	1.1/4"	
711050	50	1.1/2"	
711063	63	2"	
711075	75	2.1/2"	
711090	90	3"	
711110	110	4"	

# 轻型快接管件

## L-Compression Fitting



直接  
Coupling

COD.	D(MM)	D(MM)	📦
N701020	20	20	400
N701025	25	25	260
N701032	32	32	180
N701040	40	40	100
N701050	50	50	60
N701063	63	63	36
N701075	75	75	26
N701090	90	90	
N701110	110	110	



弯头  
90° Elbow

COD.	D(MM)	D(MM)	📦
N706020	20	20	320
N706025	25	25	220
N706032	32	32	140
N706040	40	40	90
N706050	50	50	56
N706063	63	63	30
N706075	75	75	20
N706090	90	90	
N706110	110	110	



三通  
Tee

COD.	D(MM)	D(MM)	📦
N709020	20	20	200
N709025	25	25	160
N709032	32	32	100
N709040	40	40	60
N709050	50	50	30
N709063	63	63	20
N709075	75	75	12
N709090	90	90	
N709110	110	110	



变径三通  
Reducing Tee

COD.	D(MM)	D(MM)	📦
N713025	25	20	0
N713031	32	20	
N713032	32	25	
N713038	40	20	
N713039	40	25	
N713040	40	32	
N713047	50	20	
N713048	50	25	
N713049	50	32	
N713050	50	40	
N713059	63	20	
N713060	63	25	
N713061	63	32	
N713062	63	40	
N713063	63	50	
N713075	75	40	
N713076	75	50	
N713077	75	63	
N713090	90	75	
N713110	110	90	



外丝弯头  
90° Elbow With Male Thread

COD.	D(MM)	D(MM)	📦
N707020	20	1/2"	
N707021	20	3/4"	
N707024	25	1/2"	
N707025	25	3/4"	
N707026	25	1"	
N707030	32	1/2"	
N707031	32	3/4"	
N707032	32	1"	
N707033	32	1.1/4"	
N711040	40	1.1/4"	
N711050	50	1.1/2"	
N711063	63	2"	
N711075	75	2.1/2"	
N711090	90	3"	
N711110	110	4"	



内丝弯头  
90° Elbow With Female Thread

COD.	D(MM)	D(MM)	📦
N708020	20	1/2"	0
N708021	20	3/4"	
N708024	25	1/2"	
N708025	25	3/4"	
N708030	32	1/2"	
N708031	32	3/4"	
N708032	32	1"	
N708040	40	1.1/4"	
N708050	50	1.1/2"	
N708063	63	2"	
N708075	75	2.1/2"	
N708090	90	3"	
N708110	110	3"	



变径直接  
Reducing Coupling

COD.	D(MM)	D(MM)	📦
N702025	25	20	
N702031	32	20	
N702032	32	25	
N702038	40	20	
N702039	40	25	
N702040	40	32	
N702047	50	20	
N702048	50	25	
N702049	50	32	
N702050	50	40	
N702059	63	20	
N702060	63	25	
N702061	63	32	
N702062	63	40	
N702063	63	50	
N702073	75	40	
N702074	75	50	
N702075	75	63	
N702089	90	63	
N702090	90	75	
N702091	110	75	
N702110	110	90	



外丝  
Male Adaptor

COD.	D(MM)	D(MM)	📦
N704020	20	1/2"	650
N704021	20	3/4"	
N704024	25	1/2"	
N704025	25	3/4"	450
N704026	25	1"	
N704030	32	1/2"	
N704031	32	3/4"	
N704032	32	1"	300
N704033	32	1.1/4"	
N704039	40	1"	200
N704040	40	1.1/4"	
N704041	40	1.1/2"	
N704049	50	1.1/4"	
N704050	50	1.1/2"	
N704051	50	2"	40
N704061	63	1.1/2"	
N704062	63	2.1/2"	
N704063	63	2"	
N704075	75	2.1/2"	
N704090	90	3"	
N704110	110	4"	



内丝  
Female Adaptor

COD.	D(MM)	D(MM)	📦
N703020	20	1/2"	650
N703021	20	3/4"	
N703022	20	1"	
N703024	25	1/2"	420
N703025	25	3/4"	
N703027	25	1"	
N703030	32	1/2"	
N703031	32	3/4"	260
N703032	32	1"	
N703033	32	1.1/4"	180
N703039	40	1"	
N703040	40	1.1/4"	
N703041	40	1.1/2"	40
N703049	50	1"	
N703050	50	1.1/4"	
N703051	50	1.1/2"	
N703052	50	2"	
N703061	63	1.1/4"	
N703062	63	1.1/2"	
N703063	63	2"	
N703064	63	2.1/2"	
N703074	75	2"	
N703075	75	2.1/2"	
N703076	75	3"	
N703090	90	3"	
N703110	110	4"	



内丝三通  
Tee With Female Thread

COD.	D(MM)	D(MM)	📦
N710020	20	1/2"	
N710024	25	1/2"	
N710025	25	3/4"	
N710031	32	3/4"	
N710032	32	1"	
N710039	40	1"	
N710040	40	1.1/4"	
N710050	50	1.1/2"	
N710063	63	2"	
N710075	75	2.1/2"	
N710090	90	3"	
N710110	110	4"	



外丝三通  
Tee With Male Thread

COD.	D(MM)	D(MM)	📦
N711020	20	1/2"	
N711021	20	3/4"	
N711024	25	1/2"	
N711025	25	3/4"	
N711026	25	1"	
N711031	32	3/4"	
N711032	32	1"	
N711140	40	1.1/4"	
N711141	40	1"	
N711050	50	1.1/2"	
N711063	63	2"	
N711075	75	2.1/2"	
N711090	90	3"	
N711110	110	4"	



堵头  
End Cap

COD.	D(MM)	D(MM)	📦
N705020	20	20	700
N705025	25	25	520
N705032	32	32	300
N705040	40	40	200
N705050	50	50	120
N705063	63	63	70
N705075	75	75	44
N705090	90	90	
N705110	110	110	

# 过滤器

Filter



## Y型网式过滤器

Y Type Screen Filter

货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F25YS	3/4" (25)	180*180*100	120	5	8
F32YS	1" (32)	180*180*100	120	6	8
F40YS	1.2" (40)	250*220*120	120	15	8
F50YS	1.5" (50)	250*220*120	120	20	8
F63YS	2.0" (63)	290*260*150	120	25	8
F75YS	2.5" (75)	360*330*168	120	30	8
F90YS	3" (90)	360*330*168	120	35	8



## Y型叠片过滤器

Y Type Disc Filter


货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F25YD	3/4" (25)	180*180*100	120	5	8
F32YD	1" (32)	180*180*100	120	6	8
F40YD	1.2" (40)	250*220*120	120	15	8
F50YD	1.5" (50)	250*220*120	120	20	8
F63YD	2.0" (63)	290*260*150	120	25	8
F75YD	2.5" (75)	360*330*168	120	30	8
F90YD	3" (90)	360*330*168	120	35	8



## T型网式过滤器

T Type Screen Filter

货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F63TS	2" (63)	630*350*225	120	30	10
F75TS	2.5" (75)	630*350*225	120	40	10
F90TS	3" (90)	750*350*225	120	50	10

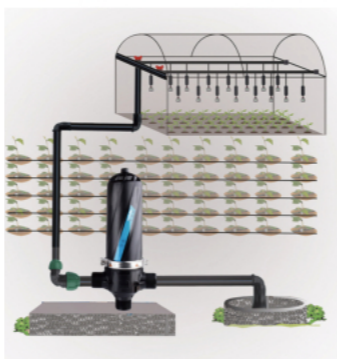

## T型叠片过滤器

T Type Disc Filter

货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F63TD	2" (63)	630*350*225	120	30	10
F75TD	2.5" (75)	630*350*225	120	40	10
F90TD	3" (90)	750*350*225	120	50	10



## H型网式过滤器

H Type Screen Filter


货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F90HS	3" (90)	945*340*220	120	50	10
F110HS	4" (110)	960*340*220	120	70	10
F110HSL	4" (110)	1200*340*220	120	100	10



## H型叠片过滤器

H Type Disc Filter

货号 Item No.	口径 (mm) Diameter	尺寸 (mm) Size	目数 Mesh	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F90HD	3" (90)	945*340*220	120	50	10
F110HD	4" (110)	960*340*220	120	70	10
F110HDL	4" (110)	1200*340*220	120	100	10

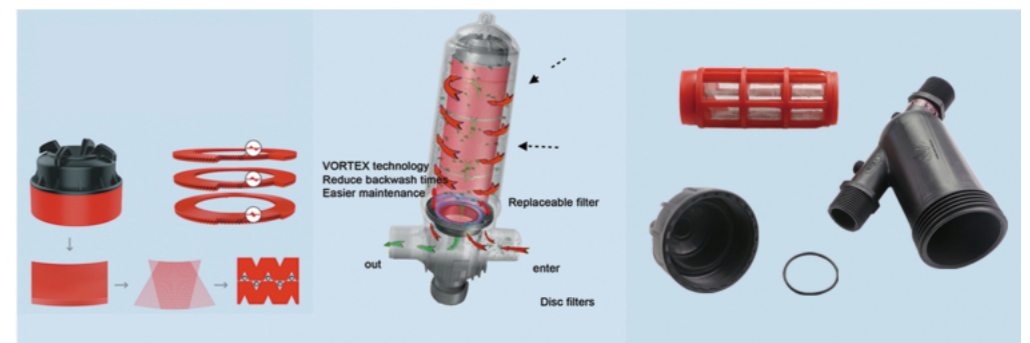

# 过滤器

Filter



## 离心过滤器

Centrifugal Type Filter

货号 Item No.	口径 (mm) Diameter	最大压力 (Bar) Max Pressure
F63LX	2" (63)	10
F90LX	3" (90)	10
F110LX	4" (110)	10


## 智能精准施肥机

Precision Fertilizer Machine



## 单通道智能水肥一体机

Single Channel

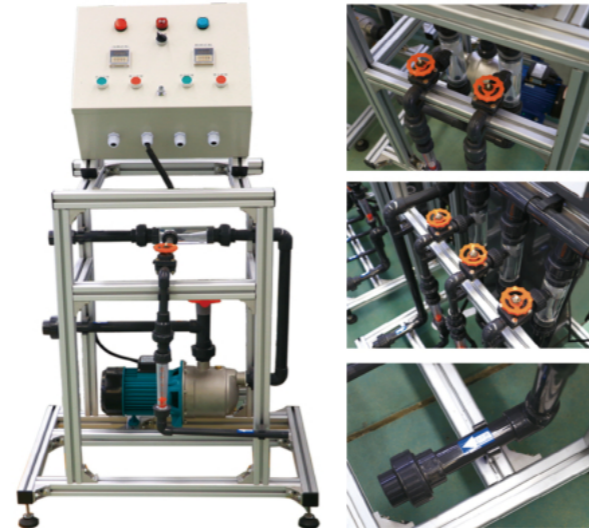

# 比例泵

proportional fertilizer applicator

## 特点:


- 无需电源，独自运转。水压工作压力节能环保，可独自运转、简单省力。
- 加药简单，节省施肥劳动力，操作灵活方便，可随时添加或更换。
- 配比准确，自动稀释。比例泵可根据实际情况来调整注入水中的添加剂，还可更改
- 药品种类和剂量，自动均匀稀释。
- 安装简单，结实耐用。设计合理，升级材质，使用寿命长。

No power source needed - operates independently on water pressure. Efficient and eco-friendly mechanism as it runs on its own and is easy to use and maintain. Adding chemicals is straightforward and labor-saving. The flexible operation allows for easy addition or replacement of chemicals at any time. Accurate mixing and automatic dilution. The ratio pump adjusts based on your needs, allowing you to change the type and amount of additives for consistent and even dilution. Simple installation and built to last. With a well-designed, upgraded material, this unit is durable and has a long service life.




## 产品参数:

货号 Item No.	HY2502	HY2504
接口尺寸 (寸) Interface Dimensions	3/4寸 (6分)	3/4寸 (6分)
比例范围 (%) Scale Range	0.3%-2%	0.4%-4%
工作压力 (Bar) Working Pressure	0.2-8 公斤	0.2-8 公斤
流量范围 (L/H) Flow Range	20-2500L/h	20-2500L/h
工作温度 (°C) Working Temperature	4°C - 40°C	4°C - 40°C

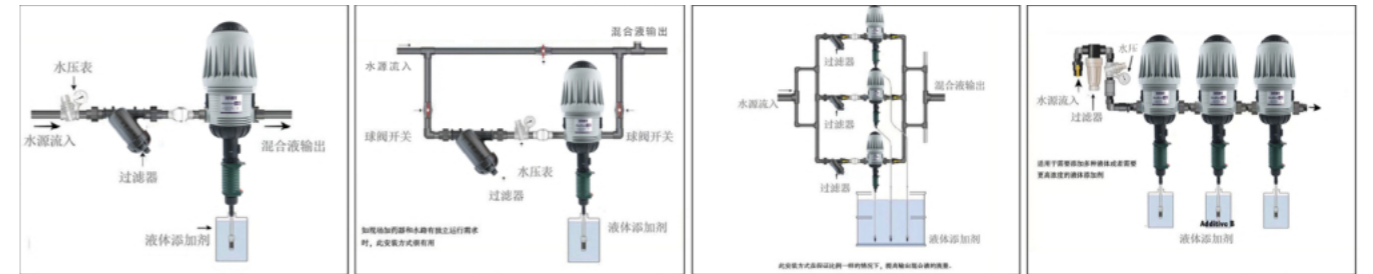

# 新型文丘里注肥器

New Venturi Fertilizer Injector

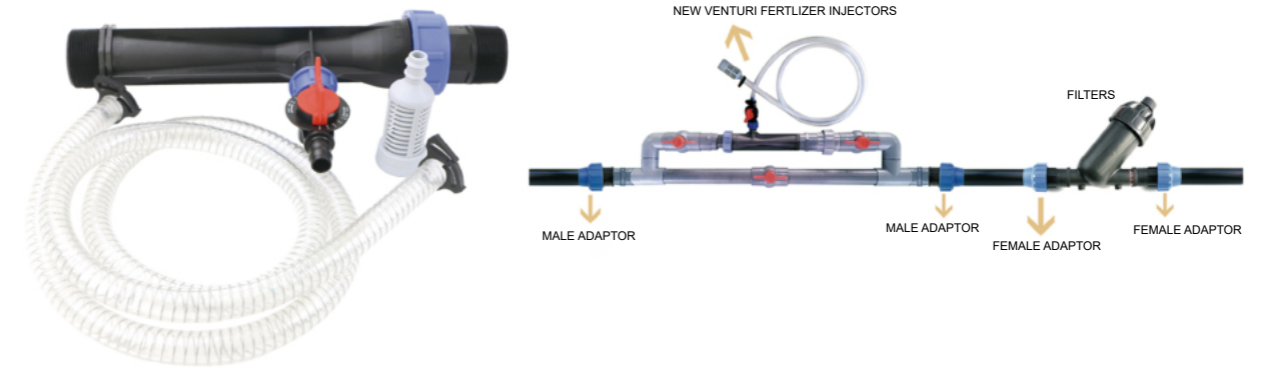

货号 Item No.	口径 (mm) Diameter	最大吸肥量 (L/H) Amount of Fertilizer Absorption	最大流量 (m³/h) Max Discharge	最大压力 (Bar) Max Pressure
F32V	1" (32)	300	8	8
F50V	1.5" (50)	780	15	8
F63V	2" (63)	1200	20	8



# 鞍座 SADDLE CLAMP



货号 Item No.	规格(mm) Size
7600642	25 × 1/2"
7600643	25 × 3/4"
7600652	32 × 1/2"
7600653	32 × 3/4"
7600654	32 × 1"
7600662	40 × 1/2"
7600663	40 × 3/4"
7600664	40 × 1"
7600672	50 × 1/2"
7600673	50 × 3/4"
7600674	50 × 1"
7600675	50 × 1.1/4"
7600676	50 × 1.1/2"
7600682	63 × 1/2"
7600683	63 × 3/4"
7600683D	63 × 3/4"
7600684	63 × 1"
7600685	63 × 1.1/4"
7600686	63 × 1.1/2"
7600687	63 × 2"
7600692	75 × 1/2"
7600693	75 × 3/4"
7600694	75 × 1"
7600695	75 × 1.1/4"
7600696	75 × 1.1/2"
7600697	75 × 2"
76006A2	90 × 1/2"

货号 Item No.	规格(mm) Size
76006A3	90 × 3/4"
76006A4	90 × 1"
76006A5	90 × 1.1/4"
76006A6	90 × 1.1/2"
76006A7	90 × 2"
76006A8	90 × 2.1/2"
76006B2	110 × 1/2"
76006B3	110 × 3/4"
76006B4	110 × 1"
76006B5	110 × 1.1/4"
76006B6	110 × 1.1/2"
76006B7	110 × 2"
76006B8	110 × 2.1/2"
76006B9	110 × 3"
76006C3	125 × 3/4"
76006C4	125 × 1"
76006C5	125 × 1.1/4"
76006C6	125 × 1.1/2"
76006C7	125 × 2"
76006C9	125 × 3"
76006D2	160 × 1/2"
76006D3	160 × 3/4"
76006D4	160 × 1"
76006D5	160 × 1.1/4"
76006D7	160 × 2"
76006D9	160 × 3"
76006H2	180 × 1/2"

货号 Item No.	规格(mm) Size
76006H3	180 × 3/4"
76006H4	180 × 1"
76006H6	180 × 1.1/2"
76006H7	180 × 2"
76006H	180 × 3"
76006E3	200 × 3/4"
76006E4	200 × 1"
76006E5	200 × 1.1/4"
76006E7	200 × 2"
76006E8	200 × 2.1/2"
76006E9	200 × 3"
76006E10	200 × 4"
76006J4	225 × 1"
76006J5	225 × 1.1/4"
76006J6	225 × 1.1/2"
76006J7	225 × 2"
76006J8	225 × 2.1/2"
76006J9	225 × 3"
76006F7	250 × 2"
76006F9	250 × 3"
76006F10	250 × 4"
76006G7	315 × 2"
76006G9	315 × 3"
76006G10	315 × 4"
76006G11	315 × 6"

# 打孔器 HOLE PUNCH

图片 Picture	货号 Item No.	规格 (mm) Specification
	P00034	3-4
	P01415	14、15、16、20、21、25
	P0004S	4
	P0008S	8
	P0008L	8
	P0010L	10
	P0012L	12
	P0008T P0010T P0015T	8、10、15
	P10014 P10016 P10020 P10025	14、16、20、25
	P00016 P00020 P00025 P00032 P00040	16、20、25、32、40
	P162025	3、4
	P00016G	16



# 园林喷头

地埋喷头 GARDEN SPRINKLER



精准地埋喷头、适用于各个区域  
Accurately bury the sprinkler, suitable for all areas

## RL1000 散射喷头 Butterfly Rotating Sprinkler



货号 Item No.	内丝口径 Diameter	流量 (m³/h) Discharge	喷洒半径 (m) Spraying Radius	工作压力 (Bar) Working Pressure
RL1000	F1/2"	0.3-1.2	5.5-8.0	1.8-4

## 地埋散射喷头 Buried Scattering Nozzle



货号 Item No.	流量 (m³/h) Discharge	射程 (m) Range	工作压力 (Bar) Working Pressure
RL1004	0.1-1.3	2.5-5.0	1.8-4

## 地埋齿轮喷头 Buried Gear Nozzle



货号 Item No.	流量 (m³/h) Discharge	射程 (m) Range	喷嘴强度 (mm/hr) Nozzle Strength	工作压力 (Bar) Working Pressure
RL5100	0.25-2.5	7.5-14	5.5-8.0	1.8-4

## 地埋射线喷头 Buried Ray Nozzle



货号 Item No.	流量 (m³/h) Discharge	射程 (m) Range	工作压力 (Bar) Working Pressure
RL200	0.3-1.2	5.5-9.0	1.8-4

# Quick Coupling Valve / 取水阀






**HYRT-QSF01 3/4"**  
压力pressure: 2-6bar

**HYRT-QSF02 1"**  
压力pressure: 2-6bar



# Valve Box / 阀门箱

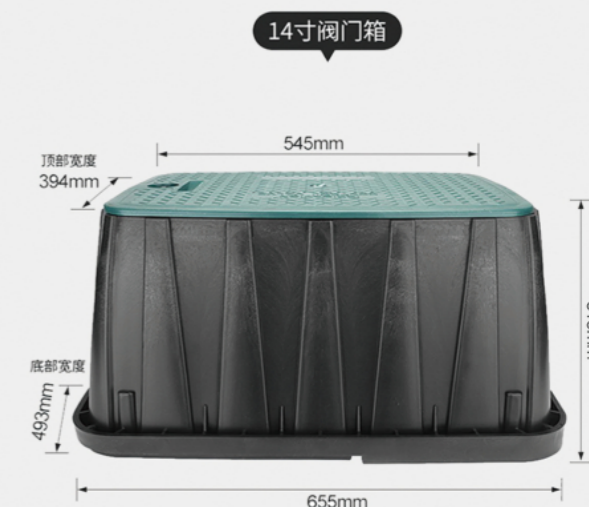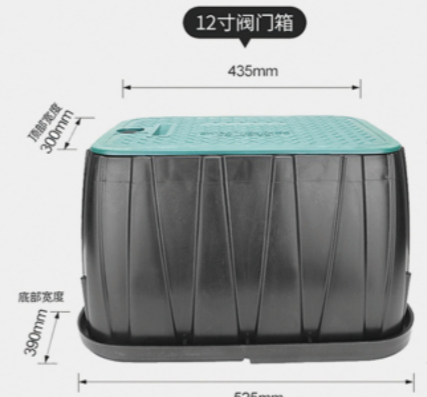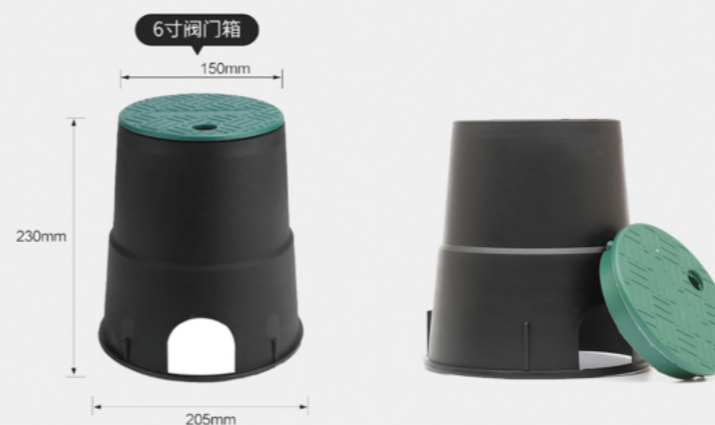

Digged Valves Box.  
The lid, green like the surrounding grass, with the sealing edge avoid dirt and dust inside.

# ProRain

双层复合式贴片滴灌带  
DOUBLE-LAYER DRIP TAPE



## Drip Pipe With Inner Cylindrical Dripper

内嵌式滴灌管



### 产品特点:

1. ProRain 滴灌带，双层复合、一次成型，显著提高滴灌带抗拉伸能力和承压能力；可外层为白色或银色，避免过量吸收太阳热量，从而避免水温过高伤苗。
2. 新型流道，全紊流、自冲洗、流量均匀、抗堵塞性能好。
3. 采用 PE 材料和先进生产工艺，耐腐蚀、抗老化、经久耐用。
4. 全自动生产挤出成型，全机器包装成卷，易于运输和存储。
5. 本产品为经济型滴灌带，性价比高，适用于农田大面积使用。
6. 小流量滴灌带，铺设距离长，省主管、省阀控、省人工，一次灌溉面积大，0.35L 滴灌带可单条铺设 300 米以上，极大降低使用成本。



### Advantages Of Double Layer Drip Tape:

Double-layer Drip Tape is a composite product manufactured in a single production process, enhancing its durability and strength. By utilizing two layers, it effectively addresses issues arising from impure raw materials, maximizing tensile resistance and pressure-bearing capacity in drip irrigation systems. Additionally, the double-layer design facilitates customization of the outer wall color. While the inner wall remains black, the outer layer can be altered to white or silver. This modification serves to mitigate heat absorption from the sun during hot summers, preventing excessive water temperature within the pipe and safeguarding delicate crop seedlings from scalding. Low-flow-rate drip tape can be used with long laying distance. It saves on main pipes, valves, and labor while covering a large irrigation area in a single operation. The 0.35L drip tape can be laid over 300 meters per line, significantly reducing usage costs.

### Product Features:

**Efficient Flow:** Ensures full turbulent flow, self-washing, and uniform distribution, minimizing blockages.  
**Durable Construction:** Made from premium PE material with advanced corrosion resistance and anti-aging properties for long-lasting performance.  
**Convenient Handling:** Fully automated production and machine packaging for easy transport and storage.  
**Cost-Effective Solution:** Ideal for large agricultural areas, offering reliable irrigation at a great value.



### 产品规格参数 Specification

口径 Diameter	壁厚 Thickness (mm)	间距 Spacing (cm)	卷 / 米 roll (m)
16	0.15	50,40,30,25,20,15,10	3000
	0.16	50,40,30,25,20,15,10	3000
	0.18	50,40,30,25,20,15,10,7.5,5	2000
	0.2	50,40,30,25,20,15,10,7.5,5	2000
	0.3	50,40,30,25,20,15,10,7.5,5	1500
	0.4	50,40,30,25,20,15,10	1000
20	0.5	50,40,30,25,20,15,10	1000
	0.6	50,40,30,25,20,15,10	800
	0.2	50,40,30,25,20,15,10,7.5,5	2000
	0.3	50,40,30,25,20,15,10,7.5,5	1500
22	0.4	50,40,30,25,20,15,10	1000
	0.5	50,40,30,25,20,15,10	1000
	0.6	50,40,30,25,20,15,10	800
	0.2	50,40,30,25,20,15,10,7.5,5	2000



最小间距可做到 5cm，最小流量可做到 0.35L  
(可提供定制包装、可定制尺寸)

The shortest spacing can be 5cm and the lowest flow rate can be 0.35L  
The packaging and printing can be customized.



### Drip Pipes Features:

- \*Labyrinth Drip Design: Engineered with a labyrinth drip head, ensuring tight integration with the pipe, resulting in stable flow and an impressive uniformity rate of 85%.
- \*Premium Quality Construction: Crafted with high-quality molds and materials for the drip head, featuring a double water hole design. This innovative design reduces soil particles, prevents crop root intrusion, and offers self-cleaning capabilities, ensuring clog-free operation.
- \*Durable Material: Manufactured using LDPE, the dripline is resistant to aging, UV damage, and corrosion, ensuring long-term sustainability.
- \*Versatile Application: Ideal for greenhouses, vegetables, fruits, grapes, and flower fields, our drip irrigation pipe conserves water by up to 50% while boosting efficiency by 20%. Additionally, it saves time and reduces fertilizer usage by over 50%.
- \*Adjustable Flow Rates: Available in various flow rates (2L, 3L, 4L) to suit different crop needs, providing flexibility and precision in irrigation.
- \*Customizable Thickness: Offered in pipe thicknesses ranging from 0.6mm to 1.0mm, catering to diverse requirements and ensuring optimal performance in various conditions.

### 技术参数 Technical Parameters

公称直径 Nominal Diameter(mm)	滴头间距 Drip Hole Spacing (cm)	最大工作压力 Max working pressure(kpa)	执行标准 Technical Standard
F63LX	20-100	3.0	GB/T17188-2001
F90LX	20-100	3.0	GB/T17188-2001



图片 Picture	口径 Diameter	壁厚 Thickness (mm)	间距 Spacing (cm)	流量 Flow Rate (L/H)	包 (米 / 卷) Package (m/roll)
	12	0.6mm (25.4mil)	15cm 20cm 30cm 50cm	2.0/3.0/4.0	500
	16	0.8mm (32mil)	15cm 20cm 30cm 50cm	2.0/3.0/4.0	500
	16	1.0mm (40mil)	15cm 20cm 30cm 50cm	2.0/3.0/4.0	500



# Rain Spray Hose/ Rain Tape 微喷带

Agricultural drip irrigation system

### ■ 柔性 PE 塑料微型雨淋软管灌溉管：

1. 采用优质，高强度的 PE 原料；
2. 无毒，无味，抗老化，重量轻，使用寿命长；高强度 PE 原料；
3. 孔光滑均匀，抗堵塞性能好；
4. 根据不同的农作物，选择不同的孔设计，喷雾效果理想；
5. 与农泵及低压输水管道配合使用，省时省水；
6. 与多功能连接，可通过调节水压自由调节喷雾宽度，高度和面积；
7. 颜色，孔设计，厚度，长度等规格可根据客户要求定制。

Introducing our Flexible PE Plastic Micro Rain Spray Hose Irrigation Tube:

1. Premium PE Material: Crafted from high-quality, high tensile-strength PE raw material, ensuring durability and reliability.
2. Safety and Longevity: Non-toxic, odorless, and resistant to aging, our hose offers a lightweight design with an extended service life.
3. Smooth and Even Holes: Precision-engineered holes provide smooth and even water distribution, with excellent resistance to clogging, ensuring uninterrupted irrigation.
4. Customized Hole Design: Tailored to different crop needs, our hose offers various hole designs for optimal spray efficiency.
5. Efficient Water Usage: Perfect for use with agricultural pumps and low-pressure water pipelines, our hose saves both time and water, promoting sustainable irrigation practices.
6. Adjustable Spraying: Equipped with a multi-function valve, our hose allows for easy adjustment of spraying width, height, and coverage area by regulating water pressure.
7. Customizable Specifications: From color and hole design to thickness and length, we offer customizable options to meet the unique requirements of our customers.



### 技术参数 Technical Parameters

直径 Diameter (mm)	折径 Fold diameter (mm)	厚度 Thickness (mm)	孔数 Holes (pc)	打孔间距 Hole spacing (mm)	每卷长度 Length of each roll (m)
20	N32	0.2/0.3	3	300	200/150/100
25	N40	0.2/0.3	5	300	200/150/100
28	N45	0.2/0.3	5	300	200/150/100
32	N50	0.2/0.3/0.4	5	300	200/150/100
40	N63	0.2/0.3/0.4	5	300	200/150/100
50	N80	0.3/0.4/0.5	7	300	150/100/100
63	N100	0.3/0.4/0.5	7	300	150/100/100
75	N120	0.3/0.4/0.5	7	300	150/100/100

### 使用注意事项

1. 水源必须干净无杂物，必要时水泵进水应包扎 60 目以上的滤网，防止杂物堵孔。
2. 首次安装使用多开几个阀门，视压力情况调节支管阀门，以免压力过大涨破管体。
3. 如遇山坡地需要等高线铺设，不可上下铺设，以免压力不均造成管体破损。
4. 砂石地使用避免拖动，以免刮伤管体。

### Cautions:

Water Quality: Ensure that the water used is clean and free from debris, Use a filter screen with a mesh size of 60 or more on the water pump if needed to prevent clogging of holes.  
Initial Installation: During the first installation, use multiple valves and adjust the branch valve according to the pressure to prevent excessive pressure that could damage the pipe.  
Hill Slope Laying: If laying the pipe on a hill slope, avoid laying it up and down to prevent damage from uneven pressure. Also, refrain from dragging the pipe on gravel floors to prevent scratches.



## HYRT 鸿源润通

### LDPE水带 LDPE Layflat Hose



主要运用于灌溉系统中的主管道和支分管道  
采用优质聚乙烯原料生产，同时添加抗 UV 和抗老化添加剂更加耐用。  
有多种规格和长度可供选择。

Mainly used as mainline and sub-line in Irrigation system made of highest grade polyethylene resins with UV additives and age-inhibiting additives which make it more durable  
available in a wide range of diameters and coil lengths



50mm-125mm

### 防爆 PVC 水带 PVC Layflat Hose

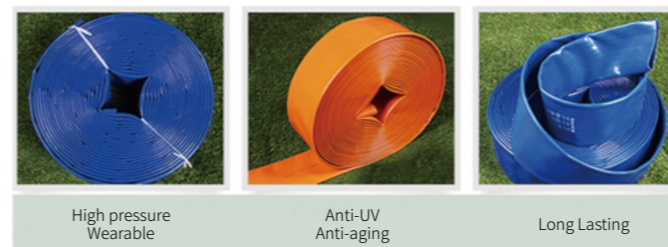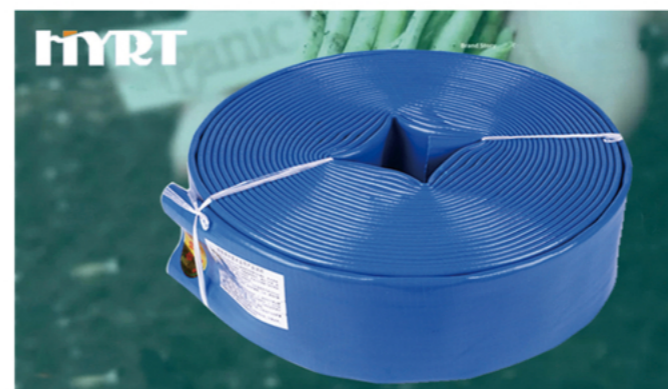

High pressure  
Wearable

Anti-UV  
Anti-aging

Long Lasting

PVC 水带 (Layflat Hose): 1 卷 50 米或 100 米 (50 or 100 meters per roll)

直径 (Diameter): 1" - 10" 压力 (Pressure): 2bar-10bar


### 定距水带 Spaced Hose



包装规格 (Packaging): 50、100m/ 每卷 (50 or 100 meters per roll)

出水孔间距 (Hole Spacing): 30、60、90

工作压力 (Pressure): 1.0-2.0bar



### 消防水带 Fire Hose



消防水带 (Fire Hose): 1 卷 20 米 (20m meters per roll)

直径 (Diameter): 1" - 12" 压力 (Pressure): 1bar-16bar

# LDPE PIPE - LDPE盘管

Professional National Standard LDPE Pipe




**特点:**  
 韧性好、适应地形能力强, 铺设方便。  
 寿命长、具有抗老化能力、在地面上裸晒 8 年以上。  
 链接方便, 有专用的快速连接管件。  
 规格齐全, 适用于不同的使用环境。

**Pros:**  
 Characterized by its exceptional toughness, our product thrives in diverse terrains, offering effortless installation and longevity. With outstanding anti-aging properties, it endures over 8 years of exposure to sunlight. Versatile in connectivity, it effortlessly joins with various fitting connectors of different specifications, ensuring suitability for any condition.

PE 盘管 (以外径为标准) 参数表  
 LDPE PIPE (Outside diameter) Parameter

规格 Specification	壁厚 Thickness	偏差 Deviation	m/kg
Φ16	1.0	0.3	20
Φ20	1.5	0.3	10
Φ25	1.8	0.3	8
Φ32	2.0	0.3	4.5
Φ40	2.5	0.4	3.5
Φ50	2.8	0.5	2.5
Φ63	3.5	0.6	1.6
Φ75	4.6	0.7	0.93

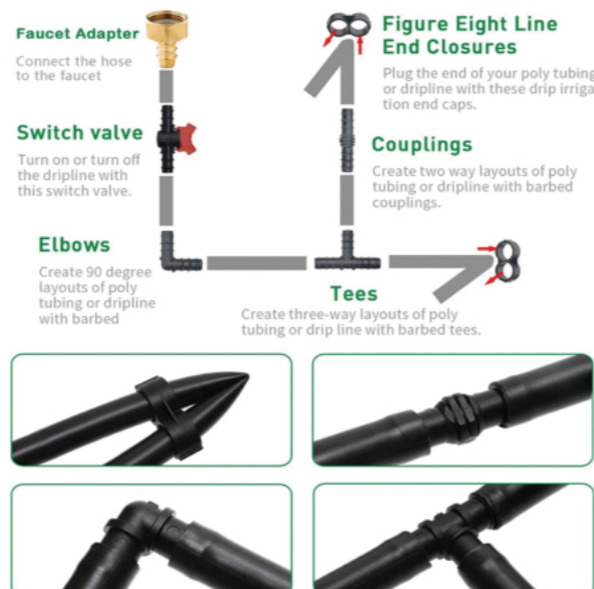

## HDPE灌溉直管HDPE PIPE



## HDPE — 参数表

		HDPE 管材米重表															
规格		SDR41	SDR33	SDR26	SDR21	SDR17	SDR13.6	SDR11	SDR9								
		PE8 级公斤压力															
		0.32Mpa	0.4Mpa	0.5Mpa	0.6Mpa	0.8Mpa	1.0Mpa	1.25Mpa	1.6Mpa	1.6Mpa							
		PE100 级公斤压力															
		0.4Mpa		0.5Mpa		0.6Mpa		0.8Mpa		1.0Mpa		1.25Mpa		1.6Mpa		2.0Mpa	
		壁厚	米重	壁厚	米重	壁厚	米重	壁厚	米重	壁厚	米重	壁厚	米重	壁厚	米重	壁厚	米重
16	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
20	—	—	—	—	—	—	—	—	—	—	—	—	—	2.3	0.133	2.3	0.133
25	—	—	—	—	—	—	—	—	—	—	—	—	—	2.3	0.170	3.0	0.216
32	—	—	—	—	—	—	—	—	—	2.3	0.223	2.4	0.232	3.0	0.283	3.6	0.334
40	—	—	—	—	—	—	2.3	0.283	2.4	0.295	3.0	0.362	3.7	0.437	4.5	0.522	
50	—	—	—	—	2.3	0.358	2.4	0.373	3.0	0.460	3.7	0.559	4.6	0.676	5.6	0.812	
63	—	—	—	—	2.5	0.494	3.0	0.588	3.8	0.735	4.7	0.895	5.8	1.076	7.1	1.635	
75	—	—	—	—	2.9	0.683	3.6	0.839	4.5	1.031	5.6	1.265	6.8	1.508	8.4	1.827	
90	—	—	—	—	3.5	0.989	4.3	1.203	5.4	1.493	6.7	1.819	8.2	2.178	10.1	2.635	
110	—	—	—	—	4.2	1.454	5.3	1.802	6.6	2.214	8.1	2.685	10.0	3.234	12.3	3.924	
125	—	—	—	—	4.8	0.888	6.0	2.318	7.4	2.838	9.2	3.455	11.4	4.204	14.0	5.075	
140	—	—	—	—	5.4	2.379	6.7	2.917	8.3	3.555	10.3	4.377	12.7	5.246	15.7	6.373	
160	—	—	—	—	6.2	3.113	7.7	3.817	9.5	4.653	11.8	5.671	14.6	6.869	17.9	8.306	
180	—	—	—	—	6.9	3.897	8.6	4.788	10.7	5.898	13.3	7.184	16.4	8.842	20.1	10.496	
200	—	—	—	—	7.7	4.822	9.6	5.949	11.9	7.262	14.7	8.847	18.2	10.913	22.4	12.991	
225	—	—	—	—	8.6	6.049	10.8	7.534	13.4	9.223	16.6	11.439	20.5	13.814	25.2	16.442	
250	—	—	—	—	9.6	7.518	11.9	9.202	14.8	11.316	18.4	14.072	22.7	17.023	27.9	20.236	
280	—	—	—	—	10.7	9.398	13.4	11.631	16.6	14.480	20.6	17.671	25.4	21.325	31.3	25.420	

# MOTOR DRIVE WATER TIMER



## HY-21025 庭院单站灌溉控制器

- 多重灌溉频率及运行时间选择
- 适配3/4" 外丝水龙头
- 需2\*AAA (7号) 碱性电池供电

## Electronic Water Timer HY-21025

- Frequency can be set at 1, 2, 3, 4, 6, 8, 12, 24, 48, 72 H, and Week
- Run Time can be set at 1, 3, 5, 10, 15, 20, 30, 60, 90, 120 mins
- For taps with 26.5mm(G 3/4") thread

## YL-21032 庭院双站灌溉控制器

- 灌溉频率可设置为：1, 2, 3, 4, 6, 8, 12, 24, 48, 72小时以及每周
- 运行时间可设置为：1, 3, 5, 10, 15, 20, 30, 60, 90, 120分钟
- 双独立灌溉出口
- 适配3/4"和 1"外丝水龙头
- 需2\*AA (5号) 碱性电池供电

## Two Outlet Electronic Water Timer YL-21032

- Frequency can be set at 1, 2, 3, 4, 6, 8, 12, 24, 48, 72 H, and Week
- Run Time can be set at 1, 3, 5, 10, 15, 20, 30, 60, 90, 120 mins
- Two outlets for independent timed watering
- For taps with 26.5mm(G 3/4") and 33.3mm(G 1") thread



## LCD Digital Water Timer

农业灌溉 / 花园灌溉 / Agricultural irrigation / garden irrigation

### Electronic Digital Water Timer YL-21006

- Programmable manual watering for up to 4 hours
- Run Time can be set from 1 minutes to 4 hours
- How Often can be set at every 6H, 12H, or any day or days of the week
- Rain sensor or moisture sensor connection available to skip watering during rainy days or when soil is too wet
- For taps with 26.5mm(G 3/4")thread



### YL21026 庭院单站灌溉控制器

- 多重灌溉频率及运行时间选择
- 适配3/4" 外丝水龙头
- 需2\*AAA(7号) 碱性电池供电

### Electronic Digital Water Timer YL-21026

- Manual ON & Man OFF
- 8 independent watering programs can be set
- Calendar and clock time display
- Motor drive ball valve system
- For taps with 26.5mm(G 3/4")thread
- 2 x AAA alkaline batteries required (not included)



### Multi-station Irrigation Controller with Internal Transformer HY-10469

- Input: AC 230V or AC 110V,35VA,50-60Hz Output: AC 24V,0.8A
- Configuration to 4,6, 9 or 11 irrigation stations
- Each station have 6 watering cycles and duration can be from 1minute to 12 hours 59 minutes
- Water budget from 10% to 200%
- Ok for 1 pump(M)and 1 sensor(R) connection
- Rain sensor or moisture sensor connection available to skip watering during rainy days or when soil is too wet
- 1 x 9V alkaline battery required (not included)



### 应用场景

RL 系列单站控制器，为用户提供极简的安装、使用、维护体验，广泛应用于大田及设施农业、庭院种植、公园、绿化带、高速公路互坡及中央隔离带等多种灌溉场景。特别在无法铺设线缆场景下，使用本产品将达到最优性价比的解决方案。



### Irrigation Timing controller HY-21873

- Working voltage: DC3V,2\*AA alkaline battery
- Output drive signal: 12V,100MS
- Waterproof rating:IP68
- Irrigation running time parameters: up to 240 minutes(manual, automatic)
- Clock mode:24-hour system or 12-hour system

one of the most professional irrigation  
manufacturers in the world—HYRT

# Typical Drip System Layout

