BEYER



Profession



Efficiency



Service



Cooperation

Guangzhou Beyer Machinery Equipment Co.,Ltd

Contact:Nancy Luo TEL/Wechat:+86-13729807702

Email:sales@beyer.ltd Whatsapp: 0085365695128

Add: Room 1112, Building G-1, No.11 XiongFeng North Street, ZhongCun Street, PanYu District, GuangZhou City, GuangDong Province ,China .

Postcode:511495

https://www.gzbeyer.com Alibaba:www.beyer.ltd

CUSTOMER PRIORITY

QUALITY FIRST

EXCELLENT SERVICE


CUSTOMER SATISFACTION



Lipstick Machine



Kajal Machine



Lipstick Mold



Lipgloss Machine



Powder Machine

BEYER

广州贝业机械设备有限公司

Guangzhou Beyer Machinery Equipment Co., Ltd

COLOR COSMETIC MACHINERY MANUFACTURER



Guang Zhou Beyer Machinery Equipment Co.,Ltd is located in Guangzhou city which is near to Hongkong and Macao .we are specialized in design , production and sales of cosmetic equipments since 2016 .

Beyer design and manufacture: lipstick/lipgloss/lipbalm/mascara/eyebrow pencil/eyeliner machines, color cosmetic powder machines,liquid&cream homogenizer mixer ,liquid&cream filling machines ,cosmetic mold ,Accessory products such as aluminum/tin pans and other cosmetic equipments .

On the basics of theory“customer priority ,customer satisfaction”,we are determined to design and produce high quality machines to customers only ,we make every effort to improve our products and service contiuously according to customers’ demands thus to guarantee our customers can get both upscale equipments and five –star service!


Beyer cherishes every trust from our customers and upholds this responsibility to provide worry free equipments and services. Creating value for our customers is the value of our Beyer existence.We believe that ,with client’s trust and our reponsibility ,mutual cooperation and win-win situations are the bridge of friendship leading us to brilliant future!

GLOBAL COOPERATION

Strong partners ensure that BEYER can Continuously provide high quality service for our customers.

Over the past 10 years ,Our machines have been exported to worldwide ,such as Germany,France ,USA, Poland,Belgium,Mexico, Malaysia,Indonesia,Egypt,Philippines,India, Thailand ,South Africa,Costa Rica,Canada,UK, and so on.....

BEYER GIOBAL MARKETING NETWORK

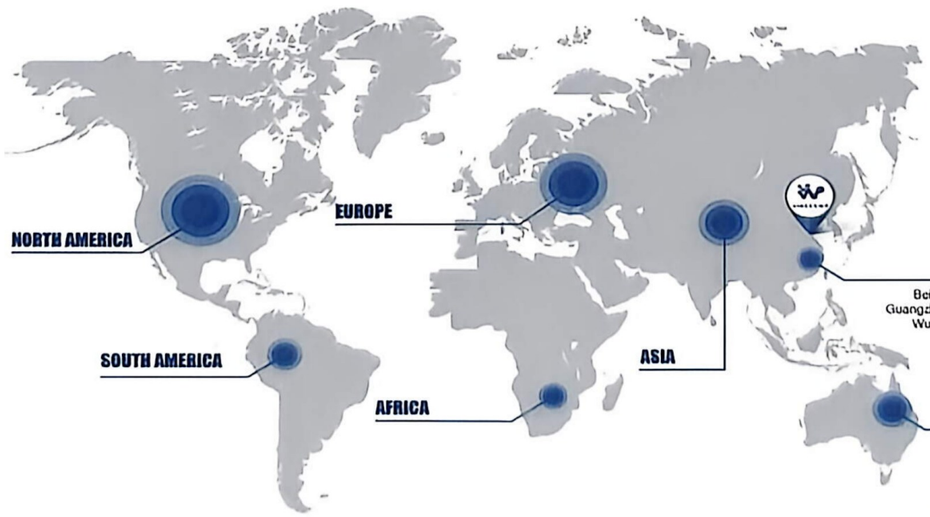

Honor qualifications



CONTENTS

12 &10 Nozzels Lipstick Filling Machine	01
12&10 Nozzels Lipstick Demoulding Machine	02
Automatic Rotary Silicone Lipstick Machine With Filling Freezing Demoulding	03
6 Cavities Silicone Lipstick Filling Machine	04
6 Cavities Full Silicone Lipstick Release Machine	05
Simple Lipstick Lip Balm Filling Machine	06
lipstick mold OK	07
12 Cavities Lipstick Aluminum Mold	07
10 Cavities Aluminum Mold	07
6 Cavities Aluminum Mold	07
Silicone lipstick mold	07
Lipstick Cooling Machine	08
Lipstick Wax Cooling Tunnel	09
Lipstick Lip Balm Heating Mixer	10
S65 Three Roll Mill	11
S150 Lipstick Three Roll Mill	12
Automatic Servo Rotor Pump Filling Machine For liquid lipstick balm cream	13
Magnetic Pump Filling Machine For Liquid Cosmetics Pan&Jar	14
Lipstick Tube Bottom Labeling Machine	15
Lipbalm Tube labeling Machine	15
12&18 Cavities Eyebrow Pencil Filling Machine	16
12&18 cavities Eyebrow Eyeliner Pencil Demoulding Machine	17
12&18 Cavities Eyebrow Pencil Filling Demoulding Machine (All In 1 Set)	18
Self Powder-Feeding Powder Press Machine	19
Manual Cosmetic powder compact machine	20
Lab Manual Powder Press Machine	21
Table Top Cosmetic Powder Pressing Machine	21
Color Cosmetic Powder Compacting Machine	22
Automatic Cosmetic Powder Press Machine	23
Loose Powder Filling Machine For Face Powder	24

15L Cosmetic Powder Mixer 24
50L Makeup Powder Mixer 25
100L Powder Mixer 26
200L Cosmetic Powder Mixer 27
Cosmetic Powder Pulverizer 28
Lab Powder Pulverizer 29
Powder Sifting Machine With Mixing 29
Powder Sifting Machine 30
2 Heads Rotary Mascara/Lipgloss Filling Capping Machine 31
2 Heads Lip Gloss Mascara Filling Machine 32
Single Nozzle Lip Gloss Filling Machine 33
Linear Lip Gloss Filling Capping Production Line 34
High End Mascara/Lipgloss Filling Capping Machine 35
100L Cream Vacuum Emulsifying Mixer 36
Air Washing Machine For PET Glass Bottles 37
Semi Automatic Perfume Filling Machine 38
Perfume Capper Grasping Machine 39
Bottle Plug Press Machine 39
Cosmetic Aluminum Mould 40
Cosmetic Aluminum Mould 41
Lipstick Silicone Mold（Half Silicone) 42
Lipstick Silicone Mould(Full Silicone) 43
Aluminum/Tin/Magnetic Pan 44
Aluminum/Tin/Magnetic Pan 45
Cosmetic Mold And Related Accessories 46

12 &10 Nozzels Lipstick Filling Machine



Application:

This machine is suitable for filling cosmetics, such as lipstick ,lipgloss, small plastic pen, Fine shape lipstick, lip balm etc. Even if raw material has glitter powder or pearly luster.



Features:

1.20L pressure and heating stiring double material basket. The temperature and stiring speed is adjustable.
2. Piston filling system is driven by step motor and numerical control. Spindle is driven by cylinder.
3. Stiring device is driven by motor.
4. Moulds lifting function is driven by step motor and numerical control.
5. Nozzle pipe heating plate design.
6. Colours man-machine touch interface and omnibearing numerical control. easy operation and high precise.
7. Can fill Irregular tubes and bottles.
8. PLC: Mitsubishi, Display screen: Weilun(Taiwan), servo : Delta, cylinder : SMC. The parts contact raw materials use SUS304, Frame use : aluminum alloy 6061.
9.Mould preheating device is optional.

Parameter：

Model	BYLF-12
Cavities customized according mould	12cavities filler for aluminum mould 10cavities filler for half silicone mould
Voltage	AC220V, 60Hz, 1PH, 20A
Power	6KW
Working air pressure	4-6Kg/cm^3
Filling Volume	7ml-15ml,12pcs/1 time filling
Output	6-10moulds/min(72~120pcs), According to the size of vessel
Tank Temperater	120 degree
Filling precision	±1%
Tank volume	20L
Dimension	1100*960*1960mm(L*W*H)
Weight	200kg

12&10 Nozzels Lipstick Demoulding Machine



Application:

This machine is used for aluminum lipstick mould demoulding . Also can customize for half silicone mould and full silicone mould releasing .

Features:

1, The product is designed for the auxiliary stripping moulds device of lipstick.
2, Easy to use interface operation.
3, Simple machine, easy maintenance.
4, Reducing production procedure, improve working efficiency.
5,Mini machine,save space.
6,Pneumatic drive, easy to maintenance and clean..
7, Side-blown design, avoid damage and nozzle jammed at the bottom of the mold.
8. Machine use cylinder : SMC. Some parts materials use SUS304, Frame use : aluminum alloy 6061.

Parameter:

Name	Lipstick demoulding machine
Cavities	Customized ,6 holes,10holes and 12 holes
Model	BYLA
Voltage	AC220V / 1 ¢ / 50HZ
Power	100w
Pressure	6kg / cm^2
Operator	1 person
Dimension	450mm(L)*410mm(W)*1300mm(H)
Weight	55kg



Automatic Rotary Silicone Lipstick Machine With Filling Freezing Demoulding



Application:

This machine is designed for lipstick filling , cooling and demoulding , For Full silicone lipstick mould. Suitable for different shape lipstick and specifications, with surface engraved patterns according to customer needs.



Features:

1. Size :L3850 x W1450 x H1900 mm
2. Voltage: 380V/3PH/50HZ/15KW
3. Air pressure :5-7 KG/cm ²
4. 2-3 operators
5. Production capacity :20-28PCs/Min
6. 20L material tank
7: Maximum filling capacity: 6mL
8: Filling accuracy: ±0.1ml
9: Clean and change color : 20-30 minutes
Need 80 or 160 silicone molds depends on cavities.



Parameter:

Name	All silicone lipstick production line
Application	Full silicone Lipstick
Voltage	380V/3PH/50HZ
Power	15KW
Cavities	2 cavities ,4 cavities customized
Applicable mold	Full silicone mold
Capacity	1400-2000pcs/hour
Air pressure	5-7KG/CM^2
Filling material	Lipstick ,lipbalm
After -sales service	Video technical support or on-site training

6 Cavities Silicone Lipstick Filling Machine



Application:

This machine is suitable for filling full silicone lipstick mould.



Features:

1.20L pressure and heating stiring double material basket. The temperature and stiring speed is adjustable.
2.Piston filling system is driven by step motor and numerical control. Spindle is driven by cylinder.
3. Stiring device is driven by motor.
4. Moulds lifting function is driven by step motor and numerical control.
5. Nozzle pipe heating plate design.
6.Colours man-machine touch interface and omnibearing numerical control. easy operation and high precise.
7.PLC:Mitsubishi,Display screen:Weilun(Taiwan), servo : Delta, cylinder : SMC. The parts contact raw materials use SUS304, Frame use : aluminum alloy 6061.
8.Mould preheating device is optional.

Parameter:

Model	BYLF-6
Cavities customized according mould	12cavities filler for aluminum mould 10cavities filler for half silicone mould 6 cavities filler for full silicone mould
Voltage	AC220V, 60Hz, 1PH, 20A
Power	6KW
Working air pressure	4-6Kg/cm^3
Filling Volume	7ml-15ml,12pcs/1 time filling
Output	6-10moulds/min(72~120pcs), According to the size of vessel
Tank Temperater	120 degree
Filling precision	±1%
Tank volume	20L
Dimension	1000*800*1780mm(L*W*H)
Weight	150kg

6 Cavities Full Silicone Lipstick Release Machine



Application:

This machine applies to lipstick production line .air blow and release mould after filling . Working With Below Silicone Mould

Features:

1.Power:6A,1.32KW Voltage:AC220V,60HZ,1ph
2.Air pressure:4-6kgs/cm2.
3.Operator:1 person .
4.Auto release mould 6 pcs each time .
5.Dimension:650*520*1500MM
6.Weight:70KGs

Parameter:

Name	Lipstick demoulding machine
Cavities	Customized ,6 holes
Voltage	AC220V / 1 ¢ / 60HZ
Power	100w
Pressure	6kg / cm^2
Operator	1 person



Simple Lipstick Lip Balm Filling Machine




Application:

It is professional machine for lipstick heating , mixing and filling.

Features:

1. Voltage：220V,single phase.
2. Motor power：40W
3. Filling way：manual
4. Material: SUS 304 stainless steel.button control
5. Driven Type:electric
6. Tank capacity :15L.
7. With mixing . jacketed heating .
8.Lipstick outlet with hand switch.

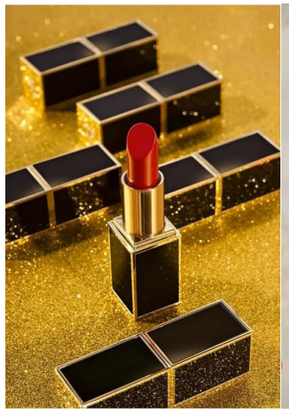




Lipstick mold



12 Cavities Lipstick Aluminum Mold



10 Cavities Aluminum Mold

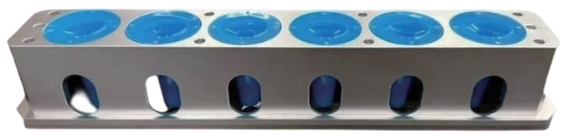

6 Cavities Aluminum Mold



Silicone Lipstick Mold

Application:

It is used for lipstick filling and shape forming .lipstick shape can be customized according to customer’s requests .

Features:

1. lipstick molds are custom-made.stand size 12.1mm* 27 in stock .
2. materials: Germany aluminium, durable.
3. lipstick mold quotation, according to the shape ,size and samples(description) from customers provided.
4. The lipstick mold cavity numbers are: 6,8,12,48,72, 96 or 100 cavities, usually do 12 cavities.according to customer’s need .
5. Production time for 12 holes lipstick mould is usually 7 days,15 days for 48/72/96/100 holes.
6. Moulds can be used by manual or applied on any types of filling machine.
7. Made by qualified aluminum , ensure the glossy and smoothness and life of the molds.
8. mold can print customer’s logo, according to customer’s requirements.
9. Optional :Upper Mold Remover is to remove the upper mold easier.

Care instructions:

Soak the mold set with white electric oil for 12 hours before using.
Clean with a lightly oiled rag, never run under water. If mold gets wet, dry thoroughly.
Don't insert any tools in the cavity that could scratch it. The scratch will show up on all your lipsticks.
Keep wrapped in saran wrap when not in use.

Use Direction:

1.put oil on mould to avoid any scratching which will show up on all your lipsticks.
2.Assemble upper mould and lower mould and fix them by screws.
3. Fill liquid raw material into the mould holes.
4.Freeze it in fridge to paste about 30 minuets.
5.Use scraper to remove the residue.
6. Gently take out the upper mould or lipbalm tubes (you can also use a mould release to avoid breaking the sticks).
7. Use a lipstick casing to absorb the paste in. Twist the stick down into the case.
8.Finished.

Lipstick Cooling Machine



Application:

Cosmetics cooling platform is used for color cosmetic .It is designed to cool lipstick or lip gloss ,lipbalm and wax .Can be connected with lipstick lipbalm filling machine to use .





Parameters:

1) Body material: stainless steel (SUS304) body design.
2) Cooling temperature: adjustable.
3) Adopts imported compressor .
4) Voltage:220V 3 phase 5 wires system .60HZ
5) Lowest cooling temperature:-18 degree
6) Cooling enzyme:404A
7) Size:1000*800*750(H)mm
8) Air compressor:1.5HP.



Lipstick Wax Cooling Tunnel





Application:

Cosmetics cooling tunnel is used for color cosmetic .It is is designed to cool lipstick or lip gloss ,lipbalm and wax . Can be connected with lipstick lipbalm filling machine to use .

Features:

1) Body material: stainless steel (SUS304) body design.
2) cooling temperature: adjustable.
3) Adopts imported compressor .
4)Voltage:380V 3 phase 5 wires system .60HZ
5)Material:stainless steel 304
6)Lowest cooling temperature:-18 degree
7)Cooling Method: air cooling blow type:downward blowing
8) Cooling enzyme:404A
9)With conveyor speed control and temperature control
10)Numbers of doors:4 or 6doors Door size:610*610mm
11)Conveyor belt traveling speed:Adjustable.
12)with frequency changer motor ,stainless steel chain belt.
13)The height to ground :750-780mm

Parameter:

Model	BYT-23	BYT-25	BYT-30
Dimension	2000(L)*750(w)*1200(H)mm	2000(L)*750(w)*1200(H)mm	3000(L)*750(w)*1200(H)mm
Power consumption	3.0HP	5.0HP	5.0HP
Number of doors	3doors	3doors	4doors
Conveyor dimension	3500MM(L)*400MM(W)	3500MM(L)*400MM(W)	5000MM(L)*400MM(W)
POWER	AC380V/50HZ		
Conveyor belt traveling speed	185MM/Second		
Blow type	Downward blow		
Material of machine	Stainless Steel(SUS304)		

Model	BYT-35
Machine Dimension	3500(L)*1050(w)*1380(H)mm
Power consumption	7.50HP
Number of doors	4doors
Conveyor dimension	5000MM(L)*800MM(W)
POWER	AC380V/50HZ
Conveyor belt traveling speed	185MM/Second
Blow type	Downward blow
Material of machine	Stainless Steel(SUS304)
weight	1000kg
Cooling capacity	50kg/hour

Lipstick Lip Balm Heating Mixer



Application:

It is suitable for lipstick raw material and lip gloss heating mixing.

Features:

1. Duble jacket type tank has function of indirect hearting tank of material SUS304 and SUS 316 .
2. Timer can be pre-set for up to 24 hours for pre-heating purpose P.I.D.Electric temperature control
3. The agitator motor is adjustable and have over - load prevention system.

Parameter:

Model	BYLH
Optional Volume	30L 50L 100L 150L 200L
Voltage	AC380/50HZ
Main power	4.3KW
Heating way	Electric heating
Dimension	900L*760W*1700H(mm)

S65 Three Roll Mill



Application:

It is used for lipstick lipbalm milling.



Features:

It is used for lipstick lipbalm milling.
1.Diameter of roll:65mm
2.speed:lower roll with 32RPM
3.Speed:middle roll with89RPM
4.Speed:fast roll 250 RPM
5.Motor: 2.2KW Speed:1400RPM
6.Dimension:440*420*400mm
7.Weight:90KG



Parameter:

Model		S65	S150	S200	S260
		220V 50Hz	380V 50Hz	380V 50Hz	380V 50Hz
Roller diameter mm		Ø65	Ø150	Ø200	Ø260
Length of roller working surface mm		125	300	500	695
Speed r.p.m	slow roller	32	25.3	22	19.1
	middle roller	89	63.25	63	54.5
	fast roller	250	152	155	155.3
model power	model	SL50-2	SL100-4	SL200-6	SL160L-6
	power KW	0.75	2.2	4	7.5
	r.p.m	1400	1420	970	970
Dimension L *W *H		400*400*420	820X800X920	1200X1180X1100	1645X1350X1100
Net weight (Kg)		40	600	800	2300

S150 Lipstick Three Roll Mill





Application:

It is used for lipstick milling

Features:

1.Diameter of roll:150mm
2.speed:lower roll with 25.3RPM
3.Speed:middle roll with63.25RPM
4.Speed:fast roll 152 RPM
5.Motor: 2.2KW Speed:1420RPM
6.Dimension:820*800*920mm
7.Weight:200KG

Parameter:


Model		S65	S150	S200	S260
		220V 50Hz	380V 50Hz	380V 50Hz	380V 50Hz
Roller diameter mm		Ø65	Ø150	Ø200	Ø260
Length of roller working surface mm		125	300	500	695
Speed r.p.m	slow roller	32	25.3	22	19.1
	middle roller	89	63.25	63	54.5
	fast roller	250	152	155	155.3
model power	model	SL50-2	SL100-4	SL200-6	SL160L-6
	power KW	0.75	2.2	4	7.5
	r.p.m	1400	1420	970	970
Dimension L *W *H		400*400*420	820X800X920	1200X1180X1100	1645X1350X1100
Net weight (Kg)		40	600	800	2300

Automatic Servo Rotor Pump Filling Machine For liquid lipstick balm cream



Application:

This machine is Suitable for filling wax products, liquid lipstick, balm, jam, Vaseline, Hair cream,hair dye, vegetable oil, honey, syrup, preparations, engine oil, and various viscous substances in the daily chemical industry that require heating and dissolution.
Suitable bottle types: round bottle, square bottle, irregular bottle, glass bottle, plastic bottle.like below products:



Features:

1.Product features of fully automatic high-speed servo filling machine: rotor pump driven filling (convenient and fast), automatic bottle feeding, automatic filling ,The use of a rotary pump control ensures more precise filling accuracy, easier adjustment of filling volume, and convenient cleaning, ensuring efficient and stable continuous production of the machine.
2.Adopting a user-friendly touch based human-machine interface, when changing specifications or correcting measurements, only adjustments need to be made on the display screen to meet the required precise measurement .
3.Touch screen control for automatic feeding and filling.
4. The touch screen can be turned on with one click to adjust the filling volume and speed. There are automatic/manual filling and cleaning functions on the manual interface, and the touch screen can be selected from Weilun/Siemens.Mitsubishi PLC, KEYENCE Bottle entry photoelectric.
5. The filling head adopts an anti drip design, and different diameters of filling heads can be selected according to the different materials and bottles. The connecting hose is fully wrapped with a heating belt to protect the material from solidification at all times
6. The double-layer heating and insulation hopper prevents the material from cooling in the hopper, and the mixing blades can make the material more uniform and the filling more accurate

Parameter:

Filling speed	1500-3000/Hour【depends on filling volume】
Filling precision	1%
Filling range	10-5000ml
Machine weight	200kg
Voltage Power	220V 3KW
Air pressure	0.5-0.7MPA
Dimension	2000*900*1650mm
Material	304 stainless steel
Parts contacted material	304/316 stainless steel ,customized
Tank Volume	40L
Bottle diameter	10-100mm
Bottle height	10-300mm

Magnetic Pump Filling Machine For Liquid Cosmetics Pan&Jar



Application:

Single Nozzle Multi Functional Gear Pump Filling Machine for Cosmetic Foundation is is used for heated filling and dosing varies kinds of viscosity's material , applicated for different specification Jars pans etc.such as foundation ,lipstick ,oil product ,lipgloss , lipbalm, lip oil,eyeliner cream,eyebrow gel so on….




Features:

1. Adopts gear pump for dosing and filling, which has wide application in cosmetic products.
2.Adopts the design of material return structure, avoid any precipitate in the product, such as glitter powder, pearl powder, etc, which ensures the mixing evenly.
3.Gear pump filling .
4.Air supply:0.6-0.8mpa.
5.gel filling (4g) and gel eyeliner filling (3g-8g)
6.Tank Volume:30KG
7.Voltage:AC220V,1Phase,50HZ

Parameter:

Model	BYG1
Outer Dimension	940*500*1500MM
Voltage	220v,1p 16A 3.5KW
Manual Fill Capacity	25-30pcs/min(manual filling)
Auto Fill Capacity	40-60pcs/min(filling with conveyor)
Output	acutal output depends on product and volume of vessel

Lipstick Tube Bottom Labeling Machine

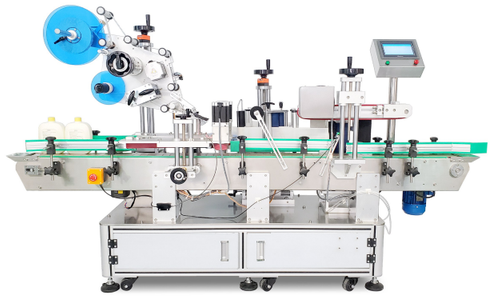

Application:

It is used for lipstick lipbalm tube bottom labeling .



Parameter:

1.Voltage:220V 1 phase.50HZ.Air:0.4-0.6Mpa
2. Detection photoelectric eye: USA HAMPSON, PLC: Panasonic ,Touch screen:Samkoon.
3.Label requests:adhesive sticker ,transparent or opaque.
4.Inner diameter of label roll :76mm(Min).
5.Outer diameter of label roll:300mm(Max)
6.Power :550W
7.Capacity :30-40tubes per minute.
8.Tube diameter: Φ20-Φ30mm.Height:25-100mm
9.Dimention:2030*930*1360mm(L*W*H).
10.Weight:230KGS.

Lipbalm Tube Labeling Machine



Application:

It is used for lipbalm tube labeling .



Parameter:

1.Voltage:220V 1 phase.
2.Driving mode:German Avery labeling engine.
3.Label requests:adhesive sticker ,transparent or opaque.
4.Inner diameter of label roll :76mm(Min).
5.Outer diameter of label roll:350mm(Max)
6.Power :550W
7.Capacity :40-50tubes per minute.
8.Dimention:1800*1800*1500mm(L*W*H).
9.Weight:300KGS.

12&18 Cavities Eyebrow Pencil Filling Machine



Application:

This machine is suitable for Oil, Eyebrow Pencil, Kajal Pencil, Kajal, Eyeliner Pencil filling.

Features:

Filling eyebrow pencil with oil spray system:
1. Bucket capacity: 5 liters
2. Delta PLC, Weinview touch screen, servo motor filling.
3. The frame is made of aluminum alloy material.
4.The storage tank is made of stainless steel SUS304.
5. Filling volume: 0.1-5mL, with an error of 0.1mL
6.Overall dimensions: 850MM * 750MM * 1700MM
7.weight:260KGS

Eyebrow Pencil

Lip Liner

Eyeliner

Parameter:

Name	Eyebrow pencil filling machine with spray oil system
Application	Oil, Eyebrow Pencil, Kajal Pencil, Kajal, Eyeliner Pencil
Filling volume	0.1-5mL, with an error of 0.1mL
Voltage	AC220V 1-phase/50Hz, Power: 3KW
Cavities	12 cavities or 18 cavities customized.
Applicable mold	Aluminum mold
Capacity	5-8 molds per minute
Air pressure	4-6KG/CM^2

12&18 cavities Eyebrow Eyeliner Pencil Demoulding Machine



Application:


This machine is suitable for Eyebrow Pencil, Kajal Pencil, Kajal, Eyeliner Pencil demouding .



Parameter:

Application	Eyebrow Pencil, Kajal Pencil, Kajal, Eyeliner Pencil
Cavities	12 cavities or 18 cavities customized.
Capacity	5-6 molds per minute
Power	0.6KW

12&18 Cavities Eyebrow Pencil Filling Demoulding Machine (All In 1 Set)

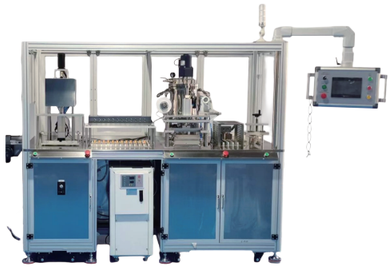

Application:

This machine is designed for rotary eyeliner eyebrow pencil .



Features:

1. including oil injection, preheating, filling, cooling, demolding, and shell rotation;
2. tank is a double-layer stainless steel with heating and mixing .tank Capacity 3.5L, adjustable mixing speed.
3. 12 PCS filling /time (depending on the mold);
4. Adopting piston pressure filling and servo motor driveThe filling pressure can be set according to demand,Ensure product quality;
5. By using piston pressure filling method, the pen core can be Same density and increased core hardness.
6. The oil injection adopts a special patented structural design to ensure beautiful surface.
7. Use a cloth to exhaust the air under the mold, so that the air exhaust is good when filling the tip of the pen, and it is not easy to have air holes on pen.
8. The digital display of raw material heating .temperature can be adjusted according to needs;
9. Preheating can be set according to demand, ensuring that the temperature of each mold is stable;
10. There are two modes of demolding, one of which uses air blowing demolding; Or one method is to use a thimble to push into tubes;
11. The rotating shell mechanism adopts a servo rotating shell to ensure that each product is screwed into right place;

Specification: Mechanical size: 200x100x175cm (L × W × H)
Voltage: 220V/1 Â
Number of operators:2
1. Mitsubishi PLC and Weilun touch screen .
2. The cylinder: SMC.
3. SUS304 stainless steel is used for the parts in contact with the raw materials, and 6061 aluminum alloy is used for other parts, except for special components.

Parameter:

Name	Eyebrow pencil filling demoulding capping in one set
Application	Oil, Eyebrow Pencil, Kajal Pencil, Kajal, Eyeliner Pencil
Filling volume	0.1-5mL, with an error of 0.1mL
Voltage	AC220V
Cavities	12 cavities or 18 cavities customized.
Applicable mold	Aluminum mold
Capacity	5-8 molds per minute 15000-18000 per day (10hours)
Air pressure	4-6KG/CM^2
Aluminum mould	15 sets needed
3 Workers	1person for preheating ,spray oil and filling . 1person for demoulding . 1 person for capping .

Self Powder-Feeding Powder Press Machine





Application:

It is widely used for powder cake ,eyes-shadow,blush and other powder pressing . automatic powder injection .high efficiency.

Features:

1. Improved design that compressing from lower to upper press and overcome tradition machine' s weakness.
2. Bottom, Middle and Top moulds all set on the working stage,Each style only needs one mould, And easy to install the mould.
3. Pressed powder volume adjustable, do not need to change or fix the depth of mould.
4. Dust-Collection function could recycle left powder.The machine has lower pollution and noiseless.
5. Finished product push up automatically.
6. The length of silk is adjustable.
7. Exhaust is very well and the finished products achievement 100%.
8. Safety device around the machine

Options:

. Automatic injection powder installation.
. Dust clean device of aluminum bottom.

Parameter:

Name	Powder press machine	Operator	1 Person
Model Number	BYP03	Automatic Grade	Semi-Automatic
application	Powder-cake,Eye- shadow,Blush	Driven Type	Hydraulic
Voltage	220V/380V	Capacity	2-3mouldS/mim
Power	2.8kw	weight	600KG
Working pressure	1-15bar	Outer size	1580(L) ×900(W) ×1700(H)mm

Manual Cosmetic Powder Compact Machine



Application:

It is widely used for powder cake , eyes-shadow, blush and other powder pressing .



Features:

1.This machine is designed for loose powder .
2.Process and manufacture by machine board pushing with moulds.
3. Special design for user’s safety. Start buttons have one in left and the other one in right ,it needs two hands to press each buttons at the same time to start operation.
4.manual operation or automatic pressing can be selected by users.
5.Time of compacting is adjustable.
6.This design is keeping powder to be compacted for a long time so as to let air out of powder completely.
7.powder compact counting function can set up the pressing board working times .which suit for more materials.

Parameter：

Model	BYMP-02
Power	AC 380V /3∅ / 50HZ
Working pressure	1-14bar
max pressure	20bar
Material	Stainless steel(SUS304)
capacity	1 mould takes 5-10 seconds
weight	400KG
Outer size	1470mm X 580mm X 1670mm

Lab Manual Powder Press Machine



Application:

It is widely used for powder cake , eyes-shadow, blush and other powder pressing in Lab.

Features:

It is used for facepowder ,eyeshadow ,blush powder pressing in lab.
1.dimension: 350 * 400 * 800mm
2. Power: 500W
3. Weight: 50KG
4. Power supply: AC220V/1 phase/50 Hz
5. Dual start mode, safe and reliable
6. Add safety light curtain to make it more safe and reliable
7. Pneumatic pressurized powder pressing
8. Body material: stainless steel (SUS304) .

Table Top Cosmetic Powder Pressing Machine



Application:

This machine is used for laborary formula studying and testing for new products’ character. also it can be used for small quantities production. application: eyeshadow ,face powder ,blush and other types of powder ...

Parameters:

Model:BYLP01
Max pressure:14tons
Voltage:220V/380V 50/60HZ.
Outer dimension:61*58*85(H)CM
Control:PLC
PLC Brand:Delta.
Electric components Brand:Schneider
Material:stainless steel 304
Dimension(L*W*H):610*580*850mm
Weight:150kg





Color Cosmetic Powder Compacting Machine





Application:

It is widely used for powder cake , eyes-shadow, blush and other powder pressing.

Features:

1.auto powder feeding device to reduce pollution，feed powder evenly，powder volume is adjustable.one set mould is suitable for all kinds of powder quality and volume。
2.auto reeling ribbon device。
3.colour HMI touch screen，operate simply、conveniently、operation stroke can be displayed，precise adjustment。
4.setting pressure by low pressure，middle pressure，high pressure.press frequenc、time and pressure can be controlled to increase.
5.exhausting time of pressing powder can be set。
6.pre-save mould module，transfer it directly while production to reduce setting time。
7.parameter encryption setting to avoid error revision or deletion.
8.auto mold releasing device。
9.high output design。

Parameters:

1.Dimension:
　1)powder pressing machine :99X75X165 CM
　2)Powder feeding machine:65X55X122cm
　3)mould releasing machine:40X75X89 CM
2.oil hydraulic cylinder: FA∅150×∅80×80ST
3.hydraulic horsepower:3HP. Max output pressure:150Kg/cm^2
4.power:AC:380V(3 phase)　:50HZ ,15A
5.production capacity:3~5 moulds/min

Automatic Cosmetic Powder Press Machine



Application:

It is suitable for color cosmetic powder pressing, such as make up powder ,eyes-shadow,blush etc…



Features:

Feeding pans, powder and pressed powder by automatic feeding machine, withpans (bottom and side) clean device. It is a full-automatic powder pressingmachine to feed multi-piece pans each time.
Process:
Auto feed pans by vibration plate→ vacuum feed pans into the mould→auto feed powder→auto replenish powder→ auto press powder→ auto push out pressed powder→ push the finished products to the conveyor belt.

Parameters:

1.Pans are feeding by vibratory screening machine. Numbers of pan for eachmould is 1~10pcs (It depends on the pan size.)
2. Turntable adopts divider positioning system and driven by motor.
3.Mould height and powder volume can be adjusted together slightly.Operate from HMI.
4.Fed powder by auto feeding powder unit,match manual feed powder method,precise feeding.
5. Sift powder to make the product surface more smooth,prevent pollution,and increase production rate.
6. Pressing powder is driven by servo hydraulic system.Press powder from bottom to top,controlled powder pressing by two-stage pressure,with airexhausting function.
7.Easy to change mould, quick disassembling design for top male mould,precise positioning.
8.Hydraulic servo system can effectively save energy,lowering thetemperature of hydraulic oil.
9. Digital hydraulic pressure control system,hydraulic pressure and speed can be controlled from HMI.
10.Could memory production data.
11. Max. diameter of powder pressing area is Φ75mm
Production Capacity:
8~12 moulds/min (It depends on the powder quality and pan size.)
Target Products:face powder, eye shadow,blusher.
Min.material needed:2kgs

Loose Powder Filling Machine For Face Powder



Application:

It is used for cosmetic loose powder filling .

Parameters:

Material:304 stainless steel for contact material.
filling range:0.5-500g(change screw attachment.)
filling accuracy:0.1%.
filling speed:10-40times/min.
control:PLC control
Power supply : 220V.1phase.
power:0.9KW
Barrel volume:50KG
Dimension:800*1200*2050mm
weight :120KG,

15L Cosmetic Powder Mixer





Application:

This cosmetic powder mixer is used for eyeshadow , face powder and blush mixing .


Features:

1.motor Power:2.2Kw,rotary speed:2800r/minute.
2.220V/380V 3phase 5wires ,50HZ.
3.15L tank ,produce 3L powder per time.
4.manual filling oil,with discharge powder device.
5.Button control .
6.Material:stainless steel 304.

Parameters:

Name	Cosmetic powder mixer
Barrel volume	15L
Total Power	3KW
Material	SUS304
Dimension	(L)600*(W)700*(H)960mm
Weight	80KG

50L Makeup Powder Mixer

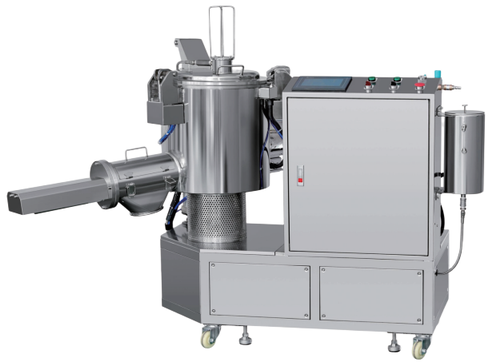

Application:

It applies to cosmetic powder mixing. The machine mixes the material quickly and equably under effective of homogenizing and stirring.



Features:

1.Mixing time is available to set, with automatic spraying oil system(spraying time is available to set). It has auto standard configured powder discharging system. Also the tank has safety switch for protection on the lid of mixing tank.
2.The tank with double jacket, and cooled by circulation water inside jacket.
3.Materials contacted with product is made of SUS304 acc. to GMP standard。
4.heating power :500W.
5.need cooling water to cool down when mixing powder .

Parameter：

Capacity	3-10kg
Main motor	11KW. 1-2930R/Min(adjustable)
Heating oil power consumption	500W
Demension	980*800*1150mm(L*W*H)

Configuration	
Touch screen	Weinview
PLC	Mitsubishi
Motor	Siemens
Electric Elements	Schneider and others
Tank Material	SUS304 or SUS316 options

100L Powder Mixer



Application:

It applies to cosmetic powder mixing. The machine mixes the material quickly and equably under effective of homogenizing and stirring.



Features:

1. Mixing time is available to set, with automatic spraying oil system(spraying time is available to set). It has auto standard configured powder discharging system. Also the tank has safety switch for protection on the lid of mixing tank.
2. The tank with double jacket, and cooled by circulation water inside jacket. The effective of mixing with color and oil is great to effect output higher.
3. Materials contacted with product is made of SUS304 acc. to GMP standard, inside in mirror, easy to sweep the powder.
4.need cooling water to cool down when mixing powder .
5.Voltage:380V.3 phase 5 wires.50HZ.

Parameter:

Model	BYCR-100L
Volume	100L
Capacity	20kg-25kg
Main motor power	18.5kw,0-2930rpm
Side powder	2.2kw,0-2930 rpm
Weight	700kgs
Out dimension	1500x1400x1550mm
Number of side stirrer	Three shaft

Configuration	
Touch screen	Weinview
PLC	Mitsubishi
Motor	Siemens
Electric Elements	Schneider and others
Tank Material	SUS304 or SUS316 options

200L Cosmetic Powder Mixer



Application:

It applies to cosmetic powder (face powder, eye-shadow blush) mixing, The machine mixes the material quickly and equably under effective of homogenizing and mixing.

Features:

1.Mixing time is available to set, with automatic spraying oil system(spraying time is available to set).. Also the tank has safety switch for protection on the lid of mixing tank.
2.The tank with double jacket, and cooled by circulation water.inside jacket.The speed of mixing is adjustable.
3.Materials contacted with product is made of SUS304 acc. toGMP standard。
4.Air control.Delta frequency converter.PLC motor.Delta servo motor.pressure tank:AIR TAC.

Parameter:

Model	BYG-200L
Name	Cosmetic powder mixer
Voltage	AC380V,3P,50/60HZ or Customize
Capacity	15L,30L,50L,100L,200L customize
Material	SUS 304&SUS316
PLC	Mitsubishi
Motor	Siemens
Touch screen	Weinview(Taiwan)
Electric elements	Schneider and others

Model	50L	100L	200L
Outer dimension (L x W x H) mm	1500 x 900 x 1500	1700x1600x1980	2150x1750x2300
Voltage	AC380V,3P,50/60HZ	AC380V,3P,50/60HZ	AC380V,3P,50/60HZ
Main motor power	7.5KW x 1	18.5KW x 1	37KW x 1
Side power	2.2KW x 3	2.2KW x 3	2.2KW x 3
Volume	50L	100L	200L
Capacity	3-10KG	10-25KG	20-50KG
Number of side stirrer	One shafts	Three shafts	Three shafts
Air supply pressure	5-6 bar	5-6 bar	5-6 bar
Weight	400KG	800KG	1450KG

Cosmetic Powder Pulverizer



Application:

It is applicated for cosmetic powder pulverizing ,such as eyeshadow ,blush and face powder ETC…



Features:

1. It adopts rotary multi-hammer to hammer the powder material, which makes powder is sheared off, scraped, scattered and pass through the mesh in high speed to achieve the requested fineness.
2. The structure is simple and precision, small footprint and easy to clean.with 12 hammers.
3. Due to the huge heat caused during pulverizing, the machine has water cooling device to prevent some of material from thermal anaphylaxis. It will release heat out of machine body by water-circulation and keep temperature at a suitable degree inside.
4. Comparing with general pulverizer, it adopts screw feeder to put raw material into the rotating crusher. Under high-speed revolution, special crush mechanism can get better homogeneity and emulsification after spraying the oil. It can avoid oil spot at the surface of powder cake and make sure its softness.
5.speed :7200/Minute.Need cooling water to cool down..

Parameter：

Model	BYGP
Hammer	12pcs
Capacity	20-50KGS/Hour
Rotary speed	7200RPM
Material Inlet	Screw Feeding(Spped is adjustable)
Crushing Power	7.5KW
Material	Stainless steel 304

Lab Powder Pulverizer



Application:

It is used for facepowder ,eyeshadow ,blush powder crushing in lab.

Features:

It is used for facepowder , eyeshadow , blush powder crushing in lab.

1. dimension: 260 * 200 * 400mm
2. Power supply: AC220V/1 phase/50 Hz
3. Main mixing motor: 1.9kw
4. Speed: 4000-25000rpm, divided into fixed speed and adjustable speed
5. Bucket volume: 0.5L
6. Maximum powder handling capacity 300g-500g
7. Use the motor to drive the tumbling powder bucket to crush powder and discharge material.
8. Body material: stainless steel (SUS304) .

Powder Sifting Machine With Mixing



Application:

It is suitable for color cosmetic powder sifting, such as make up powder ,eyes-shadow,blush etc…



Parameters:

1.Voltage:380V 3phase ,50HZ.
2.Power:750W
3.Screen diameter :500mm
4.Screen mesh:40 60 80 and 100 mesh Can be choosed.
5.Materail:stainless steel 304.
6.With mixing and frame ,more fine powder and more stable.
7.Dimension:470*750*1000mm(L*W*H).
8.Weight:50KGS.

Powder Sifting Machine



Application:

It is suitable for color cosmetic powder sifting, such as make up powder ,eyes-shadow,blush etc…



Parameter:

Model	BYS
Voltage	AC380V/3ψ/50Hz
Power	750W
Screen Diameter	Φ440mm
Screen Mesh	40mesh
material	Stainless steel(SUS304)
Dimension	470(L)*744(W)*1042(H)mm
Weight	44kg


2 Heads Rotary Mascara/Lipgloss Filling Capping Machine





Application:

it is used for liquid eyeliner . lipgloss mascara , filling . The bottle must be hard bottles . not soft bottles.

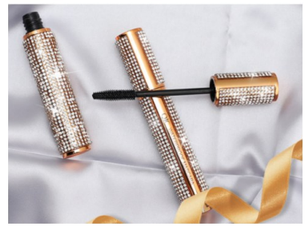

Features:

1.Manual feeding bottle ,automatic filling ,Manual feeding Nese , automatic pressing Nese. manual feeding caps , automatic capping .24 holes ,800mm table diameter.
2. filling range:5-30ml
3.filling capacity:30-40bottles/Minute.
4.power:6KW
5.G.W: 400KG
6.Material:stainless steel 304.with 2 tanks.
7.Touch screen :DELTA, filling is servo motor filling, Taiwan Delta servo motor.
8.Tank volume;20KG(with 2 tanks .one tank is with heating mixing ,one tank is with pressure)
9.Voltage:220V. Single phase
10.Dimension:1200*1000*1800MM

Parameter:

Brand Name	BEYER
Condition	New
Warranty	1 Year
Services	Online support
Marketing Type	New Product 2025
Warranty of core components	1 Year
Core Components	Gearbox, Pressure vessel, Pump, Gear, Bearing, Engine, Motor, PLC
Key Selling Points	Easy to Operate
After Warranty Service	Video technical support
Applicable Industries	Manufacturing Plant
Application	Cosmetic
Function	Filling and Capping,pressing .
Material	SUS 304/316L
Machine Type	Semi-automatic Machine
Capacity	30-40 pcs/min

2 Heads Lip Gloss Mascara Filling Machine



Application:

It is used for lipgloss liquid lipstick, mascara ,liquid highlighter filing .Semi automatic type. (hard tubes)





Parameters:

1.double hole filling machine
2. pressure barrel volume: 20L
3. Frame material: aluminum frame .
4. desktop height: 750MM.
5. weight: 100kg.
6.. barrel is with heating and mixing .without pressure.
7. servo quantitative filling, servo lifting mold (package material).
8.barrel with internal piston, air does not contact with the raw material when it has pressure.
9. filling range:0.5G-17g.
10. use the servo motor to control Lifting system(servo, PLC :Delta) cylinder, solenoid valve, pneumatic element :Air TAC Brand.
11.Voltage:220V 1phase 50HZ
12.Dimension:830x550x1600MM

Single Nozzle Lip Gloss Filling Machine



Application:

Target products :lipstick,lip gloss . lip balm , lip freeze and other creamy products that need to be heated .





Features:

1,Temperatures of vessel and nozzle are controlled independently.
2.filling range is adjustable.
3. Aapplicabel to wide variety of containers(tube , bottle ,case ,plate and etc…)
4.Easy to operate and clean.
5.Double jacket type vessel of SUS304 material has heating and stirring with speed adjuster.
6. Electric temperature control .

OPTIONS:

1.Heating hose ,expand the filling arrange.
2.conveyor with position control.

Parameter:

Model	BYCM-01
Voltage	220V
power	0.7kw
Filling range	1-150ml
material	Stainless steel SUS304
filling precision	±0.05ml.
Maximum capacity	40pcs/minute
Dimension	550mm(L)*720mm(W)*1850mm(H)
weight	200kg

Linear Lip Gloss Filling Capping Production Line



Application:

This machine is suitable for filling cosmetics, such as lipstick ,lipgloss, mascara, pen type lipstick, Large plastic pen , small plastic pen, Fine shape lipstick, vermicelli, lip balm etc. Even if raw material has glitter powder or pearly luster.





Features:

1. Two 20 L & heat stirring tank；
2. Piston filling system，motor drive,accurate quantitative；
3. Rotary shaft filling switch PUMP，wear resistance and low lost；
4.Fill 12PCS each time；
5.Filling way can choose fixed-point or decline while the fill；
6.With nozzle retracting function to keep bottle neck clean；
7. A cantainer detection system is provided;bottles do no filling when they are short；
8. Servo capping system，Set torque、namber of turns and speed can be separately set from the touch screen. Once reached the set torque value, the capping machanism will stop automatically to avoid damage the bottle cap.
9. Capping clamping jaw can be adjusted according to the bottle hight and made according to the shape of bottle cap。
10.Production Capacity：60~80 PCS/min
11. Mitsubishi is selected for PLC, Weilun is selected for touch screen, and Delta is selected for servo motor.
12. SMC is selected for the cylinder.
13. SUS304 stainless steel and 6061 aluminum alloy are used for the parts in contact with raw materials, except for special components. 12 hole filling machine (30 liter double material bucket, pressurized, including 2 return mold conveyor lines, 1 set of mold pushing mechanism, equipped with 2 pressure covers)
14.Semi automatic inserting machine (rotary type, 12 pieces per time)
15.2-meter stainless steel conveying platform (including 2 return mold conveying lines, 1 set of internal plug pressing mechanism, and 1 set of brush pressing mechanism)
16. lock cover machine includes 2 return mold conveyor lines and 1 set of push mold mechanism
17. automatic bottle picking and sorting mechanism
18.35 sets of 6 12 hole fixtures (POM)

Specifictions:

1. machanical size : 550x185x227cm (length X width X heigth)
2. voltage : 220V/single phase, 10KW

High End Mascara/Lipgloss Filling Capping Machine



Application:

This machine is suitable for filling cosmetics, such as lipstick ,lipgloss, mascara, pen type lipstick, Large plastic pen , small plastic pen, Fine shape lipstick, vermicelli, lip balm etc. Even if raw material has glitter powder or pearly luster.





Features:

Automatic filling machine for Mascara ,lip gloss and lip oil. The workflow of this model is completely controlled by Mechanical automatic filling, pressing inner plug, inserting brush and locking cover, and finally the finished product is output on the conveyor belt. For an "automatic" production machinery, It can save a lot of manpower.
Process: manual placement of packaging tubes >automatic filling (2PCS per time) ->automatic insertion of plugs >automatic pressing plugs>manual placement of brushes to the vibration platform (option) >automatic capping>automatic ejection of finished products. Mechanical characteristics:
1. It has the function of automatically inserting the inner plug, detecting the inner plug, inserting the brush and locking cover after filling, and its various mechanisms are selected according to the product being produced
Use or not use.
2. The material bucket is 15 liters and has heating, stirring, or pressurization functions.
3. This machine is a piston type filling system, and the filling parameters can be adjusted through the human-machine interface with precise quantification. Material injection and lifting selection
Servo motor, turntable with segmented feed for precise positioning.
4. This machine is equipped with servo motor drive, material extraction, lifting, and gripper locking system.
5. The internal plug and brush of this machine will be fed using a vibrating flat feeding platform.
6. Cooperate with inspection agencies to remove defective products (too heavy or too light).

Parameters:

1. Power supply: 1PH, AC220V, 60HZ;
2. Air pressure requirement: 5-6 kg/cm
3. Cleaning time: 30 minutes
4. Weight: 680KG
5.Capacity: 30~40pcs/min
6.Minimum dosage: 5 KG
7. PLC Choose Mitsubishi and Weilun for the touch screen.
8. SMC is selected for the cylinder.
9 SUS304 stainless steel are used for the parts in contact with raw materials, except for special components.6061 aluminum alloy forst frame.
10. Appearance dimensions: 120x80x208cm (length x width x height);

100L Cream Vacuum Emulsifying Mixer



Application:

Vacuum cream homogenizing mixing tank is designed according to customer's products. It can be used for cosmetic cream ,lipstick ,mascara ,lipgloss , body lotion ,shaving foam ,medical gel ,mayonnaise , tomato past ,cake gel ,honey and so on ···

Features:

1.vacuum cream homogenizing mixing tank can be customized according to customer'need .
pre-treating boiler, vacuum emulsifying tank and blending boiler, vacuum pump, hydraulic system, dumping system, electric controlsystem and work platform etc: optional.
2.The machine unit is featured by simple operation, stable performance, good homogenizing performance, high production efficiency, convenient cleaning, reasonable structure, small land area and high automatic degree etc.

Parameters:

1.Tank volume:120L ,Working volume:100L
2.vacuum type ,bottom homogenizing .
3.Polish inside and outside:0.4um.
4.Stainless steel 304 ,Inner layer thickness:4mm.middel layer thickness:4mm.outer layer thickness:2mm.
5.Top mixer:frame mixing paddle with guide plate.
6.Simense motor power :1.5kw.speed:0-63R/M.
7.BottomHomogenizer:power 2.2kw,speed:0-3600r/m,
8.Control by inverter(Taiwan Delta)
9.Bottom discharge port DN50.
10.pneumatic pump feeding port DN50.
11.Electric heating :8kw .reach 125degree by oil.
12.Control board:Voltage guage,Ampere guage,temperature meter.speed control .electric on/off,stirrer on/off.Homogenizer On/off.temperature control.
13.Tank volume:90KG
14.Voltage:380v,3phase ,5wires ,50HZ.
15.Dimension:780*780*1600MM

Air Washing Machine For PET Glass Bottles



Application:

It is used for below bottles air cleaning before filling



Introduction:

The air cleaning machine is used for cleaning plastic and glass bottles and tubes in cosmetic, pharmacy etc. With wide applications and no need to change the spare parts.

Features:

1. It can clean the dust and impurity inside the bottle, with device to eliminate static.
2. The cleaning time can be setted according to your requirement.
3.Adopt double (blow/inhale) working station, clean the dust in the bottle.
4. Ensure the purity of the air source with precise filter.

Parameters:

Voltage: single phase,220V
Air consumption: 60L/Min
Air pressure:4-5kgf/cm²
Speed :30-40 bottles/minute
Dimension:720x750x1300mm(L×W×H)
Weight:90kg

Semi Automatic Perfume Filling Machine



Application:

4 heads semi automatic bottle perfume filling machine, pneumatic perfume filler is used for filling floral water, perfume and other water-based materials. The machine adopts negative pressure ,suit for fill cologne,and fixed liquid surface type filling. Explosion-proof type products can be provided according to user requirements.





Parameter:

Production Capacity	20-40 bottles/min
Filling Volume	5-1000ml
Suitable bottle height	≤250mm
Suitable bottle diameter	≤90mm
Application of Bottle Diameter	≥5mm
Supply Voltage	3/N AC 380V/220V
Power Consumption	0.55KW 0.75KW (explosion proof Noise 70dB(A)

Perfume Capper Grasping Machine



Application:

It is used for perfume bottle grasping .



Parameter:

Product name	Pneumatic perfume bottle Grasping machine
Scope of application (diameter)	Bottle diameter:15-50MM Bottle height:40-200MM (If the bottle diameter and bottle height are larger than the above size, it needs to be customized)
Tie speed	5-15/min
Working pressure	Above 0.4MPA
Machine weight	16KG
Sealing speed	800-1000 bottles/hour

Bottle Plug Press Machine



Application:

Pneumatic Pressing-Cap Machine is widely used in cosmetic, chemical, biological and so on. It mainly presses collars of perfume, plugs of essential oil and other caps.





Parameter:

Product Name	Pneumatic pressing-cap machine
Air Source	0.4MPa-0.6MPa
Working Capacity	5-40 times/min
The Size of Mould	Customizable
Bottle Height	5-260mm (customizable)
Machine Size	L310mm*W260mm*H510mm
Product Weight	About 13kg

Cosmetic Aluminum Mould

Application:

It is used for lipstick ,eyebrow pencil ,eyeliner ,lipliner filling and shape forming . shape can be customized according to customer's requests and tubes.

Features:

1. Molds are custom-made.
2. Materials: Germany aluminium, durable.
3. Mold quotation, according to the shape ,size and samples(description) from customers provided.
4. Mold cavity numbers are: 6,8,12,18,48,60,72,90,96 ,100 cavities for options.
5. Moulds can be used by manual or applied on any types of filling machine.
7. Made by qualified aluminum , ensure the glossy and smoothness and life of the molds.
8. Mold can print customer's logo,according to customer's requirements.
9. Optional :Upper Mold Remover is to remove the upper mold easier.

Steps for lipstick production:

A.Lipstick three roll mill .
B. Lipstick Dissolving mixing Tank .Then defoaming if needed .
C. Doulbe Tank Or Lipstick Filling Machine.
D. Cooling Tunnel.
E. Manual removing mould or Air Blowing Type Lipstick Mould Remover .

Advantages:

1.Solid,durable,anti-abrasion,
2. Easy to clean, use and maintain.
3. 1 Year Warranty (Free repair service)

How to use lipstick mold and make lipstick:

1.Put oil on mould to avoid any scratching which will show up on all your lipsticks.
2.Assemble upper mould and lower mould and fix them by screws.
3. Fill liquid raw material into the mould holes.
4.Freeze it in fridge to paste about 15-30 minuets.
5.Use scraper to remove the residue.
6. Gently take out the upper mould or lipbalm tubes (you can also use a mould release to avoid breaking the sticks).
7.Use a lipstick casing to absorb the paste in. Twist the stick down into the case.
8.Finished.

Care instructions:


Soak the mold set with white electric oil for 12 hours before using.
Clean with a lightly oiled rag, never run under water. If mold gets wet, dry thoroughly.
Don't insert any tools in the cavity that could scratch it. The scratch will show up on all your lipsticks.
Keep wrapped in saran wrap when not in use.



12 Cavities Lipstick Aluminum Mold




10 Cavities Aluminum Mold

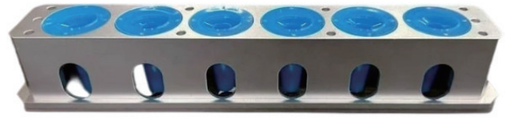

6 Cavities Aluminum Mold




Lip&eye Liner Mould

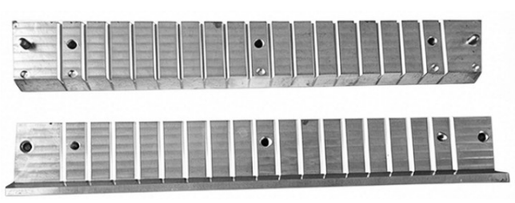

Eyebrow Pencil Mold



72&90*100 Holes Lipbalm Mold

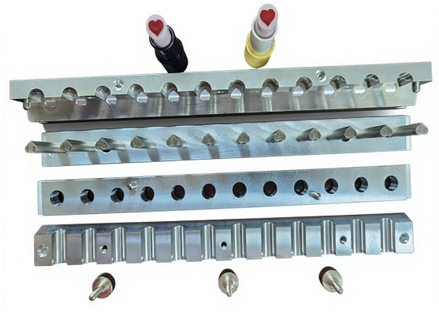

12 Cavities Multi-color lipstick mold

Lipstick Silicone Mold（Half Silicone)



Application:

It is used for lipstick filling ,the silicone mould should be put into aluminum mould for lipstick filling ,cooling and demoulding .







More lipstick shapes or designs please kindly send us an email or inquiry ,we will send you catalogue to choose the right size silicone mould ！


Half silicone mould is working with 10 cavities aluminum mould.

Lipstick Silicone Mould(Full Silicone)



Application:

It is used for lipstick filling ,the silicone mould should be put into aluminum mould for lipstick filling ,cooling and demoulding .

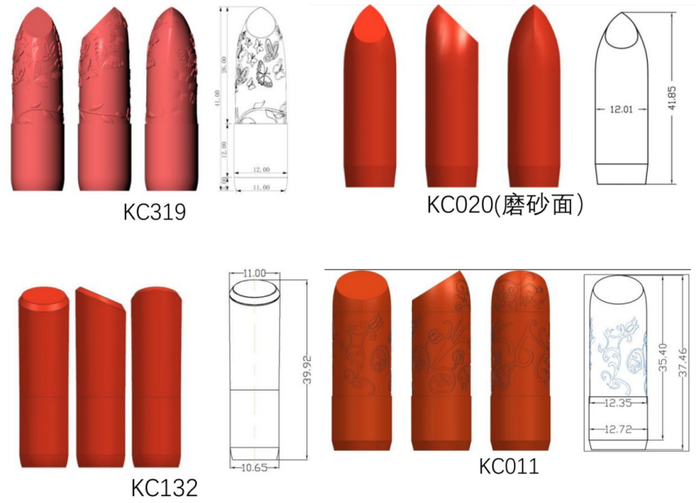

More shapes or designs please kindly send us an email or inquiry ,we will send you catalogue to choose the shape that you like .

Full silicone mould is working with 6 cavities aluminum mould.



Aluminum/Tin/Magnetic Pan

Application:

It is used for eyeshadow ,face powder and blush filling .

Product Name	Eyeshadow Palette Packaging Empty Magnetic Stainless Iron Tin Pans For Makeup,aluminum pan
Feature	not rust
Industrial Use	Cosmetic
Raw Material	stainless iron,aluminum.tin.
Use	Fill Foundation Make-Up , Eye Shadow etc
Color	Silver-Gray
Suit for	eyeshadow,blush,foundation etc
Shape and size	customize
Our advantage	have 20 years processing experience
Sample	Can Be Provided
MOQ	5000PCS
Delivery time	10days blow 50000pcs .
Packing	Film and carton
Delivery	By sea or by air

Our factory have thousand size of pans .The material of pan can be aluminum and rustless iron (Tin ,magnetic pan). We usually customize pan according to customer's palettee (packagings), we make a list for our magnetic pan size as right for your reference ,If any size you are interested in ,We will send you quotation according to your order quantities and send you samples as free .we may check freight before you place order :





Aluminum/Tin/Magnetic Pan








Many sizes for your reference(custom size is accept)

Model	Dimension(mm)	height(mm)	thickness(mm)	shape
F237-B	∮26.7	3.4	0.25	round
F2317	37*39	3.0	0.25	rectangle
F1605-3	22.8*22.8	3.5	0.25	square
F2355	31.7*28.4	3.6	0.25	rectangle
F1826	∮22.5	3.7	0.25	round
F1943	20.5*20.5	3.2	0.25	square
F1510	∮49.4	4.0	0.25	round
F2070	22.7*22.7	3.2	0.25	square
F1504	25.5*25.5	3.3	0.25	square
F1394-1	38*38	3.8	0.25	square
F1589	24.7*24.7	3.7	0.25	square
F1353	∮58	3.5	0.25	round
F1533	∮25.4	3.4	0.25	round
F043	∮26.2	2.8	0.25	round
F2403	64*57	3.0	0.25	rectangle
F1424	∮36.4	3.2	0.25	round
F1929	∮22.7	3.3	0.25	round
F2333	∮36.6	3.5	0.25	round
F1732	26*26	4.3	0.25	square

Cosmetic Mold And Related Accessories


Powder press mould is customized according to pan sample and machine type .
Powder press cloth is customized accroding to mould drawing and roll diamter.
Copper plate is customized according to pan sample and design .

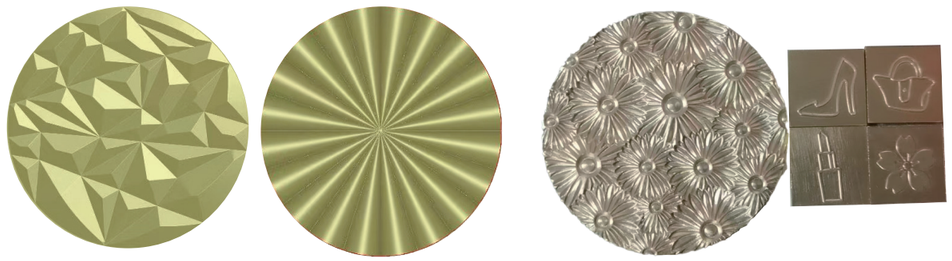

copper plate



powder press cloth

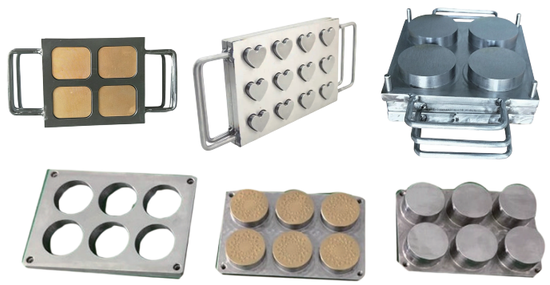

powder press mold







silicone shape

BEYER

Guangzhou Beyer Machinery Equipment Co.,Ltd

Contact:Nancy Luo
Email:sales@beyer.ltd
TEL:+86-13729807702
Whatsapp: 0085365695128

Group Photo of Cooperative Clients



