
www.zywell.net/www.zywell.com

Tik Tok：zywell8
WeChat：ruthronn
Twitter：@zywell3
Facebook：Zhuhai Zywell Technology Co., Ltd.

Zhuhai Zywell Technology Co., Ltd.

Address: 8th Floor, No.5 Workshop, No.1476
Airport West Road, Sanzao Town, Jinwan District,
Zhuhai City>>
TEL: +86-756-7682009
E-mail: sales@zywell.net

ZYWELL®

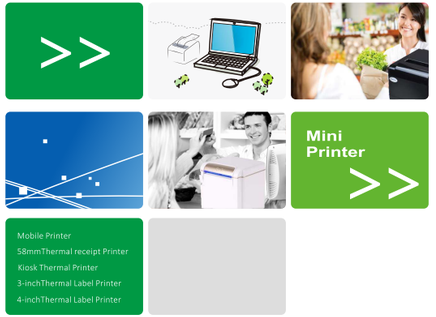

Custom Printer Manufacturer & Supplier

CATALOG



Standardized workshop management



Professional technique



Advanced equipment



Skilled assembly ability

Zywell is a comprehensive high-tech enterprise integrating POS printer research and development, production, sales and service. We has been focus on POS industry for 18 years, having ability to offer ODM and OEM service. Our goal is to provide more personalized products functions for end users to save your labor costs. All products have passed CE, ROHS, BIS certification.

Widely used in transportation , retail, telecommunications, medicine, taxation, public security, government, bank or other industries. Aiming at "achieving customers satisfaction" and guided by the slogan "It's more than a printer" of our company, we have maximized the requirements of users and won the favor of customers at home and abroad.

ABOUT US



ZYWELL®

www.zywell.net

ENERGY STAR | Appearance Patent | High-Tec ProductsA | CE | RoHS | FCC | BIS

Humanized functions make life better.

Zhuhai Zywell Technology Co., Ltd.



Certificate



Our factory



Activity



Company Milestones

- 2025 — Digital transformation to achieve digital management of R&D and manufacturing
- 2024 — Awarded as a national-level "Science and Technology-based Small and Medium-sized Enterprise"
- 2023 — Zywell was be rated as one of the top 100 innovative enterprises in Zhuhai.
- 2022 — Zywell relocate a new factory building
- 2021 — The monthly production exceeded 50,000pcs, and turnover up to 1.8 million US dollars.
- 2020 — Zywell was be rated as a high-tech enterprise.
- 2019 — Zhuhai Zywell Mechanism company was established Zhuhai Zywell own ISO9001-2015 QMS &major.
- 2018 — Zywell win the certificate of High and new technology products at 2018.
- The company's own brand "Zywell" registered successfully "Zywell" trademark successfully registered internationally.
- 2017 — The independent brand "Zywell" officially passed the national trademark registration.
- 2016 — Zhuhai Zywell was established.

Economic series

Z58-MB

58mm Kiosk Printer



Clear printing | QR code | High speed printing | Big font

Features

- 58mm Thermal Panel Receipt Printer, small and compact
- Support USB/Serial interface, high printing speed 100mm/s
- Support the maximum paper roll diameter is 48mm
- Compatible with ESC/POS command
- Application: ATM, Weighing equipment, KIOSK, Bank...

Model	Z58-MB
Print Method	Direct Thermal
Resolution	384 dots/line
Printing Width	48mm
Input buffer	64k bytes
NV Flash	256k bytes
Interface	U+S
Print Speed	Max.100mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper out, cover open, paper jam

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 65 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~52°C, 10%~85%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	132.5(D)x115(W)x86.4(H)mm
Net weight	Net weight : 0.35kg Gross weight : 0.76kg

Reliability	
Printing head	50KM

Accessories	
Accessories	Paper roll , USB cable,Serial port cable, Power adapter,Power cord,Manual, Power adapter(option)

Packing	
Individual box	Dimension 180×164×135mm(L×W×H) 1unit/carton
Master carton	Dimension 525×405×445mm(L×W×H) 18unit/carton


OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/ IOS/Windows

www.zywell.net/www.zywell.com

Compatible series

Z80-EM

80mm Kiosk Printer



Clear printing | QR code | High speed printing | Big font

Features

- ATM Terminal-manual counter business processing.
- Support 80mm paper width, with auto cutter.
- Application: ATM, Weighing equipment, KIOSK, Bank...

Model	Z80-EM
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	48mm/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S
Print Speed	200mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper out, cover open, cutter jam, paper jam and black mark detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 145 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	203(D)x112.5(W)x115(H)mm
Net weight	Net weight : 1.1 kg Gross weight : 2kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power cord, Paper roll, Manual, Roller, CD

Packing	
Individual box	Dimension 286×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 515×295×345mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

ZY-PN3501

3 inch Kiosk Printer



Clear printing | QR code | High speed printing | Big font

Features

·Automatic cutting knife, supports half-cut and full-cut, with a lifespan of up1 million cuts
·Compact and lightweight body, small and slim, looks great when embedded
·An embedded printer designed specifically for self-service terminals, with a jam-proof design
·It has sound and light alarms, and can send background remin

Model	Zy-PN3501
Print Method	Direct Thermal
Resolution	576dots/line
Printing Width	72mm
Print Speed	160mm/s (Max)
Memory	Input buffer: 256k bytes NV Flash:256k bytes
Interface	U+S

Fonts	
Font A	1.5×3.0mm (12×24点)
Font B	1.1×2.1mm (9×17点)
Chinese	GB18030/BIG5 3.0×3.0mm (24×24点)
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABA/CODE93/CODE128
2D	QR code

Reliability	
Printing head	100KM
Cutter life	1 million times

Power Supply	
Output	DC 12V/2.6A

Paper	
Paper Type	Direct Thermal
Paper Width	max 79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 81 mm
Paper Load	Easy paper loading
Paper Cut	Automatic paper cutting

Physical Charateristics	
Working Condition	0℃~45℃, 10%~80%RH
Storage Condition	-10℃~60℃,10%~90%RH
Dimensions	132*115.5*93mm (L*W*H)
Net weight	Net weight: 0.4kg Gross weight: 0.6kg

Accessories	
Accessories	Data cable, manual

Packing	
Individual box	Dimension 190*130*120MM (L*W*H)unit/carton
Master carton	Dimension 595*300*395MM (L*W*H)unit/carton

OS	
Driver	Windows XP/Vista/Win7/Win8/Win10/Win11/ Win2000/Win CE/OPOS/JPOS/ChromeOS/ MacOS/Linux/Raspberry Pi OS
SDK	Android/iOS

www.zywell.net/www.zywell.com

ZY-EM3102

3 inch Kiosk Printer



Clear printing | QR code | High speed printing | Big font

Features

· Compact size, designed specifically for self-service terminals, extremely space-saving, and easy to install.
· The anti-accidental opening safety lock design prevents the cover from being opened unintentionally.
· Multiple interfaces in one, super convenient to connect.
· 260mm/sHigh-speed, high-definition printing makes receipts clearer.
· It can be used in embedded systems or directly.

Model	Zy-EM3102
Print Method	Direct Thermal
Resolution	576dots/line
Printing Width	80mm(MAX)/72mm(default)
Paper separator (option)	58mm(57.5±0.5mm) 80mm(79.5±0.5mm)
Memory	Input buffer:4M NV Flash:256kbytes
Interface	USB+Rs232+LAN
Print Speed	260mm/s (Max)
Discharge direction	Front paper

Fonts	
Font A	12x24
Font B	9x17
Chinese	24x24 dots GB18030, Traditional Chinese BIG5
Japanese/Korea	Japanese JIS、Korean KSC5601(Optional)
User-defined	Support
Character Size (mm)	Font A:1.5x3.0mm;Font B:1.1x2.1mm;Simple/ Trinditional:3.0x3.0mm

Barcode	
1D	UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EAN8) /CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code,PDF417

Detection	
Sensors	Paper shortage detection, lid opening detection, and over-temperature detection
Function	Support two-color printing and screen display

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	58mm(57.5±0.5mm)/80mm(79.5±0.5mm)
Paper Thickness	0.04~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter(half cut)

Physical Charateristics	
Working Condition	5℃~45℃, 10%~90%RH
Storage Condition	-20℃-60℃,10%~90%RH
Dimensions	127.9(D)x103.6(W)x129(H)mm
Net weight	Net weight: 1.0kg Gross weight: 1.7kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	USB data cable, power adapter, power cord, paper roll, instruction manual, paper divider, serial cable (optional)

Packing	
Individual box	Dimension 230×155×144mm(L×W×H)1unit/carton
Master carton	Dimension 480×310×490mm(L×W×H)2unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/ iOS/Windows
Safety standard	CCC/ROHS/CE

Z58-II

58MM Thermal Receipt Printer

Features

·Fashion&simple design, small and light
·Text and picture printing, barcode and QR code printing all support
·Humanized driver, easy to install
·Compatible with various system, IOS Android and Windows ...



Simple operation | QR code | Small and portable | Big font

Model	Z58-II
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	90mm/s
Memory	Input buffer：64k bytes NV Flash:256k bytes
Interface	U/U+S/U+L/U+BT/U+W

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 45 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	100(D)x100(W)x75(H)mm
Net weight	Net weight：0.35kg Gross weight：0.65kg

Accessories	
Accessories	Paper roll, Power adaptor, Power cord, Data cable, Manual

Packing	
Individual box	Dimension 190×130×100mm(L×W×H) 1unit/carton
Master carton	Dimension 605×290×348mm(L×W×H)18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Z58-III

58MM Thermal Receipt Printer

Features

·Big gear, durable for long working time
·Variety interface can be optioned, USB, Bluetooth or wifi
·Big paper bin for 58mm paper roll
·One buttom for easy cover open
·Support Windows/Linux/Mac



Simple operation | QR code | Small and portable | Big font

Model	Z58-III
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	100mm/s(MAX)
Memory	Input buffer：64k bytes NV Flash:256k bytes
Interface	U/U+L/U+BT/U+W

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 55 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	149.6(D)x120(W)x116(H)mm
Net weight	Net weight：0.67kg Gross weight：1.1kg

Accessories	
Accessories	Paper roll, Power adaptor, Power cord, Data cable, Manual , Paper shelf , Roller

Packing	
Individual box	Dimension 180×164×135mm(L×W×H) 1unit/carton
Master carton	Dimension 525×405×445mm(L×W×H)18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Z58-IV

58MM Thermal Receipt Printer



Simple operation | QR code | Small and portable | Big font

Features

·Fashion&simple design, small and light
·Text and picture printing, barcode and QRcode printing all support
·Humanized driver, easy to install
·Compatible with various system, IOS Android and Windows ...

Model	Z58-IV
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	Max.90mm/s
Memory	Input buffer：64k bytes NV Flash:32k bytes
Interface	U/U+BT/U+W

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	155(D)x114(W)x86(H)mm
Net weight	Net weight：0.35kg Gross weight：0.7kg

Accessories	
Accessories	Paper roll, Power adaptor, Power cord, Data cable, Manual

Packing	
Individual box	Dimension 180×164×135mm(L×W×H) 1unit/carton
Master carton	Dimension 525×405×445mm(L×W×H)18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Z5801

58MM Thermal Receipt Printer



Simple operation | QR code | Small and portable | Big font

Features

·Fashion&simple design, small and light
·Text and picture printing, barcode and QRcode printing all support
·Humanized driver, easy to install
·Compatible with various system, IOS Android and Windows ...

Model	Z5801
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	Max.90mm/s
Memory	Input buffer：128k bytes NV Flash:256k bytes
Port	U+L/U+L+BT/U+L+W

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ 0.7A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	131(D)x118(W)x93.3(H)mm
Net weight	Net weight：0.45kg Gross weight：0.6kg

Accessories	
Accessories	Data cable, Power cord, Paper roll, Manual

Packing	
Individual box	Dimension 190×130×120mm(L×W×H) 1unit/carton
Master carton	Dimension 605×300×400mm(L×W×H)18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

ZM03

58mm Mobile Printer

Features

· Easy to operate APP,Support Android&IOS.
·Support charge on car.
·Support black label orientation.
·1800mAh battery,7 days standby time.
·60S auto sleep,30 mins auto off.



Simple operation | QR code | Small and portable | Big font

Model	ZM03
Print Method	Direct Thermal
Resolution	203 dpi（8 dots/mm）
Printing Width	48mm(default)
Memory	Input buffer：128k bytes NV Flash: 2M
Interface	U+BT/U+W
Print Speed	80mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A, UPC-E, EAN-8, EAN-13, CODE 39, ITF, CODE 128 , CODE 93
2D	QR code

Detection	
Sensors	Paper out detection

Power Supply	
Battery	7.4V rechargeable Li-ion battery, 1800mAh
Input	AC 100V-240V 50/60HZ
Output	DC 5V, 1A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.053~0.15mm
Roll Dia	Max. Φ40 mm (O.D)
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-10°C~50°C, 10%~80%R.H, no-condensing
Storage Condition	-20°C-60°C,10%~90%R.H, no-condensing
Dimensions	117(D)×85(W)×53(H) mm
Net weight	Net weight: 0.20kg Gross weight: 0.45kg

Accessories	
Accessories	Data cable, Power plug, Manual, Battery

Reliability	
Printing head	50KM

Packing	
Individual box	Dimension 128×66×170mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	iOS/Android/Windows

Zhuhai Zywell Technology Co., Ltd.

Economic series

ZM06

80mm Mobile Printer

Features

·Support Android&IOS.
·Support charge on car.
·Support 58/80mm paper width.
·Support black label orientation.
·Stay by 5-7days,last for 300M receipt printing.



Simple operation | QR code | Small and portable | Big font

Model	ZM06
Print Method	Direct Thermal
Resolution	203 dpi（8 dots/mm）
Printing Width	48/72mm
Memory	Input buffer：256k bytes NV Flash: 2M
Interface	U+BT/U+W
Print Speed	80mm/s(max)

Fonts	
Fonts	Alphanumeric; Simplified Chinese, Traditional Chinese; 35 International Character Sets

Barcode	
1D	UPC-A, UPC-E, EAN-8, EAN-13, CODE 39, ITF, CODE 128, CODE 93
2D	QR code , PDF417

Detection	
Sensors	Paper out, cover open detection

Power Supply	
Battery	7.4V rechargeable Li-ion battery,2000mAh
Input	AC 100V-240V 50/60HZ
Output	DC 5V, 1A
Charging time	4 hours
Standby time	105 hours
Continuous work	2.3 hours

www.zywell.net/www.zywell.com

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	58mm or 80mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Φ40 mm (O.D)
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-10°C~50°C, 10%~80%R.H, no-condensing
Storage Condition	-20°C-60°C,10%~90%R.H, no-condensing
Dimensions	117(D)x110(W)x57(H)mm
Net weight	Net weight：0.35kg Gross weight：0.5kg

Accessories	
Accessories	Data cable, Power plug, Manual, Battery

Reliability	
Printing head	50KM

Packing	
Individual box	Dimension 128×66×170mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

ZM06H

80mm Mobile Printer

Features

Weighing slip printer
·2200mAh large battery for long- lasting battery life
·0.96""OLED large-screen display for easier settings
·Print bills anytime and anywhere



Simple operation
QR code printing
Small and portable
Big font
Long-lasting battery
OLED large screen

Model	ZM06H
Print Method	Direct Thermal
Resolution	203 dpi (8dots/mm)
Printing Width	48/72mm
Paper baffle (optional)	58mm/80mm
Interface	U+BT/U+W
Print Speed	80mm/s(Max)

Fonts	
Memory	Input buffer: 256k bytes NV Flash: 2M
Fronts	Alphanumeric; Simplified Chinese, Traditional Chinese; 35 International Character Sets

Barcode	
1D	UPC-A, UPC-E, EAN-8, EAN-13, CODE 39, ITF, CODE 128 , CODE 93
2D	QR code,PDF417

Detection	
Sensors	Paper out detector, cover open detector, black mark detector
Function	0.96'' OLED Display

Power Supply	
Battery	7.4V rechargeable Li-ion battery, 2200mAh
Input	AC 100V-240V 50/60HZ
Output	DC 5V/1A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	58mm/80mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø40 mm(O.D)
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	117(D)×110(W)×57.1(H) mm
Net weight	Net weight: 0.36kg Gross weight: 0.5kg

Accessories	
Accessories	USB data cable, Power adapter, Manual, Partition board, Battery

Reliability	
Printing head	50KM
Cutter	/

Packing	
Individual box	Dimension 128×66×170mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	ESC/POS
Driver	Windows XP /Vista/ Win7/Win8 /Win10/ Win 2000/Win CE/OPOS/JPOS
SDK	iOS/Android/Windows

Zhuhai Zywell Technology Co., Ltd.

ZM04 (High-end version)

Label/Receipt Portable Printer

Features

·2000mhA large-capacity battery, super power-saving,
·Supports mobile bank charging
·Long lasting battery life to one week
·Compact size and small footprint
·Supports NV logo



Simple operation
QR code printing
Small and portable
Big font

Model	ZM04(High-end version)
Print Method	Direct Thermal
Resolution	203 dots/line
Printing Width	72mm(default)
Memory	RAM:8M FLASH: 16M
Interface	U+BT/U+W/ U+WIFI6
Print Speed	Max 100mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	(Gb18030): 16*16, 20*20,(BIG5): 24*24
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C,Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EANand UPC 2(5) digits add-on
2D	PDF-417, DataMatrix, QR code
Rotation	0°、90°、180°、270°

Detection	
Sensors	Seam mark detection, paper shortage detection, cover opening detection, black mark detection (optional)

Power Supply	
Battery	2000mAh
Charging Time	5~8h for USB TYPC 5V/1A
Electricity Supply	Input:AC100-240V, Output:DC5V/1A

www.zywell.net/www.zywell.com

Paper	
Paper Type	Thermal label paper/Thermal Receipt paper
Paper Width	30mm~80mm(including backing paper)
Paper Thickness	0.06mm-0.10mm
Roll Dia	Max. Ø45 mm
Paper Load	Easy paper loading
Paper Cut	Tear paper manually

Physical Charateristics	
Working Condition	0 ~ 50℃, Humidity≤80%RH(No condensation)
Storage Condition	-40 ~ 55℃, Humidity≤93%RH
Dimensions	123(L)×117(W)×60(H) mm
Net weight	Net weight: 0.48kg Gross weight: 0.68kg

Accessories	
Accessories	Battery,power cord, data cable, manual

Reliability	
Printing head	50KM

Battery life	
Standby Time	20H

Packing	
Individual box	Dimension 170*128*66mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	TSPL、ZPL, CPCL、ESC/POS; AUTO(default)
Driver	Windows/Linux/Mac
SDK	iOS/Android/Windows

ZM04

Label /Receipt Portable Printer

Features

·Built-in rechargeable 2000mAh lithium-ion
·Long lasting battery life to one week
·Compact size and small footprint
·Support various application and friendly app



Simple operation | QR code | Small and portable | Big font

Model	ZM04
Print Method	Direct Thermal
Resolution	203dots/line
Printing Width	72mm(default)
Print Speed	100mm/s(MAX)
Memory	RAM：256K bytes NV Flash:4M
Interface	U+BT/U+W/U+BT+W

Fonts	
Font	Alphanumeric; Simplified Chinese, Traditional Chinese; 35 International Character Sets

Barcode	
1D 2D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128 QR code/PDF417

Reliability	
Printing head	50KM

Power Supply	
Battery Input Output	2000mAh AC 100V-240V 50/60HZ DC 5V/1A

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	30~80mm(including backing paper)
Paper Thickness	0.053~0.15mm
Roll Dia	Max. Ø 45 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-10°C~50°C, 10%~80%R.H, no-condensing
Storage Condition	-20°C-60°C,10%~90%R.H, no-condensing
Dimensions	123(D)x117(W)x60(H)mm
Net weight	Net weight：0.48kg Gross weight：0.68kg

Accessories	
Accessories	Battery,Power cord, Data cable, Manual

Packing	
Individual box	Dimension 128×66×170mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	ESC/POS TSPL CPCL
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

ZM04WD

Linerless Mobile Label Printer

Features

·Built-in rechargeable 2000mAh lithium-ion
·Long lasting battery life to one week
·Label printing without backing paper,
no backing paper stripping, reduce the tedious process
·Compatible with TSPL,ESC/POS,CPCL print commands



Simple operation | QR code | Small and portable | Big font

Model	ZM04WD
Print Method	Direct Thermal
Resolution	203dots/line
Printing Width	72mm(default)
Print Speed	100mm/s(MAX)
Memory	RAM：256K bytes NV Flash:4M
Interface	U+BT/U+W/U+BT+W

Fonts	
Font	Alphanumeric; Simplified Chinese, Traditional Chinese; 35 International Character Sets

Barcode	
1D 2D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128 QR code/PDF417

Reliability	
Printing head	50KM

Power Supply	
Battery Input Output	2000mAh AC 100V-240V 50/60HZ DC 5V/1A

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper/ Non-backing paper, indefinite length, fixed length non-backing self-adhesive paper roll
Paper Width	30~80mm(including backing paper)
Paper Thickness	0.053~0.15mm
Roll Dia	Max. Ø 45 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-10°C~50°C, 10%~80%R.H, no-condensing
Storage Condition	-20°C-60°C,10%~90%R.H, no-condensing
Dimensions	123(D)x117(W)x60(H)mm
Net weight	Net weight：0.48kg Gross weight：0.68kg

Accessories	
Accessories	Battery,Power cord, Data cable, Manual

Packing	
Individual box	Dimension 128×66×170mm 1unit/carton
Master carton	Dimension 410×300×385mm 20unit/carton

OS	
Emulation	ESC/POS TSPL CPCL
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-M330B

Label /Receipt Portable Printer

Features

- High printing speed of 100mm/s
- Shock-resistant design, drop-resistant
- Built-in rechargeable 2000mAh lithium battery
- Print anytime, anywhere, compact and portable
- Optimal connectivity option for various indoor and outdoor applications



Simple operation | QR code | Small and portable | Big font

Model	Zy-M330B
Print Method	Direct Thermal
Resolution	203 DPI
Printing Width	72mm
Interface	U+BT/U+W/U+BT+W
Print Speed	100mm / s
Memory	
Memory	RAM:4M FLASH: 8M
Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support
Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8), CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code/PDF417
Sensors	
Sensors	Gap sensor/cover opening sensor/black mark sensor
Power Supply	
Battery	7.4V rechargeable Li-ion battery,2000mAh
Input	AC 100V-240V 50/60HZ
Output	USB TYPC DC 5V/1A

www.zywell.net/www.zywell.com

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	15mm~82mm
Paper Thickness	0.06~0.2mm
Roll Dia	Max. Ø50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear
Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	123.5(D)×117(W)×60(H) mm
Weight	Net weight: 0.45kg Gross weight: 0.6kg
Reliability	
Printing head	50km
Accessories	
Accessories	USB data cable, charging head, instruction manual, battery
Packing	
Individual box	Dimension 170×128×66mm 1unit/carton
Master carton	Dimension397×280×365mm 20unit/carton
OS	
Emulation	ESC/POS/TSPL/CPCL
Driver	Windows/Mac/Linux
SDK	Android/iOS/Windows

Zy-M331B

Label /Receipt Portable Printer

Features

- High printing speed of 100mm/s
- Cost savings – 50% increase in label yield per roll
- Built-in rechargeable 2200mAh lithium battery
- Supports mobile phone editing, print and apply instantly
- Optimal connectivity options for indoor and outdoor applications



Simple operation | QR code | Small and portable | Big font

Model	Zy-M331B
Print Method	Direct Thermal
Resolution	203 DPI
Printing Width	72mm
Interface	U+BT/U+W/U+BT+W
Print Speed	100mm / s
Memory	
Memory	RAM:4M FLASH: 8M
Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support
Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8), CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code/PDF417
Sensors	
Sensors	Gap sensor/cover opening sensor/black mark sensor
Power Supply	
Battery	7.4V rechargeable Li-ion battery,2200mAh
Input	AC 100V-240V 50/60HZ
Output	USB TYPC DC 5V/1A

www.zywell.net/www.zywell.com

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	15/20/25/30/35/40/45/50/55/60/65/70 /75/82mm
Paper Thickness	0.06~0.2mm
Roll Dia	Max. Ø50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear
Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	124(D)×115(W)×61(H) mm
Weight	Net weight: 0.45kg Gross weight: 0.6kg
Reliability	
Printing head	50km
Accessories	
Accessories	USB data cable, charging head, instruction manual, battery
Packing	
Individual box	Dimension 170×128×66mm 1unit/carton
Master carton	Dimension397×280×365mm 20unit/carton
OS	
Emulation	ESC/POS/TSPL/CPCL
Driver	Windows/Mac/Linux
SDK	Android/iOS/Windows

Zy-M330B (High-end version)

Label /Receipt Portable Printer

Features

- High printing speed of 100mm/s
- Shockproof design, drop resistant
- Supports barcode font rotation and graphic printing
- Built-in rechargeable 2000mAh lithium battery
- Print anytime, anywhere; small size, large memory, portable
- Supports ZPL, default AUTO



Simple operation | QR code | Small and portable | Big font

Model	Zy-M330B
Print Method	Direct Thermal
Resolution	203 DPI
Printing Width	72mm
Interface	U+BT/U+W/U+BT+W
Print Speed	100mm/ s
Memory	
Memory	RAM:8M FLASH: 16M
Built-in fonts	
Built-in fonts	Common single-byte fonts: FONT 0 to FONT 8 Simplified Chinese (Gb18030): 16x16, 20x20 Traditional Chinese (BIG5): 24x24 Korean (full text) Windows fonts (*.ttf) can be downloaded via software.
Barcode character graphics	
barcode	1D bar code: Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C,Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EANand UPC 2(5) digits add-on
2D barcode	PDF-417, DataMatrix, QR code
Font and barcode rotation	0°、90°、180°、270°
graphics	Printing of monochrome PCX, BMP and other image files
Sensors	
Sensors	Gap sensor/cover opening sensor/black mark sensor

Power Supply	
Battery	7.4V rechargeable Li-ion battery,2000mAh
Input	AC 100V-240V 50/60HZ
Output	USB TYPC DC 5V/1A
Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	18mm~82mm
Paper Thickness	0.06~0.2mm
Roll Dia	Max. Ø50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear
Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	123.5(D)×117(W)×60(H) mm
Weight	Net weight: 0.45kg Gross weight: 0.6kg
Reliability	
Printing head	50km
Accessories	
Accessories	USB data cable, charging head, instruction manual, battery
Packing	
Individual box	Dimension 170×128×66mm 1unit/carton
Master carton	Dimension 397×280×365mm 20unit/carton
OS	
Emulation	TSPL、ZPL、CPCL、ESC/POS; Default AUTO
Driver	Windows/Mac/Linux
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Compatible series

Zy-M331B (High-end version)

Label /Receipt Portable Printer

Features

- Supports barcode font rotation and graphic printing
- Built-in rechargeable 2200mAh lithium battery
- Print anytime, anywhere; small size, large memory, portable
- Supports ZPL, default AUTO



Simple operation | QR code | Small and portable | Big font

Model	Zy-M331B
Print Method	Direct Thermal
Resolution	203 DPI
Printing Width	72mm
Interface	U+BT/U+W/U+BT+W
Print Speed	100mm/ s
Memory	
Memory	RAM:8M FLASH: 16M
Built-in fonts	
Built-in fonts	Common single-byte fonts: FONT 0 to FONT 8 Simplified Chinese (Gb18030): 16x16, 20x20 Traditional Chinese (BIG5): 24x24 Korean (full text) Windows fonts (*.ttf) can be downloaded via software.
Barcode character graphics	
barcode	1D bar code: Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C,Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EANand UPC 2(5) digits add-on
2D barcode	PDF-417, DataMatrix, QR code
Font and barcode rotation	0°、90°、180°、270°
graphics	Printing of monochrome PCX, BMP and other image files
Sensors	
Sensors	Gap sensor/cover opening sensor/black mark sensor

Power Supply	
Battery	7.4V rechargeable Li-ion battery,2200mAh
Input	AC 100V-240V 50/60HZ
Output	USB TYPC DC 5V/1A
Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	15/20/25/30/35/40/45/50/55/60/65/70/75/82mm
Paper Thickness	0.06~0.2mm
Roll Dia	Max. Ø50 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear
Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	124(D)×115(W)×61(H) mm
Weight	Net weight: 0.45kg Gross weight: 0.6kg
Reliability	
Printing head	50km
Accessories	
Accessories	USB data cable, charging head, instruction manual, battery
Packing	
Individual box	Dimension 170×128×66mm 1unit/carton
Master carton	Dimension 397×280×365mm 20unit/carton
OS	
Emulation	TSPL、ZPL、CPCL、ESC/POS; Default AUTO
Driver	Windows/Mac/Linux
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Z5808

58MM Thermal Label Printer

Features

·Carbon free, color free, ink free
·Rich interface, USB+ LAN /USB+ LAN + BLUETOOTH
·Supports logo download and printing
·Support PDF417, QR code, data matrix



Simple operation
QR code
Small and portable
Big font

Model	Z5808
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	Max.101mm/s
Port	U+L/U+L+BT/U+L+W

Fonts	
Font	Alphanumeric; Simplified Chinese, Traditional Chinese;35 international character sets
Input Buffer	256kbytes
NV Flash	4M

Barcode	
1D	CODE128/128M/EAN128CODE39/39C/39S/ CODE93/EAN13/EAN13+2/EAN13+5 /An8/ EAN8+2/EAN8+5/25/25CCODABAR/POSTNET/ UPC-A/UPCA+2/UPCA+5 /UPC-E/UPCE+2/ UPC-E+5/CPOST/MSI/MSIC/PLESSEY/ITF14/EAN14
2D	QR code,PDF417,Data matrix

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ 0.7A

Paper	
Paper Type	Thermal Label Paper
Paper Width	45/40/35/30/25/20/57mm
Paper Thickness	0.06~0.19mm
Roll Dia	Max. Ø 50 mm
Loading Mode	Wrapper
Paper Cut	Tear by hand

Physical Charateristics	
Working Condition	0℃~45℃, 20%~80%RH
Storage Condition	-10℃-60℃,≤93%RH(40℃)
Dimensions	131(D)x118(W)x93.3(H)mm
Net weight	Net weight：0.45kg Gross weight：0.6kg

Accessories	
Accessories	USB cable, Power cable, Manual,Paper baffle

Packing	
Individual box	Dimension 190×130×120mm(L×W×H) 1unit/carton
Master carton	Dimension 605×300×400mm(L×W×H) 18unit/carton

OS	
Emulation	ESC/POS TSPL CPCL
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-M430B

110mm Portable Label Printer

Features

·Weighing slip printer
·Large battery for long battery life
·OLED display for easy setup
·Print anytime, anywhere
·Anti-collision design for drop resistance
·Compact size for portability



Simple operation
QR code printing
Long-lasting battery
big paper roll
OLED large screen

Model	Zy-M430B
Print Method	Direct Thermal
Resolution	203 DPI
Printing Width	104mm
Interface	U/U+BT/U+W/U+BT+W
Print Speed	101mm （4"） / s

Memory	
Memory	RAM:8M FLASH: 16M

Built-in fonts	
Built-in fonts	Common single-byte fonts: FONT 0 to FONT 8 Simplified Chinese (Gb18030): 16x16, 20x20 Traditional Chinese (BIG5): 24x24 Korean (full text) Windows fonts (*.ttf) can be downloaded via software.

Barcode character graphics	
barcode	1D bar code： Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C,Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EANand UPC 2(5) digits add-on
2D barcode	PDF-417, DataMatrix, QR code
Font and barcode rotation	0°、90°、180°、270°
graphics	Printing of monochrome PCX, BMP and other image files

Sensors	
Sensors	Gap sensor/cover opening sensor/black mark sensor

Zhuhai Zywell Technology Co., Ltd.

Power Supply	
Battery	7.4V rechargeable Li-ion battery,3000mAh
Input	AC 100V-240V 50/60HZ
Output	DC 5V/1A

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	30mm~110mm
Paper Thickness	0.06~0.2mm
Roll Dia	Max. Ø56 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	-2℃ ~ 52℃, 10% ~ 85% R.H, no-condensing
Storage Condition	-20 ~ 60℃, 5 ~ 90% R.H, no-condensing
Dimensions	155(D)×132(W)×71(H) mm
Weight	Net weight: 0.47kg Gross weight: 0.76kg

Reliability	
Printing head	50km

Accessories	
Accessories	USB data cable, charging head, instruction manual, battery

Packing	
Individual box	Dimension 210×136×76mm 1unit/carton
Master carton	Dimension 460×290×420mm 20unit/carton

OS	
Emulation	TSPL、ZPL、CPCL、ESC/POS; Default AUTO
Driver	Windows/Mac/Linux
SDK	Android/iOS/Windows

Zy-Q821

80mm Thermal POS Printer

Features

·58mm cutter& auto cutter support
·Stable performance & easy use
·Widely used in banking, telecommunications, takeaway, shopping malls, hospitals, supermarkets, and sports lottery, and other fields
·Support Windows, Android, IOS software based on ESC/POS command



Support wall mounting
QR code
Automatic paper cutting
Big font
High speed printing
Error alert

Model	Zy-Q821
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	58mm/80mm
Input buffer	128k bytes
NV Flash	256k bytes
Interface	U/U+L
Print Speed	200mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/1.25A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	173(D)x128(W)x127(H)mm
Net weight	Net weight：0.8kg Gross weight：1.45kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, Manual, Roller(option), Paper separator(option)

Packing	
Individual box	Dimension 250×140×145mm(L×W×H)1unit/carton
Master carton	Dimension 540×320×485mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy-Q822

80mm Thermal POS Printer

Features

·58mm cutter& auto cutter support
·Stable performance & easy use
·Widely used in banking, telecommunications, takeaway, shopping malls, hospitals, supermarkets, and sports lottery, and other fields
·Support Windows, Android, IOS software based on ESC/POS command



Support wall mounting
QR code
Automatic paper cutting
Big font
High speed printing
Error alert

Model	Zy-Q822
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	72mm(default)
Paper separator (option)	58mm/80mm
Input buffer	128k bytes
NV Flash	256k bytes
Interface	U/U+L
Print Speed	200mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper out, cover open, cutter jam, paper jam and black mark detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/1.25A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm/57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	173(D)x128(W)x130.5(H)mm
Net weight	Net weight：0.85kg Gross weight：1.4kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, Manual, Roll(option), Paper separator(option)

Packing	
Individual box	Dimension 250×140×145mm 1unit/carton
Master carton	Dimension 540×320×485mm(L×W×H) 12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Zy-Q823

80mm Thermal POS Printer



Support wall mounting | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Features

·Stable performance, easy to operate
·Widely applicable, used in various scenarios like supermarkets, banks, telecom, and food delivery shopping.
·Wall-plug power adapter, keeps your desktop clean and sleek
·Light and Compact Design, Space Saving
·Support Android, IOS, Windows, Linux and MAC ...

Model	ZY-Q823
Print Method	Direct Thermal
Resolution	203Dpi
Printing Width	72mm
Input buffer	128k bytes
NV Flash	256k bytes
Interface	USB+LAN
Print Speed	180mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	24 x 24 dots GB18030, Traditional Chinese
Japanese/Korea	Support(Optional)
User-defined	Support(Optional)

Barcode	
1D	UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EAN8) /CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR Code

Detection	
Sensors	Print head temperature detection, cover open detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/1.25A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	80mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 81mm
Paper Load	Easy paper loading
Paper Cut	Half-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	160(D)x128.5(W)x117.8(H)mm
Net weight	Net weight: 0.65kg Gross weight: 1kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, wall plug adapter, paper roll, manual

Packing	
Individual box	Dimension 230×140×135mm(L×W×H)1unit/carton
Master carton	Dimension 580×240×430mm(L×W×H)2unit/carton

OS	
Emulation	ESC/POS
Driver	Windows XP/Vista/Win7/Win8/Win10/Win11 /Win2000/Win CE/OPOS/JPOS/ChromeOS /MacOS/Linux/Raspberry Pi OS
SDK	Android/iOS

www.zywell.net/www.zywell.com

Zy-Q825

80mm Thermal POS Printer



Support wall mounting | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Features

·Stable performance, easy to operate
·Widely applicable, used in various scenarios like supermarkets, banks, telecom, and food delivery shopping.
·Wall-plug power adapter, keeps your desktop clean and sleek
·Light and Compact Design, Space Saving
·Support Android, IOS, Windows, Linux and MAC ...

Model	ZY-Q825
Print Method	Direct Thermal
Resolution	203Dpi
Printing Width	72mm
Input buffer	128k bytes
NV Flash	256k bytes
Interface	USB+LAN
Print Speed	180mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	24 x 24 dots GB18030, Traditional Chinese
Japanese/Korea	Support(Optional)
User-defined	Support(Optional)

Barcode	
1D	UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EAN8) /CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR Code

Detection	
Sensors	Print head temperature detection, cover open detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/1.25A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	80mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 81mm
Paper Load	Easy paper loading
Paper Cut	Half-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	160(D)x128.5(W)x115.9(H)mm
Net weight	Net weight: 0.65kg Gross weight: 1kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, wall plug adapter, paper roll, manual

Packing	
Individual box	Dimension 230×140×135mm(L×W×H)1unit/carton
Master carton	Dimension 580×240×430mm(L×W×H)2unit/carton

OS	
Emulation	ESC/POS
Driver	Windows XP/Vista/Win7/Win8/Win10/Win11 /Win2000/Win CE/OPOS/JPOS/ChromeOS /MacOS/Linux/Raspberry Pi OS
SDK	Android/iOS

www.zywell.net/www.zywell.com

Zy907

80mm Thermal POS Printer



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Features

- Built-in power adapter
- LOGO icon downloadable
- Fast silent printing up to 260mm/sec
- 80mm large capacity bin, support 58 & 80mm printing
- Power, Error & Low paper LED reminding
- ESC/POS (Epson compatible)

Model	Zy907
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U/U+L/U+BT/U+W
Print Speed	200-260mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 80 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	180(D)x142(W)x134.2(H)mm
Net weight	Net weight: 1.3kg Gross weight: 1.45kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, Power cord, Paper roll, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 246×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 520×370×505mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Economy series

Zy908

80mm Thermal POS Printer



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Features

- Built-in power adaptor,avoid messy cables in desk
- With wall hanging equipped, saving space
- Support NV logo customized in each page
- Origin Japanese mechanism, long working life
- Compatible with various system like Windows, MAC, Liunx...

Model	Zy908
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U/U+L/U+S+L/U+BT/U+W
Print Speed	200-260mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Zhuhai Zywell Technology Co., Ltd.

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 80 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	185.7(D)x142(W)x131.2(H)mm
Net weight	Net weight: 1.1kg Gross weight: 1.6kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, Power cord, Paper roll, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 246×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 520×370×505mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

Zy808

80mm Thermal POS Printer



Wall printing | QR code | Automatic paper cutting | Big font

Error alert

Features

- Support network monitor function,IP change directly from different gateway and QR code.
- Built-in power adaptor,avoid messy cables every where and save space.
- With wall hanging equipped.
- Wired printing and Wireless printing all support

Model	Zy808
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U/U+S/U+L/U+S+L/U+BT/U+W/U+S+L+BT/U+S+L+W
Print Speed	200-260mm/s

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode

1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection

Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper

Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 80 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics

Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	185(D)×145(W)×134(H) mm
Net weight	Net weight：1.2kg Gross weight：1.85kg

Reliability

Printing head	100KM
Cutter	1.0million

Accessories

Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing

Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS

Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy308

80mm Thermal POS Printer



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | USB settings

Features

·Print orders table by table
·260mm/s Ultra fast print speed
·Interlligent knife return avoid cutter jam
·Unique design for high-end application sites

Model	Zy308
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 256k bytes NV Flash 256k bytes
Interface (Witnout Voice)	U/U+L/U+S+L/U+BT/U+W/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode

1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection

Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper

Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics

Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	201.5(D)x154.5(W)x134(H)mm
Net weight	Net weight: 1.0kg Gross weight:1.67kg

Reliability

Printing head	150KM
Cutter	1.5million

Accessories

Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing

Individual box	Dimension 286×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H)12unit/carton

OS

Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy306

80mm Thermal POS Printer

Features

- Fast printing of text and images
- Long lasting auto-cutter up to 1.5million cuts
- Friendly utilities,virtual usb or usb hid setting by utilities
- Support 8 kinds of different paper width(Option)
- Support wall mounting



Wall printing · QR code · Automatic paper cutting · Big font · High speed printing

Model	Zy306
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 256k bytes NV Flash 256k bytes
Interface	U/U+S/U+L/U+W/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight: 1.0kg Gross weight: 1.8kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy307

80mm Thermal POS Printer

Features

- Support barcode and QR code.
- Support wall hanging, saving space.
- Support queuing function and easy customize the content
- Support network monitor function in different gateway.
- White or black color can be option.
- 100% origin Japanese mechanism.



Wall printing · QR code · Automatic paper cutting · Big font · High speed printing

Model	Zy307
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 256k bytes NV Flash 256k bytes
Interface	U/U+S/U+L/U+S+L/U+BT/U+W/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight: 1.0kg Gross weight: 1.67kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, power adaptor, power cord, paper roll, CD, manual, roll, paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-T812

80mm Thermal Receipt Printer

Features

- Optional voice function, optional sound and light alarm function
- Multi-interface connection: Support USB, Ethernet, serial port, Bluetooth or WiFi
- Support printing QR code,text and graphics
- Supports 58/80mm paper width



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Model	Zy-T812
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface (Without Voice)	U+L/U+S+L/U+BT/U+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Print head temperature detection,paper presence detection,liddetection, paper jam detection, sound and light alarm(option)
Function(option)	With voice function, sound and light alarm function

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	165(D)x128(W)x115(H)mm
Net weight	Net weight：0.85kg Gross weight：1.6kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 246×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 520×370×505mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-T812 (Audio version)

80mm Thermal Receipt Printer

Features

Supports voice functionality.

- Multi-interface connection: Support USB, Ethernet, serial port, Bluetooth or WiFi
- Support printing QR code,text and graphics
- Supports 58/80mm paper width



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Model	Zy-T812
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface (With Voice)	U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Print head temperature detection,paper presence detection,liddetection, paper jam detection, sound and light alarm(option)
Function(option)	With voice function, sound and light alarm function

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	165(D)x128(W)x115(H)mm
Net weight	Net weight：0.85kg Gross weight：1.6kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 246×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 520×370×505mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy905

80MM Kitchen printing king

Features

·Fast printing of text and images;
·Support network monitoring function, status checked easily
·Flash LED light and big beeper voice, no order missed
·Support wall mounting and cockroach-proof vent design
·Waterproof cover IP54 protection grade, grid network avant-garde design;



Simple operation | QR code | Small and portable | Big font

High speed printing | Sound and light alarm

Model	Zy905
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 256k bytes NV Flash 256k bytes
Interface	U+L/U+S+L/U+S+L+BT/U+S+L+W
Print Speed	230-260mm/s
Voice reminder	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck,paper pick sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	196(D)x145(W)x135(H)mm
Net weight	Net weight: 1.3kg Gross weight: 1.75kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 286×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

Zy606

80mm Thermal POS Printer

Features

·Support continue mode.
·Support wall mounting
·Support separate table receipt function.
·Professional kitchen function equipped with Flash LED light and big beeper voice, remind the owner very well.
·100% Origin Japanese Mechanism,long lasting auto-cutter up to 1.5million cuts.



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Sound and light alarm

Model	Zy606
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 256k bytes NV Flash 256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)
Voice reminder	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck,paper pick sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm/57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Function	
Voice reminder	option

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight: 1.0kg Gross weight: 1.67kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zy806

80mm Thermal POS Printer

Features

·Paper easy paper loading,big paper roll.
·Various images/curves/characters printing function.
·Auto-cutter with paper jam prevention design.



Printing | QR code | Automatic paper cutting | Big font

High speed printing | Easy loading paper

Model	Zy806
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L/U+S/U+L/U+BT/U+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	188.1(D)×145(W)×149.1(H) mm
Net weight	Net weight: 1.3kg Gross weight: 2.1kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 250×200×160mm(L×W×H)1unit/carton
Master carton	Dimension 640×280×360mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy906

80mm Thermal POS Printer

Features

·Support queuing function by friendy tools.
·Check mechanism life by command.
·Thick and solid plastic house and compelet stainless steel inner structure.
·Support 58/80mm paper width(Option a paper guider).



Printing | QR code | Automatic paper cutting | Big font

High speed printing

Model	Zy906
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L/U+BT/U+W/U+B+W
Print Speed	260mm/s(MAX)
Money Detector	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	218.7(D)x145(W)x149.1(H)mm
Net weight	Net weight: 1.45kg Gross weight: 2.2kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 250×200×160mm(L×W×H)1unit/carton
Master carton	Dimension 640×280×360mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy301

80mm Thermal POS Printer

Features

- Fast printing of text and images
- Long lasting auto-cutter up to 1.5million cuts
- Friendly utilities,virtual usb or usb hid setting by utilities
- Support 8 kinds of different paper width(Option)
- Support wall mounting



Wall printing | QR code | Automatic paper cutting | Big font | High speed printing

Model	Zy 301
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 4MB NV Flash 256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code,PDF417

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C~60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight: 1.0kg Gross weight:1.67kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Compatible series

Zy601

80mm Thermal POS Printer

Features

·Support continue mode.
·Support wall mounting
·Support separate table receipt function.
·Professional kitchen function equipped with Flash LED light and big beeper voice, remind the owner very well.
·100% Origin Japanese Mechanism,long lasting auto-cutter up to 1.5million cuts.



Wall printing | QR code | Automatic paper cutting | Big font | High speed printing | Sound and light alarm

Model	Zy601
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Memory	Input buffer 4MB NV Flash 256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code,PDF417

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck,paper pick sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Zhuhai Zywell Technology Co., Ltd.

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Function	
Voice reminder	option

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C~60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight: 1.0kg Gross weight:1.67kg

Reliability	
Printing head	150KM
Cutter	2million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zy801

80mm Thermal POS Printer

Features

·Support queuing function by friendly tools.
·Support network monitor function in different gateway.
·Check mechanism age by command.
·Thick and solid plastic house and compelet stainless steel inner structure.
·Support 58/80mm paper width(Option a paper guider).



Printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Model	Zy801
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	4M
NV Flash	256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code/PDF417

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	188.7(D)x145(W)x149(H)mm
Net weight	Net weight: 1.3kg Gross weight:2.1kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 250×210×160mm(L×W×H)1unit/carton
Master carton	Dimension 640×280×360mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Compatible series

Zy901

80mm Thermal POS Printer

Features

·Support queuing function by friendly tools.
·Check mechanism life by command.
·Thick and solid plastic house and compelet stainless steel inner structure.
·Support 58/80mm paper width(Option a paper guider).



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Queue function

Model	Zy901
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	4M
NV Flash	256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	260mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code/PDF417

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	188.7(D)x145(W)x149.1(H)mm
Net weight	Net weight: 1.4kg Gross weight: 2.2kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 250×210×160mm(L×W×H)1unit/carton
Master carton	Dimension 640×280×360mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-307Q

80mm Thermal POS Printer

Features

·With paper jam prompt function, cutter jam prompt function, cover open prompt function
·Can be connected to the cash drawer
·Support printing QR code, text and graphics
·Support 8 kinds of different paper width(Option)



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Queue function

Model	Zy307Q
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L
Print Speed	260mm/s(MAX)
Queue function	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	191(D)x145(W)x141.5(H)mm
Net weight	Net weight：1.0kg Gross weight：1.8kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy906

80mm Thermal POS Printer

Features

·Support queuing function by friendly tools.
·Check mechanism life by command.
·Receipt printer and money detector all in one, save space and cost. one button keep the fake note away
·Thick and solid plastic house and compelet stainless steel inner structure.
·Support 58/80mm paper width(Option a paper guider).



Printing | QR code | Automatic paper cutting | Big font

High speed printing | Banknote verification function

Model	Zy906
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L/U+BT/U+W/U+BT+W
Print Speed	260mm/s(MAX)
Money Detector	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	218.7(D)x145(W)x149.1(H)mm
Net weight	Net weight: 1.45kg Gross weight: 2.2kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 250×200×160mm(L×W×H)1unit/carton
Master carton	Dimension 640×280×360mm(L×W×H)6unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-H861

Thermal Receipt Printer



Features

·Modern industrial design, stylish &simple&compact ideal for counter spaces
·High printing speed up to 260mm/s and 2MB memory
·Versatile connectivity,USB, Ethernet, Bluetooth and Wifi
·Paper loading and dispensing front type.
·Visual LED display light, real-time prompt of power supply, error report and paper shortage.

Model	Zy-H861
Print Method	Direct Thermal
Resolution	203 dots/line
Printing Width	72mm(default)80mm(Max)
Paper separator (option)	80mm (79.5 ±0.5mm) 58mm (57.5 ± 0.5mm)
Input buffer	2M
NV Flash	256k bytes
Interface	U+L/U+L+BT/U+L+W
Print Speed	260mm/s(MAX)
Discharge dire-ction	"Top paper" and "front paper" can be adjusted in both directions

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Character Size (mm)	Font A: 1.5×3.0mm; Font B: 1.1×2.1mm; Simple/ Traditional: 3.0×3.0mm
Japanese/Korea	Japanese JIS□ Korean KSC5601 (optional)
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code,PDF417

Detection	
Sensors	Lack of paper detection, open cover detection, overtemperature detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	58mm (57.5 ± 0.5mm)80mm (79.5 ±0.5mm)
Paper Thickness	0.04~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter(half cut)

Physical Charateristics	
Working Condition	5°C~45°C, 10%~90%RH
Storage Condition	-20°C-60°C,10%~90%RH
Dimensions	128(D)x129(W)x132.6(H)mm
Net weight	Net weight : 1.0kg Gross weight : 1.7kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	USB data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Paper separator Serial cable (optional)

Packing	
Individual box	Dimension 230×155×144mm(L×W×H) 1unit/carton
Master carton	Dimension 500x320x510mm(LxWxH) 12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows
Safety standard	CCC\ ROHS\CE

High speed printing
QR code
Automatic paper cutting
Big font
Error alert
Queue function

www.zywell.net/www.zywell.com

Zy608

80mm Thermal POS Printer



Features

·Modern industrial design, stylish &simple&compact ideal for counter spaces
·High printing speed up to 300mm/s and 4MB memory
·Versatile connectivity,USB, Ethernet, Bluetooth and Wifi
·Paper loading and dispensing front type.
·Visual LED display light, real-time prompt of power supply, error report and paper shortage.

Model	Zy608
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	58mm/80mm
Input buffer	4M
NV Flash	256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	300mm/s(MAX)
Voice reminder	Support

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code/PDF417

Detection	
Sensors	Paper out, cover open, cutter jam, paper jam and black mark detection

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.04~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	5°C~45°C, 10%~90%RH
Storage Condition	-20°C-60°C,10%~90%RH
Dimensions	137(D)x137(W)x130(H)mm
Net weight	Net weight: 1.0kg Gross weight: 1.7kg

Reliability	
Printing head	150KM
Cutter	2.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator

Packing	
Individual box	Dimension 230×155×144mm(L×W×H)1unit/carton
Master carton	Dimension 500×320×510mm(L×W×H)/12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

High speed printing
QR code
Automatic paper cutting
Big font
Error alert
Queue function

Zhuhai Zywell Technology Co., Ltd.

Compatible series

Zy-H862

Thermal Receipt Printer

Features

·Modern industrial design, stylish &simple&compact ideal for counter spaces
·High printing speed up to 350 mm/s and 8M memory
·Versatile connectivity,USB, Ethernet, Bluetooth and Wifi
·Paper loading and dispensing front type.
·Visual LED display light, real-time prompt of power supply, error report and paper shortage.



Two-color printing | QR code | Automatic paper cutting | Big font

High speed printing | Queue function | Error alert

Model	Zy-H862
Print Method	Direct Thermal
Resolution	203 dots/line
Printing Width	72mm(default)80mm(Max)
Paper separator (option)	58mm (57.5 ± 0.5mm) 80mm (79.5 ±0.5mm)
Input buffer	8M
NV Flash	256k bytes
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	350mm/s(Max)
Discharge dire-ction	"Top paper" and "front paper" can be adjusted in both directions

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Character Size (mm)	Font A: 1.5×3.0mm; Font B: 1.1×2.1mm; Simple/ Traditional: 3.0×3.0mm
Japanese/Korea	Japanese JIS□ Korean KSC5601 (optional)
User-defined	Support

Barcode

1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code,PDF417

Detection

Sensors	Lack of paper detection, open cover detection, overtemperature detection

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper

Paper Type	Thermal Receipt Paper
Paper Width	58mm (57.5 ± 0.5mm)80mm (79.5 ±0.5mm)
Paper Thickness	0.04~0.08mm
Roll Dia	Max. Ø 82 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter(half cut)

Physical Charateristics

Working Condition	5°C~45°C, 10%~90%RH
Storage Condition	-20°C-60°C,10%~90%RH
Dimensions	128(D)x129(W)x132.6(H)mm
Net weight	Net weight : 1.0kg Gross weight : 1.7kg

Reliability

Printing head	150KM
Cutter	2.0million

Accessories

Accessories	USB data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Paper separator Serial cable (optional)

Packing

Individual box	Dimension 230×155×144mm(L×W×H) 1unit/carton
Master carton	Dimension 500x320x510mm(LxWxH) 12unit/carton

OS

Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows
Safety standard	CCC\ ROHS\CE

www.zywell.net/www.zywell.com

Zy-3311

80mmThermal Linerless Printer

Features

1. Labels with the same roll diameter increase by as much as 65%.
2. Less space is needed for label storage without liner.
3. The transportation cost of labels can be reduced by 35-40% at most.
4. There is no smooth backing paper production environment, and the safety is better.
5. There is no backing paper waste, which has obvious effect of reducing carbon dioxide emission during manufacturing and transportation.





Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Queue function

Model	Zy-3311
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	40mm/58mm/80mm
Memory	RAM: 2M Flash:4M
Interface	U+S+L/U+S+L+BT/U+S+L+W
Print Speed	Max 152mm/s

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode

1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection

Sensors	Paper out, cover open, cutter jam, paper jam and black mark detection

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper

Paper Type	Linerless Paper
Paper Width	Max.79.5±0.5mm/57.5±0.5mm
Paper Thickness	0.06~0.10mm
Roll Dia	Max. Ø 80 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics

Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	195(D)x151(W)x145(H)mm
Net weight	Net weight : 1.2kg Gross weight : 1.8kg

Reliability

Printing head	50KM
Cutter	1.0million

Accessories

Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roll, Paper separator

Packing

Individual box	Dimension 286×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H)12unit/carton

OS

Emulation	TSPL/CPCL/ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy310

80mm Thermal Label Printer

Features

152mm/s high-speed printing
With large paper bin, support the outer diameter of 90mm paper roll.
The self-control temperature print head adopts imported ROHM thermal sensitive film.
Support a variety of interface combinations.
the paper holder of Zy310 is on the same level with printer headso that the paper can come out perfectly without any barrier （no labels left on printer head ）





High definition printing | QR code | Error alert | Big font

Model	Zy310
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	72mm(default)
Memory	RAM：2M Flash: 4M
Interface	U/U+BT/U+W
Print Speed	Min:50.8mm/s Max:152mm/s

Graphics Symbologies	
Character size Graphics Processing	Font 0 ~Font 8 Support BMP/PCX/BAS files

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	CODE128/128M/EAN128/CODE39/39C/39S/CODE 93/EAN13/EAN13+2/EAN13+5 AN8/EAN8+2/EAN8 +5/25/25C/CODABAR/POSTNET/UPC-A/UPCA+2/ UPCA+5/UPC-E/UPCE+2/UPC-E+5/CPOST/MSI/ MSIC/PLESSEY / ITF14 / EAN14
2D	PDF417/QR CODE/DATA MATRIX

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	20-82mm
Paper Thickness	0.06~0.19mm
Roll inner Diameter	25mm~38mm
Roll Dia	Max. Ø 90 mm
Paper off	Tear off

Physical Charateristics	
Working Condition	5°C~45°C, 20%~80%RH
Storage Condition	-40°C-55°C,≤93%RH(40°C)
Dimensions	185(D)X144(W)X131.2(H)mm
Net weight	Net weight: 0.95kg Gross weight: 1.6kg

Reliability	
Printing head	50KM

Accessories	
Accessories	Data cable, Power adaptor, Power cord, CD, Manual, Roll, Paper separator

Packing	
Individual box	Dimension 286x164x160mm(LxWxH) 1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H）12unit/carton

OS	
Emulation	TSPL(Label mode)/ ESC/POS(Receipt mode)
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Zy-3310

80MM Thermal Label Printer

Features

·Support thermal receipt/label printing
·Automatic light sensing paper, accurate printing
· 2MB RAM, 4MB FLASH Memory
·Optional external bracket to support large paper roll
·Adjustable label width 20mm-82mm





Printing | QR code | Big paper roll | Big font | High speed printing

Model	Zy-3310
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	72mm(default)
Memory	RAM：2M Flash: 4M
Interface	U/U+BT/U+W/U+S+L+BT/U+S+L+W
Print Speed	Min:50.8mm/s Max:152mm/s

Graphics Symbologies	
Character size Graphics Processing	Font 0 ~Font 8 Support BMP/PCX/BAS files

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	CODE128/128M/EAN128/CODE39/39C/39S/CODE 93/EAN13/EAN13+2/EAN13+5 AN8/EAN8+2/EAN8 +5/25/25C/CODABAR/POSTNET/UPC-A/UPCA+2/ UPCA+5/UPC-E/UPCE+2/UPC-E+5/CPOST/MSI/ MSIC/PLESSEY / ITF14 / EAN14
2D	PDF417/QR CODE/DATA MATRIX

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper/Thermal label paper
Paper Width	20-83mm
Paper Thickness	0.06~0.19mm
Roll inner Diameter	25mm~38mm
Roll Dia	Max. Ø 83 mm
Paper off	Tear off

Physical Charateristics	
Working Condition	5°C~45°C, 20%~80%RH
Storage Condition	-40°C-55°C,≤93%RH(40°C)
Dimensions	193.5(D)X145(W)X135(H)mm
Net weight	Net weight:1.0kg Gross weight: 1.6kg

Reliability	
Printing head	50KM

Accessories	
Accessories	Data cable, Power adaptor, Power code, CD, manual, Roller, Paper separator

Packing	
Individual box	Dimension 286×164×160mm(L×W×H）1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H）12unit/carton

OS	
Emulation	TSPL(Label mode)/ ESC/POS(Receipt mode)
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-3600

3inch Thermal Label Printer

Features

- Ultra-fast printing
- Customized development for a 3-inch single face
- Clamshell paper design, large opening Angle
- One key multi-function design
- Center printing, suitable for different base paper consumables
- ESC/POS (Epson compatible)





Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Model	Zy-3600
Print Method	Direct Thermal
Resolution	203 dpi(8 points/mm)
Print Speed	50.8-152mm/s
RAM	2M
Flash	4M
Interface	U/U+BT/U+W
Automatic cutter	Optional

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	CODE128/128M/EAN128/CODE39/39C/39S/CODE93/EAN13/EAN13+2/EAN13+5 AN8/EAN8+2/EAN8+5/25/25C/CODABAR/POSTNET/UPC-A/UPCA+2/UPCA+5/ UPC-E/UPCE+2/UPC-E+5/CPOST/MSI/MSIC/PLESSEY/ITF14/EAN14
2D	PDF417/QR CODE/DATA MATRIX

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoelectric sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal receipt paper/thermal label paper
Paper Width	20mm~84mm
Paper Thickness	0.06~0.19mm
Roll Dia	92mm (MAX)
Paper off	Tear off
Media core diameter	25mm ~ 38mm

Physical Charateristics	
Working Condition	5°C~45°C, 20%~80%RH (no condensation)
Storage Condition	-40°C-55°C,≤93%RH(40°C)
Dimensions	186(L)X143(W)X136(H)mm
Net weight	Net weight: 0.85kg Gross weight: 1.5kg

Reliability	
Printing head	50KM
Cutter(option)	0.5 million

Accessories	
Accessories	USB data cable, power adapter, power cord, manual, shelf baffle, roller,Optical disk

Packing	
Individual box	Dimension 286×164×160mm(L×W×H) 1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H) 12unit/carton

OS	
Emulation	TSPL(Lable mode)/ ESC/POS(Receipt mode)
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Zy-3600(Automatic Cutter)

3inch Thermal Label Printer

Features

- Ultra-fast printing
- Customized development for a 3-inch single face
- Clamshell paper design, large opening Angle
- One key multi-function design
- Center printing, suitable for different base paper consumables
- ESC/POS (Epson compatible)





High speed printing | QR code | Automatic paper cutting | Big font

Error alert

Model	Zy-3600(Automatic Cutter)
Print Method	Direct Thermal
Resolution	203 dpi(8 points/mm)
Print Speed	50.8-152mm/s
RAM	2M
Flash	4M
Interface	U+S+L/U+S+L+W/U+S+L+BT
Automatic cutter	Optional

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	CODE128/128M/EAN128/CODE39/39C/39S/CODE93/EAN13/EAN13+2/EAN13+5 AN8/EAN8+2/EAN8+5/25/25C/CODABAR/POSTNET/UPC-A/UPCA+2/UPCA+5/ UPC-E/UPCE+2/UPC-E+5/CPOST/MSI/MSIC/PLESSEY/ITF14/EAN14
2D	PDF417/QR CODE/DATA MATRIX

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoelectric sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal receipt paper/thermal label paper
Paper Width	20mm~84mm
Paper Thickness	0.06~0.19mm
Roll Dia	92mm (MAX)
Paper off	Automatic Cutter
Media core diameter	25mm ~ 38mm

Physical Charateristics	
Working Condition	5°C~45°C, 20%~80%RH (no condensation)
Storage Condition	-40°C-55°C,≤93%RH(40°C)
Dimensions	209(L)X142(W)X135(H)
Net weight	Net weight: 0.85kg Gross weight: 1.5kg

Reliability	
Printing head	50KM
Cutter(option)	1.0million

Accessories	
Accessories	USB data cable, power adapter, power cord, manual, paper shelf, roller

Packing	
Individual box	Dimension 286×164×160mm(L×W×H) 1unit/carton
Master carton	Dimension 615×370×535mm(L×W×H) 12unit/carton

OS	
Emulation	TSPL(Lable mode)/ ESC/POS(Receipt mode)
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Zy-3608

80mm Thermal Label Printer



High speed printing | Two dimensional code printing | Big font | HD printing

Features

·Up to 152 mm/s printing speed, faster and clearer
·Customized development for 3-inch single-sided bills to meet various needs
·Supports free professional tagging software ZLABEL, with a huge library of templates
·One-button multi-function design, professional and efficient solution to printing problems



Model	Zy-3608
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Memory	Input buffer:2M NV Flash: 4M
Interface	U/U+L/U+BT/U+W
Print Speed	50.8mm/s(Min) 152mm/s(Max)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Support
User-defined	Support

Graphics	
Character length	Font 0 ~ Font 8
Expand & Rotate	Bidirectional magnification 1~10x; 0°, 90°, 270°, 360° rotation.
Graphics process	Supports BMP/PCX/BAS files

Barcode	
1D	CODE128、EAN128、ITF、CODE39、CODE93、EAN13、EAN13+2、EAN13+5、EAN8、EAN8+2、EAN8+5、CODABAR、POSTNET、UPC-A、UPCA+2、UPCA+5、UPC-E、UPCE+2、UPC-E+5、CPOST、MSI、MSIC、PLESSEY、ITF14、EAN14
2D	PDF417/QR CODE/DATA MATRIX

Detection	
Print head temperature sensor	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/1.25A

Paper	
Paper Type	Thermal Receipt Paper/Thermal Label Paper
Paper Width	20mm-84mm
Paper Thickness	0.06~0.19mm
Roll Dia	Max. Ø 92 mm
Roll inner Diameter	25mm ~ 38mm
Paper Cut	Tear paper manually

Physical Charateristics	
Working Condition	5°C~45°C, 20%~80%RH(No condensation)
Storage Condition	-40°C-55°C,≤93%RH(40°C)
Dimensions	180(L)x147(W)x134.4(H)mm
Net weight	Net weight: 1.1kg Gross weight: 1.6kg

Reliability	
Printing head	50KM

Accessories	
Accessories	USB data cable, power cord, instruction manual, paper tray, roller

Packing	
Individual box	Dimension 266×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 573×370×535mm(L×W×H)12unit/carton

OS	
Emulation	TSPL(Lable mode)/ ESC/POS(Receipt mode)
Driver	Windows/Linux/Mac
SDK	Android/ iOS/Windows

www.zywell.net/www.zywell.com



Zy-4310

4 inch Label Thermal Printer



High definition printing | Intelligent Positioning | Error alert | Big font

High printing | Rotating screen

Features

- Flip-side cover design for easy paper replacement
- No carbon.no ribbon,no ink.
- Paper bin-less design, available with external stand to supportlarge paper rolls .
- Professional wear-resistant print head, designed for printing.
- Automatic identification, intelligent positioning



Model	Zy-4310
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	108mm(MAX)
Interface	U/U+BT
Print Speed	152 mm(6")/s Max.

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
Memory	8MB Flash Memory/8MB SDRAM

Barcode	
1D	CODE128 / 128M / EAN128 / CODE39 / 39C / 39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 AN8 / EAN8+2 / EAN8+5 / 25 / 25C / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPC-E / UPCE+2 / UPC-E1-5 / CPOST / MSI / MSIC / PLESSEY / ITF14 / EAN14
2D	PDF417/QR CODE/DATA MATRIX

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Paper	
Paper Type	Thermal Label Paper
Paper Width	118mm
Paper Thickness	0.06mm-0.25mm
Label Length	10~1778mm
Label Roll Capacity	127mm(Outer Diameter)

Physical Charateristics	
Working Condition	5~40°C(41~104°F)Humidity: 25 ~ 85% non-condensing
Storage Condition	-40°C-60°C(-41~140°F)Humidity: 10 ~ 90% non-condensing
Dimensions	191(D)x82(W)x84(H)mm
Net weight	Net wight:0.75kg Gross wight:1.75kg

Performance Features	
Processor	32-bit CPU

Reliability	
Warranty	12 months
Printing head	50KM

Accessories	
Accessories	USB data cable, power adapter, power cord, manual, CD,label holder

Packing	
Individual box	Dimension 266×164×160mm(L×W×H)1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton (With external bracket)

OS	
Emulation	TSPL/CPCL/ESC/POS
Driver	Windows/Linux/Mac
SDK	Windows/Android/iOS

www.zywell.net/www.zywell.com

Zy909

4inch Shipping Label Printer



High definition printing | Self-Inspection | Error alert | Big font

High printing | Rotating screen

Features

- no need for carbon transfer ribbon, cost-saving and portable
- Can print 1D barcode, 2D barcode, picture, and text
- 2-4inches super high speed; work with 20-118mm thermal paper width, maximum printing width 108mm
- Auto paper positioning function, print correctly.



Model	Zy909
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	108mm
Interface	U/U+L/U+BT/U+W
Print Speed	152 mm(6")/s Max.

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.

Barcode	
1D	CODE128 / 128M / EAN128 / CODE39 / 39C / 39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 AN8 / EAN8+2 / EAN8+5 / 25 / 25C / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPC-E / UPCE+2 / UPC-E1-5 / CPOST / MSI / MSIC / PLESSEY / ITF14 / EAN14
2D	PDF-417, Maxicode, DataMatrix, QR code

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Detection	
Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Paper	
Paper Type	Thermal Receipt Paper/Thermal Label Paper
Paper Width	118mm
Paper Thickness	0.25mm
Paper off	Tear off

Physical Charateristics	
Working Condition	5~40°C(41~104°F)Humidity: 25 ~ 85% non-condensing
Storage Condition	-40°C-60°C(-41~140°F)Humidity: 10 ~ 90% non-condensing
Dimensions	196.5(D)x115.5(W)x104.5(H)mm
Net weight	1.15kg

Performance Features	
Processor	32-bit CPU
Memory	8MB Flash Memory/ 8MB SDRAM

Reliability	
Warranty	12 months
Printing head	50KM

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Manual ,CD

Packing	
Individual box	Dimension 264×175×172mm 1unit/carton
Master carton	Dimension 565×385×560mm 12unit/carton

OS	
Emulation	TSPL/CPCL/ESC/POS
Driver	Windows/Linux/Mac
SDK	Windows/Android/iOS

Zhuhai Zywell Technology Co., Ltd.

Zy910

4inch Thermal Label Printer

Features

·Compatible with Mobile devices including IOS,Android and Windows.
·Variety interface can be option,USB ,USB+LAN +Serial ,USB+Bluetooth , USB+WIFI
·152mm/s high speed printing
·Support 8MB Flash Memory and 8MB SDRAM





High definition printing | Self-Inspection | Error alert | Big font

High printing | Rotating screen

Model	Zy910
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	108mm
Interface	U/U+S+L/U+BT/U+W/U+S+L+BT/U+S+L+W
Print Speed	Max.152 mm(6")/s

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.

Barcode

1D	CODE128 / 128M / EAN128 / CODE39 / 39C / 39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / EAN8 / EAN8+2 / EAN8+5 / 25 / 25C / CODABAR / POSTNET / UPC-A / UPC-A+2 / UPC-A+5 / UPC-E / UPC-E+2 / UPC-E+5 / CPOST / MSI / MSIC / PLESSEY / ITF14 / EAN14
2D	PDF-417, Maxicode, DataMatrix, QR code

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Detection

Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Paper

Paper Type	Thermal Receipt Paper/Thermal Label Paper
Paper Width	118mm
Paper Thickness	0.25mm
Roll inner Diameter	Max. Ø 110 mm
Paper off	Tear off

Physical Charateristics

Working Condition	5~40°C(41~104°F)Humidity: 25 ~ 85% non-condensing
Storage Condition	-40°C-60°C(-41~140°F)Humidity: 10 ~ 90% non-condensing
Dimensions	221(D)x180(W)x161(H)mm
Net weight	Net weight: 1.4kg Gross weight:2.1kg

Performance Features

Processor	32-bit CPU
Memory	8MB Flash Memory/ 8MB SDRAM

Reliability

Warranty	12 months
Printing head	50KM

Accessories

Accessories	Data cable, Power adaptor, Power cord, Manual ,CD

Packing

Individual box	Dimension 240×240×168mm(L×W×H) 1unit/carton
Master carton	Dimension 520×260×550mm(L×W×H) 6unit/carton

OS

Emulation	TSPL/CPCL/ESC/POS
Driver	Windows/Linux/Mac
SDK	Windows/Android/iOS

www.zywell.net/www.zywell.com

Zy-4600

4inch Thermal Label Printer

Features

·Compatible with Mobile devices including IOS,Android and Windows.
·Variety interface can be option,USB ,USB+Bluetooth
·152mm/s high speed printing
·Support 8MB Flash Memory and 8MB SDRAM





High definition printing | Self-Inspection | Error alert | Big font

High printing | Rotating screen

Model	Zy-4600
Print Method	Direct Thermal
Resolution	203dpi(8dots/mm)
Printing Width	108mm
Interface	U/U+BT
Print Speed	Max.152 mm(6")/s

Fonts

Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.

Barcode

1D	Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13,EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on,MSI, PLESSEY, POSTNET, China POST
2D	PDF-417, Maxicode, DataMatrix, QR code

Power Supply

Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Detection

Sensors	Thermal sensitive resistance
Paper exists detection	Photoeletric sensor

Paper

Paper Type	Thermal Label Paper
Paper Width	118mm
Paper Thickness	0.25mm
Roll inner Diameter	Max. Ø 110 mm
Paper off	Tear off

Physical Charateristics

Working Condition	5~40°C(41~104°F)Humidity: 25 ~ 85% non-condensing
Storage Condition	-40°C-60°C(-41~140°F)Humidity: 10 ~ 90% non-condensing
Dimensions	224(D)x180(W)x161(H)mm
Net weight	Net weight: 1.4kg Gross weight:2.1kg

Performance Features

Processor	32-bit CPU
Memory	8MB Flash Memory/ 8MB SDRAM

Reliability

Warranty	12 months
Printing head	50KM

Accessories

Accessories	Data cable, Power adaptor, Power cord, Manual ,CD

Packing

Individual box	Dimension 240×240×168mm(L×W×H) 1unit/carton
Master carton	Dimension 520×260×550mm(L×W×H) 6unit/carton

OS

Emulation	TSPL/CPCL/ESC/POS
Driver	Windows/Linux/Mac
SDK	Windows/Android/iOS

Zhuhai Zywell Technology Co., Ltd.

Z58-II(Cloud Print)

58MM Thermal Receipt Printer

Features

·Fashion&simple design, small and light
·Support secondary development docking
·Own cloud platform, supports local/cloud printing
·Wireless cloud printing, no distance restrictions, remote multi-point printing



Simple operation | QR code | Small and portable | Big font

Model	Z58-II(Cloud Print)
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	90mm/s
Memory	Input buffer：64k bytes NV Flash:256k bytes
Interface	U+W/U+L+4G

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 45 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	100(D)x100(W)x75(H)mm
Net weight	Net weight：0.35kg Gross weight：0.65kg

Accessories	
Accessories	Paper roll, Power adaptor, Power cord, Data cable, manual

Packing	
Individual box	Dimension 190×130×100mm(L×W×H) 1unit/carton
Master carton	Dimension 605×290×348mm(L×W×H) 18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

www.zywell.net/www.zywell.com

Z58-III(Cloud Print)

58MM Thermal Receipt Printer

Features

·Big gear, durable for long working time
·Cloud printing network, automatic receiving and printing
·Big paper bin for 58mm paper roll
·Remote order printing
·Own cloud platform, supports local/cloud printing



Simple operation | QR code | Small and portable | Big font

Model	Z58-III(Cloud Print)
Print Method	Direct Thermal
Resolution	384dots/line
Printing Width	48mm
Print Speed	100mm/s(MAX)
Memory	Input buffer：64k bytes NV Flash:256k bytes
Interface	U+W

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Reliability	
Printing head	50KM

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 12V/2A

Zhuhai Zywell Technology Co., Ltd.

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.57.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 55 mm
Paper Load	Easy paper loading
Paper Cut	Manual tear

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	149.6(D)x120(W)x116(H)mm
Net weight	Net weight：0.67kg Gross weight :1.1kg

Accessories	
Accessories	Paper roll, Power adaptor, Power cord, Data cable, Manual , Paper shelf , Roller

Packing	
Individual box	Dimension 184×164×135mm(L×W×H) 1unit/carton
Master carton	Dimension 520×405×445mm(L×W×H)18unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zy-T811(Cloud Print)

80mm Thermal Receipt Printer

Features

- Stable cloud printing based on MQTT protocol
- Cloud command delivery, remote printing anytime, anywhere
- Support remote printing, no distance limitation
- Multiple devices online simultaneously, high concurrency
- Complete API docs for easy system integration.



Wall printing | QR code | Automatic paper cutting | Big font

High speed printing | Queue function

Model	Zy-T811(Cloud Print)
Print Method	Direct Thermal
Resolution	203 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (optional)	58mm/80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L/U+S+L+W
(With Voice)	
Print Speed	200mm/s(MAX)

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Print head temperature detection,paper presence detection,liddetection, paper jam detection, sound and light alarm
Function	With voice function, sound and light alarm function

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	58mm//80mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 83 mm
Loading mode	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	165(D)x128(W)x115(H)mm
Net weight	Net weight : 0.85kg Gross weight : 1.6kg

Reliability	
Printing head	150KM
Cutter	1.5million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roller, Paper separator(option)

Packing	
Individual box	Dimension 246×165×150mm(L×W×H)1unit/carton
Master carton	Dimension 520×370×505mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/iOS/Windows

Zhuhai Zywell Technology Co., Ltd.

Performance series

Zy808(Cloud Print)

80mm Thermal POS Printer

Features

- Stable cloud printing based on MQTT protocol
- Cloud command delivery, remote printing anytime, anywhere
- Support remote printing, no distance limitation
- Multiple devices online simultaneously, high concurrency
- Complete API docs for easy system integration.



Wall printing | QR code | Automatic paper cutting | Big font

Error alert

Model	Zy808(Cloud Print)
Print Method	Direct Thermal
Resolution	576 dots/line
Printing Width	80mm(max)/72mm(default)
Paper separator (option)	48mm/52mm/56mm/64mm/68mm/76mm /80mm
Input buffer	256k bytes
NV Flash	256k bytes
Interface	U+S+L/U+L+W
Print Speed	200mm/s

Fonts	
Font A	12x24
Font B	9x17
Chinese	GB18030, BIG5 24x24dots
Japanese/Korea	Optional
User-defined	Support

Barcode	
1D	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODABAR/CODE93/CODE128
2D	QR code

Detection	
Sensors	Paper shortage ,cover open,over heat, cutter stuck

Power Supply	
Input	AC 100V-240V 50/60HZ
Output	DC 24V/2.5A

Paper	
Paper Type	Thermal Receipt Paper
Paper Width	Max.79.5±0.5mm
Paper Thickness	0.06~0.08mm
Roll Dia	Max. Ø 80 mm
Paper Load	Easy paper loading
Paper Cut	Auto-cutter

Physical Charateristics	
Working Condition	0°C~45°C, 10%~80%RH
Storage Condition	-10°C-60°C,10%~90%RH
Dimensions	185(D)×145(W)×134(H) mm
Net weight	Net weight: 1.2kg Gross weight:1.85kg

Reliability	
Printing head	100KM
Cutter	1.0million

Accessories	
Accessories	Data cable, Power adaptor, Power cord, Paper roll, CD, Manual, Roll, Paper separator(option)

Packing	
Individual box	Dimension 266×164×160mm(L×W×H) 1unit/carton
Master carton	Dimension 575×370×535mm(L×W×H)12unit/carton

OS	
Emulation	ESC/POS
Driver	Windows/Linux/Mac
SDK	Android/IOS/Windows

www.zywell.net/www.zywell.com

Zy-4603

Thermal Transfer Desktop Printer



Clear Printing | QR code | Automatic paper cutting | Big font

High speed printing | Error alert

Features

1、Large memory:32M+32M(standard) 128M+128M((expansion)
2、Variety interface, clear printing
3、Compatible with zebra ZPLII commands
4、Abundant optional accessories, outstanding performance, great advantages
5、Rotary cutter,high speed, non-return cutting, no paper jams, long life
6、RFID, good label compatibility, simply operation, low educational cost
7、Support connecting many extended application(barcode scanner, electronic scale etc)

Compatible series

Model Name	Zy-4603		
Printing Resolution	8dots/mm (200DPI)	12dots/mm (300DPI)	24dots/mm (600DPI)
Printing Method	Direct Thermal/Thermal Transfer		
Printing Speed	2~8ips(50.8~203.2mm/s)	1~6ips(25.4.8~152.4mm/s)	1~4ips(25.4.8~101.6mm/s)
Printing Width	MAX 4.1"(104mm)	MAX 4.3"(108mm)	MAX 4.1"(105mm)
Printing Length	MIN 0.2"(4mm) MAX 157.5"(4000mm)	MIN 0.2"(4mm) MAX 118.1.5"(3000mm)	MIN 0.2"(4mm) MAX 39.4"(1000mm)
CPU	500 MHZ, RISC-32位		
Memory	Standard FLASH: 32 MByte SDRAM: 32 MByte Optional: Max. FLASH: 128 MByte SDRAM:128 MByte		
Communication Interface	Standard: •1xUSB 2.0 type-B •1xRJ45 Ethernet (10M/100M) •1xUSBHost (capable of connecting barcode scanners and keyboards) •1xSerial (9pinRS232) Optional: Bluetooth Bluetooth+WiFi(2.4G or 5G) GPIO expasion Real-Time Clock(Support Perpetual Calendar)		
Optional Items	RFID Module Cutting Module Peeling Module Paper roll stand		
Vector font	Support and support mutiple vector fonts download at the same time		
2D Barcodes	QR Code, PDF417,DataMatrix,Maxicode,MircoPDF417,Aztec,Codablock,Code49		
600dpi	High-precision printing, paper size 5mmx5mm(min)		
UsbHost(Standard)	Capable of connecting barcode scanners and keyboards Support download BAS program files, barcode printing, keyboard -input printing		
Com232(Standard)	Optional clock, and it can be externally connected to an electronic scale. Download the BAS program file to the printer, and it supports printing after weighing.		
LCD(Standard)	4.3 - inch industrial - grade TFT liquid - crystal single - point touch capacitive screen. It features 16 - bit RGB color, a resolution of 480*800, and supports TF cards.		





1D Barcodes	CodeBar,Code 11, Code 39, Code 93, Code 128 (subsets A, B, C), UPC-A, UPC-E, UCC-128, Codabar, EAN/JAN-8, EAN/JAN-13, Interleaved 2 of 5,MSI,MSIC, PLESSEY,CPOST,ITF14,EAN14,TELEPEN,PLANET,DPI,DPL,LOGMARS
Rotational Printing	4 direction(0~270°)
Command	Compatible with TSPL-II, ZPL-II
Paper Type	Continuous Paper, Gap Paper, Black -mark Paper, Folded Paper, Perforated Paper
Paper Width	20mm-110mm
Paper Thickness	0.06mm-1.5mm
Ribbon Length	Max 300m
Paper Roll Core Size	25.4mm-38mm
Paper Roll Oute Diameter	Max127mm
Dimensions (L*W*H mm)	Printer: 280*220*168;Individual Box: 370*240*205;Master Carton: 500*390*430
Net Weight	Net Weight: 2.92kg/unit; Gross Weight: 3.47kg/box; Net Weight: 15kg/carton
Housing	ABS+PC Plastic
Certification	3C
Temperature	Working Condition: 5-40°C, 25-85%RH Storage Condition: -40-60°C, 10-90%RH
Items	USB Cable Power Cable Power Adaptor
RFID Charateristics (Optional)	Standard: Support flexible & non-flexible lable /Support intelligent & accurate calibration, with simple operation and no need manual intervention /Support lable protocols EPC Class1 GEN (ISO 18000-6C) EPC Class1 Gen2 (ISO 18000-6C) /Initial label printing functionality, simple operation, high efficiency, minimize usage cost /Compatible with flexible and anti - metal materials, max thickness 1.5mm /RFID printing speed max 4inch/s (Write while printing) /Support UHF lable reading, chip type: Ucode 7、UCODE 7xm-2k、UCODE 8、UCODE 9、Higgs9、Monza4E、M4i、MonzaR6-P、Monza4QT、MonzaM730、MonzaR6、MonzaR6-P、KM4Q、ONLY2 etc. /Support reading TID、EPC、TID+EPC data, writing ASCII、hexadecimal data /It supports the configuration of RFID password for locking and unlocking. It also supports the locking of EPC (Electronic Product Code) and the user area, etc. Additionally, it supports dynamic protection passwords and inactivation passwords. /Automatically print marks for defective labels. You can set the number of reprint labels and the number of times to rewrite the chip.
Cutter Charateristics (Optional)	Standard configuration: Rotary knife (capable of cutting washing labels, ribbons, and silk ribbons). The service life of a 0.1mm thick washing label is not less than 500,000 times.Optional configuration: Guillotine knife (capable of cutting ordinary label paper). The service life of 80g paper is not less than 600,000 times, and that of thick paper used in scenic areas is not less than 300,000 times. /The paper cutting opening is equipped with an electrostatic brush. /It supports paper cutting without retreating and ensures that there is no white line left after printing. /It can cut washing labels with high static electricity without paper curling.

TS31

Wall Mounted Adjustable Tablet Printer Stand

Features

·Support wall hanging function

·Free angle adjustment





Support wall hanging function

Free angle adjustment

Model	TS31
Applicable to tablet	iPad 5(9.7")/iPad 6(9.7")/iPad Air 1(9.7")iPad Pro 10.5"/iPad Air 3(10.5")iPad Air 2(9.7")/ iPad Pro 9.7"iPad 7(10.2")/iPad 8(10.2")/ iPad 9(10.2")/iPad 10(10.9")/iPad Pro 2024(11")
Applicable tablet height	114.5mm~214.5mm
Applicable plate thickness	Below 11.5mm
Maximum supported tablet size	15.9 inches

Function	
Support wall hanging function	Support
Free angle adjustment	180° at the stand/360° at the flat plate

Property	
Adapt to printer size	187.8x155.6x140mm
Product size	410x250x60mm
Wall hanging hole	Wall mounting hole diameter 6.5mm
Color	Black
Material	Cold rolled plate

Packing	
Individual box	Dimension 435×263×70mm(L×W×H)1unit/carton
Master carton	Dimension 455×278×370mm(L×W×H)5unit/carton

Property	
Net weight	2.18kg
Gross weight	2.7kg
Full box weight/ 5 units	14kg

TS32

Wall Mounted Adjustable Tablet Printer Stand

Features

·Support wall hanging function

·Free angle adjustment





Support wall hanging function

Free angle adjustment

Model	TS32
Applicable to tablet	iPad 5(9.7")/iPad 6(9.7")/iPad Air 1(9.7")iPad Pro 10.5"/iPad Air 3(10.5")iPad Air 2(9.7")/ iPad Pro 9.7"iPad 7(10.2")/iPad 8(10.2")/ iPad 9(10.2")/iPad 10(10.9")/iPad Pro 2024(11")/ iPad Pro 2024(13")
Applicable tablet height	115mm~295mm
Applicable plate thickness	Below 11.5mm
Maximum supported tablet size	21.9 inches

Function	
Support wall hanging function	Support
Free angle adjustment	146° rotatable

Property	
Adapt to printer size	147x137x145mm
Product size	139x151x307mm
Wall hanging hole	Wall mounting hole diameter 6.5mm
Color	Black
Material	Cold rolled plate

Packing	
Individual box	Dimension 295×180×185mm(L×W×H)1unit/carton
Master carton	Dimension 560×310×385mm(L×W×H)6unit/carton

Property	
Net weight	2.3kg
Gross weight	2.6kg
Full box weight/ 6 units	16kg

Zy-BS02A

Adjustable tablet printer stand BS02 (Model A) single screen

Features

- Can support multiple tablet sizes
- Free angle adjustment





Various tablet sizes

Free angle adjustment

Model	ZY-BS02A
Applicable to tablet	iPad 5(9.7")/iPad 6(9.7")/iPad Air 1(9.7")iPad Pro 10.5"/iPad Air 3(10.5")iPad Air 2(9.7")/ iPad Pro 9.7"iPad 7(10.2")/iPad 8(10.2")/ iPad 9(10.2")/iPad 10(10.9")/iPad Pro 2024(11")
Applicable tablet height	120.8mm~179.8mm
Applicable plate thickness	Below 7.5mm
Maximum supported tablet size	11 inches

Function	
Support wall hanging function	Not supported
Free angle adjustment	171° rotatable

Property	
Adapt to printer size	197x147.4x150.1mm
Product size	200x343x250mm
Wall hanging hole	None
Color	Black
Material	Cold rolled plate

Packing	
Individual box	Dimension 595×315×510mm(L×W×H)1unit/carton

Property	
Net weight	2.5kg
Gross weight	2.6kg

Zy-BS02B

Adjustable tablet printer stand BS02 (Model B) single screen

Features

- Support wall hanging function
- Free angle adjustment





Various tablet sizes

Free angle adjustment

Model	ZY-BS02B
Applicable to tablet	iPad 5(9.7")/iPad 6(9.7")/iPad Air 1(9.7")iPad Pro 10.5"/iPad Air 3(10.5")iPad Air 2(9.7")/ iPad Pro 9.7"iPad 7(10.2")/iPad 8(10.2")/ iPad 9(10.2")/iPad 10(10.9")/iPad Pro 2024(11")
Applicable tablet height	120.8mm~179.8mm
Applicable plate thickness	Below 7.5mm
Maximum supported tablet size	11 inches

Function	
Support wall hanging function	Not supported
Free angle adjustment	97°/37° rotatable

Property	
Adapt to printer size	197x147.4x150.1mm
Product size	200x343x250mm
Wall hanging hole	None
Color	Black
Material	Cold rolled plate

Packing	
Individual box	Dimension 595×315×510mm(L×W×H)1unit/carton

Property	
Net weight	2.4kg
Gross weight	3.55kg