

An abstract background featuring a complex, symmetrical geometric pattern of thin blue lines. The pattern consists of multiple overlapping, slightly offset hexagonal and polygonal shapes that create a sense of depth and movement, resembling a stylized spiral or a complex optical illusion. The lines are a vibrant blue color against a dark blue background.

2 | 0 | 2 | 3

HITECDAD Outdoor Lighting

Since 1992

www.hitecdad.com



1998-01-01
 1998-01-01
 1998-01-01
 1998-01-01
 1998-01-01
 1998-01-01



1770-1800: The first generation of
 the family.
 1800-1850: The second generation.
 1850-1900: The third generation.
 1900-1950: The fourth generation.
 1950-2000: The fifth generation.



Author: J. L. G. Janssen
Title: J. L. G. Janssen
Address: J. L. G. Janssen
E-mail: j.l.g.janssen@wur.nl



1999-2000: 100%
 2000-2001: 100%
 2001-2002: 100%
 2002-2003: 100%
 2003-2004: 100%
 2004-2005: 100%



2000-01-01
 2000-01-01
 2000-01-01
 2000-01-01
 2000-01-01
 2000-01-01



1998 (see note 2, page 2)
 1999 (see note 2, page 2)
 2000 (see note 2, page 2)
 2001 (see note 2, page 2)
 2002 (see note 2, page 2)
 2003 (see note 2, page 2)



First Ed. very clean
Pages: 200
Language: EN
First Ed. in 1970
Condition: Good



1999: 66, 1999: 66
 1999: 66, 1999: 66
 1999: 66, 1999: 66
 1999: 66, 1999: 66
 1999: 66, 1999: 66
 1999: 66, 1999: 66



© 2000 John Wiley & Sons, Inc.
 0890-4065/00/0000-0000\$10.00
 DOI 10.1002/eqe.1000



2250-46, 2016 03 01
 2250-46, 2016 03 01
 2250-46, 2016 03 01
 2250-46, 2016 03 01
 2250-46, 2016 03 01



1. [What is the difference between a variable and a constant?](#)
 2. [What is the difference between a variable and a constant?](#)
 3. [What is the difference between a variable and a constant?](#)
 4. [What is the difference between a variable and a constant?](#)
 5. [What is the difference between a variable and a constant?](#)



1992-93: 1000
 1993-94: 1000
 1994-95: 1000
 1995-96: 1000
 1996-97: 1000



STOR Inc. 1000 Lakeside Dr.
Suite 1000
Berkeley, CA 94702
Phone: 415/841-4444
Fax: 415/841-4444



1998-1999, 2000-2001, 2002-2003, 2004-2005, 2006-2007, 2008-2009, 2010-2011, 2012-2013, 2014-2015, 2016-2017, 2018-2019, 2020-2021, 2022-2023, 2024-2025, 2026-2027, 2028-2029, 2030-2031, 2032-2033, 2034-2035, 2036-2037, 2038-2039, 2040-2041, 2042-2043, 2044-2045, 2046-2047, 2048-2049, 2050-2051, 2052-2053, 2054-2055, 2056-2057, 2058-2059, 2060-2061, 2062-2063, 2064-2065, 2066-2067, 2068-2069, 2070-2071, 2072-2073, 2074-2075, 2076-2077, 2078-2079, 2080-2081, 2082-2083, 2084-2085, 2086-2087, 2088-2089, 2090-2091, 2092-2093, 2094-2095, 2096-2097, 2098-2099, 2100-2101, 2102-2103, 2104-2105, 2106-2107, 2108-2109, 2110-2111, 2112-2113, 2114-2115, 2116-2117, 2118-2119, 2120-2121, 2122-2123, 2124-2125, 2126-2127, 2128-2129, 2130-2131, 2132-2133, 2134-2135, 2136-2137, 2138-2139, 2140-2141, 2142-2143, 2144-2145, 2146-2147, 2148-2149, 2150-2151, 2152-2153, 2154-2155, 2156-2157, 2158-2159, 2160-2161, 2162-2163, 2164-2165, 2166-2167, 2168-2169, 2170-2171, 2172-2173, 2174-2175, 2176-2177, 2178-2179, 2180-2181, 2182-2183, 2184-2185, 2186-2187, 2188-2189, 2190-2191, 2192-2193, 2194-2195, 2196-2197, 2198-2199, 2200-2201, 2202-2203, 2204-2205, 2206-2207, 2208-2209, 2210-2211, 2212-2213, 2214-2215, 2216-2217, 2218-2219, 2220-2221, 2222-2223, 2224-2225, 2226-2227, 2228-2229, 2230-2231, 2232-2233, 2234-2235, 2236-2237, 2238-2239, 2240-2241, 2242-2243, 2244-2245, 2246-2247, 2248-2249, 2250-2251, 2252-2253, 2254-2255, 2256-2257, 2258-2259, 2260-2261, 2262-2263, 2264-2265, 2266-2267, 2268-2269, 2270-2271, 2272-2273, 2274-2275, 2276-2277, 2278-2279, 2280-2281, 2282-2283, 2284-2285, 2286-2287, 2288-2289, 2290-2291, 2292-2293, 2294-2295, 2296-2297, 2298-2299, 2300-2301, 2302-2303, 2304-2305, 2306-2307, 2308-2309, 2310-2311, 2312-2313, 2314-2315, 2316-2317, 2318-2319, 2320-2321, 2322-2323, 2324-2325, 2326-2327, 2328-2329, 2330-2331, 2332-2333, 2334-2335, 2336-2337, 2338-2339, 2340-2341, 2342-2343, 2344-2345, 2346-2347, 2348-2349, 2350-2351, 2352-2353, 2354-2355, 2356-2357, 2358-2359, 2360-2361, 2362-2363, 2364-2365, 2366-2367, 2368-2369, 2370-2371, 2372-2373, 2374-2375, 2376-2377, 2378-2379, 2380-2381, 2382-2383, 2384-2385, 2386-2387, 2388-2389, 2390-2391, 2392-2393, 2394-2395, 2396-2397, 2398-2399, 2400-2401, 2402-2403, 2404-2405, 2406-2407, 2408-2409, 2410-2411, 2412-2413, 2414-2415, 2416-2417, 2418-2419, 2420-2421, 2422-2423, 2424-2425, 2426-2427, 2428-2429, 2430-2431, 2432-2433, 2434-2435, 2436-2437, 2438-2439, 2440-2441, 2442-2443, 2444-2445, 2446-2447, 2448-2449, 2450-2451, 2452-2453, 2454-2455, 2456-2457, 2458-2459, 2460-2461, 2462-2463, 2464-2465, 2466-2467, 2468-2469, 2470-2471, 2472-2473, 2474-2475, 2476-2477, 2478-2479, 2480-2481, 2482-2483, 2484-2485, 2486-2487, 2488-2489, 2490-2491, 2492-2493, 2494-2495, 2496-2497, 2498-2499, 2500-2501, 2502-2503, 2504-2505, 2506-2507, 2508-2509, 2510-2511, 2512-2513, 2514-2515, 2516-2517, 2518-2519, 2520-2521, 2522-2523, 2524-2525, 2526-2527, 2528-2529, 2530-2531, 2532-2533, 2534-2535, 2536-2537, 2538-2539, 2540-2541, 2542-2543, 2544-2545, 2546-2547, 2548-2549, 2550-2551, 2552-2553, 2554-2555, 2556-2557, 2558-2559, 2560-2561, 2562-2563, 2564-2565, 2566-2567, 2568-2569, 2570-2571, 2572-2573, 2574-2575, 2576-2577, 2578-2579, 2580-2581, 2582-2583, 2584-2585, 2586-2587, 2588-2589, 2590-2591, 2592-2593, 2594-2595, 2596-2597, 2598-2599, 2600-2601, 2602-2603, 2604-2605, 2606-2607, 2608-2609, 2610-2611, 2612-2613, 2614-2615, 2616-2617, 2618-2619, 2620-2621, 2622-2623, 2624-2625, 2626-2627, 2628-2629, 2630-2631, 2632-2633, 2634-2635, 2636-2637, 2638-2639, 2640-2641, 2642-2643, 2644-2645, 2646-2647, 2648-2649, 2650-2651, 2652-2653, 2654-2655, 2656-2657, 2658-2659, 2660-2661, 2662-2663, 2664-2665, 2666-2667, 2668-2669, 2670-2671, 2672-2673, 2674-2675, 2676-2677, 2678-2679, 2680-2681, 2682-2683, 2684-2685, 2686-2687, 2688-2689, 2690-2691, 2692-2693, 2694-2695, 2696-2697, 2698-2699, 2700-2701, 2702-2703, 2704-2705, 2706-2707, 2708-2709, 2710-2711, 2712-2713, 2714-2715, 2716-2717, 2718-2719, 2720-2721, 2722-2723, 2724-2725, 2726-2727, 2728-2729, 2730-2731, 2732-2733, 2734-2735, 2736-2737, 2738-2739, 2740-2741, 27



Title: <http://dx.doi.org/10.1007/s10670-010-9200-0>
 Issue: September 2010
 Pages: 1-10
 Keywords: *depression, self-esteem, self-worth, self-concept, self-identity*
 URL: <http://www.springerlink.com>



1750 (44, 100-1,000,000)
 1751 (44, 100-1,000,000)
 1752 (44, 100-1,000,000)
 1753 (44, 100-1,000,000)
 1754 (44, 100-1,000,000)



• 基本信息

ITEM NO.	REF. ELEMENTS ELEMENTS		
SIZE	Ø120*1800mm	Ø120*1800mm	Ø120*1800mm
CCT	3000K(WWW)		
WATTAGE	12W		
MATERIAL	ALUMINUM/PC/PMMA		
DATA SHEET	ALUMINUM/PC/PMMA		
COLOR	BLACK/GRAY/WHITE		

This series of outdoor lights is designed to provide a warm white glow, suitable for outdoor lighting and landscape lighting. The light is made of high-quality aluminum and PC/PMMA, which can withstand outdoor weather conditions. The light is made of high-quality aluminum and PC/PMMA, which can withstand outdoor weather conditions.

FRONT VIEW



FRONT VIEW



• 产品尺寸







• 基本信息

ITEM NO	HCO-CL20211017/1817		
SIZE	1000*4000mm	1000*2000mm	1000*1000mm
CC7	10000 (国内)		
1000*4000	75%		
1000*2000	AC208/AC240		
Material	Aluminum		
Color	Black/gray/white		

The shape of the frame can be used directly and placed in the other wall, designed with LED lighting, the surface, top and bottom of the frame and the wall are connected, which can be used for the decorative lighting of the wall and the ceiling, and the wall, ceiling and floor.



• 产品尺寸

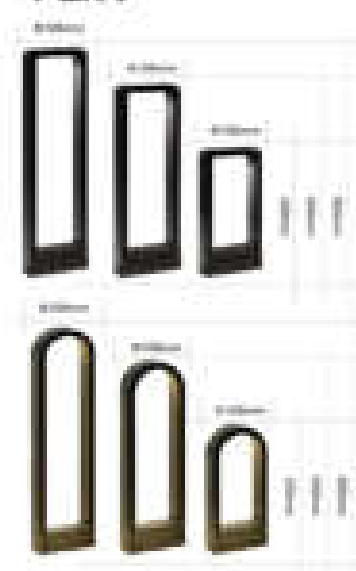



● 基本信息

ITEM NO.	HTL-CL-001006	HTL-CL-001006-1	
SIZE	Φ110	Φ120	Φ140
SIZE	6000/4000/3000		
WATTAGE	7W		
VOLTAGE	AC220V/50HZ		
MATERIAL	Aluminum		
COLOUR	Black/Gray/White		

Our design of new outdoor lighting with better performance in the most great technology and with lighting and getting the best performance of the landscape and garden decoration. With the use of the advanced lighting of the product at night, garden will become a new scene.

Accessories




Accessories




● 产品尺寸








1996-1997: 1996-1997
 1997-1998: 1997-1998
 1998-1999: 1998-1999
 1999-2000: 1999-2000
 2000-2001: 2000-2001
 2001-2002: 2001-2002
 2002-2003: 2002-2003
 2003-2004: 2003-2004
 2004-2005: 2004-2005
 2005-2006: 2005-2006
 2006-2007: 2006-2007
 2007-2008: 2007-2008
 2008-2009: 2008-2009
 2009-2010: 2009-2010
 2010-2011: 2010-2011
 2011-2012: 2011-2012
 2012-2013: 2012-2013
 2013-2014: 2013-2014
 2014-2015: 2014-2015
 2015-2016: 2015-2016
 2016-2017: 2016-2017
 2017-2018: 2017-2018
 2018-2019: 2018-2019
 2019-2020: 2019-2020
 2020-2021: 2020-2021
 2021-2022: 2021-2022
 2022-2023: 2022-2023
 2023-2024: 2023-2024
 2024-2025: 2024-2025
 2025-2026: 2025-2026
 2026-2027: 2026-2027
 2027-2028: 2027-2028
 2028-2029: 2028-2029
 2029-2030: 2029-2030
 2030-2031: 2030-2031
 2031-2032: 2031-2032
 2032-2033: 2032-2033
 2033-2034: 2033-2034
 2034-2035: 2034-2035
 2035-2036: 2035-2036
 2036-2037: 2036-2037
 2037-2038: 2037-2038
 2038-2039: 2038-2039
 2039-2040: 2039-2040
 2040-2041: 2040-2041
 2041-2042: 2041-2042
 2042-2043: 2042-2043
 2043-2044: 2043-2044
 2044-2045: 2044-2045
 2045-2046: 2045-2046
 2046-2047: 2046-2047
 2047-2048: 2047-2048
 2048-2049: 2048-2049
 2049-2050: 2049-2050
 2050-2051: 2050-2051
 2051-2052: 2051-2052
 2052-2053: 2052-2053
 2053-2054: 2053-2054
 2054-2055: 2054-2055
 2055-2056: 2055-2056
 2056-2057: 2056-2057
 2057-2058: 2057-2058
 2058-2059: 2058-2059
 2059-2060: 2059-2060
 2060-2061: 2060-2061
 2061-2062: 2061-2062
 2062-2063: 2062-2063
 2063-2064: 2063-2064
 2064-2065: 2064-2065
 2065-2066: 2065-2066
 2066-2067: 2066-2067
 2067-2068: 2067-2068
 2068-2069: 2068-2069
 2069-2070: 2069-2070
 2070-2071: 2070-2071
 2071-2072: 2071-2072
 2072-2073: 2072-2073
 2073-2074: 2073-2074
 2074-2075: 2074-2075
 2075-2076: 2075-2076
 2076-2077: 2076-2077
 2077-2078: 2077-2078
 2078-2079: 2078-2079
 2079-2080: 2079-2080
 2080-2081: 2080-2081
 2081-2082: 2081-2082
 2082-2083: 2082-2083
 2083-2084: 2083-2084
 2084-2085: 2084-2085
 2085-2086: 2085-2086
 2086-2087: 2086-2087
 2087-2088: 2087-2088
 2088-2089: 2088-2089
 2089-2090: 2089-2090
 2090-2091: 2090-2091
 2091-2092: 2091-2092
 2092-2093: 2092-2093
 2093-2094: 2093-2094
 2094-2095: 2094-2095
 2095-2096: 2095-2096
 2096-2097: 2096-2097
 2097-2098: 2097-2098
 2098-2099: 2098-2099
 2099-2100: 2099-2100
 2100-2101: 2100-2101
 2101-2102: 2101-2102
 2102-2103: 2102-2103
 2103-2104: 2103-2104
 2104-2105: 2104-2105
 2105-2106: 2105-2106
 2106-2107: 2106-2107
 2107-2108: 2107-2108
 2108-2109: 2108-2109
 2109-2110: 2109-2110
 2110-2111: 2110-2111
 2111-2112: 2111-2112
 2112-2113: 2112-2113
 2113-2114: 2113-2114
 2114-2115: 2114-2115
 2115-2116: 2115-2116
 2116-2117: 2116-2117
 2117-2118: 2117-2118
 2118-2119: 2118-2119
 2119-2120: 2119-2120
 2120-2121: 2120-2121
 2121-2122: 2121-2122
 2122-2123: 2122-2123
 2123-2124: 2123-2124
 2124-2125: 2124-2125
 2125-2126: 2125-2126
 2126-2127: 2126-2127
 2127-2128: 2127-2128
 2128-2129: 2128-2129
 2129-2130: 2129-2130
 2130-2131: 2130-2131
 2131-2132: 2131-2132
 2132-2133: 2132-2133
 2133-2134: 2133-2134
 2134-2135: 2134-2135
 2135-2136: 2135-2136
 2136-2137: 2136-2137
 2137-2138: 2137-2138
 2138-2139: 2138-2139
 2139-2140: 2139-2140
 2140-2141: 2140-2141
 2141-2142: 2141-2142
 2142-2143: 2142-2143
 2143-2144: 2143-2144
 2144-2145: 2144-2145
 2145-2146: 2145-2146
 2146-2147: 2146-2147
 2147-2148: 2147-2148
 2148-2149: 2148-2149
 2149-2150: 2149-2150
 2150-2151: 2150-2151
 2151-2152: 2151-2152
 2152-2153: 2152-2153
 2153-2154: 2153-2154
 2154-2155: 2154-2155
 2155-2156: 2155-2156
 2156-2157: 2156-2157
 2157-2158: 2157-2158
 2158-2159: 2158-2159
 2159-2160: 2159-




7700 N. 11th St., Suite 100
 Lynn, MA 01904
 Telephone: 617-552-1100
 Fax: 617-552-1101
 E-mail: info@lucy.com

[illegible]


1998-1999: 1998-1999
 1999-2000: 1999-2000
 2000-2001: 2000-2001
 2001-2002: 2001-2002
 2002-2003: 2002-2003
 2003-2004: 2003-2004
 2004-2005: 2004-2005
 2005-2006: 2005-2006
 2006-2007: 2006-2007
 2007-2008: 2007-2008
 2008-2009: 2008-2009
 2009-2010: 2009-2010
 2010-2011: 2010-2011
 2011-2012: 2011-2012
 2012-2013: 2012-2013
 2013-2014: 2013-2014
 2014-2015: 2014-2015
 2015-2016: 2015-2016
 2016-2017: 2016-2017
 2017-2018: 2017-2018
 2018-2019: 2018-2019
 2019-2020: 2019-2020
 2020-2021: 2020-2021
 2021-2022: 2021-2022
 2022-2023: 2022-2023
 2023-2024: 2023-2024
 2024-2025: 2024-2025
 2025-2026: 2025-2026
 2026-2027: 2026-2027
 2027-2028: 2027-2028
 2028-2029: 2028-2029
 2029-2030: 2029-2030
 2030-2031: 2030-2031
 2031-2032: 2031-2032
 2032-2033: 2032-2033
 2033-2034: 2033-2034
 2034-2035: 2034-2035
 2035-2036: 2035-2036
 2036-2037: 2036-2037
 2037-2038: 2037-2038
 2038-2039: 2038-2039
 2039-2040: 2039-2040
 2040-2041: 2040-2041
 2041-2042: 2041-2042
 2042-2043: 2042-2043
 2043-2044: 2043-2044
 2044-2045: 2044-2045
 2045-2046: 2045-2046
 2046-2047: 2046-2047
 2047-2048: 2047-2048
 2048-2049: 2048-2049
 2049-2050: 2049-2050
 2050-2051: 2050-2051
 2051-2052: 2051-2052
 2052-2053: 2052-2053
 2053-2054: 2053-2054
 2054-2055: 2054-2055
 2055-2056: 2055-2056
 2056-2057: 2056-2057
 2057-2058: 2057-2058
 2058-2059: 2058-2059
 2059-2060: 2059-2060
 2060-2061: 2060-2061
 2061-2062: 2061-2062
 2062-2063: 2062-2063
 2063-2064: 2063-2064
 2064-2065: 2064-2065
 2065-2066: 2065-2066
 2066-2067: 2066-2067
 2067-2068: 2067-2068
 2068-2069: 2068-2069
 2069-2070: 2069-2070
 2070-2071: 2070-2071
 2071-2072: 2071-2072
 2072-2073: 2072-2073
 2073-2074: 2073-2074
 2074-2075: 2074-2075
 2075-2076: 2075-2076
 2076-2077: 2076-2077
 2077-2078: 2077-2078
 2078-2079: 2078-2079
 2079-2080: 2079-2080
 2080-2081: 2080-2081
 2081-2082: 2081-2082
 2082-2083: 2082-2083
 2083-2084: 2083-2084
 2084-2085: 2084-2085
 2085-2086: 2085-2086
 2086-2087: 2086-2087
 2087-2088: 2087-2088
 2088-2089: 2088-2089
 2089-2090: 2089-2090
 2090-2091: 2090-2091
 2091-2092: 2091-2092
 2092-2093: 2092-2093
 2093-2094: 2093-2094
 2094-2095: 2094-2095
 2095-2096: 2095-2096
 2096-2097: 2096-2097
 2097-2098: 2097-2098
 2098-2099: 2098-2099
 2099-2100: 2099-2100
 2100-2101: 2100-2101
 2101-2102: 2101-2102
 2102-2103: 2102-2103
 2103-2104: 2103-2104
 2104-2105: 2104-2105
 2105-2106: 2105-2106
 2106-2107: 2106-2107
 2107-2108: 2107-2108
 2108-2109: 2108-2109
 2109-2110: 2109-2110
 2110-2111: 2110-2111
 2111-2112: 2111-2112
 2112-2113: 2112-2113
 2113-2114: 2113-2114
 2114-2115: 2114-2115
 2115-2116: 2115-2116
 2116-2117: 2116-2117
 2117-2118: 2117-2118
 2118-2119: 2118-2119
 2119-2120: 2119-2120
 2120-2121: 2120-2121
 2121-2122: 2121-2122
 2122-2123: 2122-2123
 2123-2124: 2123-2124
 2124-2125: 2124-2125
 2125-2126: 2125-2126
 2126-2127: 2126-2127
 2127-2128: 2127-2128
 2128-2129: 2128-2129
 2129-2130: 2129-2130
 2130-2131: 2130-2131
 2131-2132: 2131-2132
 2132-2133: 2132-2133
 2133-2134: 2133-2134
 2134-2135: 2134-2135
 2135-2136: 2135-2136
 2136-2137: 2136-2137
 2137-2138: 2137-2138
 2138-2139: 2138-2139
 2139-2140: 2139-2140
 2140-2141: 2140-2141
 2141-2142: 2141-2142
 2142-2143: 2142-2143
 2143-2144: 2143-2144
 2144-2145: 2144-2145
 2145-2146: 2145-2146
 2146-2147: 2146-2147
 2147-2148: 2147-2148
 2148-2149: 2148-2149
 2149-2150: 2149-2150
 2150-2151: 2150-2151
 2151-2152: 2151-2152
 2152-2153: 2152-2153
 2153-2154: 2153-2154
 2154-2155: 2154-2155
 2155-2156: 2155-2156
 2156-2157: 2156-2157
 2157-2158: 2157-2158
 2158-2159: 2158-2159
 2159-2160: 2159-2160
 2160-2161: 2160-2161
 2161-2162: 2161-



1996, pp. 1070-1072
 doi:10.1017/S0022292400000000
 Copyright © 1996
 Cambridge University Press
 Printed in the United Kingdom



1998-99: 100-100 (100%)
 1999-00: 100-100 (100%)
 2000-01: 100-100 (100%)
 2001-02: 100-100 (100%)
 2002-03: 100-100 (100%)
 2003-04: 100-100 (100%)
 2004-05: 100-100 (100%)
 2005-06: 100-100 (100%)
 2006-07: 100-100 (100%)
 2007-08: 100-100 (100%)
 2008-09: 100-100 (100%)
 2009-10: 100-100 (100%)
 2010-11: 100-100 (100%)
 2011-12: 100-100 (100%)
 2012-13: 100-100 (100%)
 2013-14: 100-100 (100%)
 2014-15: 100-100 (100%)
 2015-16: 100-100 (100%)
 2016-17: 100-100 (100%)
 2017-18: 100-100 (100%)
 2018-19: 100-100 (100%)
 2019-20: 100-100 (100%)
 2020-21: 100-100 (100%)
 2021-22: 100-100 (100%)
 2022-23: 100-100 (100%)
 2023-24: 100-100 (100%)
 2024-25: 100-100 (100%)
 2025-26: 100-100 (100%)
 2026-27: 100-100 (100%)
 2027-28: 100-100 (100%)
 2028-29: 100-100 (100%)
 2029-30: 100-100 (100%)
 2030-31: 100-100 (100%)
 2031-32: 100-100 (100%)
 2032-33: 100-100 (100%)
 2033-34: 100-100 (100%)
 2034-35: 100-100 (100%)
 2035-36: 100-100 (100%)
 2036-37: 100-100 (100%)
 2037-38: 100-100 (100%)
 2038-39: 100-100 (100%)
 2039-40: 100-100 (100%)
 2040-41: 100-100 (100%)
 2041-42: 100-100 (100%)
 2042-43: 100-100 (100%)
 2043-44: 100-100 (100%)
 2044-45: 100-100 (100%)
 2045-46: 100-100 (100%)
 2046-47: 100-100 (100%)
 2047-48: 100-100 (100%)
 2048-49: 100-100 (100%)
 2049-50: 100-100 (100%)
 2050-51: 100-100 (100%)
 2051-52: 100-100 (100%)
 2052-53: 100-100 (100%)
 2053-54: 100-100 (100%)
 2054-55: 100-100 (100%)
 2055-56: 100-100 (100%)
 2056-57: 100-100 (100%)
 2057-58: 100-100 (100%)
 2058-59: 100-100 (100%)
 2059-60: 100-100 (100%)
 2060-61: 100-100 (100%)
 2061-62: 100-100 (100%)
 2062-63: 100-100 (100%)
 2063-64: 100-100 (100%)
 2064-65: 100-100 (100%)
 2065-66: 100-100 (100%)
 2066-67: 100-100 (100%)
 2067-68: 100-100 (100%)
 2068-69: 100-100 (100%)
 2069-70: 100-100 (100%)
 2070-71: 100-100 (100%)
 2071-72: 100-100 (100%)
 2072-73: 100-100 (100%)
 2073-74: 100-100 (100%)
 2074-75: 100-100 (100%)
 2075-76: 100-100 (100%)
 2076-77: 100-100 (100%)
 2077-78: 100-100 (100%)
 2078-79: 100-100 (100%)
 2079-80: 100-100 (100%)
 2080-81: 100-100 (100%)
 2081-82: 100-100 (100%)
 2082-83: 100-100 (100%)
 2083-84: 100-100 (100%)
 2084-85: 100-100 (100%)
 2085-86: 100-100 (100%)
 2086-87: 100-100 (100%)
 2087-88: 100-100 (100%)
 2088-89: 100-100 (100%)
 2089-90: 100-100 (100%)
 2090-91: 100-100 (100%)
 2091-92: 100-100 (100%)
 2092-93: 100-100 (100%)
 2093-94: 100-100 (100%)
 2094-95: 100-100 (100%)
 2095-96: 100-100 (100%)
 2096-97: 100-100 (100%)
 2097-98: 100-100 (100%)
 2098-99: 100-100 (100%)
 2099-00: 100-100 (100%)
 2100-01: 100-100 (100%)
 2101-02: 100-100 (100%)
 2102-03: 100-100 (100%)
 2103-04: 100-100 (100%)
 2104-05: 100-100 (100%)
 2105-06: 100-100 (100%)
 2106-07: 100-100 (100%)
 2107-08: 100-100 (100%)
 2108-09: 100-100 (100%)
 2109-10: 100-100 (100%)
 2110-11: 100-100 (100%)
 2111-12: 100-100 (100%)
 2112-13: 100-100 (100%)
 2113-14: 100-100 (100%)
 2114-15: 100-100 (100%)
 2115-16: 100-100 (100%)
 2116-17: 100-100 (100%)
 2117-18: 100-100 (100%)
 2118-19: 100-100 (100%)
 2119-20: 100-100 (100%)
 2120-21: 100-100 (100%)
 2121-22: 100-100 (100%)
 2122-23: 100-100 (100%)
 2123-24: 100-100 (100%)
 2124-25: 100-100 (100%)
 2125-26: 100-100 (100%)
 2126-27: 100-100 (100%)
 2127-28: 100-100 (100%)
 2128-29: 100-100 (100%)
 2129-30: 100-100 (100%)
 2130-31: 100-100 (100%)
 2131-32: 100-100 (100%)
 2132-33: 100-100 (100%)
 2133-34: 100-100 (100%)
 2134-35: 100-100 (100%)
 2135-36: 100-100 (100%)
 2136-37: 100-100 (100%)
 2137-38: 100-100 (100%)
 2138-39: 100-100 (100%)
 2139-40: 100-100 (100%)
 2140-41: 100-100 (100%)
 2141-42: 100-100 (100%)
 2142-43: 100-100 (100%)
 2143-44: 100-100 (100%)
 2144-45: 100-100 (100%)
 2145-46: 100-100 (100%)
 2146-47: 100-100 (100%)
 2147-48: 100-100 (100%)
 2148-49: 100-100 (100%)
 2149-50: 100-1

[illegible]


THE NEW YORK UNIVERSITY
LIBRARY
100 EAST 4TH STREET
NEW YORK, NY 10003
Tel: (212) 998-3000
Fax: (212) 998-3000



(202) 551-1276 (toll-free)
 Fax: (202) 551-1276
 Mailing: 202 551-1276
 Mailing: 202 551-1276
 Mailing: 202 551-1276
 Mailing: 202 551-1276

[illegible]

1970-71, 1971-72, 1972-73
 1973-74, 1974-75, 1975-76, 1976-77
 1977-78, 1978-79
 1979-80, 1980-81, 1981-82
 1982-83, 1983-84, 1984-85
 1985-86, 1986-87, 1987-88
 1988-89, 1989-90, 1990-91
 1991-92, 1992-93, 1993-94
 1994-95, 1995-96, 1996-97
 1997-98, 1998-99, 1999-00
 2000-01, 2001-02, 2002-03
 2003-04, 2004-05, 2005-06
 2006-07, 2007-08, 2008-09
 2009-10, 2010-11, 2011-12
 2012-13, 2013-14, 2014-15
 2015-16, 2016-17, 2017-18
 2018-19, 2019-20, 2020-21
 2021-22, 2022-23, 2023-24
 2024-25, 2025-26, 2026-27
 2027-28, 2028-29, 2029-30
 2030-31, 2031-32, 2032-33
 2033-34, 2034-35, 2035-36
 2036-37, 2037-38, 2038-39
 2039-40, 2040-41, 2041-42
 2042-43, 2043-44, 2044-45
 2045-46, 2046-47, 2047-48
 2048-49, 2049-50, 2050-51
 2051-52, 2052-53, 2053-54
 2054-55, 2055-56, 2056-57
 2057-58, 2058-59, 2059-60
 2060-61, 2061-62, 2062-63
 2063-64, 2064-65, 2065-66
 2066-67, 2067-68, 2068-69
 2069-70, 2070-71, 2071-72
 2072-73, 2073-74, 2074-75
 2075-76, 2076-77, 2077-78
 2078-79, 2079-80, 2080-81
 2081-82, 2082-83, 2083-84
 2084-85, 2085-86, 2086-87
 2087-88, 2088-89, 2089-90
 2090-91, 2091-92, 2092-93
 2093-94, 2094-95, 2095-96
 2096-97, 2097-98, 2098-99
 2099-00, 2100-01, 2101-02
 2102-03, 2103-04, 2104-05
 2105-06, 2106-07, 2107-08
 2108-09, 2109-10, 2110-11
 2111-12, 2112-13, 2113-14
 2114-15, 2115-16, 2116-17
 2117-18, 2118-19, 2119-20
 2120-21, 2121-22, 2122-23
 2123-24, 2124-25, 2125-26
 2126-27, 2127-28, 2128-29
 2129-30, 2130-31, 2131-32
 2132-33, 2133-34, 2134-35
 2135-36, 2136-37, 2137-38
 2138-39, 2139-40, 2140-41
 2141-42, 2142-43, 2143-44
 2144-45, 2145-46, 2146-47
 2147-48, 2148-49, 2149-50
 2150-51, 2151-52, 2152-53
 2153-54, 2154-55, 2155-56
 2156-57, 2157-58, 2158-59
 2159-60, 2160-61, 2161-62
 2162-63, 2163-64, 2164-65
 2165-66, 2166-67, 2167-68
 2168-69, 2169-70, 2170-71
 2171-72, 2172-73, 2173-74
 2174-75, 2175-76, 2176-77
 2177-78, 2178-79, 2179-80
 2180-81, 2181-82, 2182-83
 2183-84, 2184-85, 2185-86
 2186-87, 2187-88, 2188-89
 2189-90, 2190-91, 2191-92
 2192-93, 2193-94, 2194-95
 2195-96, 2196-97, 2197-98
 2198-99, 2199-00, 2200-01
 2201-02, 2202-03, 2203-04
 2204-05, 2205-06, 2206-07
 2207-08, 2208-09, 2209-10
 2210-11, 2211-12, 2212-13
 2213-14, 2214-15, 2215-16
 2216-17, 2217-18, 2218-19
 2219-20, 2220-21, 2221-22
 2222-23, 2223-24, 2224-25
 2225-26, 2226-27, 2227-28
 2228-29, 2229-30, 2230-31
 2231-32, 2232-33, 2233-34
 2234-35, 2235-36, 2236-37
 2237-38, 2238-39, 2239-40
 2240-41, 2241-42, 2242-43
 2243-44, 2244-45, 2245-46
 2246-47, 2247-48, 2248-49
 2249-50, 2250-51, 2251-52
 2252-53, 2253-54, 2254-55
 2255-56, 2256-57, 2257-58
 2258-59, 2259-60, 2260-61
 2261-62, 2262-63, 2263-64
 2264-65, 2265-66, 2266-67
 2267-68, 2268-69, 2269-70
 2270-71, 2271-72, 2272-73
 2273-74, 2274-75, 2275-76
 2276-77, 2277-78, 2278-79
 2279-80, 2280-81, 2281-82
 2282-83, 2283-84, 2284-85
 2285-86, 2286-87, 2287-88
 2288-89, 2289-90, 2290-91
 2291-92, 2292-93, 2293-94
 2294-95, 2295-96, 2296-97
 2297-98, 2298-99, 2299-00
 2300-01, 2301-02, 2302-03
 2303-04, 2304-05, 2305-06
 2306-07, 2307-08, 2308-09
 2309-10, 2310-11, 2311-12
 2312-13, 2313-14, 2314-15
 2315-16, 2316-17, 2317-18
 2318-19, 2319-20, 2320-21
 2321-22, 2322-23, 2323-24
 2324-25, 2325-26, 2326-27
 2327-28, 2328-29, 2329-30
 2330-31, 2331-32, 2332-33
 2333-34, 2334-35, 2335-36
 2336-37, 2337-38, 2338-39
 2339-40, 2340-41, 2341-42
 2342-43, 2343-44, 2344-45
 2345-46, 2346-47, 2347-48
 2348-49, 2349-50, 2350-51
 2351-52, 2352-53, 2353-54
 2354-55, 2355-56, 2356-57
 2357-58, 2358-59, 2359-60
 2360-61, 2361-62, 2362-63
 2363-64, 2364-65, 2365-66
 2366-67, 2367-68, 2368-69
 2369-70, 2370-71, 2371-72
 2372-73, 2373-74, 2374-75
 2375-76, 2376-77, 2377-78
 2378-79, 2379-




1998-1999: 25000
1999-2000: 25000
2000-2001: 25000
2001-2002: 25000
2002-2003: 25000
2003-2004: 25000
2004-2005: 25000
2005-2006: 25000
2006-2007: 25000
2007-2008: 25000
2008-2009: 25000
2009-2010: 25000
2010-2011: 25000
2011-2012: 25000
2012-2013: 25000
2013-2014: 25000
2014-2015: 25000
2015-2016: 25000
2016-2017: 25000
2017-2018: 25000
2018-2019: 25000
2019-2020: 25000
2020-2021: 25000
2021-2022: 25000
2022-2023: 25000
2023-2024: 25000
2024-2025: 25000
2025-2026: 25000
2026-2027: 25000
2027-2028: 25000
2028-2029: 25000
2029-2030: 25000
2030-2031: 25000
2031-2032: 25000
2032-2033: 25000
2033-2034: 25000
2034-2035: 25000
2035-2036: 25000
2036-2037: 25000
2037-2038: 25000
2038-2039: 25000
2039-2040: 25000
2040-2041: 25000
2041-2042: 25000
2042-2043: 25000
2043-2044: 25000
2044-2045: 25000
2045-2046: 25000
2046-2047: 25000
2047-2048: 25000
2048-2049: 25000
2049-2050: 25000
2050-2051: 25000
2051-2052: 25000
2052-2053: 25000
2053-2054: 25000
2054-2055: 25000
2055-2056: 25000
2056-2057: 25000
2057-2058: 25000
2058-2059: 25000
2059-2060: 25000
2060-2061: 25000
2061-2062: 25000
2062-2063: 25000
2063-2064: 25000
2064-2065: 25000
2065-2066: 25000
2066-2067: 25000
2067-2068: 25000
2068-2069: 25000
2069-2070: 25000
2070-2071: 25000
2071-2072: 25000
2072-2073: 25000
2073-2074: 25000
2074-2075: 25000
2075-2076: 25000
2076-2077: 25000
2077-2078: 25000
2078-2079: 25000
2079-2080: 25000
2080-2081: 25000
2081-2082: 25000
2082-2083: 25000
2083-2084: 25000
2084-2085: 25000
2085-2086: 25000
2086-2087: 25000
2087-2088: 25000
2088-2089: 25000
2089-2090: 25000
2090-2091: 25000
2091-2092: 25000
2092-2093: 25000
2093-2094: 25000
2094-2095: 25000
2095-2096: 25000
2096-2097: 25000
2097-2098: 25000
2098-2099: 25000
2099-2100: 25000
2100-2101: 25000
2101-2102: 25000
2102-2103: 25000
2103-2104: 25000
2104-2105: 25000
2105-2106: 25000
2106-2107: 25000
2107-2108: 25000
2108-2109: 25000
2109-2110: 25000
2110-2111: 25000
2111-2112: 25000
2112-2113: 25000
2113-2114: 25000
2114-2115: 25000
2115-2116: 25000
2116-2117: 25000
2117-2118: 25000
2118-2119: 25000
2119-2120: 25000
2120-2121: 25000
2121-2122: 25000
2122-2123: 25000
2123-2124: 25000
2124-2125: 25000
2125-2126: 25000
2126-2127: 25000
2127-2128: 25000
2128-2129: 25000
2129-2130: 25000
2130-2131: 25000
2131-2132: 25000
2132-2133: 25000
2133-2134: 25000
2134-2135: 25000
2135-2136: 25000
2136-2137: 25000
2137-2138: 25000
2138-2139: 25000
2139-2140: 25000
2140-2141: 25000
2141-2142: 25000
2142-2143: 25000
2143-2144: 25000
2144-2145: 25000
2145-2146: 25000
2146-2147: 25000
2147-2148: 25000
2148-2149: 25000
2149-2150: 25000
2150-2151: 25000
2151-2152: 25000
2152-2153: 25000
2153-2154: 25000
2154-2155: 25000
2155-2156: 25000
2156-2157: 25000
2157-2158: 25000
2158-2159: 25000
2159-2160: 25000
2160-2161: 25000
2161-2162: 25000
2162-2163: 25000
2163-2164: 25000
2164-2165: 25000
2165-2166: 25000
2166-2167: 25000
2167-2168: 25000
2168-2169: 25000
2169-2170: 25000
2170-2171: 25000
2171-2172: 25000
2172-2173: 25000
2173-2174: 25000
2174-2175: 25000
2175-2176: 25000
2176-2177: 25000
2177-2178: 25000
2178-2179: 25000
2179-2180: 25000
2180-2181: 25000
2181-2182: 25000
2182-2183: 25000
2183-2184: 25000
2184-2185: 25000
2185-2186: 25000
2186-2187: 25000
2187-2188: 25000
2188-2189: 25000
2189-2190: 25000
2190-2191: 25000
2191-2192: 25000
2192-2193: 25000
2193-2194: 25000
2194-2195: 25000
2195-2196: 25000
2196-2197: 25000
2197-2198: 25000
2198-2199: 25000
2199-2200: 25000
2200-2201: 25000
2201-2202: 25000
2202-2203: 25000
2203-2204: 25000
2204-2205: 25000
2205-2206: 25000
2206-2207: 25000
2207-2208: 25000
2208-2209: 25000
2209-2210: 25000
2210-2211: 25000
2211-2212: 25000
2212-2213: 25000
2213-2214: 25000
2214-2215: 25000
2215-2216: 25000
2216-2217: 25000
2217-2218: 25000
2218-2219: 25000
2219-2220: 25000
2220-2221: 25000
2221-2222: 25000
2222-2223: 25000
2223-2224: 25000
2224-2225: 25000
2225-222



F100 H1. 200-CL-00001
Tall. 100cm. 200W
Reflector: 100/007
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00002
Tall. 100cm. 200W-000W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100

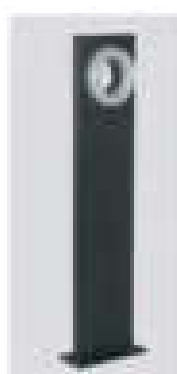

F100 H1. 200-CL-00003
Tall. 100cm. 200W-000W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100




F100 H1. 200-CL-00004
Tall. 100cm. 200W-000W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00005
Tall. 100cm
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100




F100 H1. 200-CL-00006
Tall. 100cm
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00007
Tall. 100cm. 200W-000W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00008
Tall. 100cm. 200W-000W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00009
Tall. 100cm. 200W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100




F100 H1. 200-CL-00010
Tall. 100cm. 200W
Reflector: 00
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00011
Tall. 100cm. 200W-000W
Reflector: 00/007
Voltage: 00-000-00-000
Material: Chrome
100



F100 H1. 200-CL-00012
Tall. 100cm. 200W-000W
Reflector: 00/007
Voltage: 00-000-00-000
Material: Chrome
100



LED Floor lamp

Lamp size: 110x110x40mm
Cut out size: 85x85x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 110x110x40mm
Cut out size: 85x85x40mm
Material: Die cast aluminum
PP+ frosted glass


Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 100x100x60mm
Cut out size: 85x85x60mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 210x100x40mm
Cut out size: 185x100x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 210x100x40mm
Cut out size: 185x100x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 110x110x40mm
Cut out size: 85x85x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 110x110x40mm
Cut out size: 85x85x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65



LED Floor lamp

Lamp size: 110x110x40mm
Cut out size: 85x85x40mm
Material: Die cast aluminum
PP+ frosted glass

Power: 1W
Voltage: 85-265V (universal)
IP65





LED Floor lamp

Lamp size: 170x100x30mm
Cut out size: 132x50x30mm
Material: Stainless steel /
PC, PMMA, Acrylic glass
Power: 5W
Voltage: 85-265V 50/60Hz
IP65




LED Floor lamp

Lamp size: 100x100x30mm
Cut out size: 60x40x30mm
Material: Stainless steel /
PC, PMMA, Acrylic glass
Power: 5W
Voltage: 85-265V 50/60Hz
IP65





LED Floor lamp

Lamp size: 210x100x30mm
Cut out size: 170x50x30mm
Material: Stainless steel /
PC, PMMA, Acrylic glass
Power: 5W
Voltage: 85-265V 50/60Hz
IP65



LED Floor lamp

Lamp size: 100x100x30mm
Cut out size: 60x40x30mm
Material: Stainless steel /
PC, PMMA, Acrylic glass
Power: 5W
Voltage: 85-265V 50/60Hz
IP65

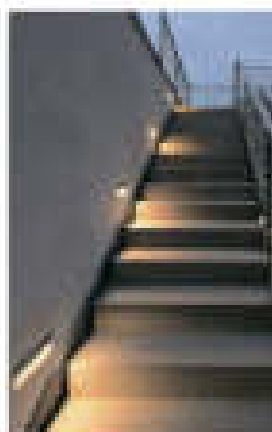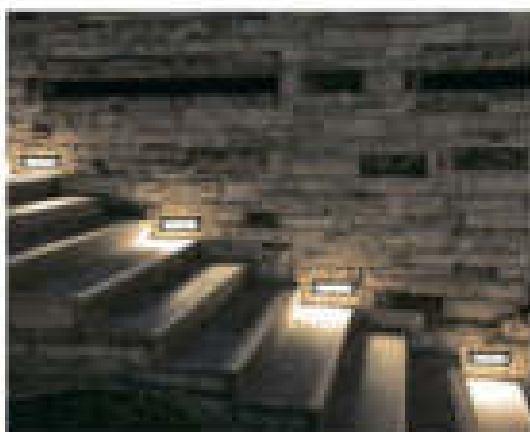



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65



LED Floor lamp
Lamp size: 110x110x110mm
Lamp size: 110x110x110mm
Material: Stainless steel +
PC + PMMA (acrylic glass)
Power: 10W
Voltage: 85-265V AC/50/60Hz
IP65





ITEM NO. HTD-EL20010
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20011
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20012
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20013
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20014
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20015
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20016
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20017
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20018
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20019
Size: 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20020
Size: 40cm 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



ITEM NO. HTD-EL20021
Size: 40cm 40cm
Voltage: 85-260V 50/60Hz
Material: Aluminum
IP65



MODE:HTD-EL5023001
POWER:3W/5W COB
SIZE:D40*H250mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023107
POWER:5W/7W COB
SIZE:D42*H280mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023071-A
POWER:5W/7W COB
SIZE:D105*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023071-B
POWER:5W/7W COB
SIZE:D105*H180mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023072-A
POWER:5W/7W COB
SIZE:D105*H310mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023072-B
POWER:5W/7W COB
SIZE:D105*H300mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023278
POWER:7W COB
SIZE:D65*H370mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023279
POWER:7W COB
SIZE:D65*H370mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023280
POWER:12W COB
SIZE:D90*H400mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023281
POWER:12W COB
SIZE:D90*H400mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023282
POWER:18W COB
SIZE:D108*H420mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023283
POWER:18W COB
SIZE:D108*H390mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023284-A
POWER:7W COB
SIZE:D65*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023284-B
POWER:7W COB
SIZE:D65*H185mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023285-A
POWER:12W COB
SIZE:D90*H215mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023285-B
POWER:12W COB
SIZE:D90*H210mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023286-A
POWER:18W COB
SIZE:D108*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023286-B
POWER:18W COB
SIZE:D108*H210mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90 ANGLE:24°



MODE:HTD-EL5023309-A
POWER:3W
SIZE:D65*H370mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023309-B
POWER:3W
SIZE:D65*H370mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023310-A
POWER:6W/7W
SIZE:D90*H400mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023310-B
POWER:6W/7W
SIZE:D90*H400mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023311-A
POWER:9W
SIZE:D108*H420mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023311-B
POWER:9W
SIZE:D108*H390mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023312-A
POWER:12W
SIZE:D130*H490mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023312-B
POWER:12W
SIZE:D130*H470mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023313-A
POWER:18W
SIZE:D145*H500mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023313-B
POWER:18W
SIZE:D145*H480mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023314-A
POWER:3W
SIZE:D65*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023314-B
POWER:3W
SIZE:D65*H185mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023315-A
POWER:6W/7W
SIZE:D90*H215mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023315-B
POWER:6W/7W
SIZE:D90*H210mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023316-A
POWER:9W
SIZE:D108*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023316-B
POWER:9W
SIZE:D108*H210mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023317-A
POWER:12W
SIZE:D130*H265mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023317-B
POWER:12W
SIZE:D130*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023318-A
POWER:18W
SIZE:D145*H290mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023318-B
POWER:18W
SIZE:D145*H245mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023303
POWER:24W COB
SIZE:D130*H490mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023304
POWER:24W COB
SIZE:D130*H470mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023305
POWER:30W COB
SIZE:D145*H500mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023306
POWER:30W COB
SIZE:D145*H480mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023307-A
POWER:24W COB
SIZE:D130*H265mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023307-B
POWER:24W COB
SIZE:D130*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023308-A
POWER:30W COB
SIZE:D145*H290mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023287
POWER:20W COB
SIZE:D85*H240mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023288
POWER:20W COB
SIZE:D85*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023289
POWER:20W COB
SIZE:D85*H380mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°




MODE:HTD-EL5023290
POWER:20W COB
SIZE:D85*H380mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°





MODE:HTD-EL5023295
POWER:15W COB
SIZE:D100*H260mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023150
POWER:15W COB
SIZE:D100*H410mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:50lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023297
POWER:20W COB
SIZE:D80*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:50lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023057
POWER:10W COB
SIZE:D80*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:50lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023059
POWER:15W COB
SIZE:D85*H185mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023003
POWER:5W COB
SIZE:D70*H280mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°



MODE:HTD-EL5023066
POWER:5W COB
SIZE:D75*H280mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023056
POWER:7W COB
SIZE:D95*H310mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023004
POWER:5W COB
SIZE:D75*H280mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°



MODE:HTD-EL5023005
POWER:7W COB
SIZE:D95*H310mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°




MODE:HTD-EL5023006
POWER:15W COB
SIZE:D155*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:60°




MODE:HTD-EL5023007
POWER:20W COB
SIZE:D185*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:60°




MODE:HTD-EL5023008
POWER:12W COB
SIZE:D80*H300mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°




MODE:HTD-EL5023009
POWER:30W COB
SIZE:D205*H250mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:60°




MODE:HTD-EL5023010
POWER:40W COB
SIZE:D235*H270mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:60°




MODE:HTD-EL5023011
POWER:5W COB
SIZE:D75*H100mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°




MODE:HTD-EL5023012
POWER:7W COB
SIZE:D95*H120mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°



MODE:HTD-EL5023013
POWER10W COB
SIZE:D115*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°




MODE:HTD-EL5023014
POWER:15W COB
SIZE:D140*H175mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:36°




MODE:HTD-EL5023064
POWER:10W COB
SIZE:D95*H130mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5023065
POWER:20W COB
SIZE:D130*H160mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°





MODE:HTD-EL5023080
POWER:10W COB
SIZE:D90*H110mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°





MODLE:HTD-EL5023081
 POWER:20W COB
 SIZED:115*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL5023082
 POWER:30W COB
 SIZE:D150*H185mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODLE:HTD-EL5023090
 POWER:10W COB
 SIZE:D95*H120mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL5023091
 POWER:20W COB
 SIZE:D120*H190mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL5023092
 POWER:30W COB
 SIZE:D150*H230mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL5023343
 POWER:10W COB
 SIZE:D87*H110mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:60°




MODLE:HTD-EL5023233
 POWER:10W COB
 SIZE:D80*H130mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODLE:HTD-EL5023234
 POWER:20W COB
 SIZE:D100*H130mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL5023235
 POWER:30W COB
 SIZE:D125*H190mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODLE:HTD-EL50225001
POWER:7W*2=14W COB
SIZE:D64*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODLE:HTD-EL50225002
POWER:12W*2=24W COB
SIZE:D90*H170mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°




MODLE:HTD-EL5025003
POWER:18W*2=36W COB
SIZE:D108*H170mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°




MODLE:HTD-EL5025004
POWER:24W*2=48W COB
SIZE:D130*H180mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODLE:HTD-EL5025005
POWER:30W*2=60W COB
SIZE:D145*H180mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°




MODLE:HTD-EL5025006
POWER:40W*2=80W COB
SIZE:D160*H200mm
INPUT VOITAGE:AC85-265V/AC24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°




MODLE:HTD-EL5025008
POWER:SOW*2=100W COB
SIZE:D200*H200mm
INPUT VOITAGE:AC85-265V/AC24V/
DC24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODLE:HTD-EL5025009
POWER:7W
SIZE:D64*H130mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODLE:HTD-EL5025010
POWER:12W
SIZE:D90*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°

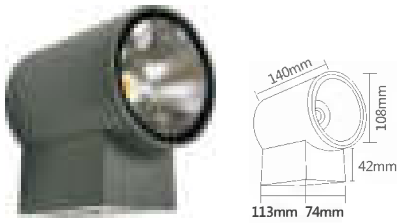

MODE:HTD-EL5025011
 POWER:18W
 SIZE:D108*H140mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025012
 POWER:24W
 SIZE:D130*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025013
 POWER:30W
 SIZE:D145*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025014
 POWER:40W
 SIZE:D160*H150mm
 INPUT VOITAGE:AC85-265V/AC24V/DC24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025016
 POWER:50W
 SIZE:D200*H150mm
 INPUT VOITAGE:AC85-265V/AC24V/DC24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°




MODE:HTD-EL5025017
 POWER:3W*2=36W
 SIZE:D64*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°




MODE:HTD-EL5025018
 POWER:6W*2=12W
 SIZE:D90*H170mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°




MODE:HTD-EL5025019
 POWER:9W*2=18W
 SIZE:D108* H170mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°

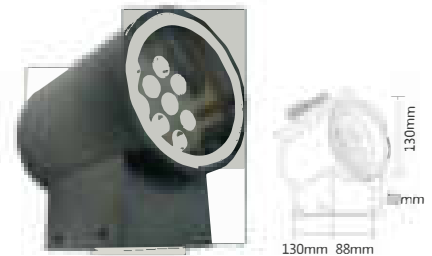

MODE:HTD-EL5025020
 POWER:12W*2=24W
 SIZE:D130*H180mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°



MODE:HTD-EL5025021
POWER:18W*2=72W
SIZE:D145*H180mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5025025
POWER:3W
SIZE:D64*H130mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5025026
POWER:6W
SIZE:D90*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5025027
POWER:9W
SIZE:D108*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5025028
POWER:12W
SIZE:D130*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5025029
POWER:18W
SIZE:D145*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5025030
POWER:36W
SIZE:D160*H150mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5025085
POWER:7W*2=14W COB
SIZE:D64*H160mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°



MODE:HTD-EL5025086
POWER:12W*2=24W COB
SIZE:D90*H260mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=90
ANGLE:24°

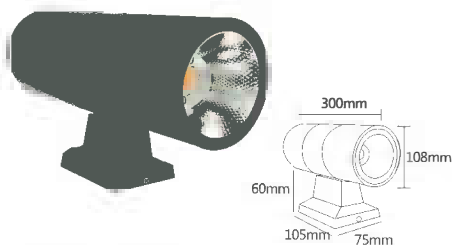


MODE:HTD-EL5025087
 POWER:18W*2=36W COB
 SIZE:D108*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025088
 POWER:24W*2=48W COB
 SIZE:D130*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°



MODE:HTD-EL5025089
 POWER:30W*2=48W COB
 SIZE:D145*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/
 DC12/24V MATERIAL:aluminum Toughened
 glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=90
 ANGLE:24°

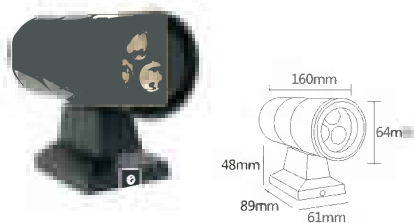

MODE:HTD-EL5025090
 POWER:2*3W=6W
 SIZE:D64 HI60mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°




MODE:HTD-EL5025091
 POWER:2*7W=14W
 SIZE:D90*H260mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°



MODE:HTD-EL5025092
 POWER:2*9W=18W
 SIZE:D108*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°



MODE:HTD-EL5025093
 POWER:2*12W=24W
 SIZE:D130*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°

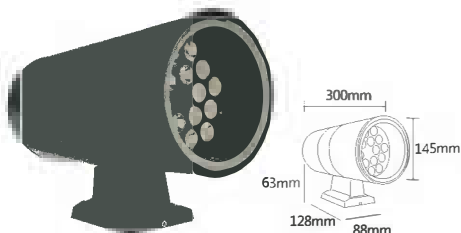

MODE:HTD-EL5025094
 POWER:2*18W=36W
 SIZE:D145*H300mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10° 15° 24° 30° 45° 60° 90°





MODE:HTD-EL5024110
POWER:6W
SIZE:200*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024112
POWER:9W
SIZE:300*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024113
POWER:12W
SIZE:300*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024114
POWER:18W
SIZE:500*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024115
POWER:24W
SIZE:1000*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024116
POWER:36W
SIZE:1000*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024024
POWER:9W
SIZE:200*48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°

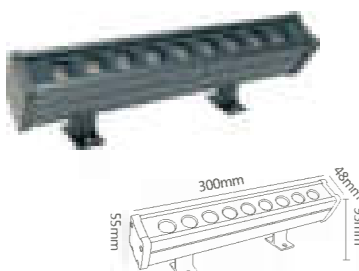

MODE:HTD-EL5024026
POWER:9W
SIZE:300*48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024011
POWER:12W
SIZE:L300*W48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL502012
POWER:18W
SIZE:500*48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024014
POWER:24W
SIZE:1000*48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024015
POWER:36W
SIZE:1000*48*H95mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024016
POWER:36W
SIZE:1000*48*H125mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024018
POWER:18W
SIZE:500*45*H65mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024019
POWER:18W
SIZE:1000*45*H65mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024020
POWER:24W
SIZE:1000*45*H65mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024021
POWER:36W
SIZE:1000*45*H65mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024022
POWER:36W
SIZE:1000*45*H95mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°

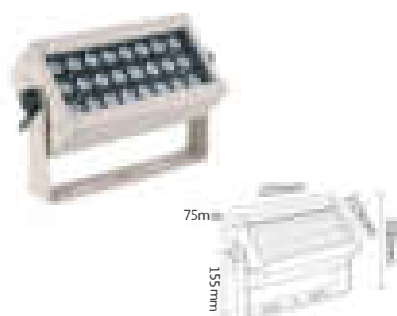

MODE:HTD-EL5024034
POWER:24W
SIZE:L225*116*H200mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024035
POWER:30W
SIZE:260*116*H200mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024041
POWER:18W
SIZE:150*160*H245mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024042
POWER:24W
SIZE:150*160*H245mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024043
POWER:35W
SIZE:320*160*H245mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass P
ROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODE:HTD-EL5024044
POWER:50W
SIZE:270*160*H245mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODLE:HTD-EL5024045
 POWER:60W
 SIZE:355*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°

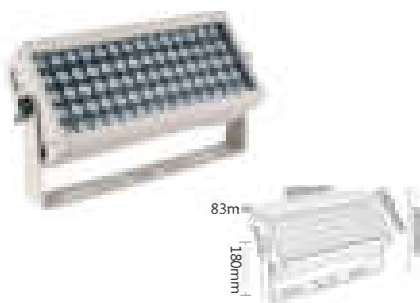


MODLE:HTD-EL5024046
 POWER:70W
 SIZE:360*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°



MODLE:HTD-EL5024053
 POWER:12*3W=36W
 CREE CHIP SIZE:L295*116*H200mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°S08°10°IS025°35°45°60°



MODLE:HTD-EL5024059
 POWER:9*3W=27W
 CREE CHIP SIZE:L150*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10°15°25°35°45°60°

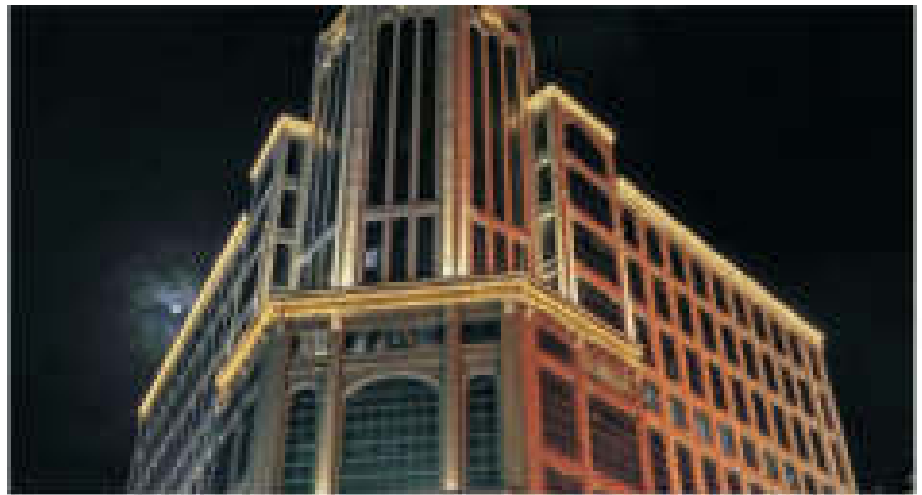


MODLE:HTD-EL5024060
 POWER:12*3W=36W CREE CHIP
 SIZE:L200*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10°15°25°35°45°60°



MODLE:HTD-EL5024061
 POWER:18*3W=54W CREE CHIP
 SIZE:L270*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°S08°10°IS025°35°45°60°



MODLE:HTD-EL5024063
 POWER:24*3W=72W CREE CHIP
 SIZE:L360*160*H245mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IPGS
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°S08°10°IS025°35°45°60°

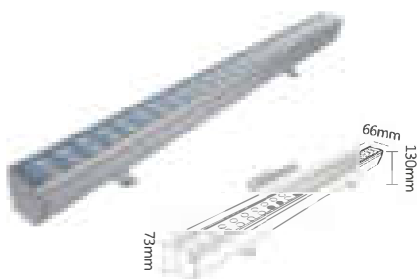

MODE:HTD-EL5024102-50W
POWER:50W
SIZE:LI000*66*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024102-60W
POWER:60W
SIZE:LI000*66*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024102-70W
POWER:70W
SIZE:LI000*66*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°10°60°15°45°




MODE:HTD-EL5024106
POWER:24*3=72W
SIZE:LI000*60*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE::3°5°8°10°15°25°35°45°60°

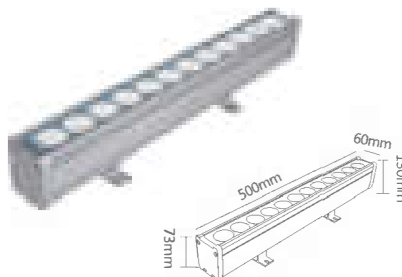

MODE:HTD-EL5024107
POWER:12*3=72W
SIZE:L500*60*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE::3°5°8°10°15°25°35°45°60°

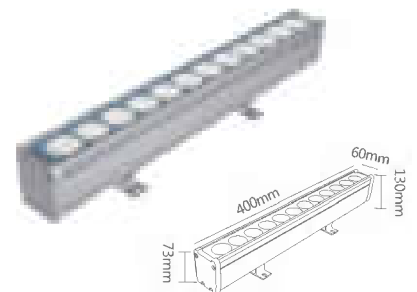

MODE:HTD-EL5024108
POWER:9*3=27W
SIZE:L400*60*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE::3°5°8°10°15°25°35°45°60°

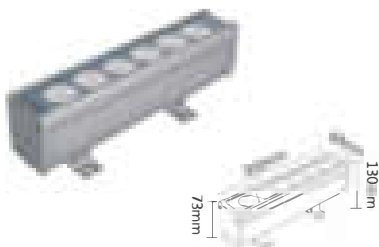

MODE:HTD-EL5024109
POWER:6*3=18W
SIZE:L300*60*H130mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE::3°5°8°10°15°25°35°45°60°






MODE:HTD-EL5023060
POWER:4*3W=12W CREE CHIP
SIZE:D100*H65mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65 Ra=80
ANGLE:120°




MODE:HTD-EL5023074
POWER:3*3W=9W
CREE CHIP SIZE:D120*H175mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65 Ra=80
ANGLE:360°



MODE:HTD-EL5023073
POWER:3*3W=9W CREE CHIP
SIZE:D100*H120mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65 Ra=80
ANGLE:360°

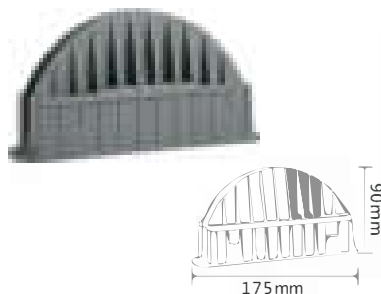

MODE:HTD-EL5023070
POWER:4*3W=12W CREE CHIP
SIZE:L175*W50*H90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65 Ra=80
ANGLE:120°

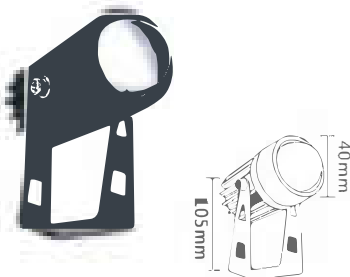

MODE:HTD-EL5023061
POWER:1*3W=3W CREE CHIP
SIZE:D40*H105mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023068
POWER:I *10W= 10W CREE CHIP
SIZE:D80*H150mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°




MODE:HTD-EL5023062
POWER:I *10W=10W CREE CHIP
SIZE:D85*H185mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°





MODE:HTD-EL5023015
POWER:3W
SIZE:D40*H250mm
INPUT VOITAGE:AC85-265V/AC12/24V/
DC12/24V MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:24°



MODE:HTD-EL5023016
POWER:5W
SIZE:D70*H280mm
INPUT VOITAGE:AC85-265V / AC12/24V /
DC12/24V MATERIAL:aluminum Toughened
glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:24°



MODE:HTD-EL5023067
POWER:7W
SIZE:D86*H105mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:24°



MODE:HTD-EL5023093
POWER:3W
SIZE:D68*H105mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5023296
POWER:1 *8W=8W
CREE CHIP SIZE:D72*H95mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023139-3W
POWER:3W
SIZE:D72*H95mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5023139-4W
POWER:3W
SIZE:D72*H95mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5023231
POWER:18W
SIZE:D150*H200mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5° 10°15°24°30°45°60°90°




MODE:HTD-EL5023017
POWER:3W
SIZE:D70*H140mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5023022
POWER:5W
SIZE:D95*H130mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5023023
POWER:9W
SIZE:D130*H160mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

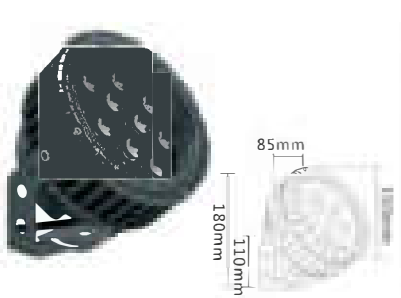


MODE:HTD-EL5023024
POWER:12W/18W
SIZE:D150*H180mm
IN PUT VOITAGE:AC85-26SV / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023025
POWER:18W/24W
SIZE:D180*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023026
POWER:24W/36W
SIZE:D230*H320mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

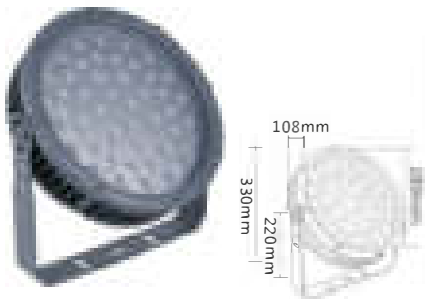


MODE:HTD-EL5023027
POWER:50W/60W/70W
SIZE:D280*H400mm
IN PUT VOITAGE:AC85-26SV / AC24V /DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

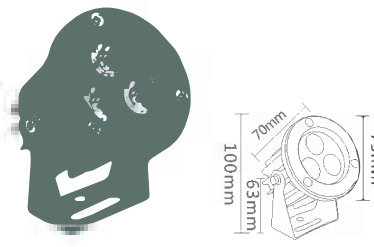

MODE:HTD-EL5023032-3W
POWER:3W
SIZE:D75*H100mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

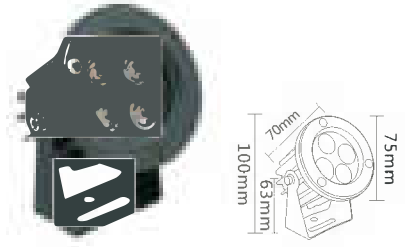

MODE:HTD-EL5023032-4W
POWER:4W
SIZE:D75*H100mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

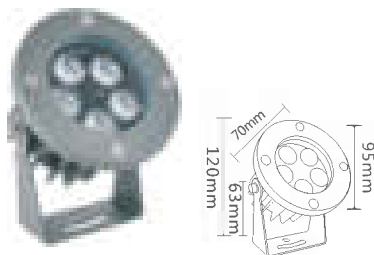

MODE:HTD-EL5023033
POWER:5W
SIZE:D95*H120mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023034-6W
POWER:6W
SIZE:D115*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023034-7W
POWER:7W
SIZE:D115*H140mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023035
POWER:12W
SIZE:D140*H175mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023041
POWER:12W
SIZE:D155*H185mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023042
POWER:18W
SIZE:D185*H235mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10° 15°24°30°45°60°90°



MODE:HTD-EL5023043
POWER:24W
SIZE:D205*H250mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023044
POWER:36W
SIZE:D235*H265mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023045
POWER:50W
SIZE:D285*H290mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10° 15°24°30°45°60°90°



MODE:HTD-EL5023055
POWER:GU10/NR16
SIZE:D60*H395mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65



MODE:HTD-EL5023063
POWER:GU10/NR16
SIZE:D100*H300mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65



MODE:HTD-EL5023083
POWER:5*3W=15W CREE CHIP
SIZE:135*135*H220mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10°15°25°35°45°60°




MODE:HTD-EL5023084
 POWER:9*3W=27W CREE CHIP
 SIZE:170*170*H230mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10° 15°25°35°45°60°



MODE:HTD-EL5023085
 POWER:16*2W=32W
 SIZE:135*135*H220mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023086
 POWER:24*2W=48W
 SIZE:170*170*H230mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
 MATERIAL:aluminum Toughened glass PROTECTION
 CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°

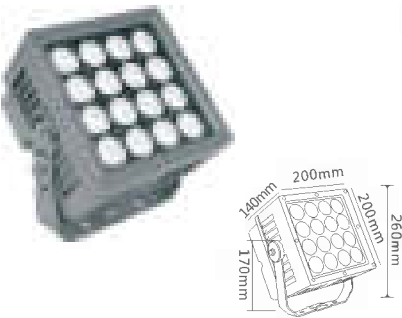

MODE:HTD-EL5023132
 POWER:16*3W=48W CREE CHIP
 SIZE:200*200*H260mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°S08°10° IS02S03S045°60°



MODE:HTD-EL5023133
 POWER:48*2W=96W
 SIZE:200*200*H260mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023134
 POWER:24*3W=72W CREE CHIP
 SIZE:245*245*H320mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8° 10°15°25°35°45°60°



MODE:HTD-EL5023135
 POWER:80*2W=80W
 SIZE:245*245*H320mm
 IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023204
 POWER:12W
 SIZE:110*110*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023205
 POWER:12W/16W
 SIZE:130*130*H185mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65 UGHT
 EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023206
POWER:18W/24W
SIZE:160*160*H200mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023207
POWER:24W/36W
SIZE:190*190*H240mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023208
POWER:48W
SIZE:230*230*H295mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

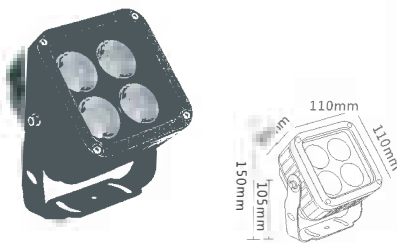


MODE:HTD-EL5023298-A
POWER:4*2W=8W CREE CHIP
SIZE:110*110*H150mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10° 15°25°35°45°60°

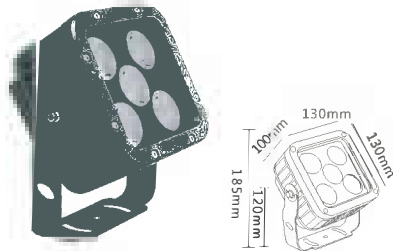

MODE:HTD-EL5023299-A
POWER:5*2W=10W CREE CHIP
SIZE:130*130*H185mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10°15°25°35°45°60°



MODE:HTD-EL5023300-A
POWER:9*2W=18W CREE CHIP
SIZE:160*160*H200mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10°15°25°35°45°60°

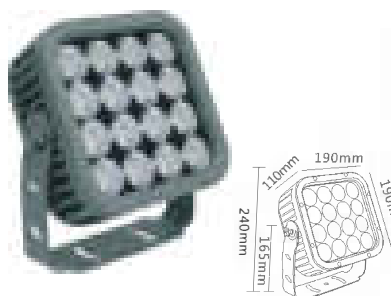


MODE:HTD-EL5023301-A
POWER:16*2W=32W CREE CHIP
SIZE:190*190*H240mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10° 15°25°35°45°60°



MODE:HTD-EL5023302-A
POWER:24*2W=48W CREE CHIP
SIZE:230*230*H295mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10°15°25°35°45°60°



MODE:HTD-EL5023298-B
POWER:4*2W=8W CREE CHIP
SIZE:110*110*H170mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5°8°10°15°25°35°45°60°

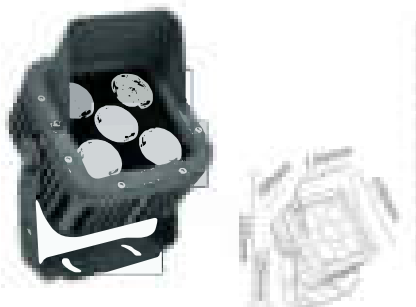

MODLE:HTD-EL5023299-B
 POWER:5*2W=10W CREE CHIP
 SIZE:130*130*H220mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10°15°25°35°45°60°



MODLE:HTD-EL5023300-B
 POWER:9*2W=18W CREE CHIP
 SIZE:160*160*H240mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10° 15°25°35°45°60°



MODLE:HTD-EL5023301-B
 POWER:16*2W=32W CREE CHIP
 SIZE:190*190*H295mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°8°10°15°25°35°45°60°



MODLE:HTD-EL5023302-B
 POWER:24*2W=48W CREE CHIP
 SIZE:230*230*H340mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:3°5°8°10°15°25°35°45°60°



MODLE:HTD-EL5023136
 POWER:5W
 SIZE:D105*H200mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODLE:HTD-EL5023137
 POWER:12W
 SIZE:D145*H350mm
 INPUT VOITAGE:AC85-265V / AC12/24V / DC12/24V MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODLE:HTD-EL5023138
 POWER:18W
 SIZE:D160*H360mm
 IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODLE:HTD-EL5023094
 POWER:5W
 SIZE:D125*H150mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°




MODLE:HTD-EL5023095
 POWER:12W
 SIZE:D150*H180mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
 MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023096
POWER:18W
SIZE:D180*H220mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023097
POWER:24W
SIZE:D205*H245mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

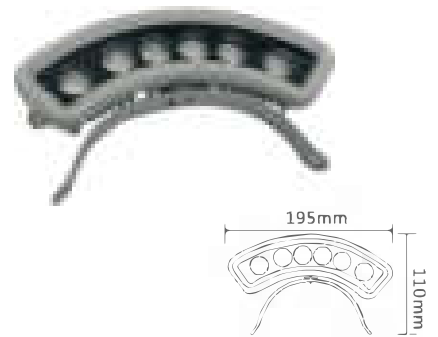


MODE:HTD-EL5023100
POWER:6W
SIZE:L195*H110mm
INPUT VOITAGE:DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

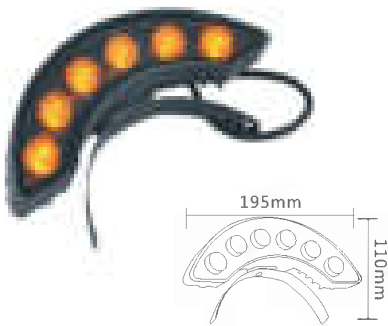

MODE:HTD-EL5023101
POWER:6W
SIZE:L195*H110mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023106
POWER:3W
SIZE:130*93*93mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

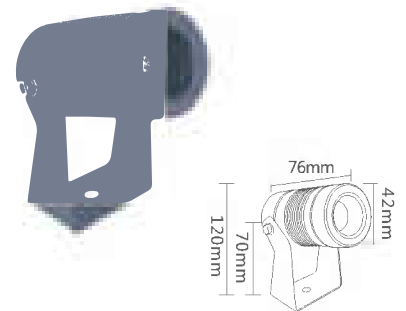

MODE:HTD-EL5023107
POWER:3W
SIZE:D42*H120mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023108
POWER:3W
SIZE:L35*35*H90mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

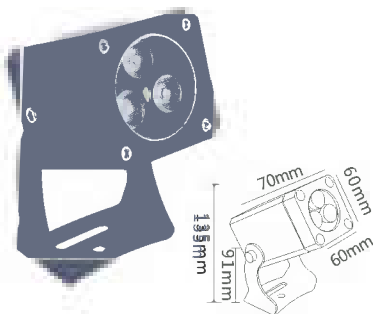

MODE:HTD-EL5023109
POWER:3*2W=6W
SIZE:L60*60*H135mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023111
POWER:5W
SIZE:D110*H146mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023112
POWER:12W/18W
SIZE:D175*H215mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023113
POWER:24W/36W
SIZE:D205*H245mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023114
POWER:50W/60W/70W
SIZE:D290*H355mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023119
POWER:9W/12W
SIZE:D135*H185mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023120
POWER:18W
SIZE:D175*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023121
POWER:24W/36W
SIZE:D215*H300mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023122
POWER:50W/60W
SIZE:D245*H350mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

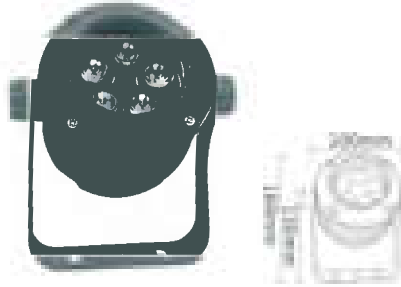

MODE:HTD-EL5023122
POWER:50W/60W
SIZE:D245*H350mm
INPUT VOITAGE:AC85-265V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

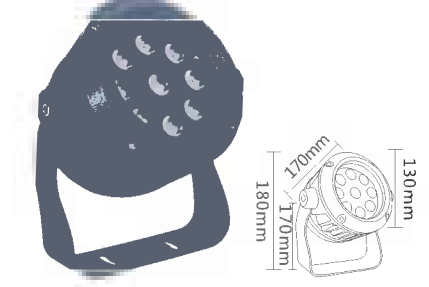

MODE:HTD-EL5023124
POWER:9W/12W
SIZE:D130*H180mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023125
POWER:12W/18W
SIZE:D160*H200mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023126
POWER:24W/36W
SIZE:D190*H230mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023127
POWER:50W/60W
SIZE:D230*H260mm
INPUT VOITAGE:AC85-265V/24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023128
POWER:70W
SIZE:D290*H425mm
INPUT VOITAGE:AC85-265V/24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

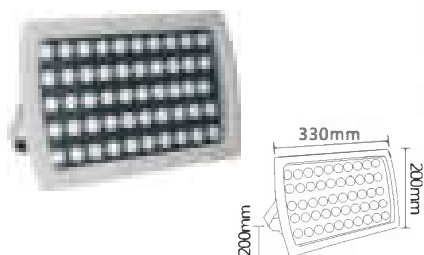

MODE:HTD-EL5023129
POWER:50W/60W
SIZE:L330*200*H200mm
INPUT VOITAGE:AC85-265V/24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

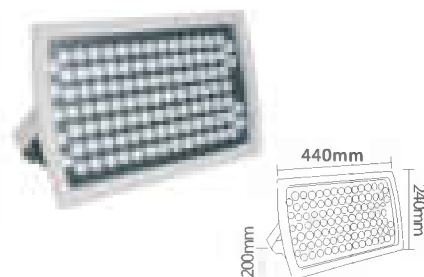

MODE:HTD-EL5023129
POWER:50W/60W
SIZE:L330*200*H200mm
INPUT VOITAGE:AC85-265V/24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

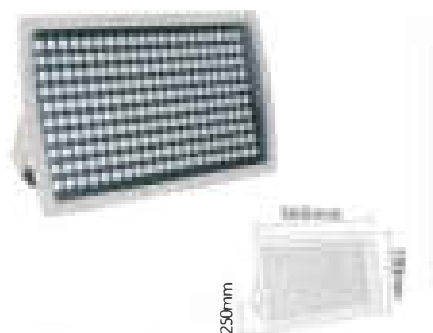


MODE:HTD-EL5023131
POWER:200W
SIZE:L560*330*H250mm
INPUT VOITAGE:AC85-265V/24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023194-A
POWER:3*2W=6W
SIZE:D85*H140mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023194-B
POWER:3*2W=6W
SIZE:D85*H165mm
INPUT VOITAGE:AC85-265V / AC12/24V / DC12/24V
MATERIAL:aluminum Toughened glass PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023195-A
 POWER:9W/12W
 SIZE:D125*H212mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023195-B
 POWER:9W/12W
 SIZE:D25*H263mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023196-A
 POWER:18W
 SIZE:D165*H268mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023196-B
 POWER:18W
 SIZE:D165*H337mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023197-A
 POWER:24/36W
 SIZE:D193*H273mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023197-B
 POWER:24W/36W
 SIZE:D193*H355mm
 INPUT VOITAGE:AC85-265V / AC12/24V / DC12/24V MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023198-A
 POWER:36W/54W
 SIZE:D230*H350mm
 INPUT VOITAGE:AC85-265V / AC12/24V / DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5023198-B
 POWER:36W/54W
 SIZE:D230*H390mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023256
 POWER:10W= 10W CREE CHIP
 SIZE:D90*H150mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:80lm/W Ra=80
 ANGLE:5°



MODE:HTD-EL5023257
POWER:9*3W=27W CREE CHIP
SIZE:D138*H200mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°




MODE:HTD-EL5023258
POWER:12*3W=36W
CREE CHIP SIZE:D185*H260mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023292
POWER:6*3W=18W CREE CHIP
SIZE:D130*H140mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023293
POWER:9*3W=27W CREE CHIP
SIZE:D150*H180mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023294
POWER:12*3W=36W CREE CHIP
SIZE:D180*H215mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°



MODE:HTD-EL5023221-A
POWER:5W
SIZE:D105*H370mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023220-B
POWER:5W
SIZE:D105*H340mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023224-A
POWER:12W
SIZE:D145*H410mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023224-B
POWER:12W
SIZE:D145*H380mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5023225-A
POWER:18W
SIZE:D160*H480mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60° 90°



MODE:HTD-EL5023225-B
POWER:18W
SIZE:D160*H460mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60° 90°



MODE:HTD-EL5023226-A
POWER:12W
SIZE:D140*H400mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10° 15°24°30°45°60° 90°



MODE:HTD-EL5023226-B
POWER:12W
SIZE:D140*H380mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60° 90°



MODE:HTD-EL5023228
POWER:18W
SIZE:D160*H480mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60° 90°



MODE:HTD-EL5021046
POWER:2W
SIZE:D42*H72mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60° 90°



MODE:HTD-EL5021047
POWER:2W
SIZE:D52*H72mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021048
POWER:3W
SIZE:D62*H90mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




Φ67*H93mm

MODE:HTD-EL5021049
POWER:3W/6W
SIZE:D75*H95mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°80°90°




Φ38*H70mm

MODE:HTD-EL5021157
POWER:2W
SIZE:D42*H72mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




Φ46*H80mm

MODE:HTD-EL5021158
POWER:2W
SIZE:D52*H72mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




Φ67*H93mm

MODE:HTD-EL5021159
POWER:3W
SIZE:D62*H90mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




Φ38*H70mm

MODE:HTD-EL5021072
POWER:2W
SIZE:45*45*H72mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



Φ46*H80mm

MODE:HTD-EL5021073
POWER:2W
SIZE:55*55*H72mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



Φ55*H88mm

MODE:HTD-EL5021099
POWER:3W
SIZE:65*65*H72mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




Φ8*H28mm

MODE:HTD-EL5021165
POWER:0.1W
SIZE:D12*H18mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ13*H31mm

MODE:HTD-EL5021166
POWER:0.2W
SIZE:D15*H31mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ14*H34mm

MODE:HTD-EL5021167
POWER:0.2W
SIZE:D20*H31mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ18*H36mm

MODE:HTD-EL5021168
POWER:0.5W
SIZE:D22*H36mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ20.5*H55mm

MODE:HTD-EL5021169
POWER:0.5W
SIZE:D22*H56mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ20*H34mm

MODE:HTD-EL5021170
POWER:0.2W
SIZE:D25*H34mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ32*H36mm

MODE:HTD-EL5021171
POWER:1W
SIZE:D32*H36mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ28.5*H60mm

MODE:HTD-EL5021172
POWER:1W
SIZE:D32*H60mm
INPUT VOITAGE:DC12/24V
MATERIAL:304SS
PROTECTION CLASS:IP68



Φ60*H78mm

MODE:HTD-EL5021001
POWER:2W
SIZE:D65*H78mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°80° 90°





Φ74*H78mm

MODE:HTD-EL5021002
POWER:3W
SIZE:D80*H78mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°80° 90°



Φ95*H78mm

MODE:HTD-EL5021003
POWER:5W
SIZE:D100*H78mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°80° 90°



Φ117*H93mm

MODE:HTD-EL5021004

POWER:6W/7W

SIZE:D130*H93mm


INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ133*H93mm

MODE:HTD-EL5021005

POWER:7W/9W

SIZE:D150*H93mm



INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ145*H93mm

MODE:HTD-EL5021006

POWER:9W/12W

SIZE:D160*H93mm


INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CL ASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ156*H93mm

MODE:HTD-EL5021007

POWER:12W/18W

SIZE:D180*H93mm



INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ185*H93mm

MODE:HTD-EL5021008

POWER:18W/24W

SIZE:D200*H93mm


INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ210*H93mm

MODE:HTD-EL5021010

POWER:24W/36W

SIZE:D220*H93mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CL ASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ238*H93mm

MODE:HTD-EL5021009

POWER:24W/36W

SIZE:D250*H93mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80



Φ60*H78mm

MODE:HTD-EL5021012

POWER:2W

SIZE:D65*H78mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80



Φ74*H78mm

MODE:HTD-EL5021013

POWER:3W


SIZE:D80*H78mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CL ASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80



Φ95*H78mm

MODE:HTD-EL5021014

POWER:5W

SIZE:D100*H78mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ117*H93mm

MODE:HTD-EL5021015

POWER:6W/7W

SIZE:D130*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ133*H93mm

MODE:HTD-EL5021016

POWER:7W/9W

SIZE:D150*H93mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ145*H93mm

MODE:HTD-EL5021017

POWER:9W/12W

SIZE:D160*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ156*H93mm

MODE:HTD-EL5021018

POWER:12W/18W

SIZE:D180*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ185*H93mm

MODE:HTD-EL5021019

POWER:18W/24W

SIZE:D200*H93mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ210*H93mm

MODE:HTD-EL5021020

POWER:24W/36W

SIZE:D220*H90mm


IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60° 90°



Φ100*H130mm

MODE:HTD-EL5021071

POWER:NR16/GU10

SIZE:D100*H125mm

INPUT VOITAGE:AC85-265V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65



Φ89*H103mm

MODE:HTD-EL5021225

POWER:NR16

SIZE:D100*H103mm

INPUT VOITAGE:AC85-265V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68



Φ38*H70mm

MODLE:HTD-EL5021100

POWER:3W COB

SIZE:D42*H72mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=90



Φ46*H80mm

MODLE:HTD-EL5021101

POWER:3W COB


SIZE:D52*H82mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

UGHT EFFICIENCY:80lm/W Ra=90



Φ55*H88mm

MODLE:HTD-EL5021102

POWER:5W COB

SIZE:D62*H90mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=90



Φ67*H93mm

MODLE:HTD-EL5021103

POWER:7W COB

SIZE:D75*H95mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=90



Φ60*H78mm

MODLE:HTD-EL5021109

POWER:3W COB


SIZE:D65*H78mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=90



Φ60*H78mm

MODLE:HTD-EL5021028

POWER:5W COB


SIZE:D100*H90mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=90



Φ95*H110mm

MODLE:HTD-EL5021029

POWER:7W COB

SIZE:D120*H110mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=90



Φ133*H93mm

MODLE:HTD-EL5021030

POWER:10W COB

SIZE:D50*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=90



Φ156*H93mm

MODLE:HTD-EL5021032

POWER:15W COB

SIZE:D180*H93mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=90



MODE:HTD-EL5021033

POWER:20W COB


SIZE:D200*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=90



MODE:HTD-EL5021034

POWER:30W COB

SIZE:D220*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=90



MODE:HTD-EL5021118

POWER:50W COB

SIZE:D300*H93mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=90



MODE:HTD-EL5021126

POWER:9W CREE LED

SIZE:D150*H93mm


INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:3°5° 8° 10°15°25°35°45°60°



MODE:HTD-EL5021127

POWER:12W CREE LED

SIZE:D160*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80



MODE:HTD-EL5021128

POWER:18W CREE LED

SIZE:D180*H93mm


INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:3°5° 8° 10°15°25°35°45°60°



MODE:HTD-EL5021129

POWER:27W CREE LED

SIZE:D200*H93mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:3°5° 8° 10°15°25°35°45°60°



MODE:HTD-EL5021130

POWER:36W CREE LED

SIZE:D250*H93mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:3°5° 8° 10°15°25°35°45°60°



MODE:HTD-EL5021130

POWER:54W CREE LED

SIZE:D300*H93mm


INPUT VOITAGE:AC85-265V/AC24V/DC24V

MATERIAL:201SS aluminum Toughened glass plastic


PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:3°5° 8° 10°15°25°35°45°60°

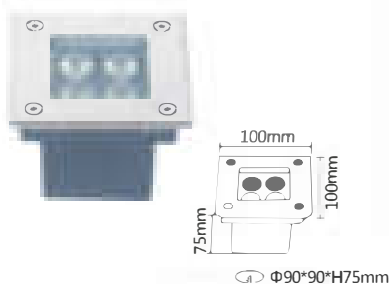


MODE:HTD-EL5021035
POWER:4W
SIZE:100*100*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

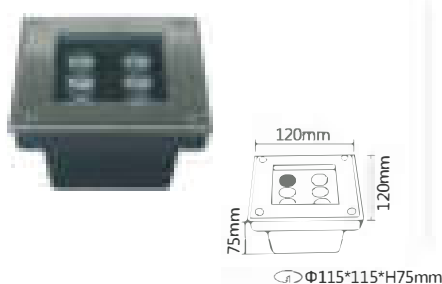


MODE:HTD-EL5021036
POWER:6W
SIZE:120*120*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°




MODE:HTD-EL5021037
POWER:9W
SIZE:150*150*H75mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

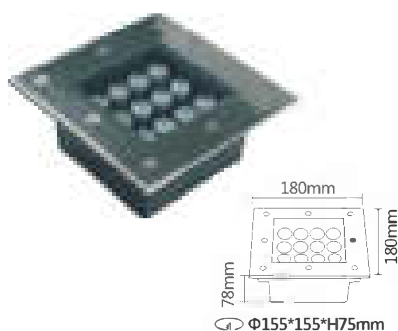


MODE:HTD-EL5021038
POWER:12W
SIZE:180*180*H78mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

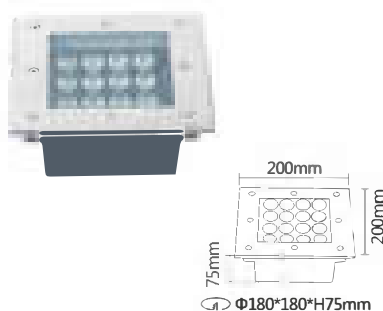


MODE:HTD-EL5021039
POWER:18W
SIZE:200*200*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

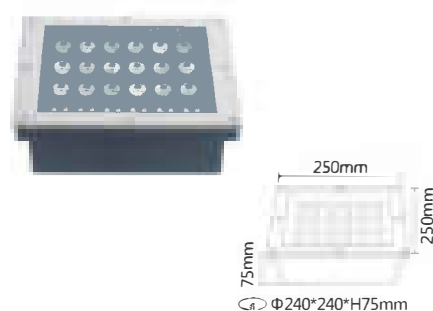

MODE:HTD-EL5021040
POWER:24W
SIZE:250*250*H75mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

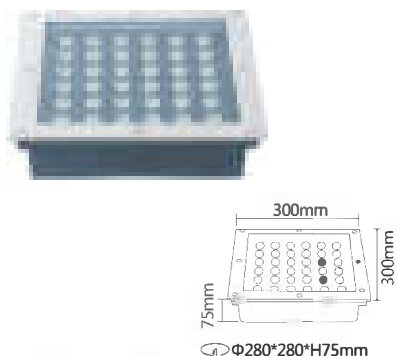

MODE:HTD-EL5021041
POWER:36W
SIZE:300*300*H75mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°

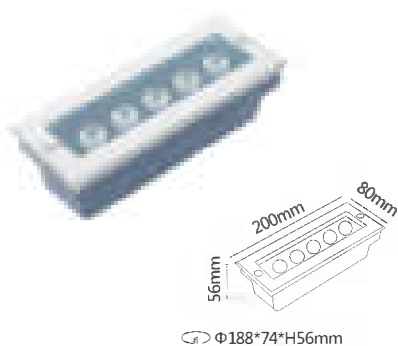


MODE:HTD-EL5021042-SW
POWER:5W
SIZE:200*80*H60mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°




MODE:HTD-EL5021042-GW
POWER:6W
SIZE:200*80*H60mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:3°5° 8° 10°15°25°35°45°60°



MODLE:HTD-EL5021043-9W
POWER:9W
SIZE:300*90*H75mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

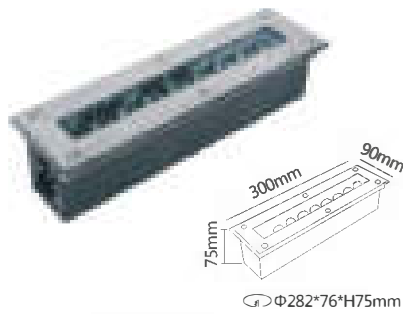

MODLE:HTD-EL5021043-12W
POWER:12W
SIZE:300*90*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

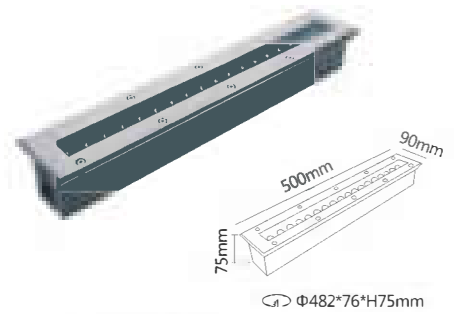

MODLE:HTD-EL5021044-18W
POWER:18W
SIZE:500*90*H75mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CL ASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODLE:HTD-EL5021045-24W
POWER:24W
SIZE:1000*90*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODLE:HTD-EL5021045-36W
POWER:36W
SIZE:1000*90*H75mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODLE:HTD-EL5021079
POWER:2W
SIZE:D42*H82mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CL ASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODLE:HTD-EL5021080
POWER:2W
SIZE:D52*H95mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODLE:HTD-EL5021081
POWER:3W
SIZE:D62*H95mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODLE:HTD-EL5021178
POWER:3W/6W
SIZE:D75*H100mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CL ASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021134
POWER:3W
SIZE:D78*H100mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021135
POWER:5W
SIZE:D100*H100mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021136
POWER:6W/7W
SIZE:D120*H115mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021137
POWER:7W/9W
SIZE:D150*H122mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021139
POWER:2W
SIZE:D42*H85mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021140
POWER:2W
SIZE:D52*H95mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021141
POWER:3W
SIZE:D62*H95mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021082
POWER:3W
SIZE:D78*H98mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021083
POWER:5W
SIZE:D100*H110mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021084

POWER:6W/7W

SIZE:D120*H115mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021085

POWER:7W/9W

SIZE:D150*H120mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021086

POWER:9W/12W

SIZE:D160*H120mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5° 10°15°24°30°45°60°90°



MODE:HTD-EL5021087

POWER:12W/18W

SIZE:D180*H90mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021088

POWER:18W/24W

SIZE:D200*H90mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021142

POWER:2LED*2W=4W

SIZE:D100*H35mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021143

POWER:3LED*2W=6W

SIZE:D120*H42mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021144

POWER:4LED*2W=8W

SIZE:D120*H40mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021145

POWER:4LED*2W=8W

SIZE:D150*H45mm


INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021146
POWER:8LED*2W=16W
SIZE:D150*H45mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021147
POWER:8LED*2W=16W
SIZE:D150*H45mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021149-1
POWER:2LED*2W=4W
SIZE:D105*H132mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5021149-2
POWER:4LED*1W=4W
SIZE:D105*H132mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021149-3
POWER:6LED*1W=6W
SIZE:D105*H132mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021149-4
POWER:5LED*1W=8W
SIZE:D105*H132mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021119
POWER:3W
SIZE:D120*H130mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021152
POWER:3LED*2W=6W
SIZE:D120*H120mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021153
POWER:9W/12W
SIZE:D160*H154mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:304SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



Φ187*H170mm

MODE:HTD-EL5021154

POWER:18W

SIZE:D200*H170mm


INPUT VOLTAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:304SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ236*H194mm

MODE:HTD-EL5021155

POWER:24W/36W

SIZE:D250*H194mm

INPUT VOLTAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:304SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ115*H120mm

MODE:HTD-EL5021200

POWER:3*2W=6W

SIZE:D120*H120mm

INPUT VOLTAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:304SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ140*H125mm

MODE:HTD-EL5021201

POWER:4*2W=8W

SIZE:D150*H125mm


INPUT VOLTAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ158*H130mm

MODE:HTD-EL5021202

POWER:6*2W=12W

SIZE:D180*H130mm

INPUT VOLTAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ185*H140mm

MODE:HTD-EL5021203

POWER:9*2W=18W

SIZE:D200*H140mm

INPUT VOLTAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ188*74*H60mm

MODE:HTD-EL5021179

POWER:3W CREE chip LED


SIZE:205*85*60mm

INPUT VOLTAGE:AC85-265V / AC12/24V /DC12/24V


MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:351lm/W Ra=80



Φ201*56*H51mm



Φ178*35*H42mm

MODE:HTD-EL5021181

POWER:3W CREE chip LED


SIZE:185*40*45mm

INPUT VOLTAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:351lm/W Ra=80



Φ139*35*H42mm

MODLE:HTD-EL5021182
POWER:3W CREE chip LED
SIZE:145*40*45mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80



Φ111*44*H55mm

MODLE:HTD-EL5021183
POWER:3W CREE chip LED
SIZE:110*45*55mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:35lm/W Ra=80




Φ97*50*H52mm

MODLE:HTD-EL5021184
POWER:3W CREE chip LED
SIZE:100*60*52mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80



Φ65*H48mm

MODLE:HTD-EL5021185
POWER:3W CREE chip LED
SIZE:Ø82*48mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80

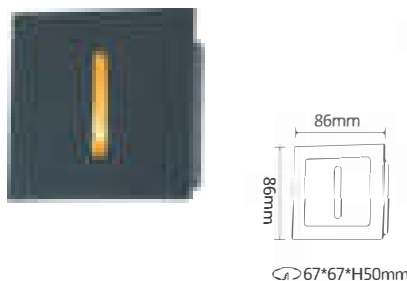

Φ67*67*H50mm

MODLE:HTD-EL5021186
POWER:3W CREE chip LED
SIZE:86*86*50mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:35lm/W Ra=80




200*200*H62mm

MODLE:HTD-EL5021187
POWER:12W
SIZE:220*220*62mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80




Φ148*148*H62mm

MODLE:HTD-EL5021188
POWER:7W
SIZE:160*160*62mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80

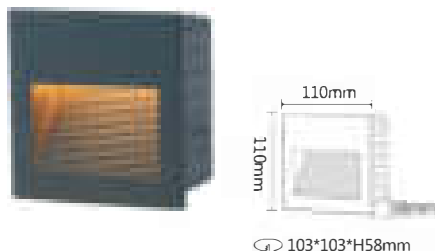

Φ103*103*H58mm

MODLE:HTD-EL5021189
POWER:5W
SIZE:110*110*58mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:35lm/W Ra=80

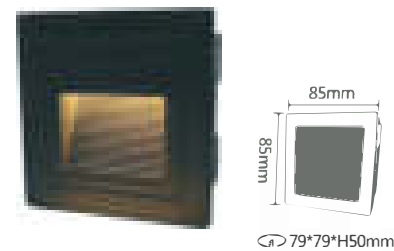

Φ79*79*H50mm

MODLE:HTD-EL5021190
POWER:3W
SIZE:85*85*50mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80



Power	Material	Size (mm)	IP	LED	Wavelength	Beam	Life	Light Output	Color
3W	Aluminum Anodized Aluminum	80/80	IP65/IP68	10000/50000	4000-6500 10000K	90°/120°/180°	> 50	100lm/W	P40
5W	Aluminum Anodized Aluminum	80/80	IP65/IP68	10000/50000	4000-6500 10000K	90°/120°/180°	> 50	100lm/W	P40
7W	Aluminum Anodized Aluminum	80/80	IP65/IP68	10000/50000	4000-6500 10000K	90°/120°/180°	> 50	100lm/W	P40
10W	Aluminum Anodized Aluminum	80/80	IP65/IP68	10000/50000	4000-6500 10000K	90°/120°/180°	> 50	100lm/W	P40



DF165 (black) / **DF165** (black/white)
Dimension: 80x100 / 100x100mm
Lamp: LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF167 / **DF168** (black/white)
Dimension: 120x120 / 150x150mm
Lamp: LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF169
Dimension: 80x100mm
Lamp: LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF170
Dimension: 100x100mm
Lamp: LED 6x1W / 5Wx3
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF171
Dimension: 100x100mm
Lamp: LED 6x1W / 1x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF172
Dimension: 100x100mm
Lamp: LED 12x1W / LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF173
Dimension: 100x100mm
Lamp: LED 18x1W / LED 3x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF174
Dimension: 200x200mm
Lamp: LED 3x1W / LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic



DF175
Dimension: 100x100mm
Lamp: LED 3x1W / LED 6x1W
Voltage: 85-265V
Material: Aluminium+Glass
Stainless steel+Plastic




MODE:HTD-EL5021191
 POWER:3W
 SIZE:58*58*46mm
 INPUT VOITAGE:AC85-265V / AC12/24V / DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021192
 POWER:5W
 SIZE:210*65*55mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 UGHT EFFICIENCY:35lm/W Ra=80




MODE:HTD-EL5021193
 POWER:SW
 SIZE:162*100*58mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:35lm/W Ra=80

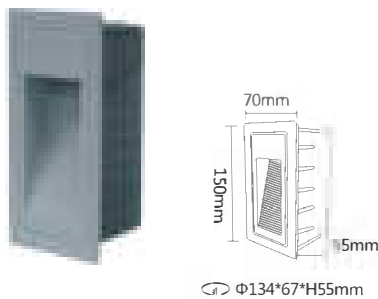


MODE:HTD-EL5021194
 POWER:5W
 SIZE:150*70*55mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:35lm/W Ra=80




MODE:HTD-EL5021195
 POWER:3W
 SIZE:100*60*52mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 UGHT EFFICIENCY:35lm/W Ra=80

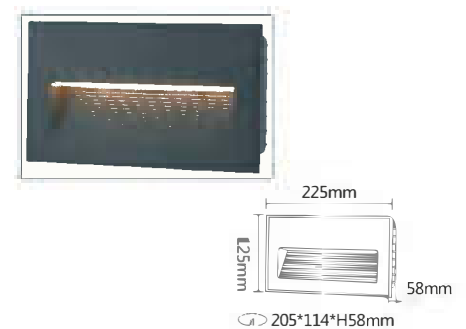


MODE:HTD-EL5021197
 POWER:12W
 SIZE:225*125*58mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65 L
 IGHTEFFICIENCY:35lm/W Ra=80

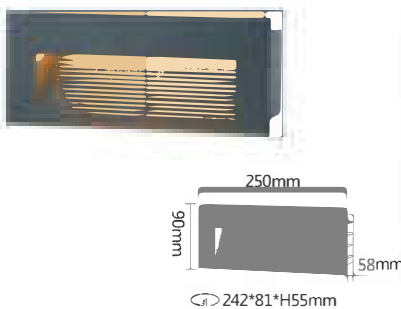


MODE:HTD-EL5021198
 POWER:12W
 SIZE:250*90*58mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:35lm/W Ra=80

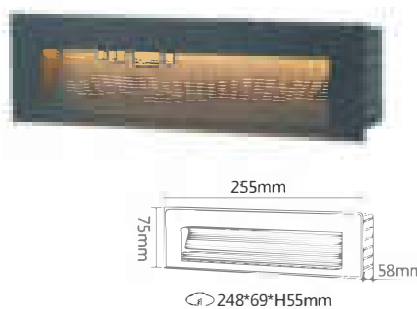

MODE:HTD-EL5021199
 POWER:12W
 SIZE:255*75*58mm
 INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 UGHT EFFICIENCY:v35lm/W Ra=80

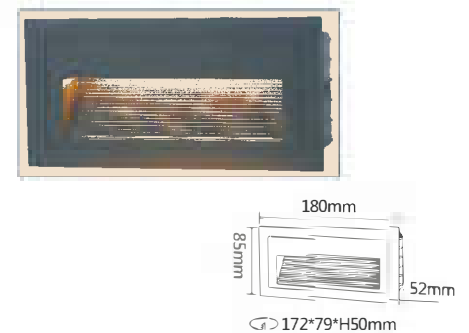

MODE:HTD-EL5021200
 POWER:7W
 SIZE:180*85*52mm
 INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V MATERIAL:aluminum Toughened glass plastic PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021201

POWER:7W



SIZE:210*85*52mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021202

POWER:12W

SIZE:210*85*52mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021203

POWER:7W


SIZE:210*65*58mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021204

POWER:5W


SIZE:162*100*58mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021205

POWER:5W

SIZE:170*70*58mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021206

POWER:5W


SIZE:150*70*55mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021208

POWER:5W


SIZE:105*85*52mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021210

POWER:3W

SIZE:100*60*52mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IPG5

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021210

POWER:3W

SIZE:100*60*52mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021211

POWER:3W

SIZE:D68*52mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021212

POWER:3W


SIZE:D82*65mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80

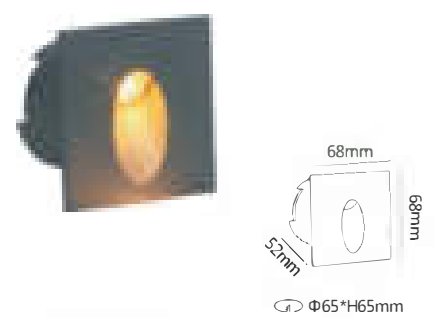

MODE:HTD-EL5021213

POWER:3W


SIZE:68*68*52mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80

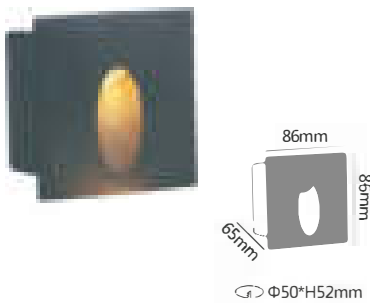

MODE:HTD-EL5021214

POWER:3W


SIZE:86*86*65mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80

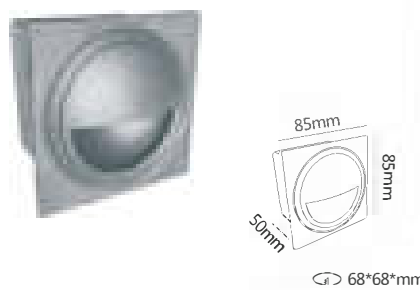

MODE:HTD-EL5021215

POWER:5W


SIZE:85*85*50mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80

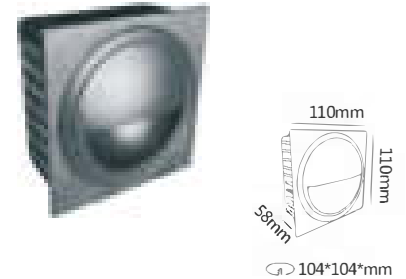

MODE:HTD-EL5021216

POWER:5W


SIZE:110*110*58mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80

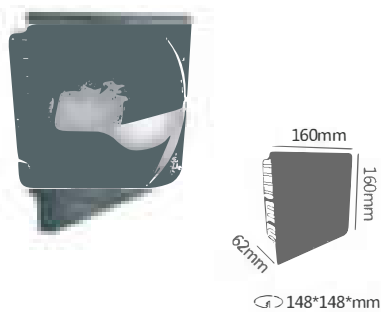

MODE:HTD-EL5021217

POWER:7W

SIZE:160*160*62mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021222

POWER:E27

SIZE:233*101*83mm

INPUT VOITAGE:AC85-265V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65



MODE:HTD-EL5021222

POWER:E27

SIZE:233*101*83mm


INPUT VOITAGE:AC85-265V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65




MODE:HTD-EL5021224
POWER:E27
SIZE:233*101*83mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65

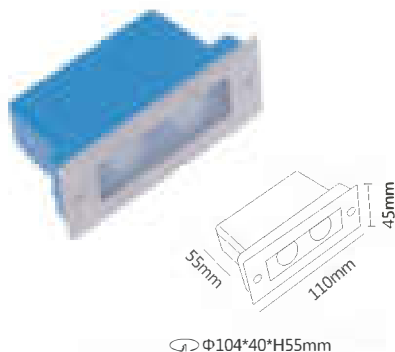

MODE:HTD-EL5021089
POWER:2W
SIZE:110*45*55mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5021090
POWER:3W
SIZE:110*45*55mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

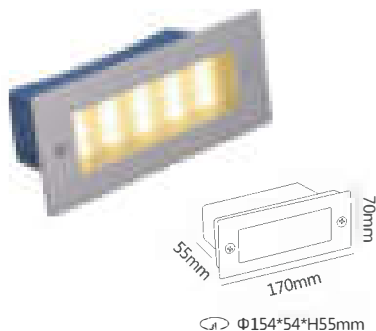


MODE:HTD-EL5021050
POWER:5W
SIZE:170*70*55mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80




MODE:HTD-EL5021050
POWER:5W
SIZE:170*70*55mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021052
POWER:5W
SIZE:170*70*55mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80

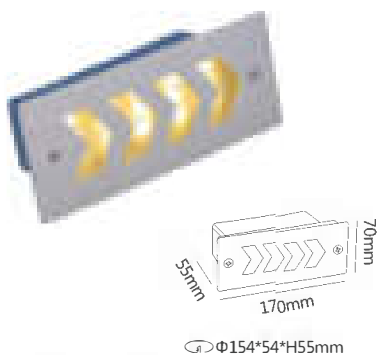


MODE:HTD-EL5021053
POWER:5W
SIZE:170*70*55mm
IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80

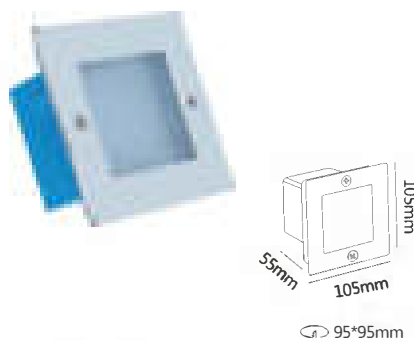

MODE:HTD-EL021054
POWER:5W
SIZE:105*105*55mm
INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021055
POWER:5W
SIZE:105*105*55mm
INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V
MATERIAL:201SS aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:35lm/W Ra=80



MODLEHTD-EL5021056

POWER:5W


SIZE:105*105*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021057

POWER:5W


SIZE:105*105*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021058

POWER:3W

SIZE:110*45*55mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021059

POWER:3W


SIZE:110*45*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021060

POWER:3W


SIZE:110*45*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021061

POWER:3W


SIZE:110*45*55mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021062

POWER:3W

SIZE:70*70*55mm

IN PUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021063

POWER:3W


SIZE:70*70*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



MODE:HTD-EL5021064

POWER:3W


SIZE:70*70*55mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



Φ 65*65*H55mm

MODLE:HTD-EL5021065

POWER:3W


SIZE:70*70*55mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:201SS aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



157*96*H60mm

MODLE:HTD-EL5021066

POWER:5W



SIZE:160*100*60mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



Φ157*96*H65mm

MODLE:HTD-EL5021067

POWER:5W


SIZE:160*100*60mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



143*70*H60mm

MODLE:HTD-EL5021068

POWER:3W

SIZE:147*70*60mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



Φ254*70*H95mm

MODLE:HTD-EL5021069

POWER:7W


SIZE:255*70*95mm

INPUT VOITAGE:AC85-265V/AC12/24V/DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

UGHT EFFICIENCY:35lm/W Ra=80



254*70*95mm

MODLE:HTD-EL5021070

POWER:7W


SIZE:255*70*90mm

INPUT VOITAGE:AC85-265V / AC12/24V /DC12/24V

MATERIAL:aluminum Toughened glass plastic

PROTECTION CLASS:IP65

LIGHT EFFICIENCY:35lm/W Ra=80



MODLE:BB-2043

POWER:3W/6W/NR16

SIZE:Φ85H120mm


INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODLE:BB-2044

POWER:3W/6W/NR16

SIZE:Φ85H120mm


INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODLE:HTD-EL5022045

POWER:NR16

SIZE:D98H146mm

MATERIAL:304SS Toughened glass

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022002
POWER:6W/7W
SIZE:D120*H145mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022003
POWER:9W/12W
SIZE:D145*H180mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022004
POWER:12W/18W
SIZE:D170*H200mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304S5 Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022005
POWER:18W/24W
SIZE:D190*H220mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022006
POWER:24W/36W
SIZE:D210*H220mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022007
POWER:36W/48W
SIZE:D235*H240mm
INPUT VOITAGE:AC24V/DC24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022053
POWER:3W
SIZE:D82*H140mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022054
POWER:6W/7W
SIZE:D120*H140mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°





MODE:HTD-EL5022055
POWER:9W/12W
SIZE:D145*H180mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304S5 Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022056
POWER:9W/12W
SIZE:D160*H215mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022058
POWER:18W/24W
SIZE:D190*H205mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

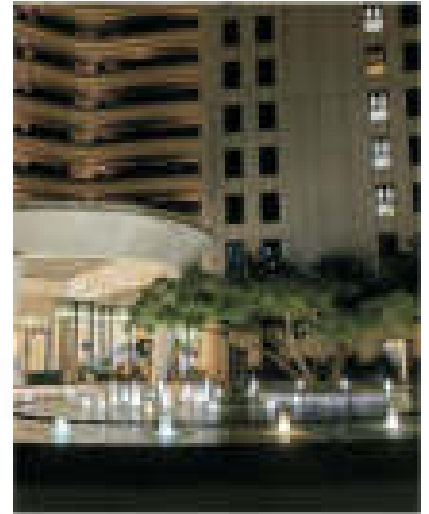


MODE:HTD-EL5022008
POWER:3W
SIZE:D82*H140mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022009
POWER:6W/7W
SIZE:D120*H140mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022010
POWER:9W/12W
SIZE:D145*H180mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022011
POWER:9W/12W
SIZE:D160*H215mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022012
POWER:12W/18W
SIZE:D175*H210mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022013
POWER:18W/24W
SIZE:D190*H205mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022023
POWER:6W/9W
SIZE:D130*H70mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022024
POWER:9W/12W
SIZE:D160*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022025
POWER:12W/18W
SIZE:D180*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022026
POWER:18W/24W
SIZE:D200*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:201SS aluminum Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL502016
POWER:6W
SIZE:D150*H77mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022017
POWER:9W
SIZE:D170*H89mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022018
POWER:12W
SIZE:D180*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022019
POWER:18W
SIZE:D200*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022020
POWER:24W
SIZE:D230*H85mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022046
POWER:6W/9W
SIZE:D130*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022047
POWER:9W
SIZE:D145*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022048
POWER:12W
SIZE:D160*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022049
POWER:18W
SIZE:D170*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304S5 Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:S0I0°15°24°30°4S0G0°90°



MODE:HTD-EL5022050
POWER:24W
SIZE:D190*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022051
POWER:9W
SIZE:D150*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022052
POWER:12W
SIZE:D170*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022030
POWER:3W
SIZE:D100*H75mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022031
POWER:6W/7W
SIZE:D125*H118mm
INPUT VOITAGE:AC12/24V/DC12/24V
MATERIAL:304SS Toughened glass plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



Φ139*H105mm

MODE:HTD-EL5022032

POWER:9W

SIZE:D150*H105mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ169*H115mm

MODE:HTD-EL5022033

POWER:12W

SIZE:D180*H115mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ200*H135mm

MODE:HTD-EL5022034

POWER:18W

SIZE:D210*H135mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ230*H140mm

MODE:HTD-EL5022035

POWER:24W

SIZE:D240*H140mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



Φ242*H155mm

MODE:HTD-EL5022036

POWER:36W

SIZE:D260*H155mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS Toughened glass plastic

PROTECTION CLASS:IP68

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022053



POWER:18W

SIZE:D229*H30mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS plastic

PROTECTION CLASS:IP68 Ra=80



MODE:HTD-EL5022027

POWER:6W

SIZE:D180* H60mm


INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022028

POWER:9W/12W

SIZE:D230*H60mm


INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS plastic

PROTECTION CLASS:IP68

UGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022029

POWER:18W/24W/36W

SIZE:D290*H60mm

INPUT VOITAGE:AC12/24V/DC12/24V

MATERIAL:304SS plastic

PROTECTION CLASS:IP68

LIGHT EFFICIENCY:80lm/W Ra=80

ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022037
POWER:9W/12W
SIZE:D230*H60mm
INPUT VOLTAGE:AC12/24V/DC12/24V
MATERIAL:plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022038
POWER:9W/12W
SIZE:D230*H60mm
INPUT VOLTAGE:AC12/24V/DC12/24V
MATERIAL:plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°




MODE:HTD-EL5022039
POWER:9W/12W
SIZE:D230*H60mm
INPUT VOLTAGE:AC12/24V/DC12/24V
MATERIAL:plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022040
POWER:18W/24W/36W
SIZE:D290*H60mm
INPUT VOLTAGE:AC12/24V/DC12/24V
MATERIAL:plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°



MODE:HTD-EL5022041
POWER:18W/24W/36W
SIZE:D290*H60mm
INPUT VOLTAGE:AC12/24V/DC12/24V
MATERIAL:plastic
PROTECTION CLASS:IP68
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:5°10°15°24°30°45°60°90°

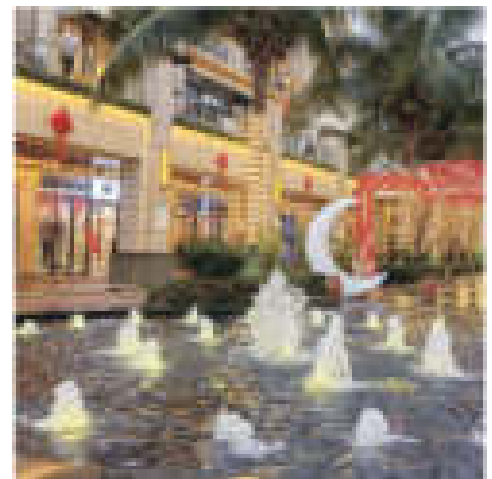


MODE:HTD-EL5026001
POWER:50W
SIZE:D355*H280mm
INPUT VOLTAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP55
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°90°



MODE:HTD-EL5026002
POWER:100W
SIZE:D410*H350mm
INPUT VOLTAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP55
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°90°



MODE:HTD-EL5026003
POWER:150W
SIZE:D410*H370mm
INPUT VOLTAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP55
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°90°



MODE:HTD-EL5026004
POWER:200W
SIZE:D470*H410mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP55
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°90°



MODE:HTD-EL5026005
POWER:240W
SIZE:D470*H410mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP55
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°90°



MODE:HTD-EL5026014
POWER:100W
SIZE:D280*H180mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°



MODE:HTD-EL5026015
POWER:150W
SIZE:D330*H180mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°



MODE:HTD-EL5026016
POWER:200W
SIZE:D380*H180mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:60°



MODE:HTD-EL5027001
POWER:50W
SIZE:410*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027002
POWER:100W
SIZE:500*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027003
POWER:150W
SIZE:590*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°




MODE:HTD-EL5027004
POWER:200W
SIZE:680*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027005
POWER:250W
SIZE:780*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027006
POWER:300W
SIZE:860*290*90mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027007
POWER:50W
SIZE:400*360*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027008
POWER:100W
SIZE:480*360*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°




MODE:HTD-EL5027009
POWER:150W
SIZE:560*360*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027010
POWER:200W
SIZE:640*360*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027013
POWER:100W
SIZE:350*290*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°

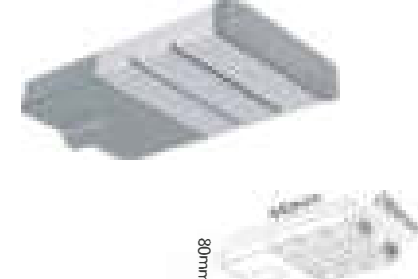

MODE:HTD-EL5027014
POWER:150W
SIZE:440*290*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027015
POWER:200W
SIZE:530*290*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5027017
POWER:100W
SIZE:370*370*175mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:80°150°150°



MODE:HTD-EL5027018
POWER:200W
SIZE:380*480*175mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:80°150°150°



MODE:HTD-EL5027019
POWER:300W
SIZE:385*640*185mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:80°150°150°



MODE:HTD-EL5027024
POWER:60W
SIZE:475x200x98mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027025
POWER:120W
SIZE:570x290x98mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027031
POWER:20W
SIZE:315*128*76mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027032
POWER:30W
SIZE:351*142*76mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027033
POWER:80W/60W
SIZE:405*166*79mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027034
POWER:100W
SIZE:484*211 *83mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027035
POWER:120W
SIZE:484*211 *83mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027036
POWER:180W
SIZE:580*242*83mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027038
POWER:50W
SIZE:500*215*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027039
POWER:100W
SIZE:720*280*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027040
POWER:150W
SIZE:860*330*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027055
POWER:30W
SIZE:500*210*65mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027056
POWER:60W
SIZE:500*210*65mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80



MODE:HTD-EL5027057
POWER:60W
SIZE:500*210*65mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027058
 POWER:80W
 SIZE:600*265*70mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass plastic
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027059
 POWER:100W
 SIZE:600*265*70mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass plastic
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:100lm/W Ra=80




MODLE:HTD-EL5027060
 POWER:120W
 SIZE:600*265*70mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass plastic
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027061
 POWER:150W
 SIZE:700*285*70mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum Toughened glass plastic
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027064
 POWER:50W
 SIZE:500*215*65mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:100lm/W Ra=80

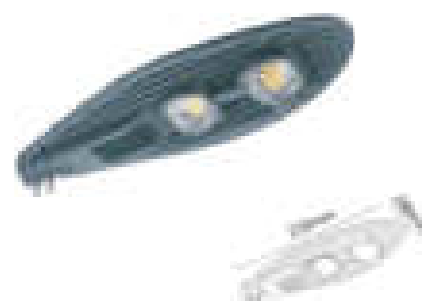


MODLE:HTD-EL5027065
 POWER:100W
 SIZE:720*280*75mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027066
 POWER:150W
 SIZE:860*330*75mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum glass
 PROTECTION CLASS:IP65
 LIGHT EFFICIENCY:100lm/W Ra=80



MODLE:HTD-EL5027067
 POWER:200W
 SIZE:950*335*80mm
 INPUT VOITAGE:AC85-265V
 MATERIAL:aluminum glass
 PROTECTION CLASS:IP65
 UGHT EFFICIENCY:100lm/W Ra=80

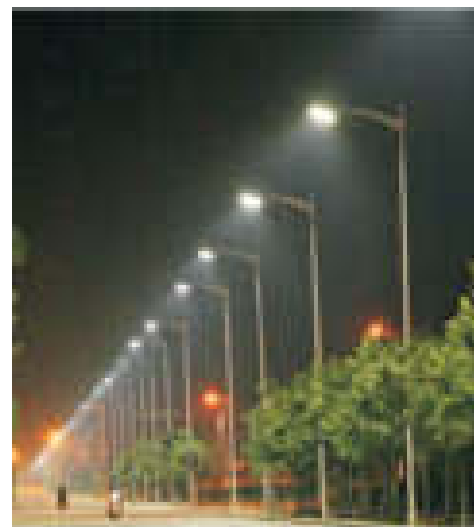



98mm

MODE:HTD-EL5028001
POWER:50W
SIZE:297*98*210mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



180mm

MODE:HTD-EL5028002
POWER:100W
SIZE:297*180*210mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



270mm

MODE:HTD-EL5028003
POWER:150W
SIZE:270*297*210mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



360mm

MODE:HTD-EL5028004
POWER:200W
SIZE:360*297*210mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:75°145°



MODE:HTD-EL5028007
POWER:30W
SIZE:200*167*40mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028008
POWER:50W
SIZE:265*220*47.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028009
POWER:60W
SIZE:265*220*47.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028010
POWER:70W
SIZE:300*245*49.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028011
POWER:80W
SIZE:300*245*49.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028012
POWER:100W
SIZE:345*295*53.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028013
POWER:120W
SIZE:365*330*53.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028014
POWER:150W
SIZE:365*330*53.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028015
POWER:180W
SIZE:400*360*53.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028016
POWER:200W
SIZE:400*360*53.5mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028057
POWER:50W
SIZE:346*200*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:30°60° 90° 80°140°




MODE:HTD-EL5028029
POWER:100W
SIZE:365*310*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:30°60° 90° 80°140°




MODE:HTD-EL5028030
POWER:150W
SIZE: 365*365*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:30°60° 90° 80°140°




MODE:HTD-EL5028031
POWER:200W
SIZE:365*420*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum plastic
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:30°60° 90° 80°140°



MODE:HTD-EL5028032
POWER:30W
SIZE:235*185*55mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028033
POWER:50W
SIZE:270*230*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028034
POWER:60W
SIZE:270*230*60mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028035
POWER:70W
SIZE:315*275*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028036
POWER:50W
SIZE:315*275*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028037
POWER:100W
SIZE:315*275*80mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028038
POWER:120W
SIZE:385*330*85mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028039
POWER:150W
SIZE:385*330*85mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028040
POWER:180W
SIZE:405*365*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°




MODE:HTD-EL5028041
POWER:200W
SIZE:405*365*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028042
POWER:240W
SIZE:405*365*100mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE:120°



MODE:HTD-EL5028051
POWER:30W
SIZE:265*220*47.5mm
INPUT VOITAGE:AC85-265V/AC24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

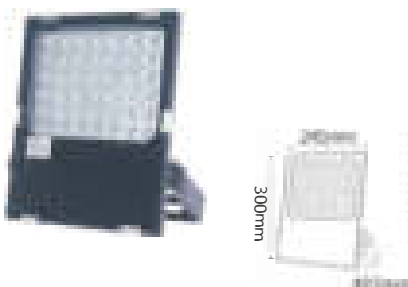

MODE:HTD-EL5028052
POWER:48W
SIZE:300*245*49.5mm
IN PUT VOITAGE:AC85-265V / AC24V /DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°




MODE:HTD-EL5028053
POWER:50W
SIZE:345*295*53.5mm
IN PUT VOITAGE:AC85-265V / AC24V /DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5028054
POWER:100W
SIZE:365*330*53.5mm
INPUT VOITAGE:AC85-265V/AC24V/DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°



MODE:HTD-EL5028055
POWER:120W
SIZE:400*360*53.5mm
IN PUT VOITAGE:AC85-265V / AC24V /DC24V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:80lm/W Ra=80
ANGLE:10°15°24°30°45°60°90°

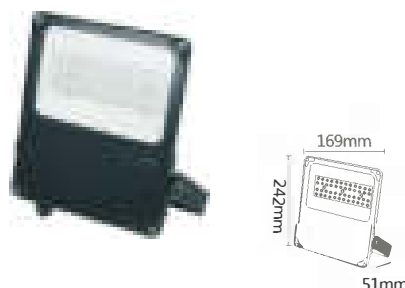

MODE:HTD-EL5028058
POWER:30W
SIZE:242*169*51mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028059
POWER:50W
SIZE:282*204*52mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028060
POWER:100W
SIZE:337*269*52mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028061
POWER:120W
SIZE:394*394*56mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028062
POWER:180W
SIZE:445*392*56mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028063
POWER:240W
SIZE:497*392*56mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
LIGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°



MODE:HTD-EL5028064
POWER:320W
SIZE:503*545*64mm
INPUT VOITAGE:AC85-265V
MATERIAL:aluminum Toughened glass
PROTECTION CLASS:IP65
UGHT EFFICIENCY:100lm/W Ra=80
ANGLE: 30° 60° 90° 120°

