

SF-P Tri-proof Light Datasheet




Key Features

- ⇒ Beautiful appearance, simple and elegant!
- ⇒ The lamp body radiator has a respirator, which dissipates heat faster!
- ⇒ **Efficacy:** Up to 130 lm/w
- ⇒ **LED Chip:** SMD2835
- ⇒ **SDCM:** <5
- ⇒ **Beam Angle:** 120° PC cover
- ⇒ **IP Rating:** IP65
- ⇒ **Installation:** Hanging | Ceiling
- ⇒ **Certifications:** CE, RoHS
- ⇒ **Warranty:** 5 years

Application

Warehouses, libraries, workshops, shopping malls, supermarkets, cold storage, shops, restaurants, sports centers, cinemas, hospitals, clothing stores, bars and other indoor lighting places.

Photometry

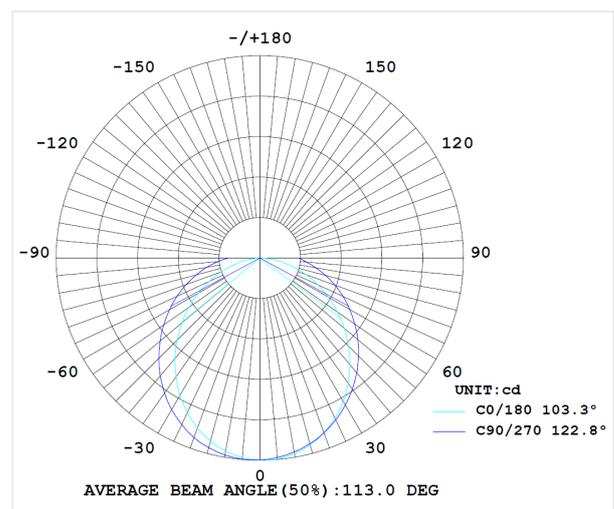

SF-P Tri-proof Light Datasheet

Product Data

Model No.	SF-P38-60-35	SF-P38-120-50	SF-P38-150-70	SF-P50-60-40	SF-P50-120-60	SF-P50-150-80
Power	35W	50W	70W	40W	60W	80W
Lumen Output	4,550 lm	6,500 lm	9,100 lm	5,200 lm	7,800 lm	10,400 lm
Length	0.6m	1.2m	1.5m	0.6m	1.2m	1.5m
Luminous Efficacy	130 lm/w					
CCT	3000K/4000K/5000K/5700K/6500K					
CRI	Ra≥80					
Input Voltage	100-277 VAC					
Efficiency In	≥90%					
Power Factor	PF>0.90					
Energy Efficiency Class	E					
Housing Color	Silver + White					
Housing Material	AL; PC ; ABS					
Operating Temperature	-25°C to +40°C					
Operating Humidity	10% to 90% RH					
Lifespan design	100,000 hours					
Warranty	5 years					

**Note: 1. The above parameters are all obtained at +25°C and there are errors within the allowable range of relevant standards.
2. This specification book is for reference only. We retains the right to optimize and modify without pre -notification!**

SF-P Tri-proof Light Datasheet

Product Data

Model No.	SF-P80-60-50	SF-P80-120-80	SF-P80-150-100	SF-P90-60-60	SF-P90-120-90	SF-P90-150-120
Power	50W	80W	100W	60W	90W	120W
Lumen Output	6,500 lm	10,400 lm	13,000 lm	7,800 lm	11,700 lm	15,600 lm
Length	0.6m	1.2m	1.5m	0.6m	1.2m	1.5m
Luminous Efficacy	130 lm/w					
CCT	3000K/4000K/5000K/5700K/6500K					
CRI	Ra≥80					
Input Voltage	100-277 VAC					
Efficiency In	≥90%					
Power Factor	PF>0.90					
Energy Efficiency Class	E					
Housing Color	Silver + White					
Housing Material	AL; PC ; ABS					
Operating Temperature	-25°C to +40°C					
Operating Humidity	10% to 90% RH					
Lifespan design	100,000 hours					
Warranty	5 years					

**Note: 1. The above parameters are all obtained at +25°C and there are errors within the allowable range of relevant standards.
2. This specification book is for reference only. We retains the right to optimize and modify without pre -notification!**

SF-P Tri-proof Light Datasheet


Product Data

Model No.	SF-P88-60-40	SF-P88-120-60	SF-P88-150-80	SF-P128-60-80	SF-P128-120-120	SF-P128-150-150
Power	40W	60W	80W	80W	120W	150W
Lumen Output	5,200 lm	7,800 lm	10,400 lm	10,400 lm	15,600 lm	19,500 lm
Length	0.6m	1.2m	1.5m	0.6m	1.2m	1.5m
Luminous Efficacy	130 lm/w					
CCT	3000K/4000K/5000K/5700K/6500K					
CRI	Ra≥80					
Input Voltage	100-277 VAC					
Efficiency In	≥90%					
Power Factor	PF>0.90					
Energy Efficiency Class	E					
Housing Color	Silver + White					
Housing Material	AL; PC ; ABS					
Operating Temperature	-25°C to +40°C					
Operating Humidity	10% to 90% RH					
Lifespan design	100,000 hours					
Warranty	5 years					

**Note: 1. The above parameters are all obtained at +25°C and there are errors within the allowable range of relevant standards.
2. This specification book is for reference only. We retains the right to optimize and modify without pre -notification!**

SF-P Tri-proof Light Datasheet

Images Mounting & Accessories

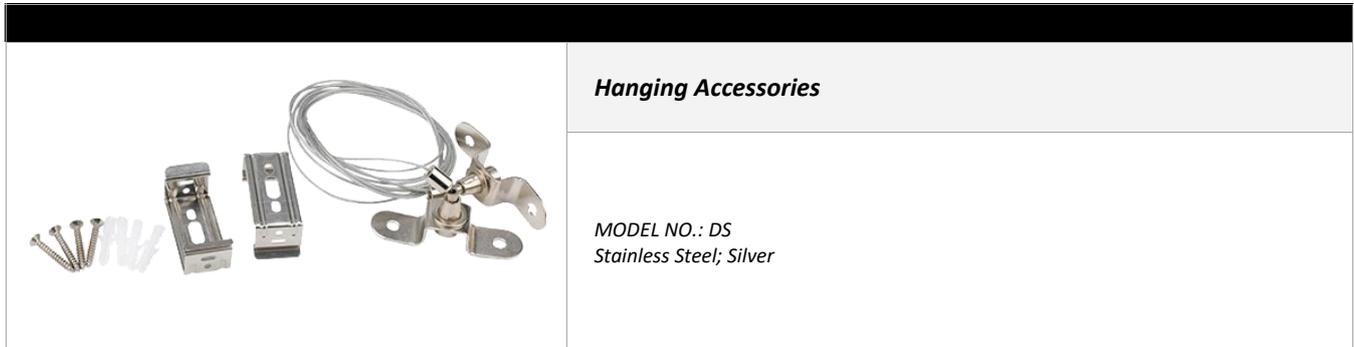

Hanging Accessories

MODEL NO.: DS
Stainless Steel; Silver

Dimension (unit: mm)



SF-P38

Item	SF-P38-60-35	SF-P38-120-50	SF-P38-150-70
L	600mm	1200mm	1500mm




SF-P50

Item	SF-P50-60-40	SF-P50-120-60	SF-P50-150-80
L	600mm	1200mm	1500mm



SF-P80

Item	SF-P80-60-50	SF-P80-120-80	SF-P80-150-120
L	600mm	1200mm	1500mm

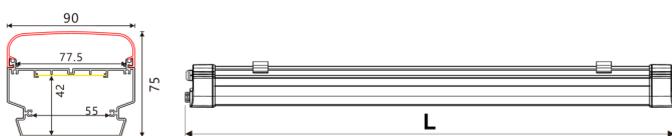


SF-P90

Item	SF-P90-60-60	SF-P90-120-90	SF-P90-150-120
L	600mm	1200mm	1500mm


SF-P Tri-proof Light Datasheet

Dimension (unit: mm)

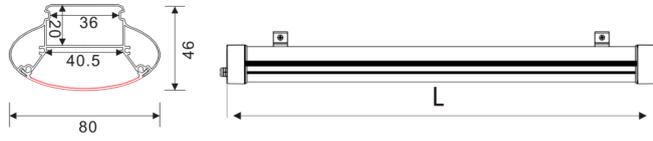

SF-P88

Item	SF-P88-60-50	SF-P88-120-80	SF-P88-150-120
L	600mm	1200mm	1500mm



SF-P128

Item	SF-P128-60-60	SF-P128-120-90	SF-P128-150-120
L	600mm	1200mm	1500mm