

SF-Q Tri-proof Light Datasheet




Key Features

- ⇒ Beautiful appearance, simple and elegant!
- ⇒ The lamp body radiator has a respirator, which dissipates heat faster!
- ⇒ **Efficacy:** Up to 130 lm/w
- ⇒ **LED Chip:** SMD2835
- ⇒ **SDCM:** <5
- ⇒ **Beam Angle:** 120° PC cover
- ⇒ **IP Rating:** IP65
- ⇒ **Installation:** Hanging | Ceiling
- ⇒ **Certifications:** CE, RoHS
- ⇒ **Warranty:** 5 years

Application

Warehouses, libraries, workshops, shopping malls, supermarkets, cold storage, shops, restaurants, sports centers, cinemas, hospitals, clothing stores, bars and other indoor lighting places.

Photometry

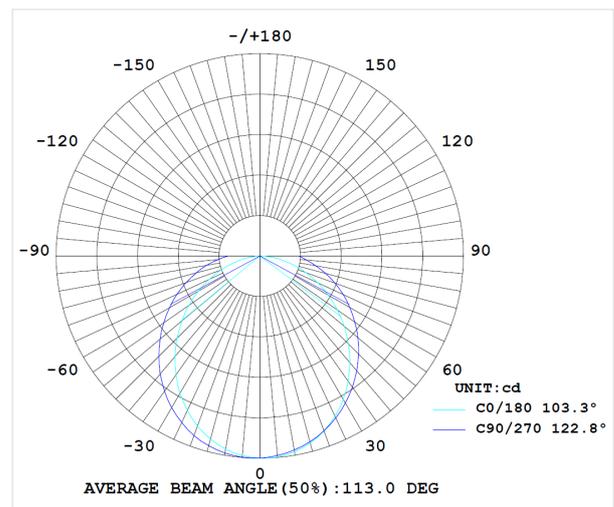

SF-Q Tri-proof Light Datasheet


Product Data

Model No.	SF-Q60-60-40	SF-Q60-120-60	SF-Q60-150-80	SF-Q90-60-60	SF-Q90-120-90	SF-Q90-150-120
Power	40W	60W	80W	60W	90W	120W
Lumen Output	5,200 lm	7,800 lm	10,400 lm	7,800 lm	11,700 lm	15,600 lm
Length	0.6m	1.2m	1.5m	0.6m	1.2m	1.5m
Luminous Efficacy	130 lm/w					
CCT	3000K/4000K/5000K/5700K/6500K					
CRI	Ra≥80					
Input Voltage	100-277 VAC					
Efficiency In	≥90%					
Power Factor	PF>0.90					
Energy Efficiency Class	E					
Housing Color	Silver + White					
Housing Material	AL; PC ; ABS					
Operating Temperature	-25°C to +40°C					
Operating Humidity	10% to 90% RH					
Lifespan	100,000 hours					
Warranty	5 years					


**Note: 1. The above parameters are all obtained at +25°C and there are errors within the allowable range of relevant standards.
2. This specification book is for reference only. We retains the right to optimize and modify without pre -notification!**

SF-Q Tri-proof Light Datasheet

Image Mounting & Accessories

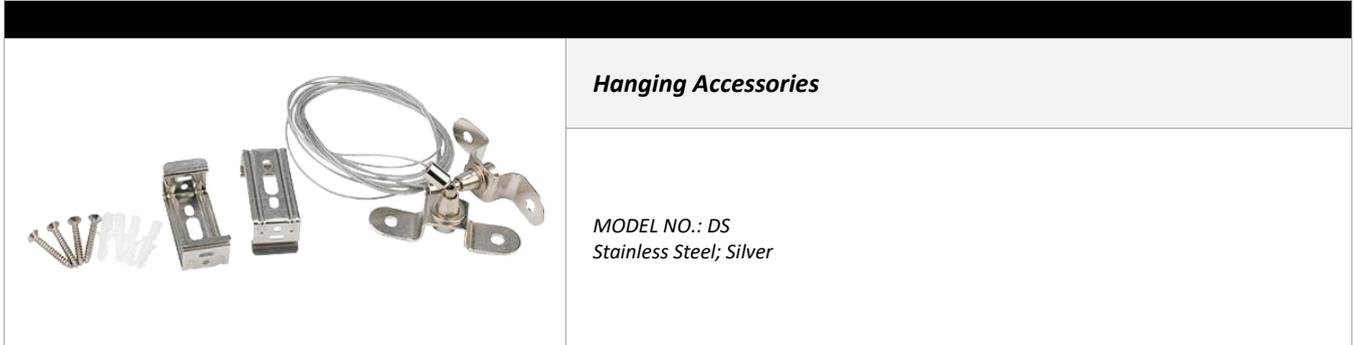


Dimension (unit: mm)

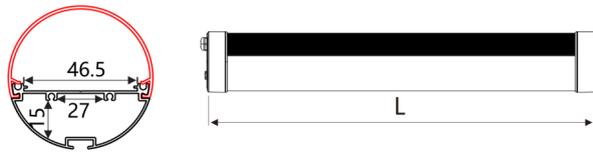

SF-Q60

Item	SF-Q60-60-60	SF-Q60-120-90	SF-Q60-150-120
L	600mm	1200mm	1500mm
D	Ø60mm	Ø60mm	Ø60mm

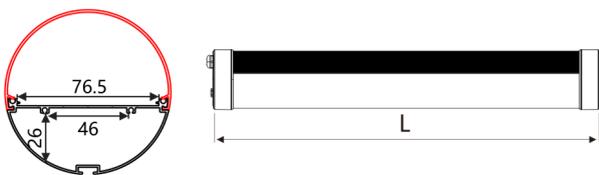

SF-Q90

Item	SF-Q90-60-60	SF-Q90-120-90	SF-Q90-150-120
L	600mm	1200mm	1500mm
D	Ø90mm	Ø90mm	Ø90mm