


HOP-HQ490 Thermal Transfer/Direct thermal Label Printer

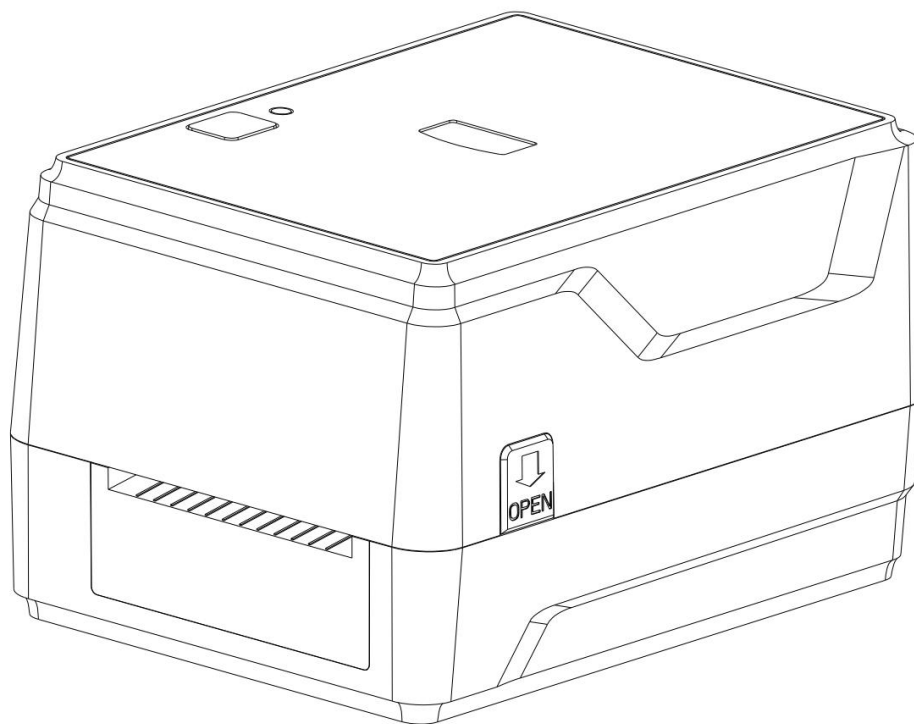

Specifications

Items		Parameters/Descriptions
User Indicator		A power switch,A feed button,A LED indicator
Sensor		Gap sensor,Black mark sensor, Printer head up sensor Temperature Sensor (THP) ,Ribbon Sensor
Printing Method		Direct thermal/Thermal Transfer
Print Location		Center printing
Resolution		203 dpi or 300dpi
Print Density		1-15 density Level
Speed		152mm/s(Max)
Label	Paper Width	25.4 ~ 120 mm
	Paper Height	10-1770mm
	Paper Diameter	25-125mm

	Label Type	Direct Thermal:Continuous, gap, black mark, fan-fold, punched hole,label paper, tag paper card Thermal Transfer:Continuous, gap, black mark, fold-fold, perforated paper, label paper, tag paper card, coated paper,matte silver paper, washing label, shelf label, etc.
	Paper Thickness	0.05mm-0.26mm
	Printing Width(Max)	104mm
Paper Type		Inner roll paper, outer roll paper and stack paper
Printer Size		315mm*230mm*190mm
Printer Weight		2.93kg (Pure printer without package)
Memory		4MB Flash Memory/8MB SDRAM
Interface		USB or USB+Bluetooth
1D Barcode		1D bar code: Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11
2D BarCode		2D bar code: PDF-417, Maxicode, DataMatrix, QR code, Aztec
Rotation		0°、90°、180°、270°
Emulation		TSPL、EPL、ZPL、DPL
System		Support Windows, Android,iOS,Mac
External Paper Diameter		8 inch Roll type paper roll/folding paper/cardboard
TPH Working Life		Over 100,000,000 pulses or over 50 km
Power Adaptor		Input: AC 110V~260V/50Hz/60Hz Output: DC 12/24V—2.5A(Instantaneous 10A)
Using Environment	working environment	5℃~50℃ (non-condensing)
	storage environment	-20℃~60℃ (non-condensing)
	Working humidity	20%~85% RH (non-condensing)
	Storage humidity	5%~95% RH (non-condensing)