


HOP-HQ400B

4 Inch Thermal Label and Receipt Printer (Dual Mode)

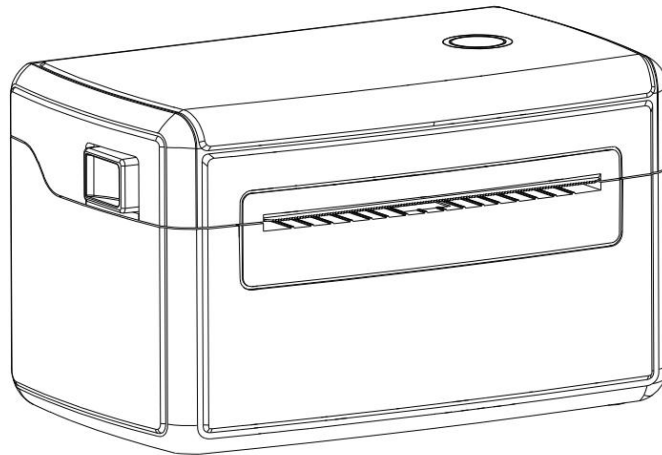

Specifications

Items			Parameters/Descriptions
User Indicator			A power switch,A feed button,A LED indicator (Multi-color LED indicator)
Sensor			Gap sensor Black mark sensor (the sensor position moves along with the black mark) Printer head up sensor Temperature Sensor (THP)
Paper Type	Label Paper	Width	37-123 mm
		Diameter	25-120mm
		Height	10-280mm
		Media Type	Continuous, gap, black mark, fan-fold, punched hole,label paper, tag paper card
		Thickness	0.05mm-0.26mm
		Printing width(Max)	108mm
	Receipt Paper	Width	58mm,80mm,104mm
		Diameter	80mm(Max)
Label Paper Type			Roll type or Stack Type
Printer Size			200 mm (L) x130 mm (W) x114 mm (H)
Printer Weight			1.05kg (Pure printer weight without package)
Open Method			Shell way
Print Method			Direct thermal
Print Location			Center printing
Resolution			203 dpi
Print Density			1-15 density Level



Speed		152mm/sec
Memory		512KB Flash Memory/320KB RAM + 2MB PSRAM
Interface		USB/Ethernet/COM/Bluetooth/Wi-Fi Optional
1D Barcode		1D barcode : Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on
2D BarCode		2D barcode: PDF-417, QR code
Rotation		0°、90°、180°、270°
Emulation		TSPL、CPCL、ESC/POS
System		Windows,Android,iOS,Mac,Linux
TPH Working Life		Over 100,000,000 pulses or over 50 km
Power Adaptor		Input: AC 110V~260V/50Hz/60Hz Output: DC 24V—2.5A
Using Environment	working altitude	Only suitable for safe use in areas below 2000m above sea level
	working	5℃~50℃ (non-condensing)
	storage	-20℃~60℃ (non-condensing)
	Working humidity	20%~85% RH (non-condensing)
	Storage humidity	5%~95% RH (non-condensing)