
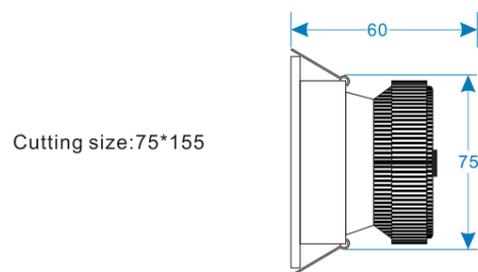


**RECTANGULAR**  
**2X6W COB**  
**LED CEILING LIGHT**  
180°rotatable

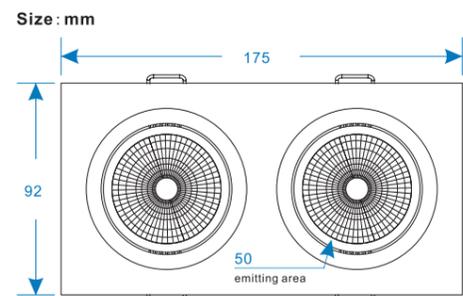

**C06752**

|                           |                                |  |  |
|---------------------------|--------------------------------|--|--|
| <b>NETWEIGHT</b><br>0.6KG | <b>CUTTINGSIZE</b><br>75X155MM | <b>PACKING</b><br>1 PC<br>18X12.4X11.5CM | <b>PACKING</b><br>16PC<br>52.5X38.5X24.5CM |
|---------------------------|--------------------------------|--|--|

**Features:**

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

**Application:**


Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.




| Lamp Parameters :     | Standard                  | Super-bright  |
|-----------------------|---------------------------|---------------|
| Input Voltage         | AC100-277V or AC200V-240V |               |
| Frequency Range       | 50Hz~60Hz                 |               |
| Led Consumption       | 12W                       |               |
| System Consumption    | 15W                       |               |
| Led Initial Flux      | 1080LM-1168LM             | 1140LM-1260LM |
| Color Rendering Index | >80                       |               |
| Working Temperature   | -40°C ~ +55°C             |               |
| Fireproof Class       | V0                        |               |
| Power cable           | 2x0.75mm2                 |               |
| Color of housing      | black, white, silver      |               |
| Certificate           | CE ROHS ERP V0 FCC        |               |
| Optical data:         | IES                       |               |

| Driver Parameters :               |                             |
|-----------------------------------|-----------------------------|
| Brand                             | Lifud                       |
| Input                             | AC100-277V or AC200V-240V   |
| Output                            | DC18-30V 350mA              |
| Power Factor                      | 0.9~0.97                    |
| Power Efficiency                  | 80%                         |
| Certificate                       | CE<br>TUV<br>CQC            |
| Dimmable                          | Triac / dali / 1-10V / WIFI |
| MEANWELL : APC-12-350 is optional |                             |


| Model No. | Beam angle | CRI | CCT   | Illumination | Illumination (S) | Input Voltage(V)         |
|-----------|------------|-----|-------|--------------|------------------|--------------------------|
| C06752    | 30°/50°    | >80 | 3000K | 1080LM       | 1140LM           | AC100-277V<br>AC200-240V |
|           |            |     | 4000K | 1120LM       | 1200LM           |                          |
|           |            |     | 6000K | 1160LM       | 1260LM           |                          |

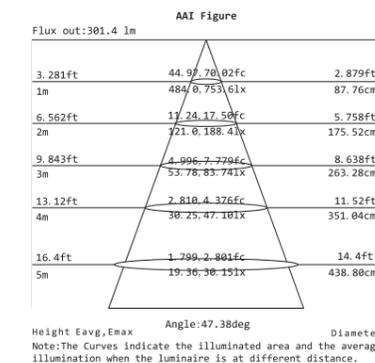


Graphical Representation for  
**D0675 WW 50° (S)**

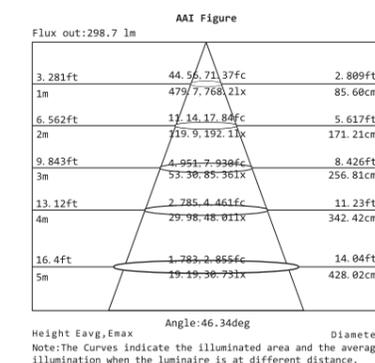

Graphical Representation for  
**D0675 NW 50°**

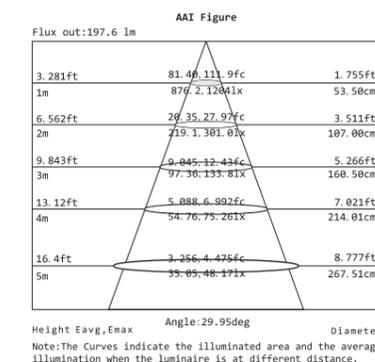

Graphical Representation for  
**D0675 NW 30° (S)**

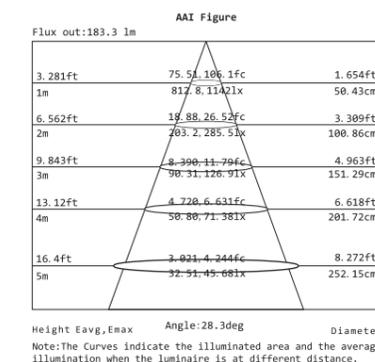

Graphical Representation for  
**D0675 WW 30°**