



◆Product description:

This series of specifications for the use of the physical, rated working voltage 1500V, rated working current 2-20A and 25-50A electric line for overload or short circuit protection. Rated breaking capacity 1500V /20KA DC, products comply with IEC60269-1, GB13539.1, IEC60269-6, GB13539.6 standards.


Product Name	gPV Fuse	Model/Size	10*85mm
Rated Voltage	1500VDC	Rated Current	2A,3A,3.5A,4A,5A,6A,8A,10A,12A,15A,16A,20A,25A,30A,32A,40A,50A
Breaking capacity	20kA	Class of operation	gPV (IEC60269-1/GB13539-1/IEC60269-6/GB13539-6)
Minimum interrupting rating	2 x I	Time constant	1-2 ms
Rated Impulse voltage	1575V	Rated breaking capacity	20KA

◆Size:

2-20A

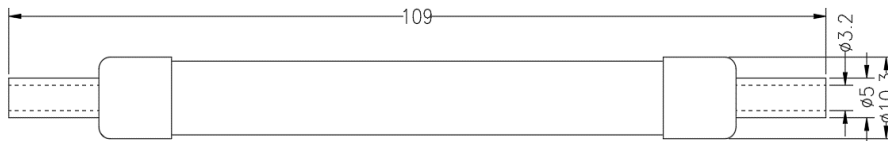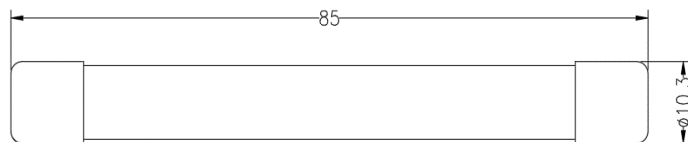


25-50A

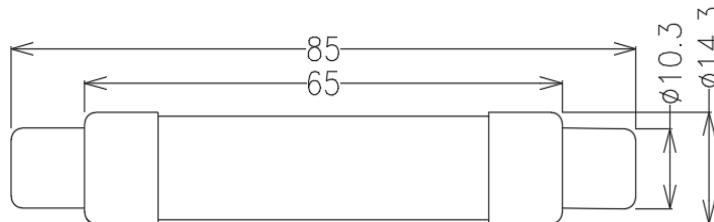

◆Technical data:

Rated Current (A)	Rated Voltage (V)	Rated breaking capacity(DC)	Pre-arc=I ² t-value(A ² S)	Total I ² t-value @DC 1500V(A ² S)	Power Loss (W)
2	1500	20kA@1500V	3.56	9.72	2.45
3	1500	20kA@1500V	27	50.1	1.48
3.5	1500	20kA@1500V	32	53.8	1.53
4	1500	20kA@1500V	37.5	57.5	1.58
5	1500	20kA@1500V	44.6	60.2	1.64
6	1500	20kA@1500V	50	63	2.19
8	1500	20kA@1500V	69.2	68.6	2.5
10	1500	20kA@1500V	87.5	74.5	3.2
12	1500	20kA@1500V	106.8	168.6	3.4
15	1500	20kA@1500V	132	301	3.7
16	1500	20kA@1500V	142	312	3.9
20	1500	20kA@1500V	172.6	341.8	4.3
25	1500	20kA@1500V	214	382	4.8
30	1500	20kA@1500V	256	423	5.2
32	1500	20KA@1500V	270	443	8.85
40	1500	20KA@1500V	350	650	12.67
50	1500	20KA@1500V	470	800	13.65

◆Time current curve:

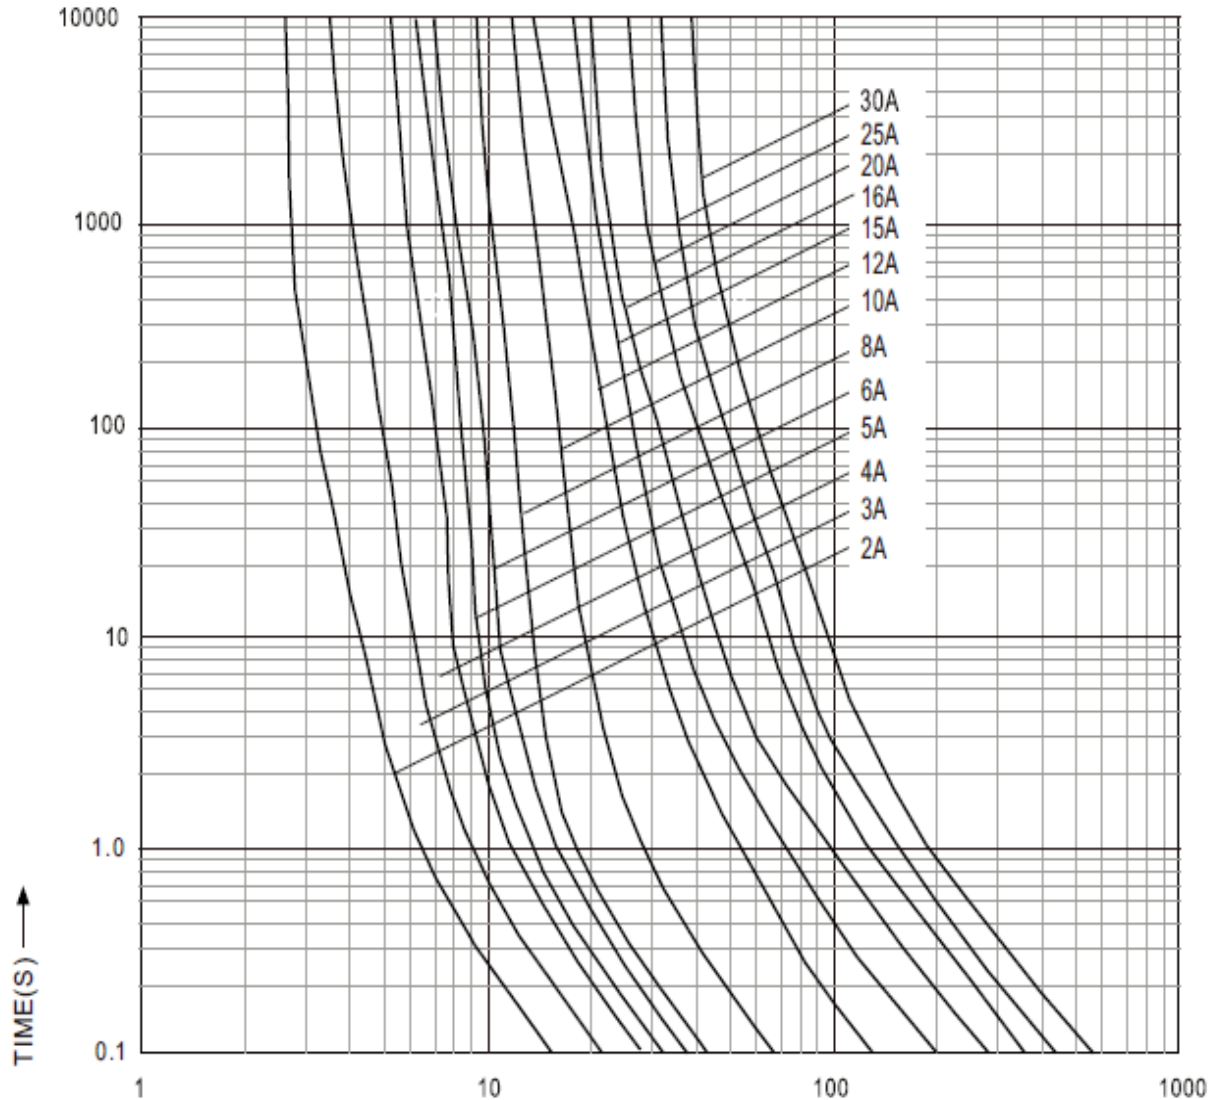

◆Material:

- 1)The contacts of the cup is the copper, the internal is high precision Sterling Silver with melt, melt pipe is made of 95% alumina ceramics, arc quenching medium is the high silica sand.
- 2)The contact surface treatment of electroplating for nickel plating.

◆Environmental parameters:

- 1)Working environment

-The working temperature: $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$.
-The installation site: 2000m altitude does not exceed 2000m.

- 2)Storage environment

-The storage temperature: $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$
-The storage humidity: $\leq 90\%$

3)No harmful gases and flammable and explosive materials and corrosive items in the warehouse, and should not have received strong mechanical vibration, shock and strong magnetic field effect.

◆Reference standard:

- 1)GB 13593.1/IEC60269.1
- 2)GB 13539.6/IEC60269.6

◆The other parameters:

- 1)Marking:The fuse identification using printing form.
- 2)Package:The standard package is in accordance with the relevant provisions of GB/T13384-2008


1500VDC FUSE DIN HOLDER

◆Product description:

This fuse type is mainly used for breaking in case of possible photovoltaic series of solar energy -collecting plates in solar energy photovoltaic header boxes and circuit overload and short-circuit current caused by current feedback of inverters ,thus protecting the entire photovoltaic energy-collecting plates.Also in=t can be used in any other DC circuit protection of electric elements.

Rated Voltage	1500VDC	Accept the rated power	<5W
Rated Current	Max.50A	The working temperature	-40C°~+85C°

◆Size:

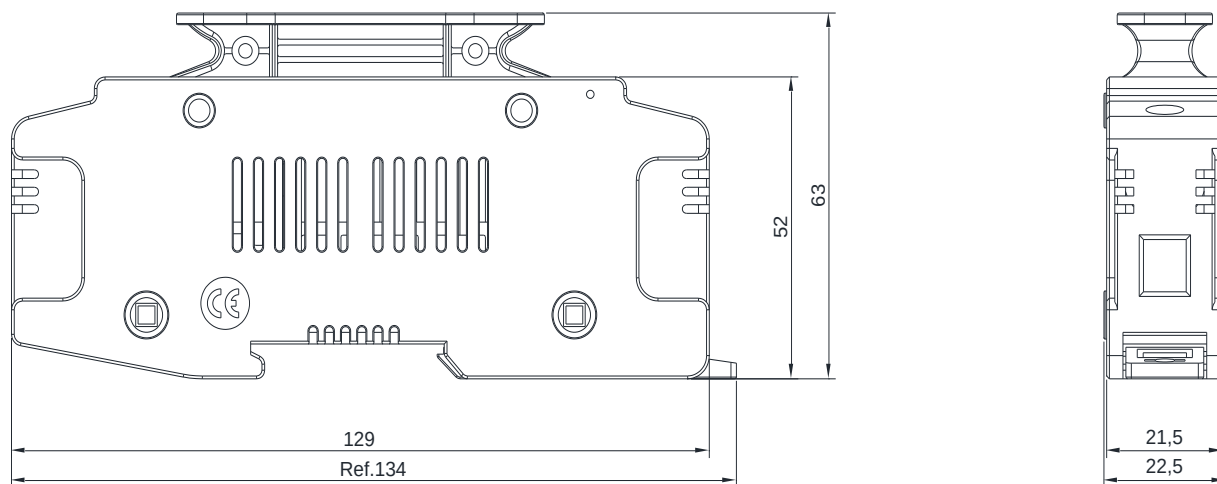

◆Picture:



◆Storage environment:

The storage temperature: -40C°~+85C°

The storage humidity: ≤90%

No harmful gases and flammable and explosive materials and corrosive items in the warehouse, and should not have received strong mechanical vibration, shock and strong magnetic field effect.