

## 光伏2转1保险丝连接器Y型线束


### PV 2 TO1 Y CABLE BRANCH FUSE CONNECTORS

#### 产品规格 Product Specifications

绝缘材料 Insulation material	PPE/PA	保险丝规格 Fuse Specification	1A,2A,3A,3.5A,4A,5A,6A,8A, 10A,12A,15A,16A,20A,25A,30A, 32A,35A,40A,45A,50A
额定电流 Rated current (Without fuse)	Max. Input:30A Max. Output:60A	安全等级 Safety degree	II
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
最大的测试电压 Maximum voltage	8kV	环境温度范围 Ambient temperature range	-40℃...+85℃(IEC)
连接器接触电阻 contact resistance	≤0.25mΩ	温度上限 Upper limiting temperature	110℃(IEC)
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	适配电线规格 Suitable cable cross sections	4-10sqmm cable
保护等级 Degree of protection	IP68	适配保险丝尺寸 (mm) Suitable for fuse size(mm)	10*85/10/14*85
Rated Impulse voltage 额定脉冲电压	16kV	符合标准 Regulatory approval	TUV/CE (EN60269/EN62208)

#### 图示 Drawing

4FBCC1F2M-15

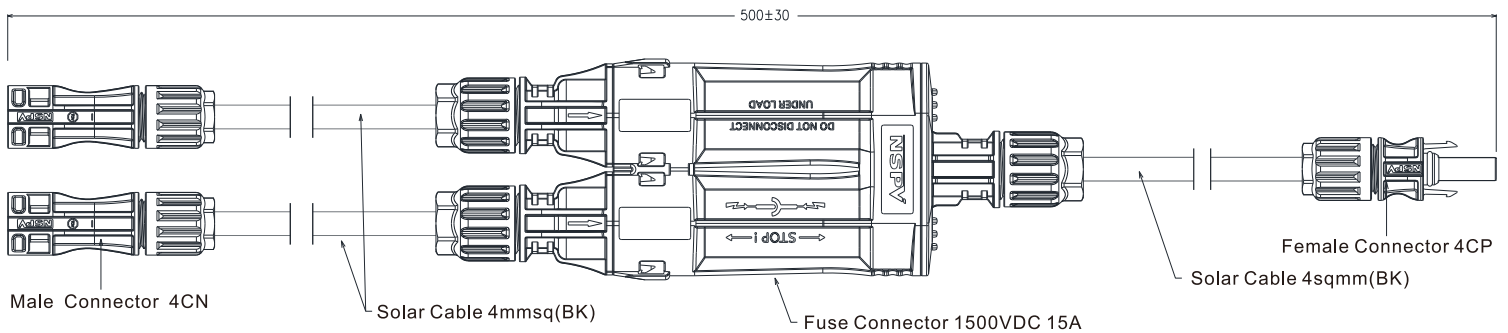

4FBCC1M2F-15

