
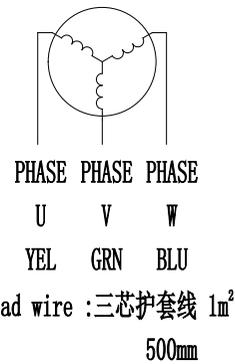


Electrical Spec:

Model	80BL110S50-430TK9	
ITEM	UNIT	SPEC
PHASE	PHS	3
VOLTAGE	VDC	48
ROTOR POLES	POLES	4
ROTOR INERTIA	g. cm ²	950
RESISTANCE@25° C	Ω	0.25±10%
INDUCTANCE	mH	1.4±20%
NOLOAD SPEED	RPM	4000REF
NOLOAD CURRENT	A	1.5REF
RATED SPEED	RPM	3000
RATED POWER	W	500
RATED TORQUE	N.m	1.6
RATED CURRENT	A	14.8
INSULATING STRENGTH	VAC	500
IP CLASS		IP40
INSULATION CLASS		B
WEIGHT	Kg	2.2



						BRUSHLESS MOTOR			规格书
标记	处数	分区	更改文件号	签名	年、月、日				
设计			标准化			阶段标记	重量	比例	
审核						1:1.4			
工艺			批准			共 张 第 张			
						80BL110S50-430TK9			