


## Swing barrier gate turnstile

**BLS-S205**

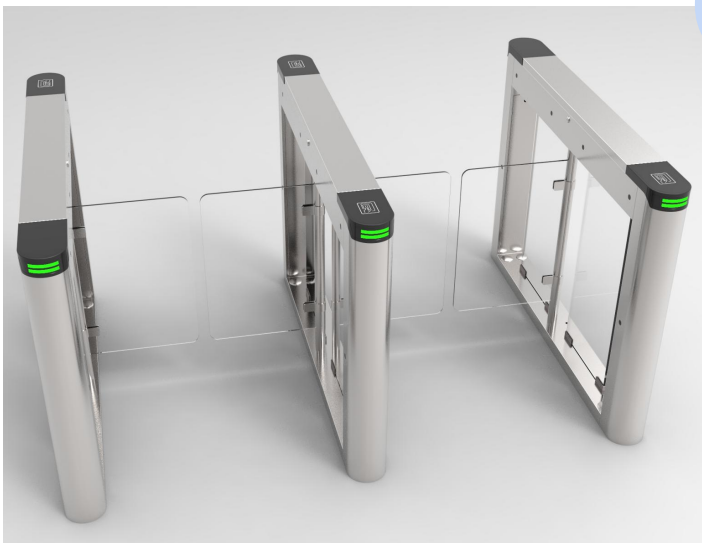

## Features

- **DC Brush-less Motor & anti-collision mechanism:** High-efficiency, low-noise, long-life drive; closed-loop speed control, anti-collision, users friendly
- **Hall Sensor:** Magnetic position/speed detection; closed-loop control + motor overload protection.
- **Infrared Sensors:** Multi-point array; anti-pinch/tailgating/pass-back & passage confirmation;
- **Auto-Lock Reset:** Auto-locks on unauthorized access; resets post-passage; 30s adjustable
- **Startup Self-Diagnosis:** Power-on key part inspection; fault code display; passage blocked on critical faults.
- **Audio-Visual Alert:** Buzzer + warning light for anomalies; customized alert modes.
- **Voice & LED Guidance:** Multi-language voice + LED prompts; guides orderly, safe passage.

## Solutions:

- Access control and time attendance system: RFID card/wristband, biometric/face recognition, computer with management software can also control directly
- Ticket system: QR code wristband/ticket, E-QR code
- coin/token collector or RFID card insert, wristband collector
- Exit button(optional)
- Wireless remote control(optional)
- Manual override keys(optional)
- Manual push after power off
- Infrared sensor detector(factory setting optional)
- Any other control system or solutions please confirm with us

## Technical Specifications

Parameters	Specification
Material	Frame:304stainless steel Carbon steel powder coating colors, 316stainless steel optional
	Swing barriers: 10mm thickness Acrylic, tempered glass, stainless steel
Dimensions	Main body:1200mm(length)*135mm(width)*980mm(height) Swing barriers: 300mm-450mm width
Passage Width	Standard: 600-900mm customized, some special models can be much wider
Speed Performance	30 people/min; Barrier opening time: 0.8-1.2s after authorization
Power Supply	AC 100-240V (universal voltage);
	Control voltage: DC 24V
Motor Parameters	Brush-less DC motor; Power: 40-60W; Rotational speed: 3000rpm (stable and low-noise operation)
Interface & communication	Input: dry contact RS232/RS485
Environmental Resistance	IP54/IP65 rating;
	Operating temp: -15°C to 70°C;

### Customization options:

- Custom Design Flexibility

Full customization to turn bespoke concepts into functional swing turnstiles

- Tailored Dimensions & Layout

Custom shapes/sizes for on-site space constraints and project-specific needs

- Premium Material & Finish Options

Body: 304/316 stainless steel/powder-coated steel (custom colors); finishes: brushed, snowflake, mirror, matte

Barriers: Adjustable-width (glass/acrylic/steel) with custom logos, lights & decorations

- Brand-Focused Customization

Logo engraving/silk-screening on cabinets/barriers; custom access control windows for unified branding

- Optional Accessory Upgrades

Dual-mode LED indicators, audio alarms & custom ambient lighting available

- Portable Configuration Option

Optional base for convenient on-site relocation

- Professional Customization Support

Details on Customization Services page; inquiries welcome for specialized demands

## Applications:

- Suited for applications requiring high volume access and medium levels of security
- Used extensively in applications such as scene spots, hospitals, clinics, colleges, libraries, leisure parks and stadiums, retail stores, supermarket

## Dimensions:

