常州万钧仪器有限公司
W&J Instrument Co., Ltd.

常州万钧仪器有限公司
W&J Instrument Co., Ltd..
Address: Huayuan Road, Mudu Town, Jiangsu Province, PRC
Tel: 0086-(0)519-85286122/6336
Mobile: 0086-136 0612 1307
Email: weighinginstru@gmail.com

www.weighinginstru.com

常州万钧仪器有限公司
W&J Instrument Co., Ltd.

公司介绍
Company profile

W＆J仪器有限公司 是一家专业的实验室设备供应商，提供高精度电子天平超过25年。

我们的产品广泛应用于化工，轻工，医疗和科研等部门。公司自成立以来一直致力于技术改革和创新。

现在，我们正在推出高精度电子天平，水分分析仪，粘度计，pH计，电导率仪等.....

W&J Instrument CO., LTD. is a professional supplier of laboratory equipment, which produces high precision electronic balances more than 25 years.

Our products are widely used in chemical industry,light industry, medical and scientific research departments.The company since its establishment has been committed to reform and innovation of technology.

Now, we are providing high precision electronic balances, moisture analyzers, viscometers, pH meters, conductivity meters, etc...

We research and develop new products every year.

目录
Contents

01 公司介绍 COMPANY PROFILE

03 分析天平 Analytical Balance

04 实验室天平 Laboratory Balance

05 精密天平 Precision Balance

06 电子天平 Electronic Balance

07 台秤 Weighing Scale

08 水分测定仪 Moisture Analyzer

09 防水秤 Waterproof Scale

10 纺织天平 Textile Balance

11 静水天平 Hydrostatical Balance

12 砝码 Calibration Weight

14 粘度计 Viscometer

15 恒温槽 Thermostat Water Bath

16 酸度计/电导率仪 pH Meter/Conductivity Meter

17 光度计 Spectrophotometer

18 光照培养箱/霉菌培养箱 Light Incubator/Microbiological Incubator

分析天平
Analytical Balance

特点：

- 具有计件、单位转换（米制克拉、金盎司等）、稳定度、全量程去皮、零点跟踪功能
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE：

- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

特点：

- 高清触屏分析天平
- 具有 10 组数据储存功能
- 内置 RS232, USB 接口，可连接计算机，打印机

FEATURE：

- HD Touch Screen
- 10 groups data storing function
- Built-in RS232C, USB interface

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	秤盘尺寸 Plate size	净重 N.W.	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension
FA1004	0-100g	0.1mg	Φ80mm	6.8kg	350×215×340mm	480×375×515mm
FA1204	0-120g	0.1mg	Φ80mm	6.8kg	350×215×340mm	480×375×515mm
FA1604	0-160g	0.1mg	Φ80mm	6.8kg	350×215×340mm	480×375×515mm
FA2004	0-200g	0.1mg	Φ80mm	6.8kg	350×215×340mm	480×375×515mm
FA2204	0-220g	0.1mg	Φ80mm	6.8kg	350×215×340mm	480×375×515mm
FA3004	0-100g	0.1mg	Φ90mm	6.8kg	350×215×340mm	480×375×515mm

实验室天平
Laboratory Balance

特点：

- 应变式传感器
- 具有计件、单位转换（米制克拉、金盎司等）、稳定度、全量程去皮、零点跟踪等多种功能
- 内置 RS232C 输出接口，可直接链接计算机、打印机等外部设备

FEATURE：

- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero
- tracking, etc.
- Built-in RS232C interface

特点：

- 电磁力天平
- 具有计件、单位转换（米制克拉、金盎司等）、稳定度、全量程去皮、零点跟踪功能
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE：

- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	秤盘尺寸 Plate size	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension	净重 N.W.
WA1003	0-100g	1mg	Φ110mm	350×215×340mm	385×316×375mm	6.8kg
WA2003	0-200g	1mg	Φ110mm	350×215×340mm	385×316×375mm	6.8kg
WA3003	0-300g	1mg	Φ110mm	350×215×340mm	385×316×375mm	6.8kg
WA5003	0-500g	1mg	Φ110mm	350×215×340mm	385×316×375mm	6.8kg
WA6003	0-600g	1mg	Φ110mm	350×215×340mm	385×316×375mm	6.8kg
JA10003	0-1000g	1mg	Φ90mm	350×215×340mm	480×375×515mm	6.8kg

精密天平
Precision Balance

特点：

- 应变式传感器
- 带水准仪，液晶背光显示，称量反应速度快，高稳定性
- 传感器采用独特的锁紧装置，确保天平在运输起到保护作用

FEATURE:

- Load cell weighing sensor
- Level bubble, LCD display, quick and stable weighing response
- Load cell protection system

特点：

- 计数，百分比，自动校准，校准多点选择，配校准砝码（可选）
- 具有单位转换（米制克拉、金盎司等）、稳定度、记忆功能、动物称重、全量程去皮等多种功能
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE:

- Counting, percentage, automatic calibration, multi-point calibration, standard calibration weight(optional).
- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension	秤盘尺寸 Plate size
WA1002Y	0-100g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA2002Y	0-200g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA3002Y	0-300g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA5002Y	0-500g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA6002Y	0-600g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA10002Y	0-1000g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA20002Y	0-2000g	0.01g	250×180×60mm	325×245×152mm	130×130mm
WA30002Y	0-3000g	0.01g	250×180×60mm	325×245×152mm	165×175mm
WA50002Y	0-5000g	0.01g	250×180×60mm	325×245×152mm	165×175mm
WA60002Y	0-6000g	0.01g	250×180×60mm	325×245×152mm	165×175mm
WA30001Y	0-3000g	0.1g	250×180×60mm	325×245×152mm	165×175mm
WA50001Y	0-5000g	0.1g	250×180×60mm	325×245×152mm	165×175mm
WA60001Y	0-6000g	0.1g	250×180×60mm	325×245×152mm	165×175mm

电子天平
Electronic Balance

特点：

- 应变式传感器
- 带水准仪，液晶背光显示，称量反应速度快，高稳定性
- 传感器采用独特的锁紧装置，确保天平在运输起到保护作用

FEATURE:

- Load cell weighing sensor
- Level bubble, LCD display, quick and stable weighing response
- Load cell protection system

特点：

- 计数，百分比，自动校准，校准多点选择，配校准砝码（可选）
- 具有单位转换（米制克拉、金盎司等）、稳定度、记忆功能、动物称重、全量程去皮等多种功能
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE:

- Counting, percentage, automatic calibration, multi-point calibration, standard calibration weight(optional).
- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension	秤盘尺寸 Plate size
WA101	0-10kg	0.1g	300×120×160mm	356×310×165mm	310×220mm
WA151	0-15kg	0.1g	300×120×160mm	356×310×165mm	310×220mm
WA201	0-20kg	0.1g	300×120×160mm	356×310×165mm	310×220mm
WA301	0-30kg	0.1g	300×120×160mm	356×310×165mm	310×220mm
WA10	0-10kg	1g	300×120×160mm	356×310×165mm	310×220mm
WA15	0-15kg	1g	300×120×160mm	356×310×165mm	310×220mm
WA20	0-20kg	1g	300×120×160mm	356×310×165mm	310×220mm
WA30	0-30kg	1g	300×120×160mm	356×310×165mm	310×220mm

台秤
Weighing Scale

特点：

- 应变式传感器
- 带水准仪，液晶背光显示，称量反应速度快，高稳定性
- 传感器采用独特的锁紧装置，确保天平在运输起到保护作用

FEATURE:

- Load cell weighing sensor
- Level bubble, LCD display, quick and stable weighing response
- Load cell protection system

特点：

- 计数，百分比，自动校准，校准多点选择，配校准砝码（可选）
- 具有单位转换（米制克拉、金盎司等）、稳定度、记忆功能、动物称重、全量程去皮等多种功能
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE:

- Counting, percentage, automatic calibration, multi-point calibration, standard calibration weight(optional).
- Counting, Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension	秤盘尺寸 Plate size
WA603	0-60kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA1003	0-100kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA1503	0-150kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA2003	0-200kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA2503	0-250kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA3003	0-300kg	1g	400×300×120mm	480×490×160mm	400×500mm
WA602	0-60kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA1002	0-100kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA1502	0-150kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA2002	0-200kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA2502	0-250kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA3002	0-300kg	10g	400×300×120mm	480×490×160mm	400×500mm
WA5002	0-500kg	10g	400×300×120mm	480×490×160mm	400×500mm

水分测定仪
Moisture Analyzer

特点：

- 点阵式液晶显示屏 - 提供丰富的测定信息
- 便捷的操作
- 标配 RS232 通讯接口 - 方便链接打印机、电脑和其他外围设备
- 卤素灯加热适用于需快速加热的样品测定

FEATURE:

- Dot-Matrix LCD Display
- User-friendly operating
- Built-in RS232 interface, connect to printer, PC, etc
- Halogen heating lamp, quick measuring

特点：

- 高清触摸式显示屏提供丰富的测定信息
- 便捷的操作
- 标配 RS232 通讯接口 - 方便链接打印机、电脑和其他外围设备
- 卤素灯加热适用于需快速加热的样品测定

FEATURE:

- HD touch screen display
- User-friendly operating
- Built-in RS232 interface, connect to printer, PC, etc.
- Halogen heating lamp, quick measuring

TECHNICAL PARAMETERS:

型　　号 Model	50-10/100-10	50-5/100-5	50-1/100-1
最大称量 Capacity	50g/110	50g/110	50g/110
可 读 性 Accuracy:	0.01g	0.005g	0.001g
水份百分比精度 Moisture percentage:	0.3%	0.2%	0.1%
秤 盘 尺 寸 Plate size:	Φ90mm	Φ90mm	Φ90mm
调 温 范 围 Heating Temperature:	50-180℃	50-180℃	50-180℃
环 境 温 度 Environment Temperature:	10-30℃	10-30℃	10-30℃

防水秤
Waterproof Scale

特点：

- 交直流两用，带水准仪，液晶背光显示，称量反应速度快，高稳定性
- IP65

FEATURE:

- Being equipped with both AC and DC power source, having gradienter back-lighted
- LED , IP65

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	显示 Display	秤盘尺寸 Plate size
MT1500	0-1500g	0.2g	LED	182×226mm
MT3500	0-3500g	0.5g	LED	182×226mm
MT7500	0-7500g	1g	LED	182×226mm
MT15K	0-15kg	2g	LED	182×226mm
MP30K	0-30kg	10g	LED	182×226mm

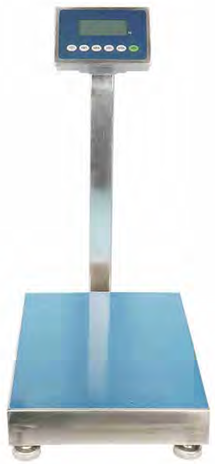

特点：

- 人性化设计使产品具有高稳定性，背光液晶显示屏，全不锈钢秤体
- IP65

FEATURE:

- User friendly design provide high stability; with big LCD display, stainless steel scale body
- IP65

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	外形尺寸 Outline Dimension	秤盘尺寸 Plate size
MT1003L	0-100kg	1g	500×400×975mm	500×400mm
MT2003L	0-200kg		500×400×975mm	500×400mm
MT3003L	0-300kg		500×400×975mm	500×400mm
MT1002L	0-100kg	10g	500×400×975mm	500×400mm
MT2002L	0-200kg		500×400×975mm	500×400mm
MT3002L	0-300kg		500×400×975mm	500×400mm
MT5002L	0-500kg		500×400×975mm	500×400mm

纺织天平
Textile Balance

特点：

- 系统操作有：g/m2 计数功能，百分比，自动校准，校准多点选择，配校准砝码（可选）。
- 具有单位转换（米制克拉、金盎司等）、稳定度、记忆功能、动物称重、全量程去皮等多种功能，操作更简便可靠。
- 内置 RS232C 输出接口，可直接连接计算机、打印机等外部设备

FEATURE:

- System operating: g/m2, counting, percentage, automatic calibrating, calibrating point selecting,calibrating weigh (optional).
- Unit switch (ct, oz, etc.), Full range tare , Zero tracking, etc.
- Built-in RS232C interface

型号 Model	尺寸 Dimension	外形尺寸 Outline Dimension
WA001m^2	Φ113mm-0.01cm	Φ160×130mm
橡胶垫（Rubber Mat）	Φ200mm	Φ200×130mm

TECHNICAL PARAMETERS:

型号 Model	称量范围 Capacity	可读性精度 Accuracy	秤盘尺寸 Plate size	外形尺寸 Outline Dimension
WA1002	0-100g	10mg	Φ115mm	175×230×150mm
WA2002	0-200g	10mg	Φ115mm	175×230×150mm
WA3002	0-300g	10mg	Φ115mm	175×230×150mm
WA5002	0-500g	10mg	Φ115mm	175×230×150mm
WA6002	0-600g	10mg	Φ115mm	175×230×150mm
WA10002	0-1000g	10mg	Φ160mm	260×295×110mm
WA20002	0-2000g	10mg	Φ160mm	260×295×110mm
WA30002	0-3000g	10mg	Φ160mm	260×295×110mm
WA1003	0-100g	1mg	Φ80mm	260×295×110mm
WA2003	0-200g	1mg	Φ80mm	260×295×110mm
WA3003	0-300g	1mg	Φ80mm	260×295×110mm

静水天平
Hydrostatical Balance

特点：

- 利用阿基米德原理，采用浸液法可以进行各种比重测定。只需按天平所显示信息的提示进行操作，即可直接读取比重值，快速

FEATURE:

- Specific gravity is measured in immersion method under Archimsdes principle. Operate as per clues displayed on the balance,then specific gravity value can be directly,rapidly and conveniently tread out.

特点：

- 具有精密电子天平的技术性能 ,内置 RS-232C 输出接口 ,可以与微机、打印机等外部设备连接使用。与比重测定配套组件（选配件）配合可进行固（液）体比重测定

FEATURE:

- Technical performance of electronic precision balance,built-in RS-232C output interface allows direct connection to external equipment such as computer and printer.Solid(liquid)gravity can be measured under the cooperation of supporting annex

TECHNICAL PARAMETERS:

型号 Model	最大称量 Capacity	最小读数 Accuracy	外形尺寸 Outline Dimension	外包装尺寸 Packing Dimension
FA2104J	210g	0.1mg	350mm×215mm×340mm	480mm×375mm×515mm
FA2004J	200g	0.1mg	350mm×215mm×340mm	480mm×375mm×515mm
FA1004J	100g	0.1mg	350mm×215mm×340mm	480mm×375mm×515mm
FA5003J	500g	1mg	350mm×215mm×340mm	480mm×375mm×515mm
FA3003J	300g	1mg	350mm×215mm×340mm	480mm×375mm×515mm
FA2003J	200g	1mg	350mm×215mm×340mm	480mm×375mm×515mm
MD-100	100g	10mg	250mm×180mm×246mm	335mm×255mm×252mm
MD-200	200g	10mg	250mm×180mm×246mm	335mm×255mm×252mm
WA20001	2000g	0.1g	310mm×330mm×390mm	480mm×326mm×415mm
WA50001	5000g	0.1g	310mm×330mm×390mm	480mm×326mm×415mm

砝码
Calibration Weight

等级 / Class: E1, E2, F1, F2, M1
材质 / Material: Stainless Steel
范围 / Range: 1mg~20kg
包装 / Package: 铝盒 / Aluminum box
We provide custom made service!

等级 / Class: E1, E2, F1, F2, M1
材质 / Material: Stainless Steel
范围 / Range: 5kg~25kg
包装 / Package: 铝盒 / Aluminum box
We provide custom made service!

等级 / Class: E1, E2, F1, F2, M1
材质 / Material: Stainless Steel
范围 / Range: 1g~25kg
包装 / Package: 塑料盒，铝盒 / Plastic box, Aluminum box
We provide custom made service!

等级 / Class: E1, E2, F1, F2, M1
材质 / Material: Stainless Steel
范围 / Range: 1g~20kg
包装 / Package: 塑料盒，铝盒 / Plastic Box, Aluminum box
We provide custom made service!

砝码
Calibration Weight

等级 / Class: M1 , M2

材质 / Material: 钢制镀铬 / Chrome plated steel

范围 / Range: 10mg~5000g

包装 / Package: 塑料盒，铝盒 / Plastic box, Aluminum box

We provide custom made service!

等级 / Class: M1，M2

材质 / Material: Cast iron

密度 / Density: 7.2g/cm3

范围 / Range: 1kg~1000kg

We provide custom made service!

等级 / Class: M1，M2

材质 / Material: Cast iron

密度 / Density: 7.2g/cm3

范围 / Range: 500kg~1000kg

We provide custom made service!

等级 / Class: M1，M2

材质 / Material: Cast iron

密度 / Density: 7.2g/cm3

范围 / Range: 100kg~1000kg

We provide custom made service!

粘度计
Viscometer

TECHNICAL PARAMETERS:

型号 Model	范围 Range	转子 Spindle	转速 Speed
RV-1S	1-1×10^5mpa.s	1，2，3，4 号转子(0 号转子为选购件) No.1, No.2, No.3, No.4 (No.0 is an optional accessory)	6、12、30、60rpm/min
RV-2M	1-2×10^6mpa.s		0.3、0.6、1.5、3、6、12、30、60rpm/min
RV-2T	1-2×10^6mpa.s		
RV-6M	1-6×10^6mpa.s		0.1、0.3、0.6、1.5、3、6、12、30、60rpm/min
RVDV	1-13×10^6mpa.s	1、2、3、4、5、6、7 号七个转子 No.1,No.2,No.3,No.4,No.5,No.6,No.7	0.3、0.6、1.5、3、6、12、30、60 rpm/min, 0.5、1、2、2.5、4、5、10、20、50、100 rpm/min, 0.5、1、2、2.5、4、5、10、20、50、100 rpm/min
LVDV-2	1-2×10^6mpa.s	1，2，3，4 号转子 No.1, No.2, No.3, No.4	0.3、0.6、1.5、3、6、12、30、60 rpm/min, 0.5、1、2、2.5、4、5、10、20、50、100 rpm/min
LVDV-2S	1-2×10^6mpa.s	0，1，2，3，4，21，27，28，29 号转子 No.0, No.1, No.2, No.3, No.4, No.21, No.27, No.28, No.29	0.3、0.6、1.5、3、6、12、30、60 rpm/min, 0.5、1、2、2.5、4、5、10、20、50、100 rpm/min, 0.5、1、2、5、10、20、50、100 rpm/min

TECHNICAL PARAMETERS:

测量范围 Measurement Range	1-1×10^5mpa.s
测量误差 Measurement Tolerance	±5%（牛顿液体） ±5%（newtonian liquid）
转子转速 Speed	6、12、30、60 转/分 6、12、30、60 rpm
转子 Spindle	0 号、1 号、2 号、3 号、4 号[0 号转子为选购件] Number0、1、2、3、4 [Rotor 0 is an optional accessory]

恒温槽
Thermostat Water Bath

特点：

- 低温恒温槽采用风冷式全封闭压缩机制冷，降温速度快，噪音低，操作方便。使用电源为 220V、50Hz。

FEATURE:

- Low temperature&constant temperature tank adopts air cooling hermetic compressor for refrigeration,which is featured by fast temperature drop, low noise and easy operation. It uses power supply at 220V/50HZ.

TECHNICAL PARAMETERS:

Model	Temperature °C	Error °C	Work Volume mm³	Bath Depth mm
CH-1006	RT-100	0.05	240×150×150	150
CH-1015	RT~100	0.05	280×200×220	200
CH-1515	RT~150	0.05	280×200×220	200
DC-0506	.-5~100	0.05	250×200×150	150
DC-1006	.-10~100	0.05	250×200×150	150
DC-2006	.-20~100	0.05	250×200×150	150
DC-3006	.-30~100	±0.1	250×200×150	150
DC-4006	.-40~100	±0.1	250×200×150	130
DC-0510	.-5~100	0.05	250×200×200	150
DC-1010	.-10~100	0.05	250×200×200	200
DC-2010	.-20~100	0.05	250×200×200	200
DC-3010	.-30~100	0.05	250×200×200	200
DC-4010	.-40~100	±0.1	250×200×200	200
DC-1015	.-10~100	0.05	280×200×220	220
DC-2015	.-20~100	0.05	300×250×220	200
DC-3015	.-30~100	0.05	300×250×220	200
DC-1020	.-10~100	0.05	280×200×220	280
DC-2020	.-20~100	0.05	280×200×220	280
DC-0520	-5~100	0.05	400×325×230	280
DC-0530	-5~100	0.05	400×325×230	230
DC-1030	.-10~100	0.05	400×325×230	230
DC-2030	.-20~100	0.05	400×325×230	230
DC-3030	.-30~100	±0.1	280×200×220	230

酸度计
PH Meter

TECHNICAL PARAMETERS:

型号 Model		PHS-3CB	PHS-3CU	PH-25	PH-3C
仪器级别 Rank		0.01	0.01	0.05	0.01
测量范围 Range	PH	(-2.00~19.99)PH	(-2.00~19.99)PH	(0.00~14.00)PH	PH:(0.00~16.00)PH
	MV	(0~±1999)MV	(0~±1999)MV	(0~1599)MV	MV:(0~±1999)MV
	温度/Temp.	(0.0~80.0)℃	(0.0~80.0)℃	-	-
分比率 Resolution	PH	0.01PH	0.01PH	0.01PH	0.01PH
	MV	±1MV	±1MV	1MV	1MV
	温度/Temp.	0.1℃	0.1℃	-	-
基本误差 Error	PH	±0.01PH	±0.01PH	±0.02PH±1d	±0.02PH±1d
	MV	±.1MV±.1d	±.1MV±.1d	±1%FS	±1%FS
	温度/Temp.	±0.1℃	±0.1℃	-	-

电导率仪
Conductivity Meter

TECHNICAL PARAMETERS:

型号 Model		DDS-307	DDS-11A
仪器级别 Rank		1.0	1.5
测量范围 Range	电导率 Conductivity	0.00μS/cm-199.9mS/cm	0.00μS/cm-199.9mS/cm
	TDS	0.00mg/L-1999mg/L	-
	温度 Temperature	(0.0-60.0)℃	(0.0-60.0)℃
电子单元基本误差 Electronic Unit Error	电导率 Conductivity	±1.0%（FS）	±1.0%（FS）
	TDS	±1.0%（FS）	-
	温度 Temperature	±0.4℃	±0.4℃
仪器的基本误差 Conductivity Error	电导率 Conductivity	±1.5%（FS）	±2.0%（FS）
	温度 Temperature	±0.6℃	±0.4℃

光度计
Spectrophotometer

Model	UV752N/P
Wavelength Range	190-1100nm
Spectral bandwidth	4nm
Wavelength Accuracy	±2nm
Wavelength Repeatability	≤0.2 nm
Photometric Range	0~125%T、-0.3-3A
Photometric Accuracy	±0.5%T
Photometric Repeatability	≤0.2%T
Stray Radiant	≤0.5%T
Min. Resolution	0.1nm
Light	Tungsten

Models	UV-1600PC
Operation mode	Host or PC operating including on-line software
Wavelength range	190 - 1100nm
Spectral bandwidth	2nm
Optical system	Accurate , Czerny-Turner, Grating 1200line/mm
Wavelength Accuracy	±0.1 nm（656.1 nm D2）,±1 nm(the whole wavelength range)
Wavelength Repeatability	±0.5nm
Wavelength Resolution	0.1nm
Photometric Range	-3 to 3A； 0-200%T； -9999 to 9999C
Photometric Accuracy	±0.002A(0～0.5A)±0.004A(0.5～1A) ±0.008A(1～2A) ±0.5%T(0～100%T)
Photometric Repeatability	±0.001A(0～0.5A)±0.002A(0.5～1A) ±0.004A(1～2A) ±0.0.3%T(0～100%T)
Stray light	≤ 0.1%T （220 nm，NaI：340 nm，NaNO2）

Models	TU-1810
Operation mode	Host or PC operating including on-line software
Wavelength range	190 - 1100nm
Spectral bandwidth	1.8nm
Optical system	Accurate , Czerny-Turner, Grating 1200line/mm
Wavelength Accuracy	±0.1 nm（656.1 nm D2）,±0.3 nm(the whole wavelength range)
Wavelength Repeatability	±0.15nm
Wavelength Resolution	0.1nm
Photometric Range	-3 to 3A； 0-200%T； -9999 to 9999C
Photometric Accuracy	±0.002A(0～0.5A) ±0.004A(0.5～1A) ±0.008A(1～2A) ±0.3%T(0～100%T)
Photometric Repeatability	±0.001A(0～0.5A) ±0.002A(0.5～1A) ±0.004A(1～2A) ±0.15%T(0～100%T)

Model	TU-1900	TU-1901
Wavelength Range	190-1100nm	190-1100nm
Spectral bandwidth	1.8nm/1nm	0.5/1/2/4/5nm
Wavelength Accuracy	±0.3nm	±0.3nm
Wavelength repeatability	≤0.1 nm	≤0.1 nm
Photometric Range	0~200%T -0.3-3A	0~200%T -0.3-3A
Photometric Accuracy	±0.3%T	±0.3%T
Photometric Repeatability	≤0.15%T	≤0.15%T
Stray Radiant	≤0.05%T	≤0.05%T

光照培养箱
Light Incubator

TECHNICAL PARAMETERS:

型号 Item	MGC-150I MGC-150II	MGC-250I MGC-250II	MGC-300I MGC-300II	MGC-500I MGC-500II	MGC-150	MGC-250	MGC-300	MGC-400
温度范围 Tempt.	illumination：10~50℃ No illumination：4~50℃							
温控波动 Tempt. Error	±1℃							
温度分辨率 Temp. Accuracy	0.1℃							
光照强度 Light intensity	0~6000Lx				0~12000Lx	0~15000Lx	0~20000Lx	0~25000Lx
	0~9000Lx	0~12000Lx	0~12000Lx	0~12000Lx				
					Six levels adjustable			
输入功率 input	950W	1200W	1300W	1450W	1500W	1900W	2200W	2500W
工作容积 Volume	150L	250L	300L	500L	150L	250L	300L	400L
托架 Tray	3 pcs							

霉菌培养箱
Microbiological Incubator

TECHNICAL PARAMETERS:

型号 Model	温控范围 Tempt.	温度波动 Temp. Error	温度分辨率 Temp. Accuracy	控湿范围 Humidity	湿度偏差 Humidity Error	输入功率 Input	工作容积 Volume	托架 Tray	定时范围 Time
MJ-70-I / MJ-70F-I	0~65℃	High Temp. ±0.5℃ Low Temp. ±1℃	±0.1℃	No	No	500W	70L	2 pcs	1~9999 min.
MJ-100-I / MJ-100F-I						650W	100L	2 pcs	
MJ-150-I / MJ-150F-I						900W	150L	3 pcs	
MJ-250-I / MJ-250F-I						1150W	250L	3 pcs	
MJ-300-I / MJ-300F-I						1250W	300L	3 pcs	
MJ-100-II	With humidification 15~60℃ No humidification 10~60℃			60-85%RH	+/-5%RH	1100W	100L	3 pcs	
MJ-150-II						1400W	150L	3 pcs	
MJ-250-II						1950W	250L	3 pcs	
MJ-300-II						2500W	300L	3 pcs	