KosinTec®



# L-Shaped Tablet-Metal Casing

Kosintec's The L-shaped tablet features an integrated angular L-form structure combining screen and base. Equipped with a touch panel, it supports intuitive interactive operation and allows flexible content display for advertisements, welcome information, form filling and service guidance. Widely deployed at reception desks, retail checkout counters, hotel front desks, restaurant ordering stations and office service counters, it serves customer interaction, self - service inquiry and on - site information presentation.

## DL1011T

### • Optimal Visual Clarity
- High-performance image processor.
- Delivers true color expression and high resolution.
- Offers adjustable picture quality and white balance.

### • Fail Over Support

### • CMS / Remote Management Support (optional)
- Cloud-based remote management (CetusMSC) and CMS platform (GalaxyASC) support.
- Real-time monitoring of display status, parameters adjustment, and content distribution.
- Remote control via PC and Smart phone.

### • Open API & SDK Support and RS232 Compatible

### • OTA Firmware Update
- Enables remote firmware and application updates.
- Designed for seamless upgrades.

### • Extended Product Warranty
- Engineered for long-term durability.
- Guarantees reliable 24/7 operation.
- Comprehensive warranty ensures customer satisfaction and confidence.

### • Built-in Lithium ion battery pack
- Built-in battery for portable design
- Battery continous working 10-12H

### • L-Shaped Tablet
- Modern and minimalist design

### • Anti-reflection Anti-glare Surface Optional
- Higher haze panel
- Anti-reflection and anti-glare effects.

### • GPlay Convenient U disk
- Simply insert the U disk for automatic content copying and playback on the device upon booting

### • Built-in Speaker

### • Fire Protection Certification

# Specification

## Hardware Specification

| | |
|---|---|
| Panel | IPS |
| Display Size | 10.1 inch |
| Protection Glass | N/A |
| Protection Level | / |
| Front Color | Black |
| Set Dimension (L*W*D) | 180×200×300mm |
| Bezel Width Width(mm) | / |
| Active Display Area(H*V) | 276mm x165mm |
| Resolution | 1280 x 800 |
| Type | 60Hz E-LED BLU |
| Brightness(Typ.) | 250 cd/m² |
| Contrast Ratio(Typ.) | 1000:1 |
| Haze | 25% |
| Viewing Angle(H/V) | 178°(H) X 178°(V)(CR≥10) |
| Chromaticity | 16.7M |
| Color Gamut | 72% |
| Response Time | 6ms (Typ) |
| Operation Hour | 24/7 |
| Panel Orientation | Portrait |
| Connectivity | USB *2,TF*1,HDMI*1,DC in *1,RJ45*1 |
| Power Adaptor | 12V 3 A |
| Power Consumption | 18W |
| Speaker | 2W * 2 |
| Battery | Lithium battery 7.26V-14700mAh |
| Touch Technology | PCAP Touch Optional |
| Camera | N/A |
| Installation | Table top |
| VESA Mount | / |
| Package(W*H*D) | To be advise |
| Weight (kg) | To be advise |
| Operating Temperature | -10°C~+50°C |
| Storage Temperature | -20°C~+60°C |

## System Specification

| | |
|---|---|
| CPU | RK3566 |
| GPU | / |
| Operating System | Android 11 |
| Cloud Advertising Distribution System | Optional |
| Cloud Splice System | Optional |
| Memory | DDR 2G |
| Storage | EMMC 16GB |
| Ethernet | Ethernet (RJ45)<br>WiFi 802.11b/g/n<br>4G LTE(FDD/TDD)(Optional) |
| Panel Image Rotation | 0/90/180/270/360 Angle Rotation |
| Video Decoder | MPEG-1/2/4,H.264,HEVC,VP8,VP9,AVS+,AVS2.AV1 |
| Audio Decoder | MPEG-1.MPEG-2(layerI/II),MP3,AAC-LC,HE-AAC |
| Picture Decoding | JPG,JPEG ,PNG ,BMP |

## What's in the box


| | |
|---|---|
| Power Cable | x 1 Power cord (based on region) |
| Adaptor | x 1 |
| Display | x 1 |

## Warranty

| | |
|---|---|
| Warranty | 1 year |

## Dimensions

Unit: mm

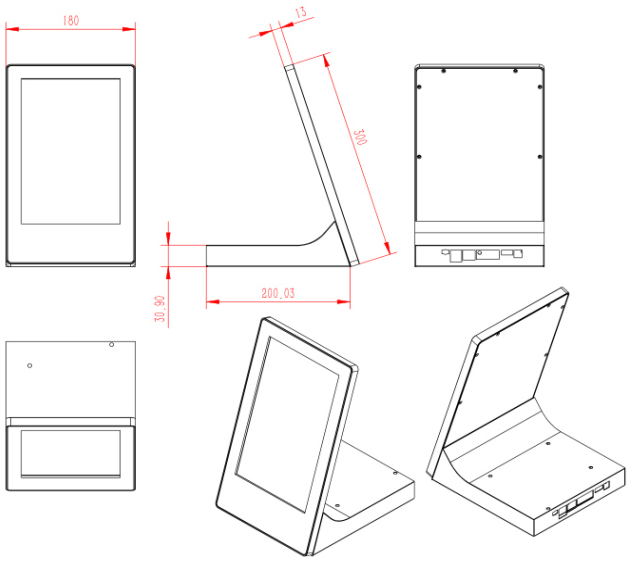


* Compatibility may differ by equipment.
* Software compatibility may change over time. Please contact your regional sales representative for details.
* Specifications are subject to change without notice, so please contact sales team to verify before ordering.