KosinTec®



Small Size Plastic Shell Wall Mount Display

Kosintec's Small size wall mount display with plastic housing, With ultra-thin lamination assembly process, resulting in a slim, minimalist body that is easy to install. delivers an exquisite visual appearance. Display widely applicable for shopping malls, hotels, office buildings, restaurants, service halls, elevator lobbies and many other scenarios.

DW2384T

• Optimal Visual Clarity
- High-performance image processor.
- Delivers true color expression and high resolution.
- Offers adjustable picture quality and white balance.

•Ultra-thin Design
- More minimalist and aesthetically pleasing appearance.

• Fail Over Support

• Anti-reflection Anti-glare Surface Optional
- Higher haze panel
- Anti-reflection and anti-glare effects.

• CMS / Remote Management Support (optional)
- Cloud-based remote management (CetusMSC) and CMS platform (GalaxyASC) support.
- Real-time monitoring of display status, parameters adjustment, and content distribution.
- Remote control via PC and Smart phone.

• GPlay Convenient U disk
- Simply insert the U disk for automatic content copying and playback on the device upon booting

• Open API & SDK Support and RS232 Compatible

• Built-in Speaker

• OTA Firmware Update
- Enables remote firmware and application updates.
- Designed for seamless upgrades.

• Landscape/Portrait Compatible
- Portrait and landscape display orientations.

• Extended Product Warranty
- Engineered for long-term durability.
- Guarantees reliable 24/7 operation.
- Comprehensive warranty ensures customer satisfaction and confidence.

• Fire Protection Certification

Specification

Hardware Specification

Panel	IPS
Display Size	23.8 inch
Protection Glass	N/A
Protection Level	/
Front Color	Black/White
Set Dimension (L*W*D)	565 .24x 334.66x 53.3mm
Bezel Width Width(mm)	19.1mm
Active Display Area(H*V)	527 .04mm x 296.46mm
Resolution	1920 x 1080
Type	60Hz E-LED BLU
Brightness(Typ.)	250 cd/m²
Contrast Ratio(Typ.)	1200:1
Haze	25%
Viewing Angle(H/V)	178°(H) X 178°(V)(CR≥10)
Chromaticity	16.7M
Color Gamut	72%
Response Time	6ms (Typ)
Operation Hour	24/7
Panel Orientation	Landscape/Portrait
Connectivity	USB *2, TF*1,HDMI*1,DC*1,RJ45*1
Power Input Supply	100-240V AC， 50/60Hz
Power Consumption	48W
Speaker	4Ω5W*2
IR	/
Touch Technology	PCAP Touch Optional
Camera	N/A
Installation	Wall mount
VESA Mount	100 x 100 mm
Package(W*H*D)	To be advise
Weight (kg)	To be advise
Operating Temperature	0°C~+50°C
Storage Temperature	-5°C~+60°C

System Specification

CPU	RK3566
GPU	/
Operating System	Android 11
Cloud Advertising Distribution System	Optional
Cloud Splice System	Optional
Memory	DDR 2G
Storage	EMMC 32GB
Ethernet	Ethernet (RJ45) WiFi 802.11b/g/n 4G LTE(FDD/TDD)(Optional)
Panel Image Rotation	0/90/180/270/360 Angle Rotation
Video Decoder	MPEG-1/2/4,H.264,HEVC,VP8,VP9,AVS+,AVS2.AV1
Audio Decoder	MPEG-1.MPEG-2(layerI/II),MP3,AAC-LC,HE-AAC
Picture Decoding	JPG,JPEG ,PNG ,BMP

What's in the box


Power Cable	x 1 Power cord (based on region)
Remote Control	x 1
Wall Mount Bracket	x 1

Warranty

Warranty	1 year

Dimensions

Unit: mm

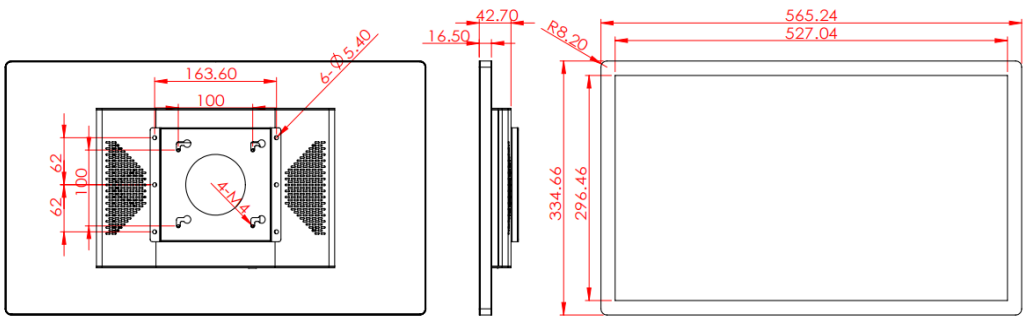

* Compatibility may differ by equipment.
* Software compatibility may change over time. Please contact your regional sales representative for details.
* Specifications are subject to change without notice, so please contact sales team to verify before ordering.