
KosinTec®

L-Shaped Desktop Landscape With Plastic Casing

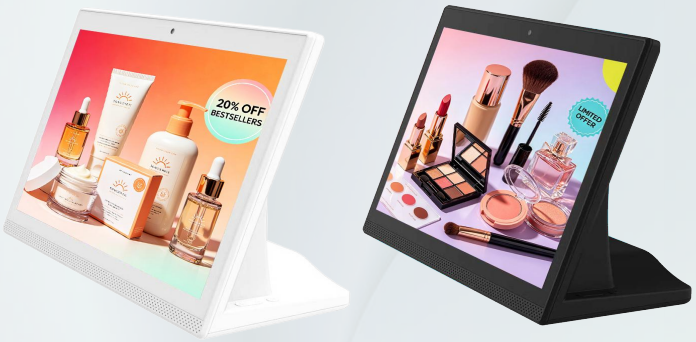

Kosintec's The L-shaped tablet features an integrated angular L-form structure combining screen and base. Equipped with a touch panel, it supports intuitive interactive operation and allows flexible content display for advertisements, welcome information, form filling and service guidance. Widely deployed at reception desks, retail checkout counters, hotel front desks, restaurant ordering stations and office service counters, it serves customer interaction, self-service inquiry and on-site information presentation.

DL1402T

• Optimal Visual Clarity
- High-performance image processor.
- Delivers true color expression and high resolution.
- Offers adjustable picture quality and white balance.

• Fail Over Support

• CMS / Remote Management Support (optional)
- Cloud-based remote management (CetusMSC) and CMS platform (GalaxyASC) support.
- Real-time monitoring of display status, parameters adjustment, and content distribution.
- Remote control via PC and Smart phone.

• Open API & SDK Support and RS232 Compatible

• OTA Firmware Update
- Enables remote firmware and application updates.
- Designed for seamless upgrades.

• Extended Product Warranty
- Engineered for long-term durability.
- Guarantees reliable 24/7 operation.
- Comprehensive warranty ensures customer satisfaction and confidence.

• Built-in Lithium ion battery Optional
- Built-in battery for portable design
- Long-lasting working time

• L-Shaped Tablet
- Modern and minimalist design

• Anti-reflection Anti-glare Surface Optional
- Higher haze panel
- Anti-reflection and anti-glare effects.

• GPlay Convenient U disk
- Simply insert the U disk for automatic content copying and playback on the device upon booting

• Built-in Speaker

• Fire Protection Certification

Specification

Hardware Specification

Panel	IPS
Display Size	14 inch
Protection Glass	N/A
Protection Level	/
Front Color	Black/White
Set Dimension (L*W*D)	333.37 x 124.99 x 224.95mm
Bezel Width Width(mm)	/
Active Display Area(H*V)	311.6mm x175.8mm
Resolution	1920 x 1200
Type	60Hz E-LED BLU
Brightness(Typ.)	250 cd/m^2
Contrast Ratio(Typ.)	1000:1
Haze	25%
Viewing Angle(H/V)	178°(H) X 178°(V)(CR≥10)
Chromaticity	16.7M
Color Gamut	72%
Response Time	6ms (Typ)
Operation Hour	24/7
Panel Orientation	Landscape
Connectivity	USB *2,TF*1,HDMI*1,DC in *1,RJ45*1
Power Adaptor	12V 2 A
Power Consumption	18W
Speaker	2W * 2
Battery	Lithium battery customize based on working time
Touch Technology	PCAP Touch Optional
Camera	N/A
Installation	Table top
VESA Mount	/
Package(W*H*D)	To be advise
Weight (kg)	To be advise
Operating Temperature	-10°C~+50°C
Storage Temperature	-20°C~+60°C

System Specification

CPU	RK3566
GPU	/
Operating System	Android 11
Cloud Advertising Distribution System	Optional
Cloud Splice System	Optional
Memory	DDR 2G
Storage	EMMC 16GB
Ethernet	Ethernet (RJ45) WiFi 802.11b/g/n 4G LTE(FDD/TDD)(Optional)
Panel Image Rotation	0/90/180/270/360 Angle Rotation
Video Decoder	MPEG-1/2/4,H.264,HEVC,VP8,VP9,AVS+,AVS2.AV1
Audio Decoder	MPEG-1.MPEG-2(layerI/II),MP3,AAC-LC,HE-AAC
Picture Decoding	JPG,JPEG ,PNG ,BMP

What's in the box


Power Cable	x 1 Power cord (based on region)
Adaptor	x 1
Display	x 1

Warranty

Warranty	1 year

Dimensions

Unit: mm

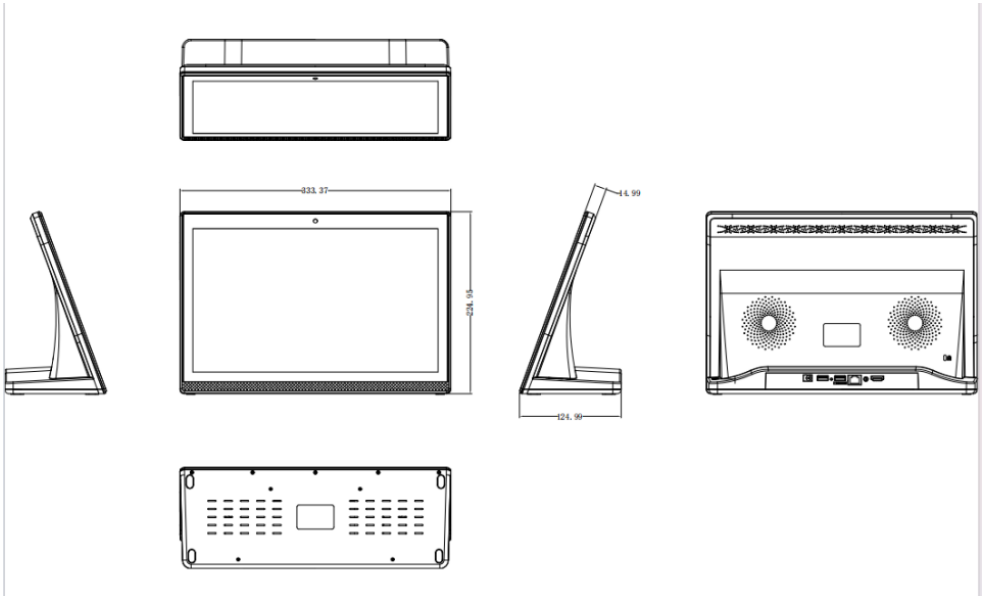

* Compatibility may differ by equipment.
* Software compatibility may change over time. Please contact your regional sales representative for details.
* Specifications are subject to change without notice, so please contact sales team to verify before ordering.