



GAS
SPRING

E

气撑系列

PAGE - 144-165



Today, with the rapid development of hardware industry, the home furnishing market put forward higher requirement for the hardware.

Aosite always stand in a new industry perspective, using excellent and innovative technology to build the new hardware quality standard.

上翻随意停支撑

FREE STOP SOFT UP GAS SPRING AG3510



主要材质:铁,塑料
承重力:轻型2.7-3.7kg, 中型3.9-4.8kg, 重型4.9-6kg
产品功能:关门角度25°以下具有缓冲功能、最大开启角度110°, 柜体无需安装铰链

Main material: Steel,Plastic
Loading capacity: Light type 2.7-3.7kg /Middle type 3.9-4.8kg /Heavy type 4.9-6kg
Product Features:With soft closing under angle 25°, max opening angle is 110°. No need hinges for cabinet

产品信息/ Product information



订购编号/ Model: AG3510

上翻装置 (左右) /开启角度: 110度
Lift body (left &right) Opening Angle: 110°

				
1*上翻装置整套 1 set* lift body	1*A型面壳整套 1 set* A style cover	1*面板快装整套 1 set* quick installation panel accessories	8*木工螺丝 8 pcs* wood screws φ4*39mm	8*木工螺丝 4 pcs* wood screws φ4*16mm


柜体高度 Height of cabinet: 300-500mm
柜体宽度 Width of cabinet: 600-1200mm
面板厚度 Thickness of panel: 16/19/22/26/28mm

AOSITE®


GAS SPRING
气撑系列

安装/ Mounting


定位孔位置与所需空间
Hole position and needed space

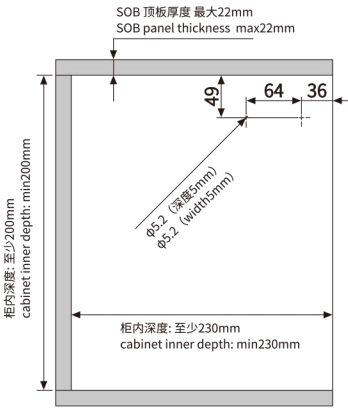


固定位置
Fixed Position

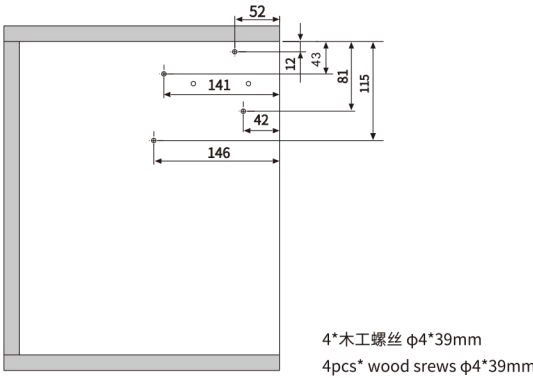



面板安装尺寸
Panel installation size

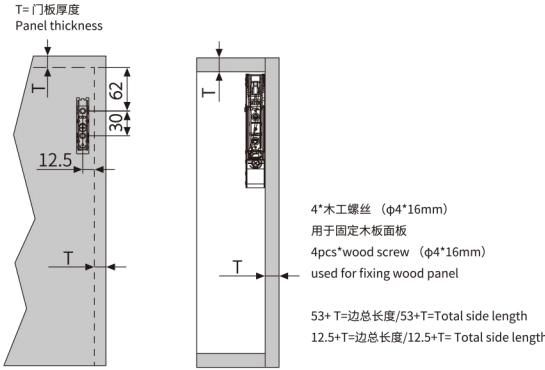

最小门缝
Minimum door gap

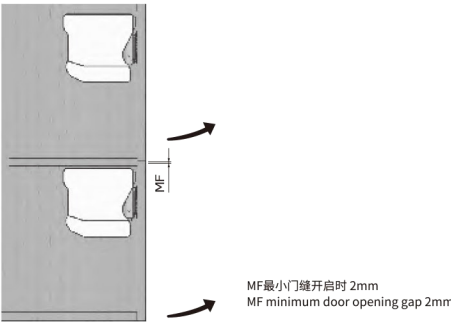

顶线/饰板 所需空间
Needed space for top side and decorative board

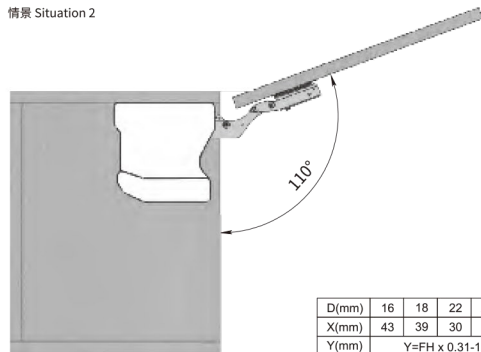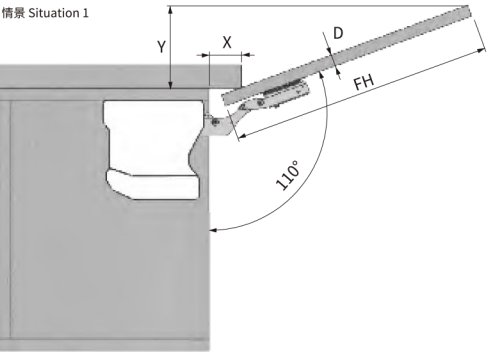

D(mm)	16	18	22	26	28
X(mm)	43	39	30	18	12
Y(mm)	Y=FH x 0.31-15+D				

关门带缓冲气撑

SOFT-UP GAS SPRING(WITH DAMPER) C18



主要材质:20# 精轧管, 尼龙
支撑力:20N-150N
中心距:245mm
产品功能:可调节, 关门带缓冲

Main material: 20# finishing tube, nylon
Force: 20N-150N
Center distance: 245mm
Product Features: Adjustable, soft closing



GAS SPRING
气撑系列

产品信息/ Product information




订购编号/ Model: C18

技术参数表/ Technical parameter table

自由上翻气弹簧选型																					
REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N			
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N			
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N			
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	1		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）
Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)


安装/ Mounting

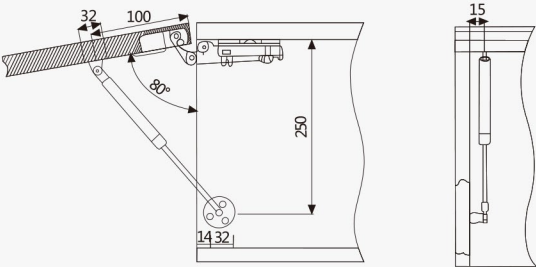

C18-301

产品用途：汽动上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。


Usage: Soft-up gas spring
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

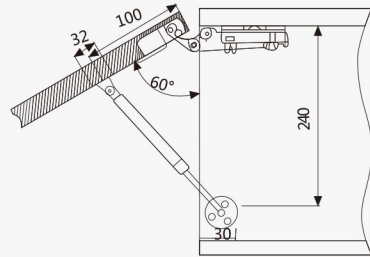

C18-302

产品用途：汽动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop gas spring
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.

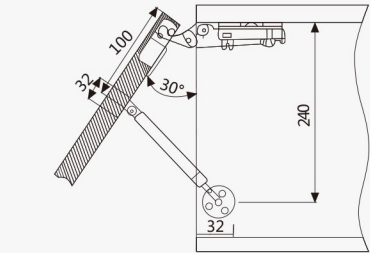

C18-303

产品用途：汽动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop gas spring
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.

关门带缓冲气撑

SOFT-UP GAS SPRING(WITH DAMPER) C20



主要材质:20# 精轧管, POM

支撑力:20N-150N

中心距:245mm

产品功能:可调节, 关门带缓冲

Main material: 20# finishing tube, POM

Force: 20N-150N

Center distance: 245mm

Product Features: Adjustable, soft closing



GAS SPRING
气撑系列



产品信息/ Product information



订购编号/ Model: C20




安装/ Mounting

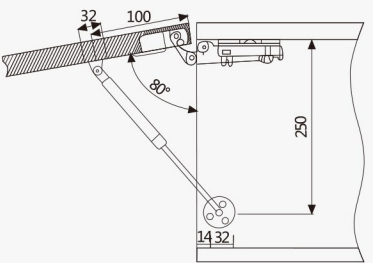

C20-301

产品用途：汽动上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。

Usage: Soft-up gas spring
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

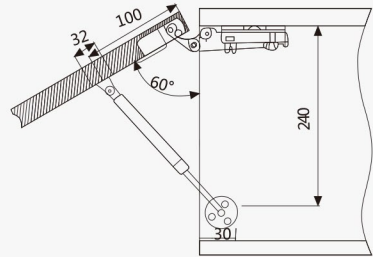

C20-303

产品用途：汽动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop gas spring
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.

技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N		2	120N
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N		2	120N
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N		2	-
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	1		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）
Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

铝框专用气撑

GAS SPRING FOR ALUMINUM FRAME DOOR

BKK



主要材质:铁, POM, 20# 精轧管

支撑力:20N-150N

中心距:245mm

产品功能:气动上翻/随意停

Main material: Steel, POM, 20# finishing tube

Force: 20N-150N

Center distance: 245mm

Product Features: Soft up/free stop

技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N		2	120N
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N		2	120N
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N		2	-
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	-		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）

Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: BKK

安装/ Mounting

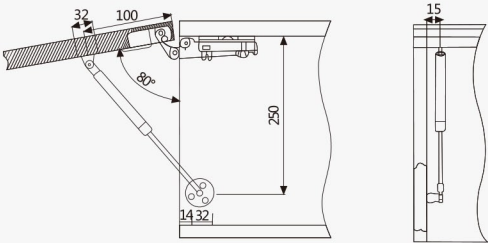

BKK-301

产品用途：气动上翻支撑


举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。

Usage: Soft-up

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

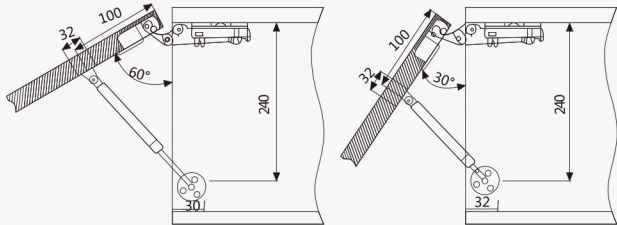

BKK-303

产品用途：气动上翻任意停支撑


举力规格：45N-65N

用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop

Force Specifications: 45N-65N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.




BKK-302

产品用途：液压下翻支撑

用途说明：可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down

Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

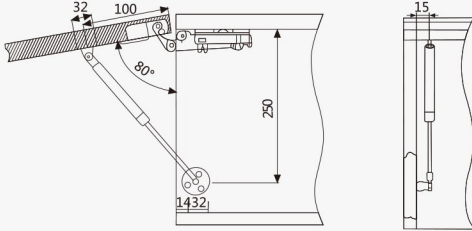

BKK-304

产品用途：液压上翻支撑

举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

铝框专用气撑

GAS SPRING FOR ALUMINUM FRAME DOOR

NCC



主要材质:铁,POM, 20# 精轧管

支撑力:20N-150N

中心距:245mm

产品功能:气动上翻/随意停

Main material: Steel, POM, 20# finishing tube

Force: 20N-150N

Center distance: 245mm

Product Features: Soft up/free stop

技术参数表/ Technical parameter table

随意停气弹簧选型 REFERENCE DATA FOR INSTALLATION AND USE OF FREE STOP GAS SUPPORT																						
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200			
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	
350	1.5-2.0	1	45N	2.5-3.0	1	45N	3.0-3.5	1	45N	3.5-4.0	1	45N	4.0-4.5	-	-	4.5-5.0	-	-	5.5-6.0	-	-	
		-	-		-	-		-	-		2	45N		2	45N							
400	2.0-2.5	1	45N	2.5-3.0	1	45N	3.0-3.5	1	45N	4.0-4.5	1	-	4.5-5.0	1	-	5.0-5.5	-	-	6.0-6.5	-	-	
		-	-		2	-		2	45N		2	45N		2	45N							
450	2.5-3.0	1	45N	3.0-3.5	1	65N	3.5-4.0	1	65N	4.5-5.0	-	-	5.0-5.5	-	-	5.5-6.0	-	-	6.5-7.0	-	-	
		-	-		2	-		2	45N		2	65N		2	65N							
500	3.0-3.5	1	65N	3.5-4.0	1	65N	4.0-4.5	1	65N	5.0-5.5	-	-	5.5-6.0	-	-	6.0-6.5	-	-	7.0-7.5	-	-	
		2	-		2	-		2	65N		2	65N		2	65N							
550	3.5-4.0	1	-	4.0-4.5	-	-	4.5-5.0	-	-	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-	
		2	45N		2	45N		2	65N		2	65N		2	85N							
600	4.0-4.5	1	-	4.5-5.0	-	-	5.0-5.5	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-	
		2	45N		2	45N		2	65N		2	65N		2	85N							
650	4.5-5.0	1	-	5.0-5.5	-	-	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-	
		2	45N		2	65N		2	65N		2	85N		2	-							
700	5.0-5.5	1	-	5.5-6.0	-	-	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-	
		2	45N		2	65N		2	85N		2	85N		2	-							

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）

Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/Model: NCC

安装/ Mounting

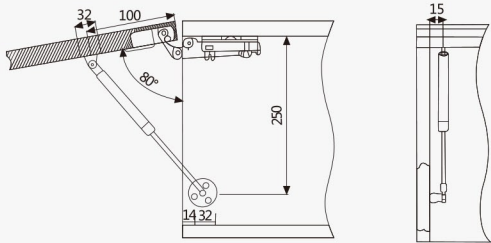

NCC-301

产品用途：气动上翻支撑


举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。

Usage: Soft-up

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

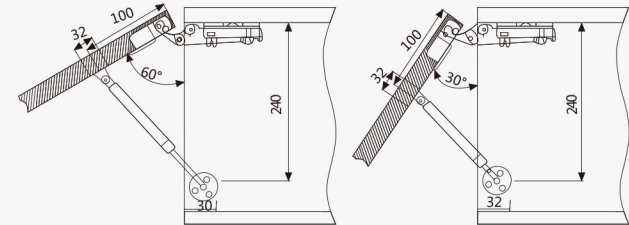

NCC-303

产品用途：气动上翻任意停支撑


举力规格：45N-65N

用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop

Force Specifications: 45N-65N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.




NCC-302

产品用途：液压下翻支撑

用途说明：可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down

Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

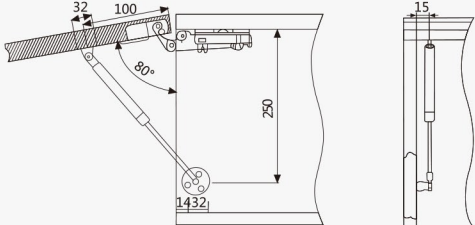

NCC-304

产品用途：液压上翻支撑

举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

上翻门气撑

SOFT UP GAS SPRING C1-301



主要材质:铁, POM, 20# 精轧管
支撑力:20N-150N
中心距:245mm
产品功能:气动上翻, 液压下翻, 随意停

Main material: Steel, POM, 20# finishing tube
Force: 20N-150N
Center distance: 245mm
Product Features: Soft up, Soft down, free stop

技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N		2	120N
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N		2	120N
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N		2	-
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	1		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）
Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: C1-301


安装/ Mounting

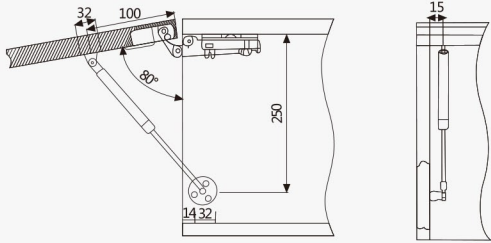

C1-301

产品用途：气动上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。


Usage: Soft-up
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

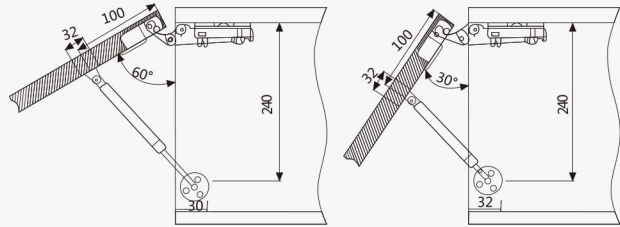

C1-303

产品用途：气动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。


Usage: Free stop
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.



C1-302

产品用途：液压下翻支撑
用途说明：可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down
Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

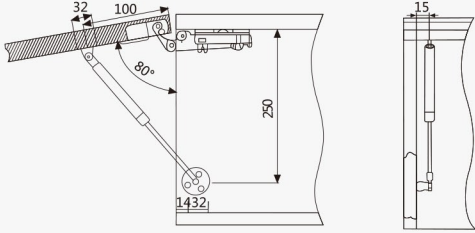

C1-304

产品用途：液压上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

上翻门气撑

SOFT UP GAS SPRING C12-301



主要材质:铁, POM, 20# 精轧管
支撑力:20N-150N
中心距:245mm
产品功能:气动上翻, 液压下翻, 随意停

Main material: Steel, POM, 20# finishing tube
Force: 20N-150N
Center distance: 245mm
Product Features: Soft up, Soft down, free stop

技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N		2	120N
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N		2	120N
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N		2	-
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	100N		2	1		2	-		2	1		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）
Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)




GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: C12-301


安装/ Mounting

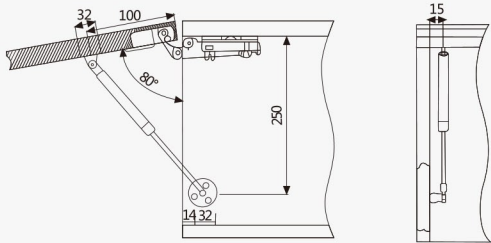

C12-301

产品用途：气动上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。


Usage: Soft-up
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

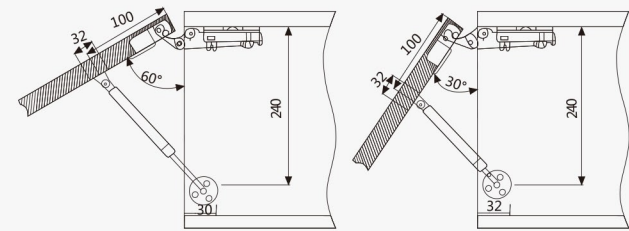

C12-303

产品用途：气动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。


Usage: Free stop
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.



C12-302

产品用途：液压下翻支撑
用途说明：可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down
Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

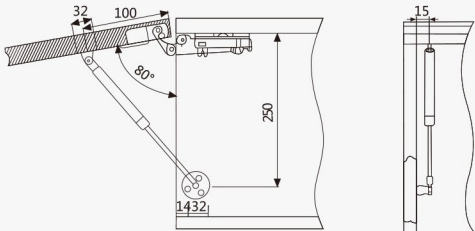

C12-304

产品用途：液压上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

上翻门气撑

SOFT UP GAS SPRING C12-305



主要材质:铁,POM, 20# 精轧管
支撑力:20N-150N
中心距:245mm
产品功能:气动上翻, 液压下翻, 随意停

Main material: Steel, POM, 20# finishing tube
Force: 20N-150N
Center distance: 245mm
Product Features: Soft up, Soft down, free stop



技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N		2	120N
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N		2	120N
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N		2	-
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	-		2	-

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）
Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: C12-305


安装/ Mounting

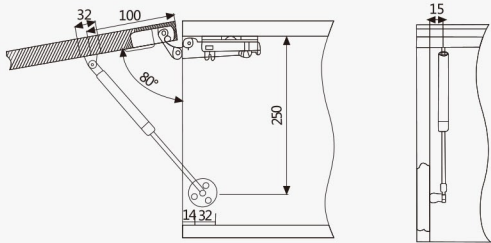

C12-301

产品用途：气动上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。


Usage: Soft-up
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

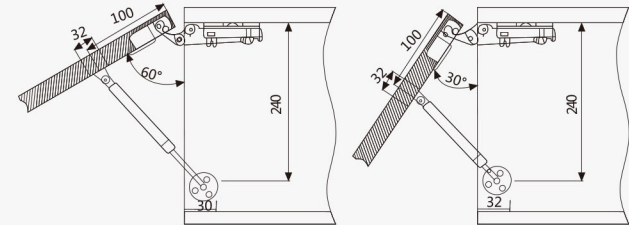

C12-303

产品用途：气动上翻任意停支撑
举力规格：45N-65N
用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。


Usage: Free stop
Force Specifications: 45N-65N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.



C12-302

产品用途：液压下翻支撑
用途说明：可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down
Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

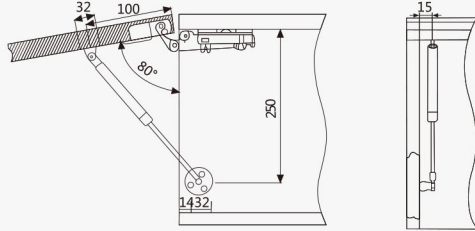

C12-304

产品用途：液压上翻支撑
举力规格：50N-150N
用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step
Force Specifications: 50N-150N
Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

上翻门气撑

SOFT UP GAS SPRING C6



主要材质:铁, 20# 精轧管

支撑力:20N-150N

中心距:245mm

产品功能:气动上翻, 液压下翻, 随意停

Main material: Steel, 20# finishing tube

Force: 20N-150N

Center distance: 245mm

Product Features: Soft up, Soft down, free stop

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: C6

安装/ Mounting

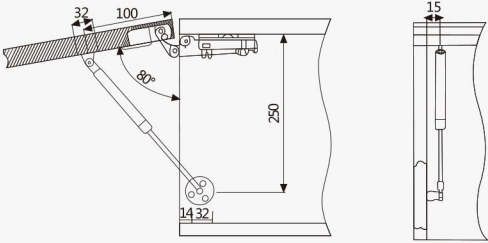

C6-301

产品用途: 气动上翻支撑


举力规格: 50N-150N

用途说明: 可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。

Usage: Soft-up

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

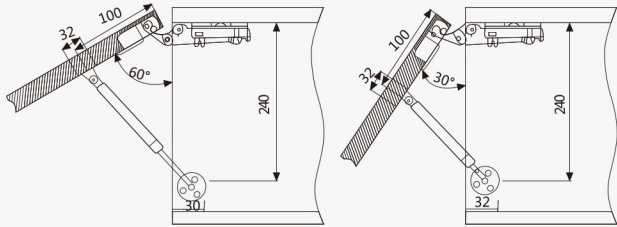

C6-303

产品用途: 气动上翻任意停支撑


举力规格: 45N-65N

用途说明: 可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop

Force Specifications: 45N-65N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.




C6-302

产品用途: 液压下翻支撑

用途说明: 可使下翻木门/铝框门稳定速度缓慢向下翻。

Usage: Soft down

Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

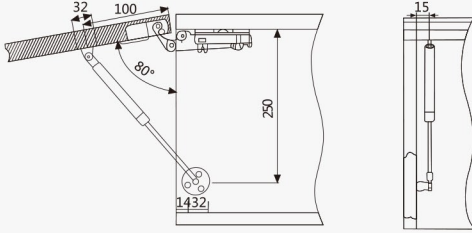

C6-304

产品用途: 液压上翻支撑

举力规格: 50N-150N

用途说明: 可使合适重量的上翻木门/铝框门慢慢向上翻起, 并能在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.

技术参数表/ Technical parameter table

自由上翻气弹簧选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFTUP GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	1.5-1.8	1	60N	2.0-2.5	1	80N	2.5-3.0	1	80N	3.5-4.0	1	100N	4.0-4.5	1	100N	4.5-5.0	1	120N	5.5-6.0	1	-
		-	-		2	40N		2	50N		2	50N		2	50N		2	60N		2	80N
400	1.9-2.1	1	80N	2.5-3.0	1	80N	3.0-3.5	1	100N	4.0-4.5	1	120N	4.5-5.0	1	120N	5.0-5.5	-	-	6.0-6.5	-	-
		-	-		2	50N		2	50N		2	60N		2	60N		2	80N		2	80N
450	2.1-2.4	1	80N	3.0-3.5	1	100N	3.5-4.0	1	120N	4.5-5.0	1	150N	5.0-5.5	1	150N	5.5-6.0	-	-	6.5-7.0	-	-
		-	-		2	50N		2	60N		2	80N		2	80N		2	80N		2	100N
500	2.4-2.6	1	80N	3.2-3.5	1	120N	4.0-4.5	1	120N	5.0-5.5	1	180N	5.5-6.0	-	180N	6.0-6.5	-	-	7.0-7.5	-	-
		2	50N		2	60N		2	60N		2	80N		2	-		2	100N		2	120N
550	2.6-2.9	1	100N	3.5-4.0	1	150N	4.5-5.0	1	150N	5.5-6.0	-	-	6.0-6.5	-	-	6.5-7.0	-	-	7.5-8.0	-	-
		2	50N		2	80N		2	80N		2	100N		2	100N		2	100N			
600	3.0-3.3	1	100N	4.0-4.5	1	150N	5.0-5.5	1	150N	6.0-6.5	-	-	6.5-7.0	-	-	7.0-7.5	-	-	8.0-8.5	-	-
		2	50N		2	80N		2	80N		2	100N		2	120N		2	120N			
650	3.3-3.6	1	120N	4.5-5.0	1	150N	5.5-6.0	-	-	6.5-7.0	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.5-9.0	-	-
		2	60N		2	80N		2	100N		2	100N		2	120N		2	120N			
700	3.6-4.0	1	120N	5.0-5.5	1	180N	6.0-6.5	-	-	7.0-7.5	-	-	7.5-8.0	-	-	8.0-8.5	-	-	9.0-9.5	-	-
		2	60N		2	100N		2	120N		2	1		2	-		2	1		2	-

以上选型为实验室测试结果: 门板 (中密度板), 板厚18mm (承载力参数: 仅供参考)

Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

下翻门支撑

SOFT DOWN GAS SPRING C5



主要材质:铁, 20# 精轧管

支撑力:20N-150N

中心距:245mm

产品功能:气动上翻, 液压下翻, 随意停

Main material: Steel, 20# finishing tube

Force: 20N-150N

Center distance: 245mm

Product Features: Soft up, Soft down, free stop

技术参数表/ Technical parameter table

液压下翻撑选型 REFERENCE DATA FOR INSTALLATION ANDUSE OF SOFT DOWN GAS SUPPORT																					
柜门长度 (mm) Length of cabinet door	500			600			700			800			900			1000			1200		
柜门宽度 (mm) Height of cabinet door	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force	柜门重量 (KG) Weight of cabinet door	使用数量 (条) Quantity	使用力 (值) Force
350	2.0-2.5 2.3	1	60N	2.5-3.5 2.7	1	80N	2.5-5.5 3.2	1	80N	3.5-4.5 3.6	1	100N	4.5-5.5 4.1	1	-	4.5-5.5 4.5	1	-	5.5-6.5 5.5	1	-
		-	-		1	-		2	-		2	60N		2	80N		2	100N			
400	2.5-3.5 2.6	1	80N	2.5-3.5 3.1	1	80N	2.5-3.5 3.6	1	100N	3.5-4.5 4.1	1	-	4.5-5.5 4.7	1	-	4.5-5.5 5.2	-	-	5.5-6.5 6.2	-	-
		-	-		2	-		2	-		2	60N		2	80N		2	100N			
450	2.5-3.5 2.9	1	80N	3.0-3.5 3.5	1	100N	3.5-4.5 4.1	1	-	4.5-5.5 4.7	-	-	4.5-5.5 5.2	1	-	5.5-6.5 5.8	-	-	6.5-7.5 7.0	-	-
		-	-		2	-		2	60N		2	80N		2	100N		2	80N		2	120N
500	2.5-3.5 3.3	1	100N	3.5-4.5 3.8	1	-	3.5-4.5 3.3	1	-	4.5-5.5 3.3	1	-	5.5-6.5 3.3	-	-	5.5-6.5 3.3	-	-	7.5-8.5 3.3	-	-
		2	-		2	60N		2	80N		2	80N		2	100N		2	100N		2	150N
550	3.5-4.5 3.6	1	-	3.5-4.5 4.3	1	-	4.5-5.5 5.0	1	-	5.5-6.5 5.8	-	-	3.5-4.5 6.4	-	-	3.5-4.5 7.1	-	-	3.5-4.5 8.6	-	-
		2	60N		2	60N		2	80N		2	100N		2	100N		2	120N		2	150N
600	3.5-4.5 3.9	1	-	4.5-5.5 4.7	1	-	4.5-5.5 5.5	1	-	5.5-6.5 6.2	-	-	6.5-7.5 7.0	-	-	7.5-8.5 7.8	-	-	8.5-9.5 9.3	-	-
		2	60N		2	80N		2	80N		2	100N		2	120N		2	150N		2	180N
650	4.5-5.5 4.2	1	-	4.5-5.5 5.1	1	-	5.5-6.5 5.9	-	-	6.5-7.5 6.7	-	-	6.5-7.5 7.6	-	-	7.5-8.5 8.4	-	-	9.5-10.5 10	-	-
		2	80N		2	80N		2	100N		2	120N		2	120N		2	150N		2	200N
700	4.5-5.5 4.5	1	-	5.5-6.5 5.4	1	-	5.5-6.5 6.4	-	-	6.5-7.5 7.3	-	-	7.5-8.5 8.2	-	-	8.5-9.5 9.1	-	-	9.5-10.5 10.8	-	-
		2	80N		2	100N		2	100N		2	120N		2	150N		2	180N		2	200N

以上选型为实验室测试结果：门板（中密度板），板厚18mm（承载力参数：仅供参考）

Note: the above selection is the laboratory test results: door panel (medium density door panel), plate thickness of 18mm (bearing capacity parameters: for reference only)

AOSITE®


GAS SPRING
气撑系列

产品信息/ Product information



订购编号/ Model: C5

安装/ Mounting

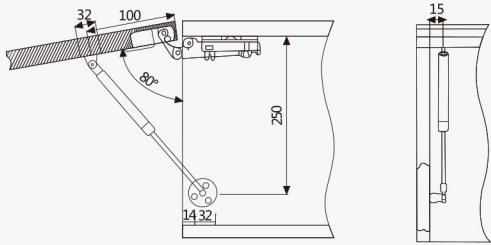

C5-301

产品用途：气动上翻支撑


举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门稳定速度慢慢向上翻起。

Usage: Soft-up

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed.

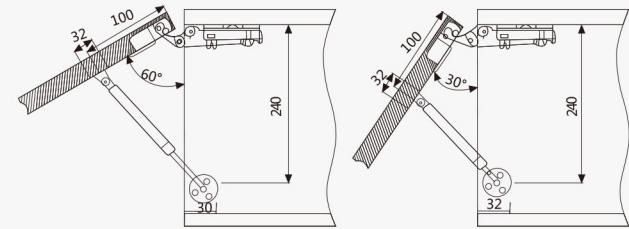

C5-303

产品用途：气动上翻任意停支撑


举力规格：45N-65N

用途说明：可使合适重量的上翻木门/铝框门在30°-90°的开启角度之间任意停留。

Usage: Free stop

Force Specifications: 45N-65N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to free stop between the opening angle of 30°-90°.




C5-302

产品用途：液压下翻支撑

用途说明：可使下翻木门/铝框门稳定速度缓缓向下翻。

Usage: Soft down

Application: It can make a suitable weight of down-turning wooden door/aluminum frame door to be turned down at a stable speed.

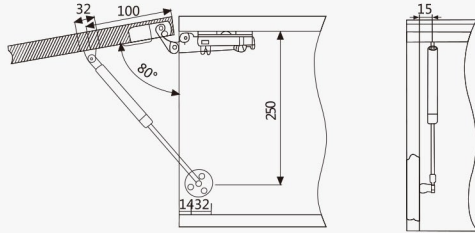

C5-304

产品用途：液压上翻支撑

举力规格：50N-150N

用途说明：可使合适重量的上翻木门/铝框门慢慢向上翻起，并在60°-90°的开启角度之间产生缓冲作用。

Usage: Hydraulic double step

Force Specifications: 50N-150N

Application: It can make a suitable weight of up-turning wooden door/aluminum frame door to be turned up at a stable speed. And it can soft close between the opening angle of 60°-90°.