



## HINGE D

## 铰链系列

PAGE - 070-143



Today, with the rapid development of hardware industry, the home furnishing market put forward higher requirement for the hardware.

Aosite always stand in a new industry perspective, using excellent and innovative technology to build the new hardware quality standard.

无力铰链

SPRINGLESS HINGE Q98



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:无弹簧结构,完美搭配反弹器,免装拉手

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: No spring structure, perfect match with push-opener, handle-free design

产品信息/ Product information



订购编号/ Model: Q98-09









订购编号/ Model: Q98-08



订购编号/ Model: Q98-07

配件 Accessories



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay

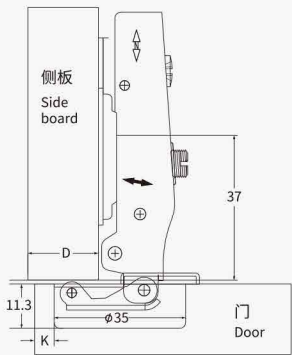


$H=15+K-D$

半盖 Half overlay

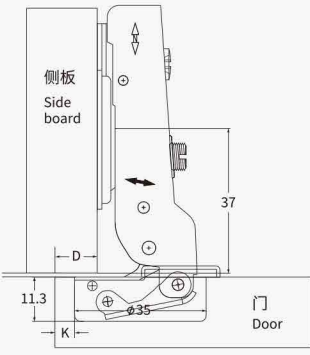

$H=5+K-D$

内嵌 Embed

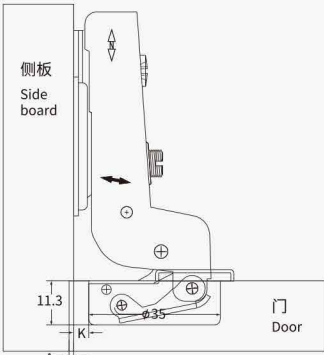

$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 10 | 11 | 12 | 13 | 14 |   |   |
| 2 | 8  | 9  | 10 | 11 | 12 |   |   |
| 4 | 6  | 7  | 8  | 9  | 10 |   |   |

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 1 | 0 | -1 | -2 | -3 |   |   |
| 2 | 3 | 2 | 1  | 0  | -1 |   |   |
| 4 | 5 | 4 | 3  | 2  | 1  |   |   |

铰链的调节/ Hinge adjustment

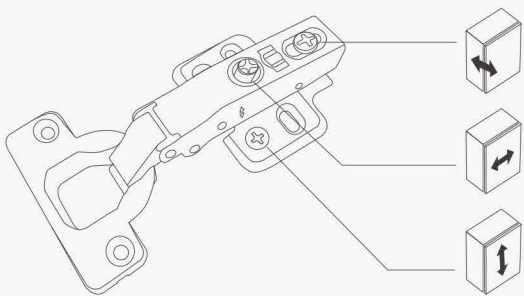

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.


铰杯钻孔/ Cup drilling dimension

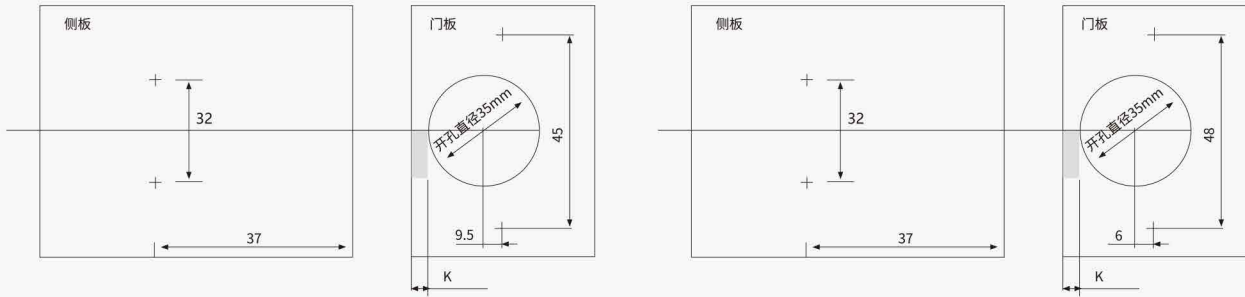

二段力固装液压阻尼铰链(厚门)

TWO WAY INSEPARABLE HYDRAULIC DAMPING HINGE (THICK DOOR)

AQ840

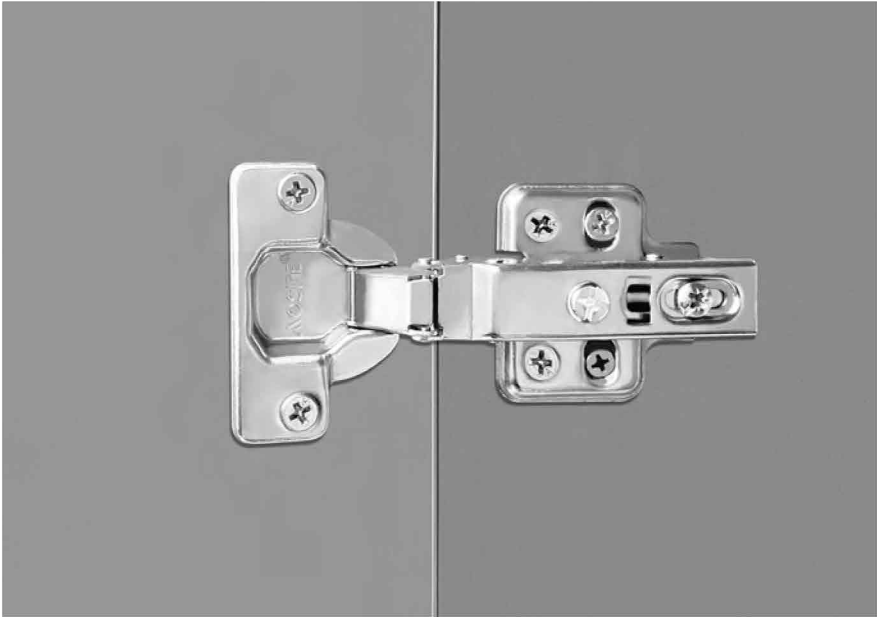

主要材质:冷轧钢板  
适用门板厚度:16-25mm  
开启角度:95°  
盖位调节:+2-3mm  
产品功能:静音效果,内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 16-25mm  
Opening angle: 95°  
Overlay position adjustment: +2-3mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: AQ840-09




订购编号/ Model: AQ840-08




订购编号/ Model: AQ840-07

配件 Accessories

A



B



C



D



E



F



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay

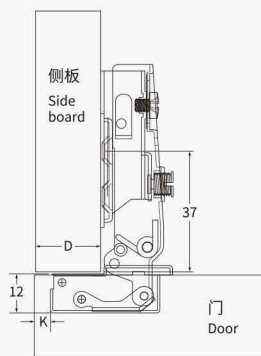


$$H=15+K-D$$

半盖 Half overlay

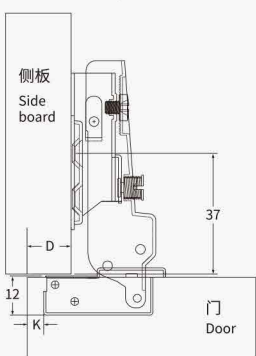

$$H=5+K-D$$

内嵌 Embed

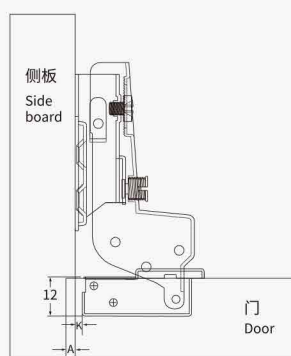

$$H=A+K-4$$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 19 | 20 | 21 | 22 | 23 |   |   |
| 2 | 17 | 18 | 19 | 20 | 21 |   |   |
| 4 | 15 | 16 | 17 | 18 | 19 |   |   |

A: 间隙位计算值/gap calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 12 | 13 | 14 | 15 | 16 |   |   |
| 2 | 10 | 11 | 12 | 13 | 14 |   |   |
| 4 | 8  | 9  | 10 | 11 | 12 |   |   |

| A | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | -1 | -2 | -3 | -4 | -5 |   |   |
| 2 | 1  | 0  | -1 | -2 | -3 |   |   |
| 4 | 3  | 2  | 1  | 0  | -1 |   |   |

铰链的调节/ Hinge adjustment

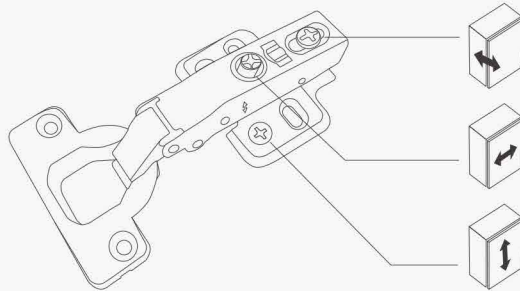

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 5mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 5mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

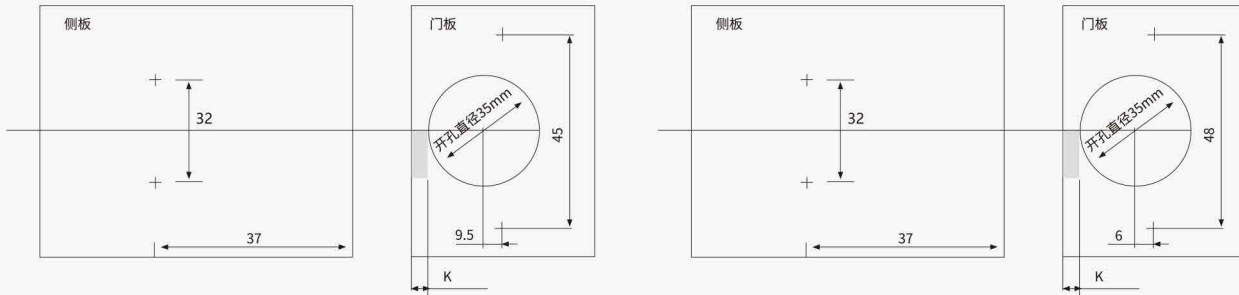

一段力固装阻尼铰链

INSEPARABLE HYDRAULIC DAMPING HINGE (ONE WAY) Q18



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: Q18-09



订购编号/ Model: Q18-08



订购编号/ Model: Q18-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列



盖位计算表/ Overlay calculation form

全盖 Full overlay

$H=15+K-D$

半盖 Half overlay

$H=5+K-D$

内嵌 Embed

$H=A+K-4$

D: 盖位计算值表/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 10 | 11 | 12 | 13 | 14 |   |   |
| 2 | 8  | 9  | 10 | 11 | 12 |   |   |
| 4 | 6  | 7  | 8  | 9  | 10 |   |   |

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 1 | 0 | -1 | -2 | -3 |   |   |
| 2 | 3 | 2 | 1  | 0  | -1 |   |   |
| 4 | 5 | 4 | 3  | 2  | 1  |   |   |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.


建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

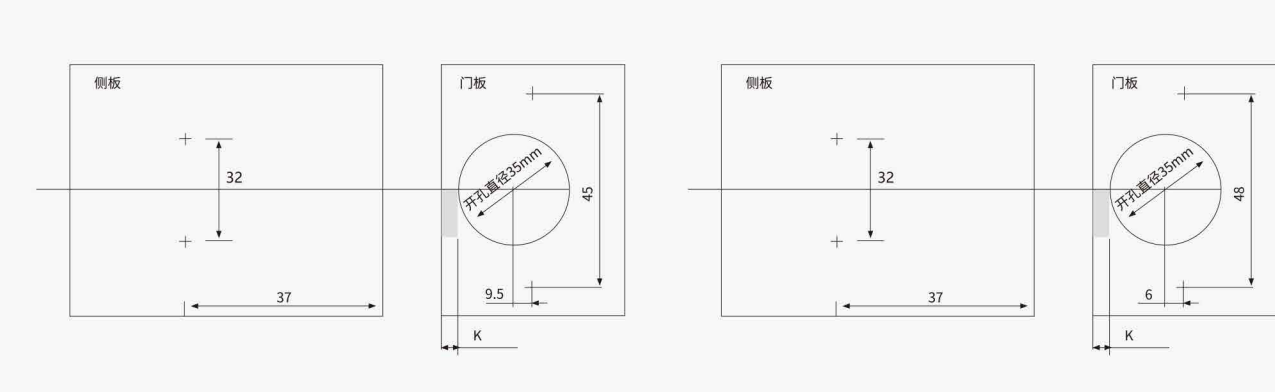

一段力快装阻尼铰链

CLIP ON HYDRAULIC DAMPING HINGE (ONE WAY) Q58

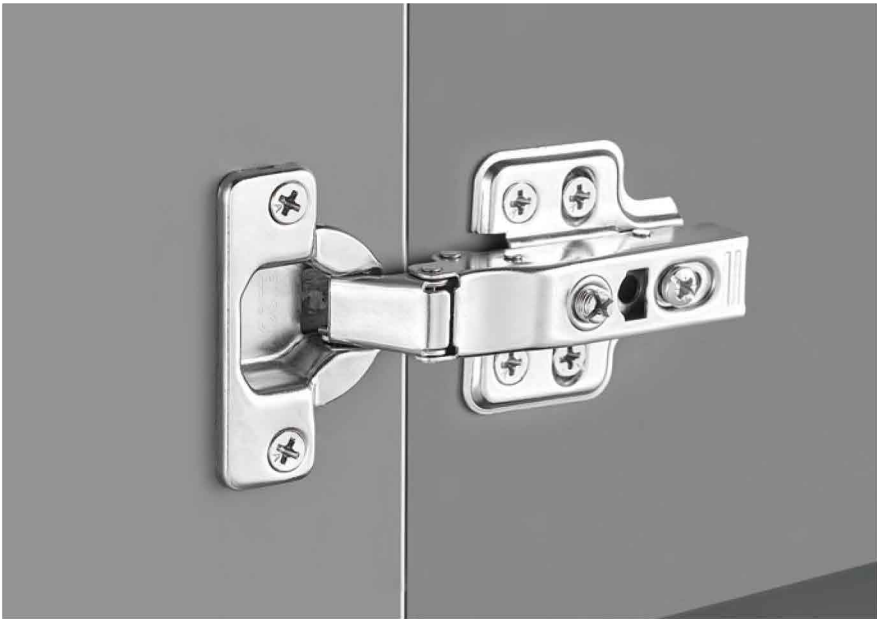

主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°±3°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°±3°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: Q58-09



订购编号/ Model: Q58-08



订购编号/ Model: Q58-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

半盖 Half overlay

内嵌 Embed

D: 盖位计算值/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
| 2 | 15 | 16 | 17 | 18 | 19 |   |   |
| 4 | 13 | 14 | 15 | 16 | 17 |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K   | 3    | 4    | 5    | 6 | 7 |
|---|-----|-----|------|------|------|---|---|
| 0 | 1.5 | 0.5 | -0.5 | -1.5 | -2.5 |   |   |
| 2 | 3.5 | 2.5 | 1.5  | 0.5  | -1.5 |   |   |
| 4 | 5.5 | 4.5 | 3.5  | 2.5  | 1.5  |   |   |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

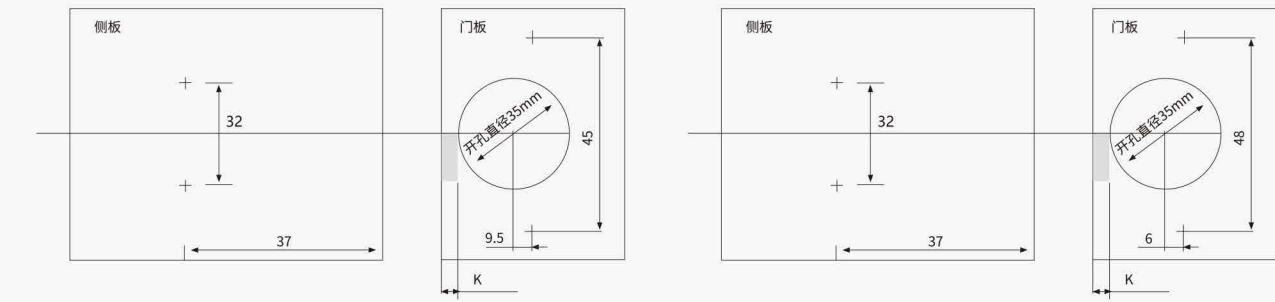

一段力快装三维可调液压阻尼铰链

CLIP ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE (ONE WAY)

Q68



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°±3°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°±3°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: Q68-09



订购编号/ Model: Q68-08



订购编号/ Model: Q68-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

半盖 Half overlay

内嵌 Embed

$H=15+K-D$

$H=5+K-D$

$H=A+K-4$

D: 盖位计算值表/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
| 2 | 15 | 16 | 17 | 18 | 19 |   |   |
| 4 | 13 | 14 | 15 | 16 | 17 |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K   | 3    | 4    | 5    | 6 | 7 |
|---|-----|-----|------|------|------|---|---|
| 0 | 1.5 | 0.5 | -0.5 | -1.5 | -2.5 |   |   |
| 2 | 3.5 | 2.5 | 1.5  | 0.5  | -1.5 |   |   |
| 4 | 5.5 | 4.5 | 3.5  | 2.5  | 1.5  |   |   |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

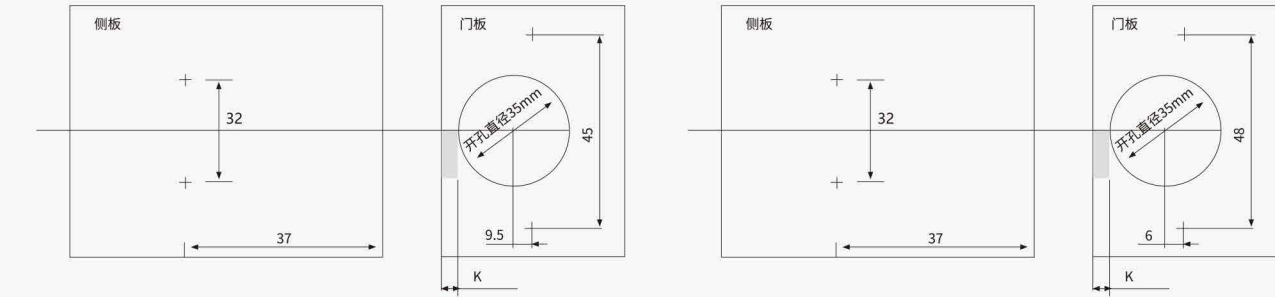

一段力固装液压阻尼铰链

INSEPARABLE HYDRAULIC DAMPING HINGE (ONE WAY) A01



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: A01-09



订购编号/ Model: A01-08



订购编号/ Model: A01-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


盖位计算表/ Overlay calculation form

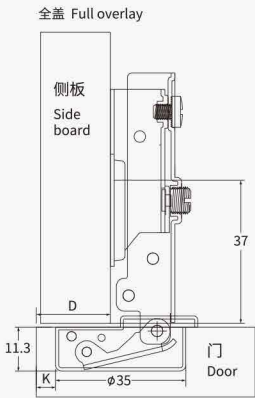

$H=15+K-D$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

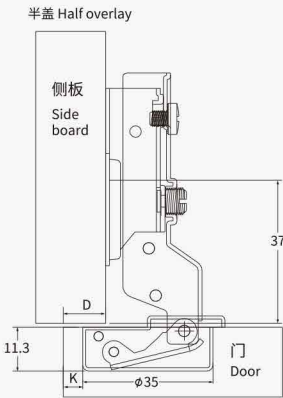

$H=5+K-D$

A: 间隙位计算值/gap calculation form


| D | H | K  | 3  | 4  | 5  | 6 | 7 |
|---|---|----|----|----|----|---|---|
| 0 | 9 | 10 | 11 | 12 | 13 |   |   |
| 2 | 7 | 8  | 9  | 10 | 11 |   |   |
| 4 | 5 | 6  | 7  | 8  | 9  |   |   |

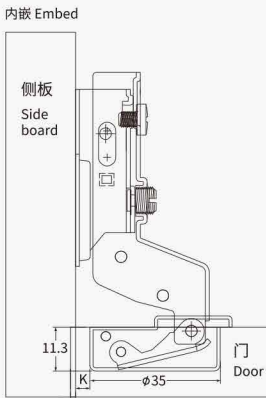

$H=A+K-4$

| A | H | K  | 3  | 4  | 5  | 6 | 7 |
|---|---|----|----|----|----|---|---|
| 0 | 0 | -1 | -2 | -3 | -4 |   |   |
| 2 | 2 | 1  | 0  | -1 | -2 |   |   |
| 4 | 4 | 3  | 2  | 1  | 0  |   |   |

铰链的调节/ Hinge adjustment

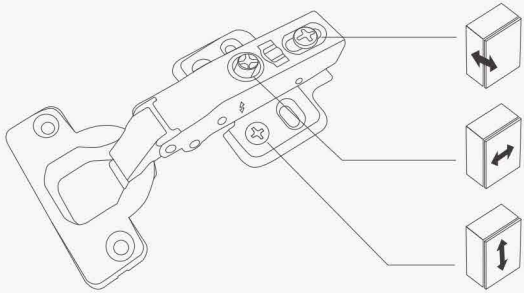

- 深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**高度调整**  
通过安装在侧板上的底座进行调节
- Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

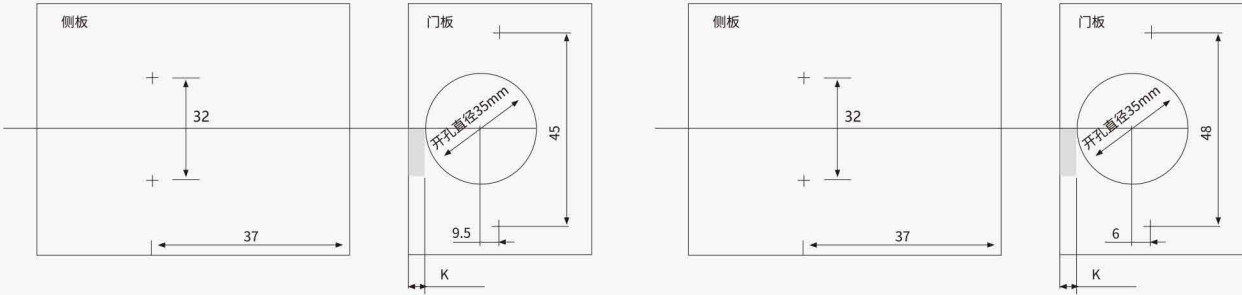

一段力快装液压阻尼铰链

CLIP ON HYDRAULIC DAMPING HINGE (ONE WAY) A03



主要材质:冷轧钢板  
适用门板厚度:14-19mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-19mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: A03-09



订购编号/ Model: A03-08



订购编号/ Model: A03-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


盖位计算表/ Overlay calculation form

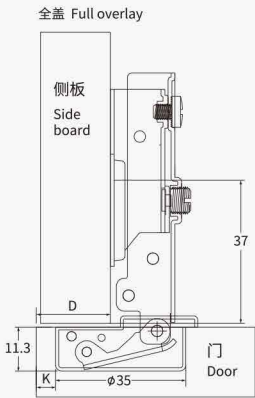

$H=15+K-D$

D: 盖位计算值/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
| 2 | 15 | 16 | 17 | 18 | 19 |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |

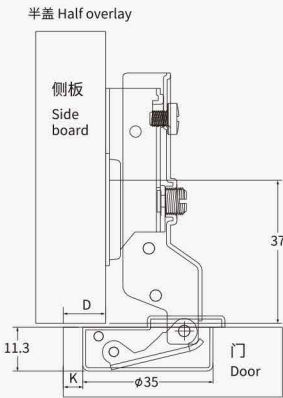

$H=5+K-D$

A: 间隙位计算值/gap calculation form


| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
|   |   |   |    |    |    |   |   |
|   |   |   |    |    |    |   |   |

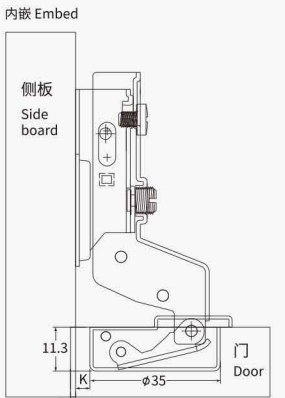

$H=A+K-4$

| A | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 1 | 0 | -1 | -2 | -3 |   |   |
| 2 | 1 | 0 | 1  | 0  | -1 |   |   |
|   |   |   |    |    |    |   |   |
|   |   |   |    |    |    |   |   |

铰链的调节/ Hinge adjustment

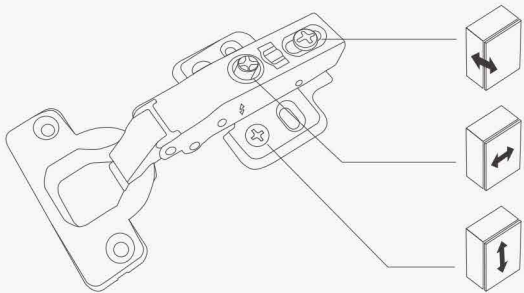

- 深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**高度调整**  
通过安装在侧板上的底座进行调节
- Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

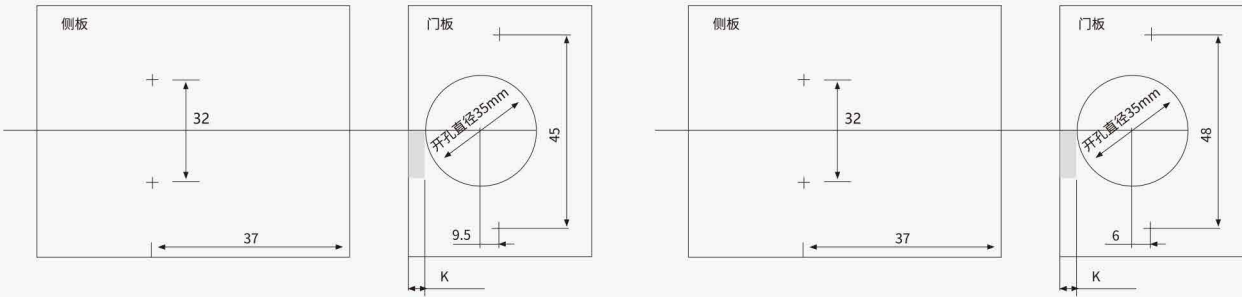

一段力快装三维可调液压阻尼铰链

CLIP ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE (ONE WAY)

A05



主要材质:冷轧钢板  
适用门板厚度:14-19mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静

Main material: Cold rolled steel  
Door thickness: 14-19mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly

产品信息/ Product information



订购编号/ Model: A05-09



订购编号/ Model: A05-08



订购编号/ Model: A05-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列

盖位计算表/ Overlay calculation form

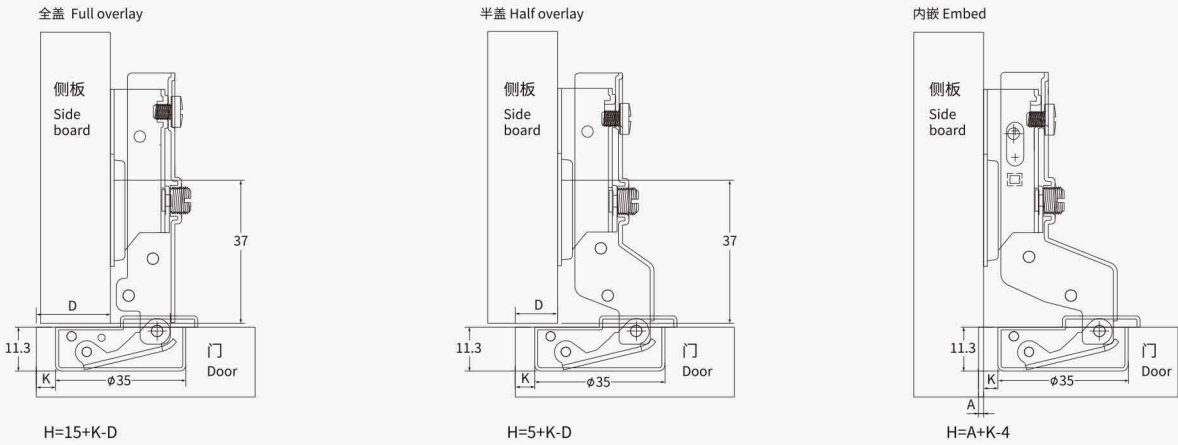


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
| 2 | 15 | 16 | 17 | 18 | 19 |   |   |
| 4 | 13 | 14 | 15 | 16 | 17 |   |   |

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 1 | 0 | -0 | -1 | -2 |   |   |
| 2 | 3 | 2 | 1  | 0  | -1 |   |   |
| 4 | 5 | 4 | 3  | 2  | 1  |   |   |

铰链的调节/ Hinge adjustment

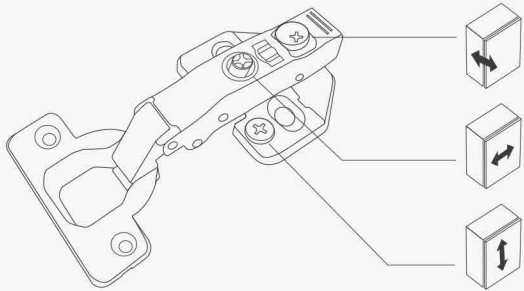

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

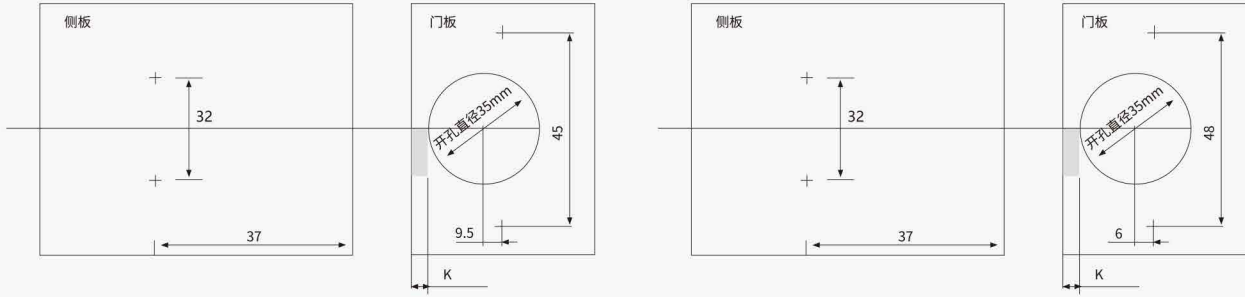

二段力固装液压阻尼铰链

INSEPARABLE HYDRAULIC DAMPING HINGE (TWO WAY) AQ820



主要材质:冷轧钢板  
适用门板厚度:16-20mm  
开启角度:110°  
盖位调节:-2+4mm  
产品功能:随意开停, 婴儿防夹, 舒适安全

Main material: Cold rolled steel  
Door thickness: 16-20mm  
Opening angle: 110°  
Overlay position adjustment: -2+4mm  
Product Features: Free stop, baby anti-pinch, comfortable and safe

产品信息/ Product information



订购编号/ Model: AQ820-09



订购编号/ Model: AQ820-08



订购编号/ Model: AQ820-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay

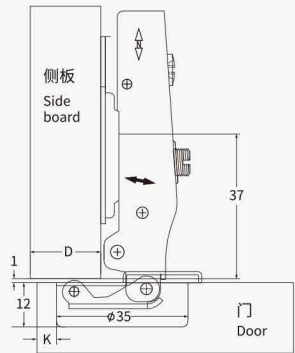


$H=15+K-D$

半盖 Half overlay

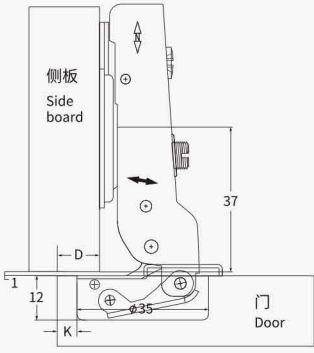

$H=5+K-D$

内嵌 Embed

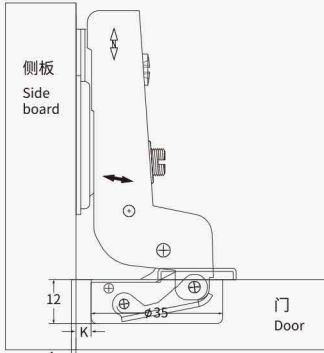

$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K    | 3    | 4    | 5    | 6 | 7 |
|---|-----|------|------|------|------|---|---|
| 0 | 0.5 | -0.5 | -1.5 | -2.5 | -3.5 |   |   |
| 2 | 2.5 | 1.5  | 0.5  | -0.5 | -1.5 |   |   |
| 4 | 4.5 | 3.5  | 2.5  | 1.5  | 0.5  |   |   |

铰链的调节/ Hinge adjustment

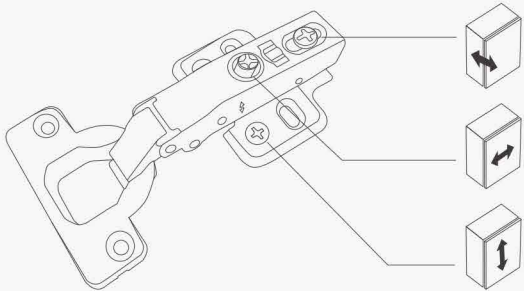

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.


建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

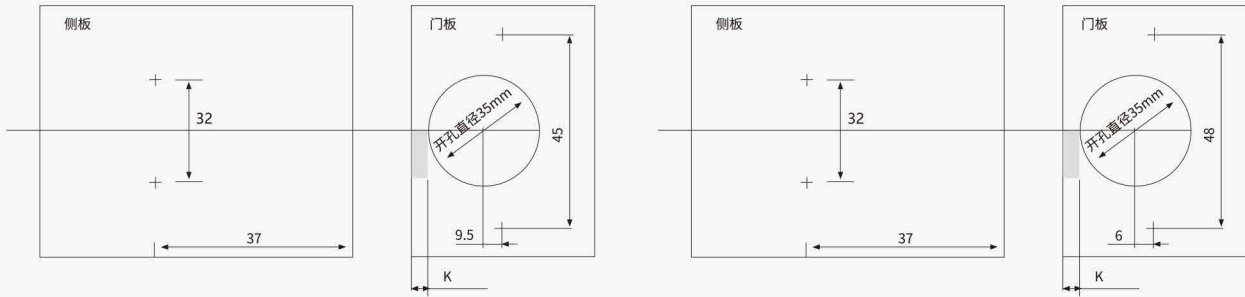

二段力固装阻尼铰链

INSEPARABLE HYDRAULIC DAMPING HINGE (TWO WAY) AQ860

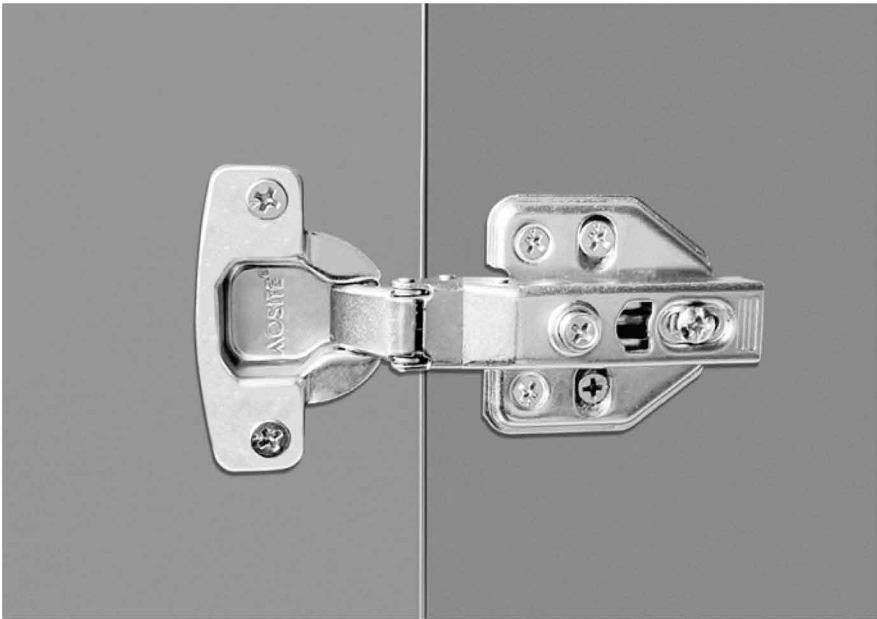

主要材质:冷轧钢板  
适用门板厚度:16-20mm  
开启角度:110°  
盖位调节:+2-4mm  
产品功能:随意开停, 婴儿防夹, 舒适安全, 小角度缓冲

Main material: Cold rolled steel  
Door thickness: 16-20mm  
Opening angle: 110°  
Overlay position adjustment: +2-4mm  
Product Features: Free stop, baby anti-pinch, comfortable and safe, small angle buffer

产品信息/ Product information



订购编号/ Model: AQ860-09



订购编号/ Model: AQ860-08



订购编号/ Model: AQ860-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列

盖位计算表/ Overlay calculation form

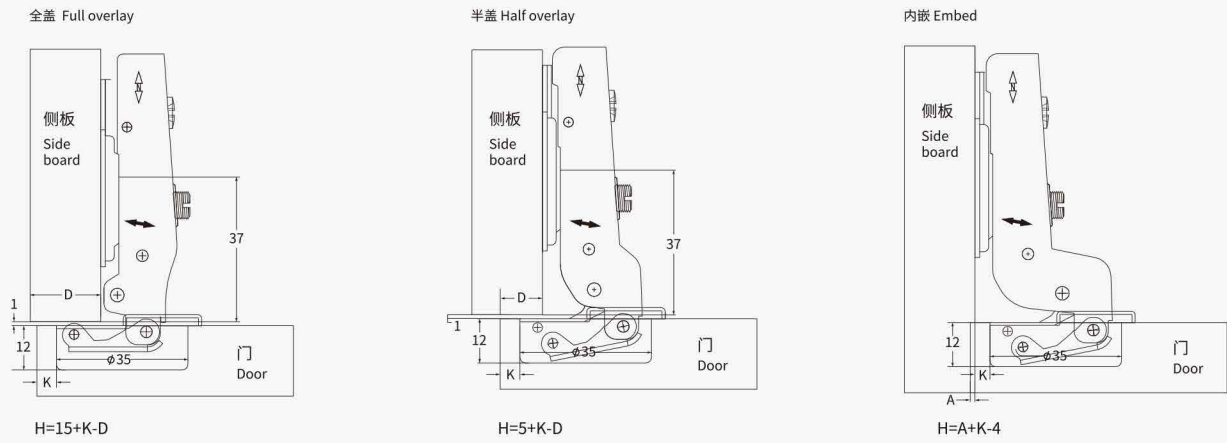

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 10 | 11 | 12 | 13 | 14 |   |   |
| 2 | 8  | 9  | 10 | 11 | 12 |   |   |
| 4 | 6  | 7  | 8  | 9  | 10 |   |   |

| A | H   | K    | 3    | 4    | 5    | 6 | 7 |
|---|-----|------|------|------|------|---|---|
| 0 | 0.5 | -0.5 | -1.5 | -2.5 | -3.5 |   |   |
| 2 | 2.5 | 1.5  | 0.5  | -0.5 | -1.5 |   |   |
| 4 | 4.5 | 3.5  | 2.5  | 1.5  | 0.5  |   |   |

铰链的调节/ Hinge adjustment

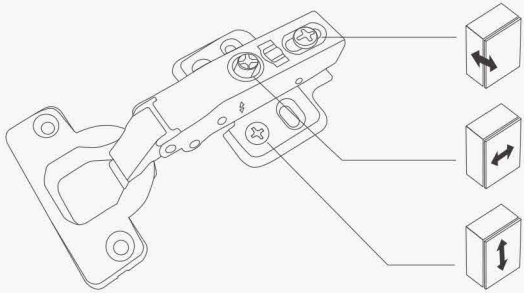

- 深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**高度调整**  
通过安装在侧板上的底座进行调节
- Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

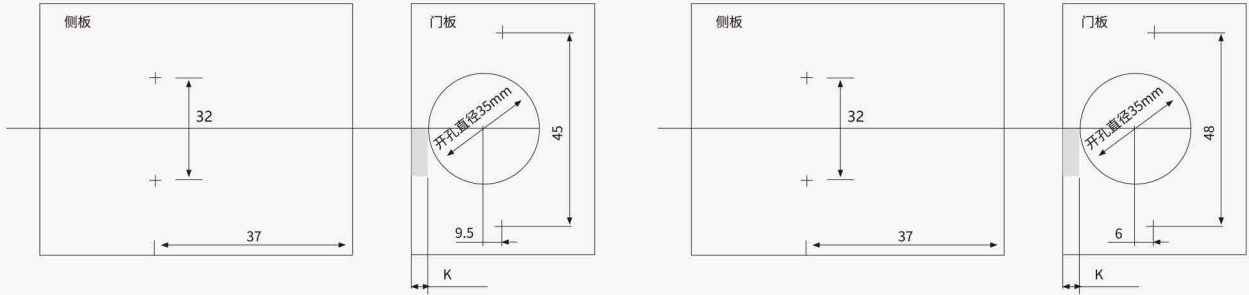

二段力快装移位阻尼铰链

CLIP ON SHIFTING HYDRAULIC DAMPING HINGE (TWO WAY)

AQ866



主要材质:冷轧钢板  
适用门板厚度:16-20mm  
开启角度:110°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静, 小角度缓冲

Main material: Cold rolled steel  
Door thickness: 16-20mm  
Opening angle: 110°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly, small angle buffer

产品信息/ Product information



订购编号/ Model: AQ866-09



订购编号/ Model: AQ866-08



订购编号/ Model: AQ866-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

$H=15+K-D$

半盖 Half overlay

$H=5+K-D$

内嵌 Embed

$H=A+K-4$

D: 盖位计算值表/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K   | 3   | 4    | 5    | 6 | 7 |
|---|-----|-----|-----|------|------|---|---|
| 0 | 2.5 | 1.5 | 0.5 | -0.5 | -1.5 |   |   |
| 2 | 4.5 | 3.5 | 2.5 | 1.5  | 0.5  |   |   |
| 4 | 6.5 | 5.5 | 4.5 | 3.5  | 2.5  |   |   |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.


铰杯钻孔/ Cup drilling dimension

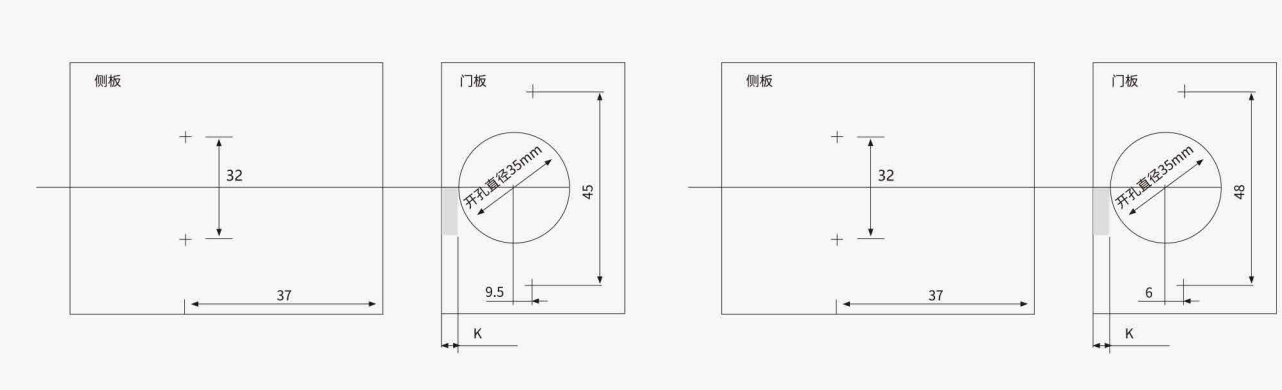

二段力快装三维阻尼铰链

CLIP ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE (TWO WAY)

AQ868

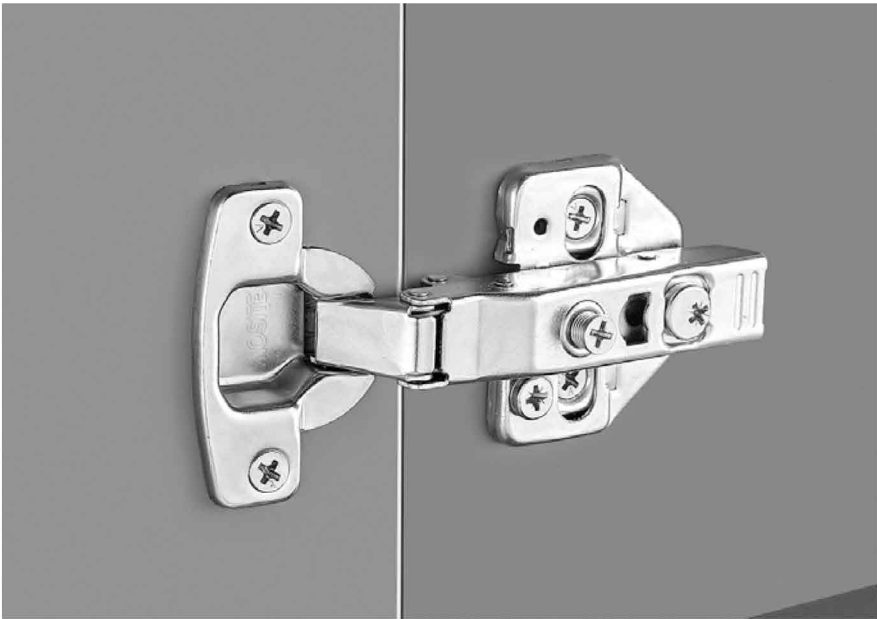

主要材质:冷轧钢板  
适用门板厚度:16-20mm  
开启角度:110°  
盖位调节:+2-4mm  
产品功能:静音效果, 内置缓冲装置使门板关闭轻柔安静, 小角度缓冲

Main material: Cold rolled steel  
Door thickness: 16-20mm  
Opening angle: 110°  
Overlay position adjustment: +2-4mm  
Product Features: Silent system, the built-in damper makes the door close gentle and quietly, small angle buffer

产品信息/ Product information



订购编号/ Model: AQ868-09



订购编号/ Model: AQ868-08



订购编号/ Model: AQ868-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列

盖位计算表/ Overlay calculation form

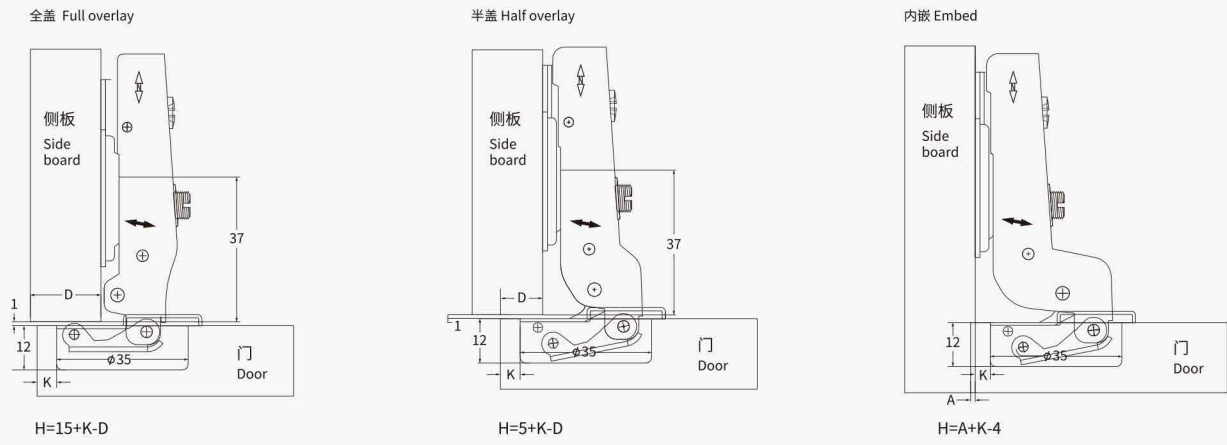

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K   | 3   | 4    | 5    | 6 | 7 |
|---|-----|-----|-----|------|------|---|---|
| 0 | 2.5 | 1.5 | 0.5 | -0.5 | -1.5 |   |   |
| 2 | 4.5 | 3.5 | 2.5 | 1.5  | 0.5  |   |   |
| 4 | 6.5 | 5.5 | 4.5 | 3.5  | 2.5  |   |   |

铰链的调节/ Hinge adjustment

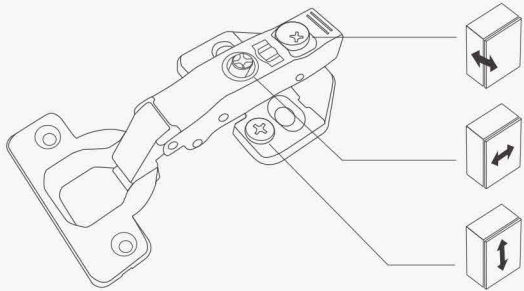

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

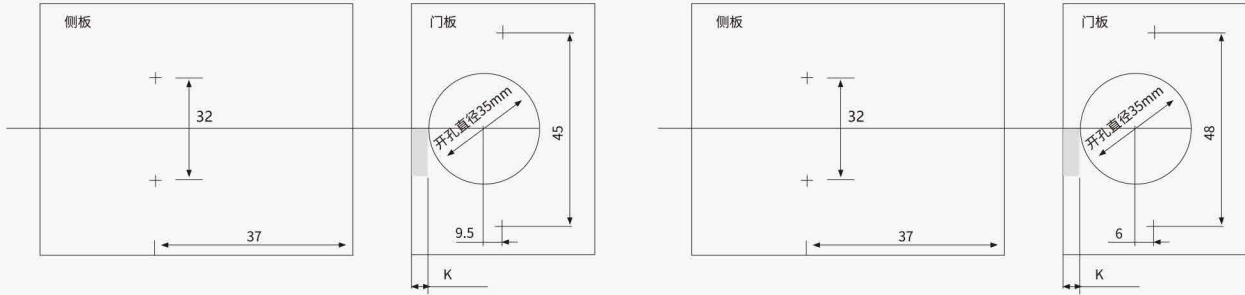

165°固装阻尼铰链

165 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

AH1639/1638/1637



主要材质:冷轧钢板  
适用门板厚度:14-18mm  
开启角度:165°  
盖位调节:+2-4mm  
产品功能:连接柜门,缓冲关闭,使柜门开启165°

Main material: Cold rolled steel  
Door thickness: 14-18mm  
Opening angle: 165°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, opening angle is 165°

产品信息/ Product information



订购编号/ Model: AH1639



订购编号/ Model: AH1638



订购编号/ Model: AH1637

配件 Accessories

**A**

**B**

**C**

**D**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw

AOSITE®

HINGE  
铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

$H=15+K-D$

半盖 Half overlay

$H=5+K-D$

内嵌 Embed

$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H | K | 3  | 4  | 5  | 6  | 7  |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 16 | 17 | 18 | 19 | 20 |
| 2 |   |   | 14 | 15 | 16 | 17 | 18 |
|   |   |   |    |    |    |    |    |
|   |   |   |    |    |    |    |    |

A: 间隙位计算值/gap calculation form

| D | H | K | 3 | 4 | 5 | 6  | 7  |
|---|---|---|---|---|---|----|----|
| 0 |   |   | 7 | 8 | 9 | 10 | 11 |
| 2 |   |   | 5 | 6 | 7 | 8  | 9  |
|   |   |   |   |   |   |    |    |
|   |   |   |   |   |   |    |    |

| A | H | K | 3    | 4    | 5    | 6    | 7    |
|---|---|---|------|------|------|------|------|
| 0 |   |   | -2.5 | -1.5 | -0.5 | 0.5  | 1.5  |
| 2 |   |   | -0.5 | +0.5 | +1.5 | +2.5 | +3.5 |
|   |   |   |      |      |      |      |      |
|   |   |   |      |      |      |      |      |

铰链的调节/ Hinge adjustment

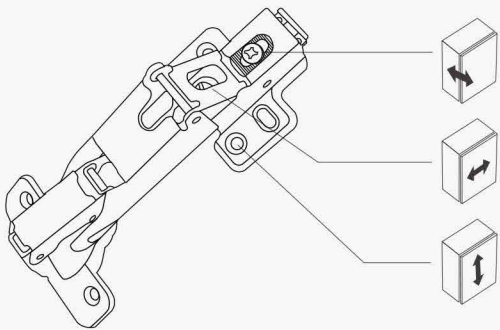

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

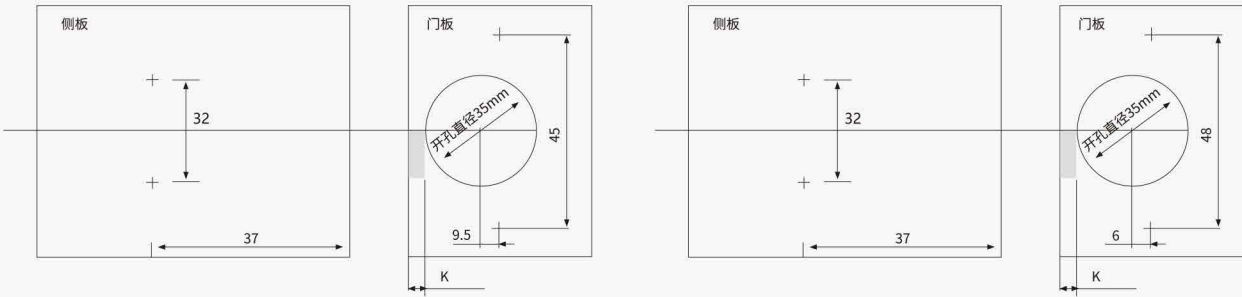

165°快装阻尼液压铰链

165 DEGREE CLIP-ON HYDRAULIC DAMPING HINGE

AH1649/1648/1648



主要材质:冷轧钢板  
适用门板厚度:14-18mm  
开启角度:165°  
盖位调节:+2-4mm  
产品功能:连接柜门,缓冲关闭,使柜门开启165°

Main material: Cold rolled steel  
Door thickness: 14-18mm  
Opening angle: 165°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, opening angle is 165°

产品信息/ Product information



订购编号/ Model: AH1649



订购编号/ Model: AH1648



订购编号/ Model: AH1647

配件 Accessories

A



B



C



D




A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw

AOSITE®

HINGE  
铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay




$$H=15+K-D$$

半盖 Half overlay



$$H=5+K-D$$

内嵌 Embed



$$H=A+K-4$$

D: 盖位计算值表/overlay calculation form


| D | H | K | 3  | 4  | 5  | 6  | 7  |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 16 | 17 | 18 | 19 | 20 |
| 2 |   |   | 14 | 15 | 16 | 17 | 18 |
|   |   |   |    |    |    |    |    |
|   |   |   |    |    |    |    |    |

A: 间隙位计算值/gap calculation form

| D | H | K | 3 | 4 | 5 | 6  | 7  |
|---|---|---|---|---|---|----|----|
| 0 |   |   | 7 | 8 | 9 | 10 | 11 |
| 2 |   |   | 5 | 6 | 7 | 8  | 9  |
|   |   |   |   |   |   |    |    |
|   |   |   |   |   |   |    |    |

| A | H | K | 3    | 4    | 5    | 6    | 7    |
|---|---|---|------|------|------|------|------|
| 0 |   |   | -2.5 | -1.5 | -0.5 | 0.5  | 1.5  |
| 2 |   |   | -0.5 | +0.5 | +1.5 | +2.5 | +3.5 |
|   |   |   |      |      |      |      |      |
|   |   |   |      |      |      |      |      |

铰链的调节/ Hinge adjustment

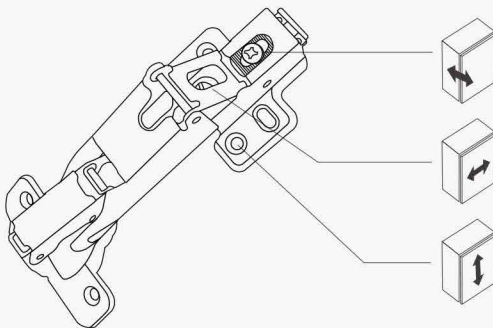

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

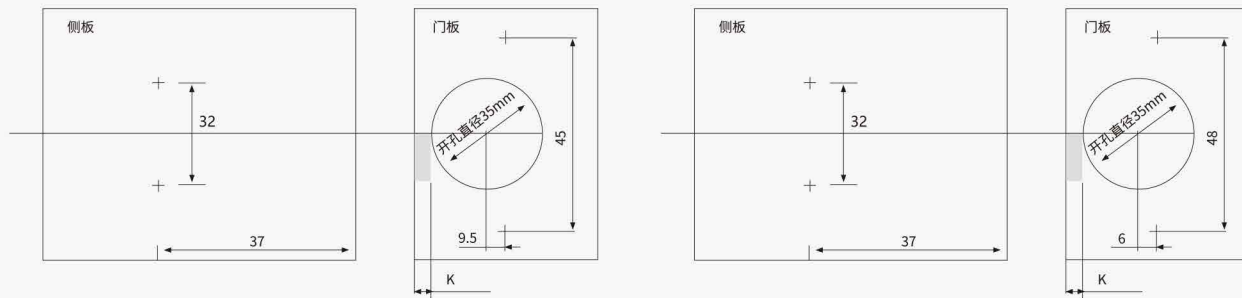

165°快装三维阻尼铰链

165 DEGREE CLIP-ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE

AH1659/1658/1657



主要材质:冷轧钢板  
适用门板厚度:14-18mm  
开启角度:165°  
盖位调节:+2-4mm  
产品功能:连接柜门,缓冲关闭,使柜门开启165°

Main material: Cold rolled steel  
Door thickness: 14-18mm  
Opening angle: 165°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, opening angle is 165°

产品信息/ Product information



订购编号/ Model: AH1659



订购编号/ Model: AH1658



订购编号/ Model: AH1657

配件 Accessories

A



B



C



D



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


AOSITE®

HINGE  
铰链系列

D


盖位计算表/ Overlay calculation form

全盖 Full overlay




$H=15+K-D$

半盖 Half overlay



$H=5+K-D$

内嵌 Embed



$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H | K | 3  | 4  | 5  | 6  | 7  |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 16 | 17 | 18 | 19 | 20 |
| 2 |   |   | 14 | 15 | 16 | 17 | 18 |

A: 间隙位计算值/gap calculation form

| A | H | K | 3 | 4 | 5 | 6  | 7  |
|---|---|---|---|---|---|----|----|
| 0 |   |   | 7 | 8 | 9 | 10 | 11 |
| 2 |   |   | 5 | 6 | 7 | 8  | 9  |

| A | H | K | 3    | 4    | 5    | 6    | 7    |
|---|---|---|------|------|------|------|------|
| 0 |   |   | -2.5 | -1.5 | -0.5 | 0.5  | 1.5  |
| 2 |   |   | -0.5 | +0.5 | +1.5 | +2.5 | +3.5 |

铰链的调节/ Hinge adjustment

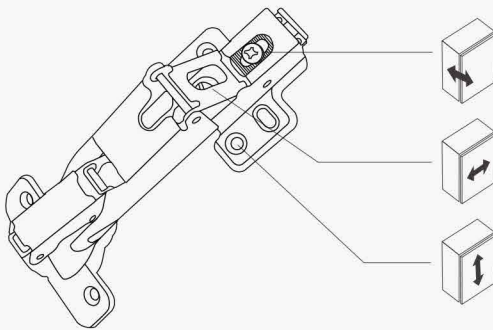

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

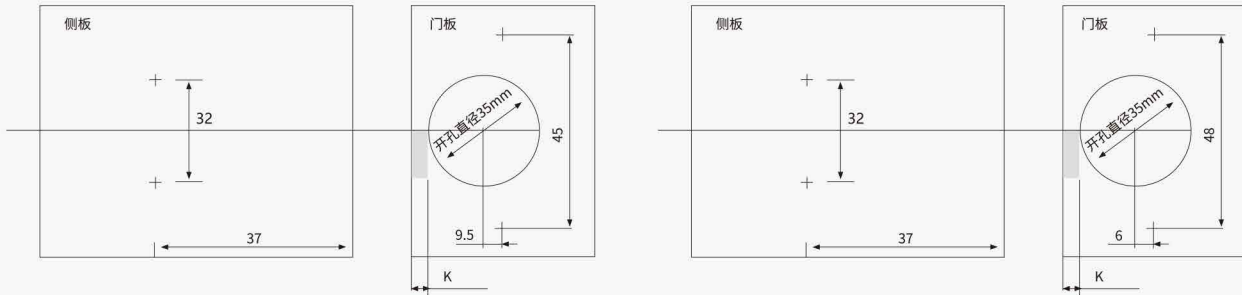

135°滑入式铰链

135 DEGREE SLIDE-ON HINGE AH5135



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:135°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门开启135°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 135°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, opening angle is 135°

产品信息/ Product information




订购编号/ Model: AH5135




配件 Accessories

A



12  
Ø 8

B




12  
Ø 10

C



Ø 2.7  
Ø 4+0.1

D



Ø 0.63

E



F



40.5  
13.5  
AOSITE


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


D

盖位计算表/ Overlay calculation form



|   | 门板厚度<18mm<br>Door thickness | 22mm>门板厚度>18mm<br>Door thickness |
|---|-----------------------------|----------------------------------|
| H | 2                           | 0                                |
| X | 37                          | 37                               |

铰链的调节/ Hinge adjustment

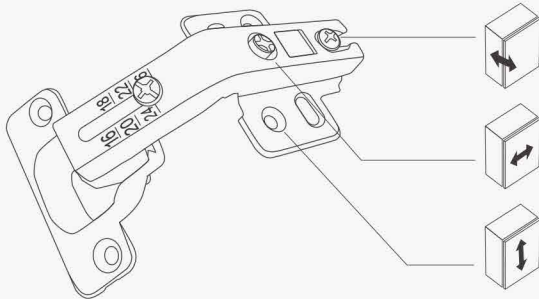

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

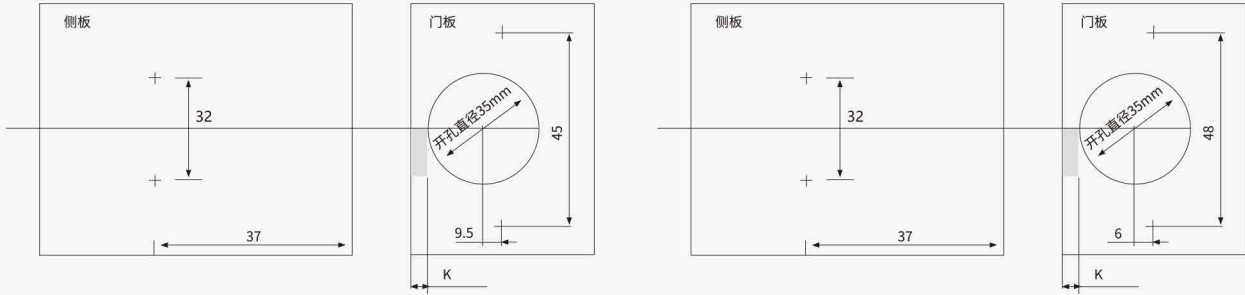

90°固装液压阻尼铰链

90 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

KT-90°



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为90°


Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 90°

AOSITE®

HINGE  
铰链系列

D

盖位计算表/ Overlay calculation form

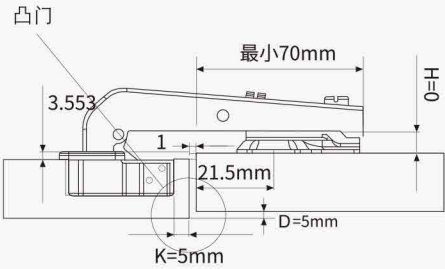

H=0 D=4mm

| D | H | K | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|---|
|   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |

产品信息/ Product information



订购编号/ Model: KT-90°



配件 Accessories

**A**

**B**

**C**


**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

铰链的调节/ Hinge adjustment

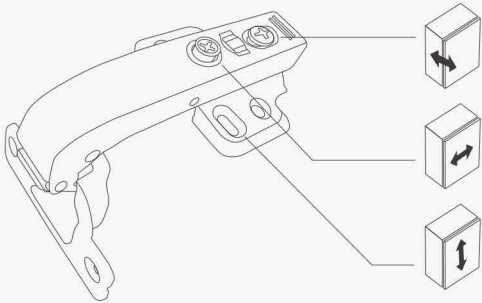

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

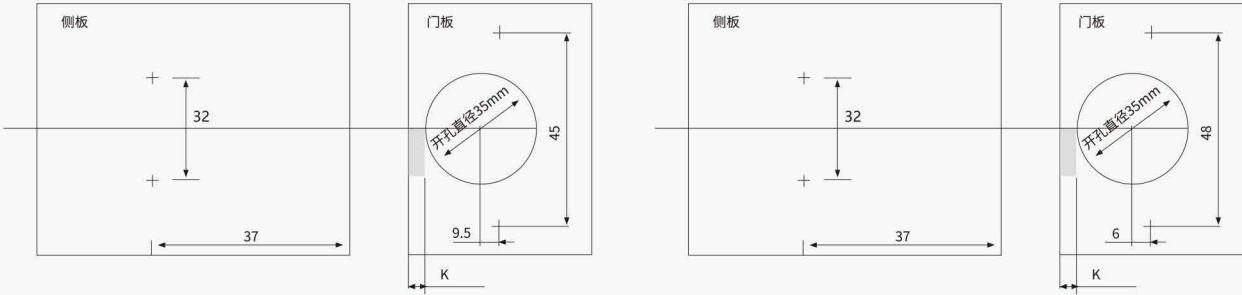

90°滑入式铰链

90 DEGREE SLIDE ON HINGE

AH5090



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节: +2-4mm  
产品功能:连接柜门,使柜门关闭为90°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door,  
closing angle is 90°

产品信息/ Product information




订购编号/Model: AH5090




配件 Accessories

**A**



12  
Ø 8

**B**



12  
Ø 10

**C**



Ø 2.7  
Ø 4+0.1

**D**



Ø 0.63

**E**



**F**



41.5  
15  
AOSITE

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
铰链系列


D

盖位计算表/ Overlay calculation form

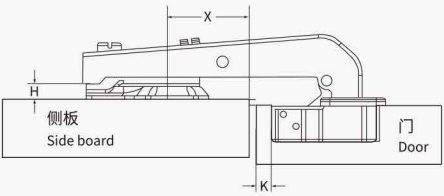

| H | K  | 4    | 5  |      |  |   |
|---|----|------|----|------|--|---|
| 0 | 20 | 2.8  | 19 | 2.8  |  |   |
| 2 | 20 | 0.8  | 19 | 0.8  |  |   |
| 4 | 20 | -1.2 | 19 | -1.2 |  |   |
|   | X  |      |    |      |  | D |

铰链的调节/ Hinge adjustment

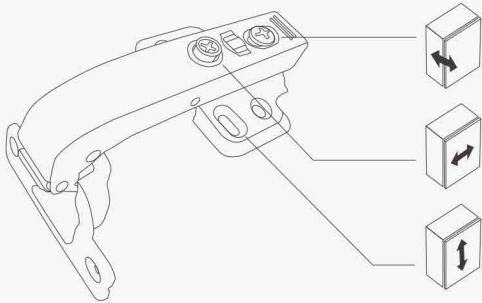

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

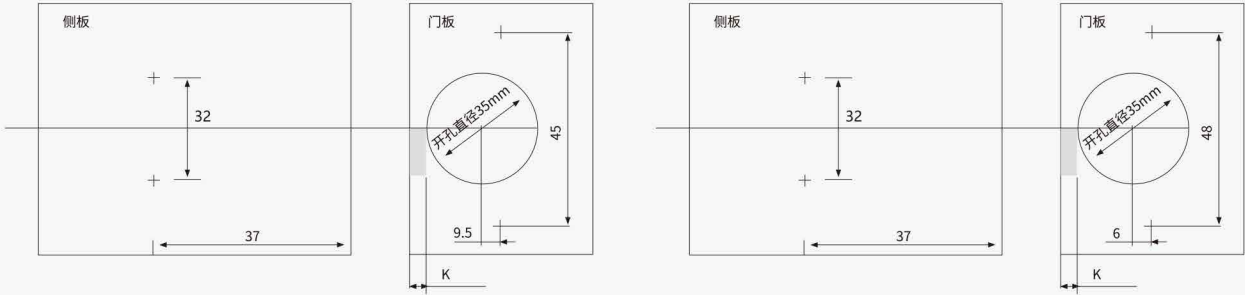

90°固装液压阻尼铰链

90 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

AH5190



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为90°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 90°

产品信息/ Product information



订购编号/ Model: AH5190

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw

E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap




HINGE  
铰链系列

盖位计算表/ Overlay calculation form

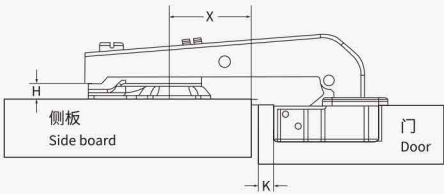

| H \ K | 4          | 5          |  |  |   |
|-------|------------|------------|--|--|---|
| 0     | 20<br>2.8  | 19<br>2.8  |  |  |   |
| 2     | 20<br>0.8  | 19<br>0.8  |  |  |   |
| 4     | 20<br>-1.2 | 19<br>-1.2 |  |  |   |
|       | X          |            |  |  | D |

铰链的调节/ Hinge adjustment

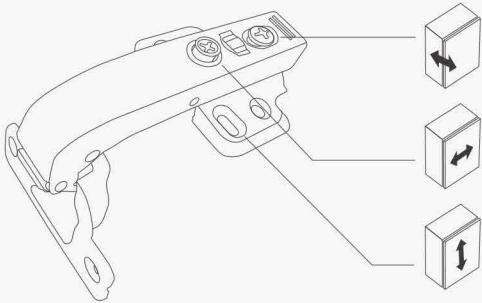

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

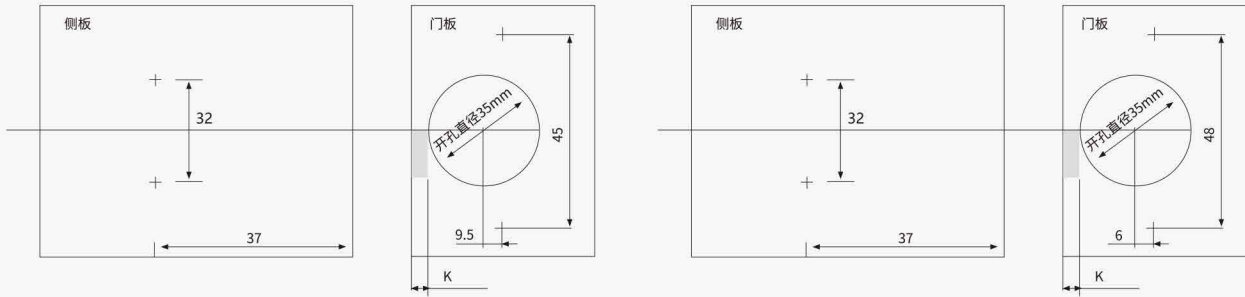

90°快装液压阻尼铰链

90 DEGREE CLIP-ON HYDRAULIC DAMPING HINGE

AH5290



主要材质:冷轧钢板

适用门板厚度:14-20mm

开启角度:100°

盖位调节:+2-4mm

产品功能:连接柜门,使柜门关闭为90°

Main material: Cold rolled steel

Door thickness: 14-20mm

Opening angle:100°


Overlay position adjustment: +2-4mm

Product Features: Connect the cabinet door, soft close, closing angle is 90°

AOSITE®

HINGE  
铰链系列

安装尺寸/ Installation dimension

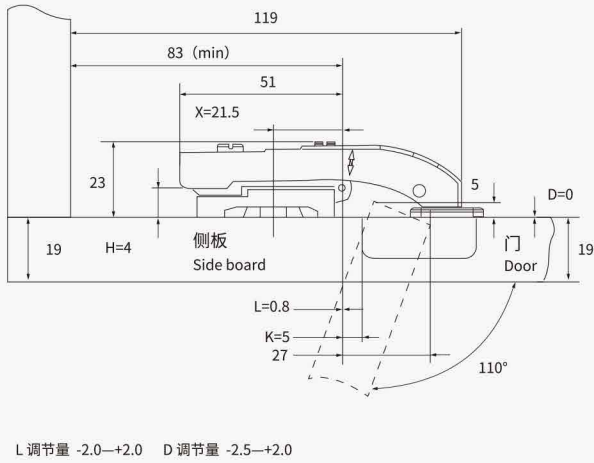

产品信息/ Product information




订购编号/ Model: AH5290

配件 Accessories



铰链的调节/ Hinge adjustment

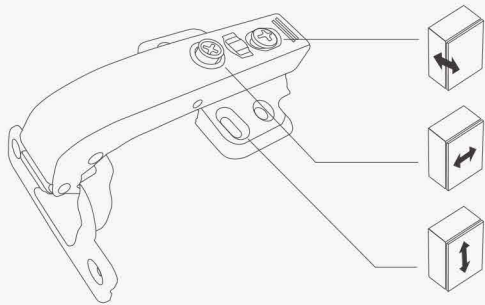

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

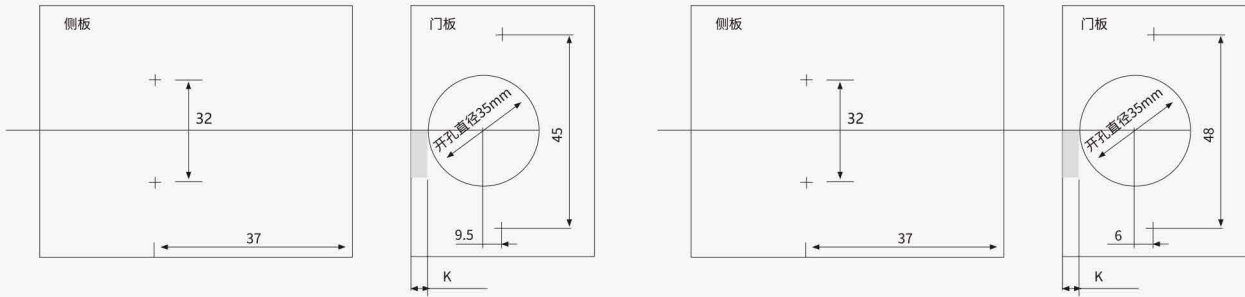

45°固装液压阻尼铰链

45 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

KT-45°



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为45°


Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle:100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 45°

AOSITE®

HINGE  
铰链系列

D

盖位计算表/ Overlay calculation form

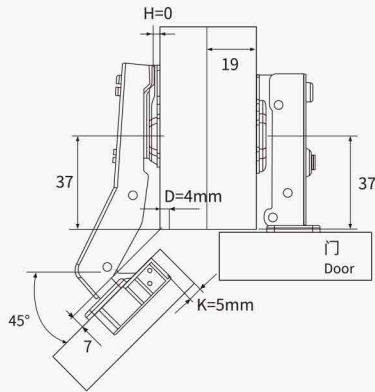

H=0 D=4mm

| D | H | K |   |  |  |
|---|---|---|---|--|--|
| 0 |   |   | 5 |  |  |
| 2 |   |   | 4 |  |  |
|   |   |   | 2 |  |  |
|   |   |   |   |  |  |
|   |   |   |   |  |  |

产品信息/ Product information



订购编号/ Model: KT-45°

配件 Accessories

**A**

**B**

**C**


**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

铰链的调节/ Hinge adjustment

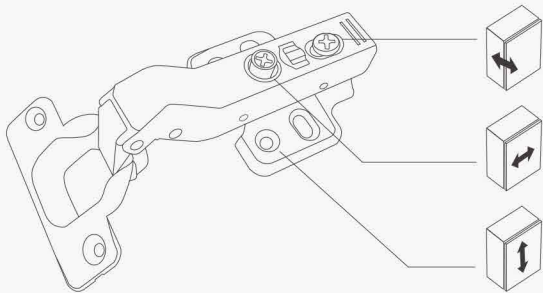

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

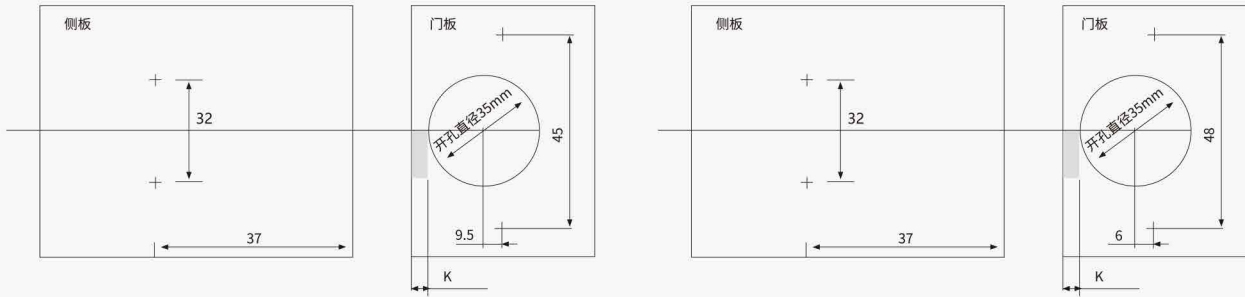

# 45°滑入式铰链

45 DEGREE SLIDE ON HINGE AH5045



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节: +2-4mm  
产品功能:连接柜门,使柜门关闭为45°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle:100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, closing angle is 45°

## 产品信息/ Product information




订购编号/ Model: AH5045




### 配件 Accessories

**A**



12  
Ø 8

**B**



12  
Ø 10

**C**



Ø 2.7  
Ø 4+0.1

**D**



Ø 0.63

**E**



**F**



41.5  
15  
AOSITE

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
铰链系列




## 盖位计算表/ Overlay calculation form

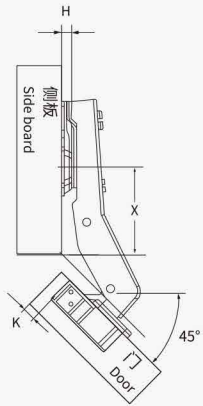

| H \ K | 4         | 5         | 6         | 7         |   |
|-------|-----------|-----------|-----------|-----------|---|
| 0     | 37<br>4.5 | 36<br>5.2 | 35<br>5.9 | 34<br>6.6 |   |
| 2     | 37<br>2.5 | 36<br>3.2 | 35<br>3.9 | 34<br>4.6 |   |
| 4     | 37<br>0.5 | 36<br>1.2 | 35<br>1.9 | 34<br>2.6 |   |
|       | X         |           |           |           | D |

## 铰链的调节/ Hinge adjustment

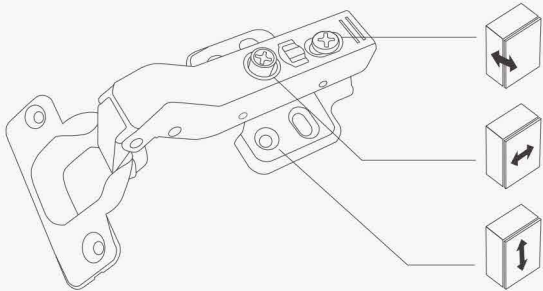

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

## 铰杯钻孔/ Cup drilling dimension

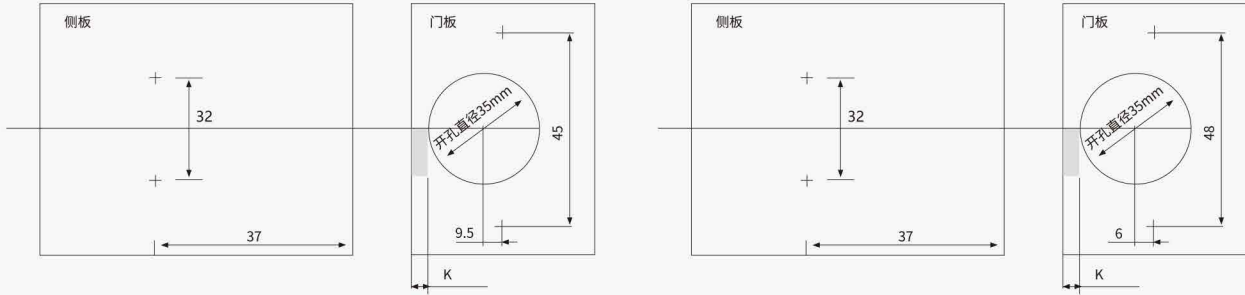

45°固装液压阻尼铰链

45 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

AH5145



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为45°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle:100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 45°


产品信息/ Product information



订购编号/ Model: AH5145


配件 Accessories

**A**



12  
Ø8

**B**




12  
Ø10

**C**



Ø2.7  
Ø4+0.1

**D**



Ø0.63

**E**



**F**



41.5  
15  
AOSITE


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw

E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
铰链系列

盖位计算表/ Overlay calculation form

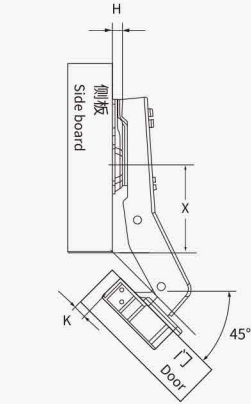

| H \ K | 4         | 5         | 6         | 7         |   |
|-------|-----------|-----------|-----------|-----------|---|
| 0     | 37<br>4.5 | 36<br>5.2 | 35<br>5.9 | 34<br>6.6 |   |
| 2     | 37<br>2.5 | 36<br>3.2 | 35<br>3.9 | 34<br>4.6 |   |
| 4     | 37<br>0.5 | 36<br>1.2 | 35<br>1.9 | 34<br>2.6 |   |
|       | X         |           |           |           | D |

铰链的调节/ Hinge adjustment

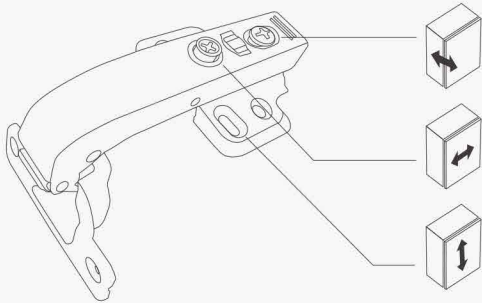

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

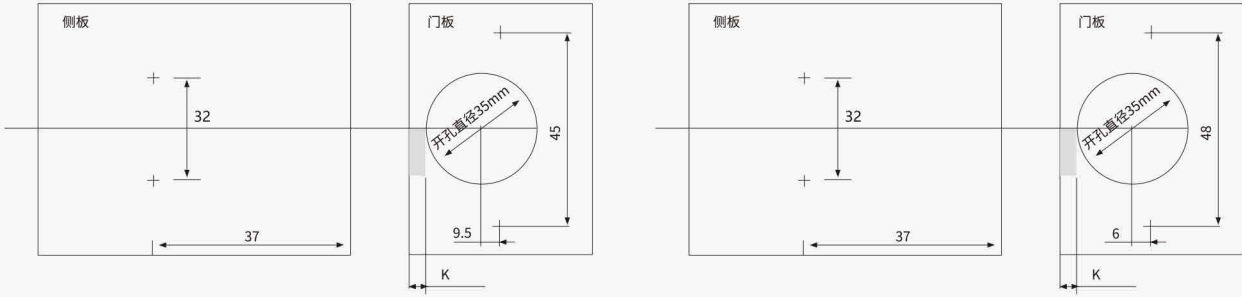

# 45°快装液压阻尼铰链

45 DEGREE CLIP-ON HYDRAULIC DAMPING HINGE

AH5245



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为45°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle:100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 45°

## 产品信息/ Product information



订购编号/ Model: AH5245

### 配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
铰链系列

## 盖位计算表/ Overlay calculation form

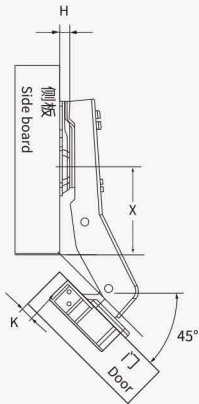

| H \ K | 4         | 5         | 6         | 7         |   |
|-------|-----------|-----------|-----------|-----------|---|
| 0     | 37<br>4.5 | 36<br>5.2 | 35<br>5.9 | 34<br>6.6 |   |
| 2     | 37<br>2.5 | 36<br>3.2 | 35<br>3.9 | 34<br>4.6 |   |
| 4     | 37<br>0.5 | 36<br>1.2 | 35<br>1.9 | 34<br>2.6 |   |
|       | X         |           |           |           | D |

## 铰链的调节/ Hinge adjustment

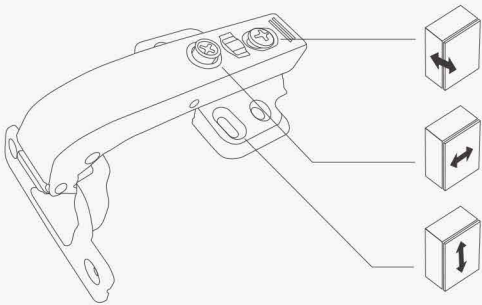

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

## 铰杯钻孔/ Cup drilling dimension

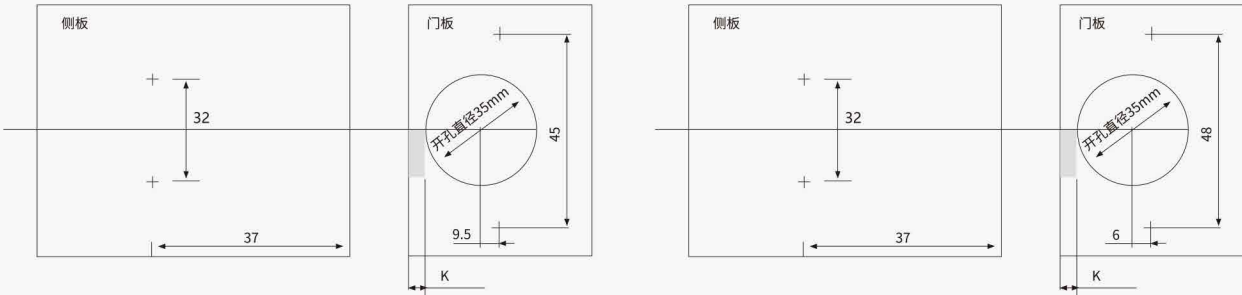

30°固装液压阻尼铰链

30 DEGREE INSEPARABLE HYDRAULIC DAMPING HINGE

KT-30°



主要材质:冷轧钢板  
适用门板厚度:14-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:连接柜门,使柜门关闭为30°

Main material: Cold rolled steel  
Door thickness: 14-20mm  
Opening angle:100°  
Overlay position adjustment: +2-4mm  
Product Features: Connect the cabinet door, soft close, closing angle is 30°

产品信息/ Product information



订购编号/ Model: KT-30°

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
铰链系列

盖位计算表/ Overlay calculation form

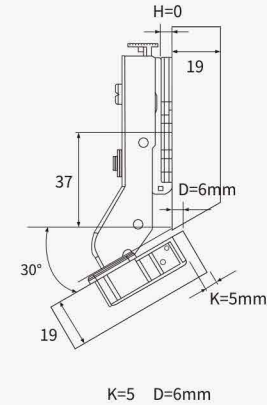

| D | H | K |   |  |  |
|---|---|---|---|--|--|
| 0 |   |   | 5 |  |  |
| 2 |   |   | 4 |  |  |
|   |   |   | 2 |  |  |
|   |   |   |   |  |  |
|   |   |   |   |  |  |

铰链的调节/ Hinge adjustment

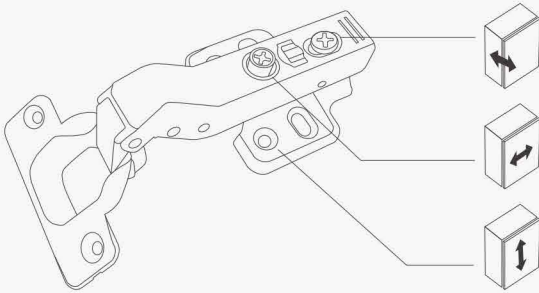

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

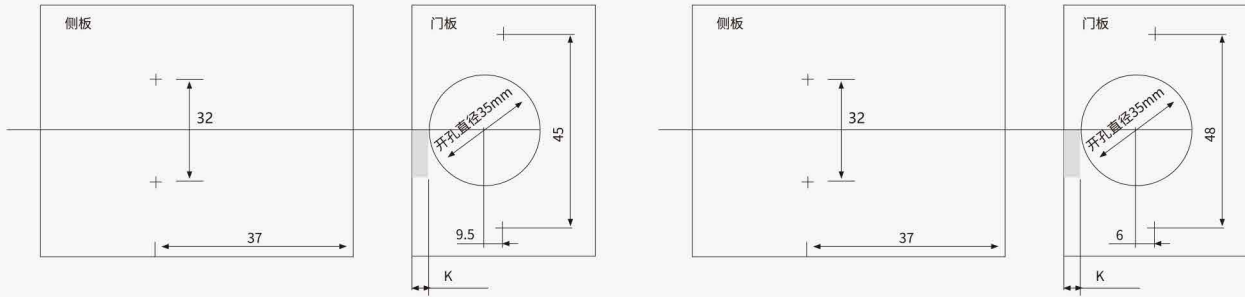

不锈钢固装阻尼铰链

STAINLESS STEEL INSEPARABLE HYDRAULIC DAMPING HINGE

AH6619/6618/6617



主要材质: 不锈钢  
适用门板厚度: 14-20mm  
开启角度: 100°  
盖位调节: 0-5mm  
产品功能: 内置阻尼, 轻松拆卸, 缓冲闭合, 超强防锈

Main material: Stainless Steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: 0-5mm  
Product Features: The built-in damper ,easy to remove soft closure ,super anti-rust

产品信息/ Product information



订购编号/ Model: AH6619



订购编号/ Model: AH6618



订购编号/ Model: AH6617

配件 Accessories

**A**

**B**

**C**

**D**

**E**


**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap




HINGE  
不锈钢铰链系列

盖位计算表/ Overlay calculation form

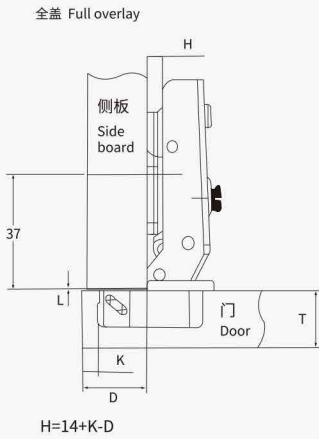


D: 盖位计算值/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |

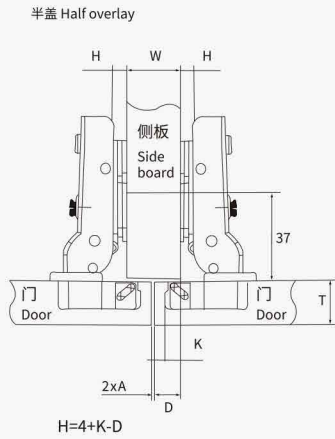


A: 间隙位计算值/gap calculation form

| A | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 7 | 8 | 9 | 10 | 11 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

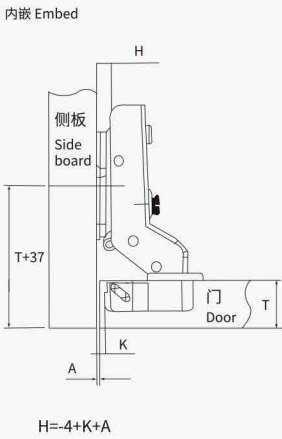

| A | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 2 | 1 | 0 | -1 | -2 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

铰链的调节/ Hinge adjustment

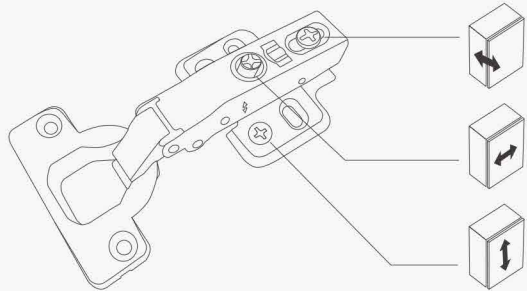

- 深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 5mm


**高度调整**  
通过安装在侧板上的底座进行调节
- Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 5mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

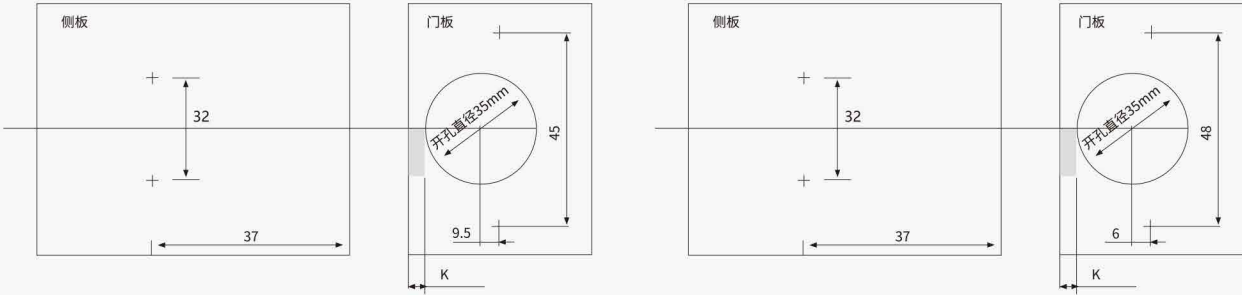

不锈钢快装阻尼铰链

STAINLESS STEEL CLIP-ON HYDRAULIC DAMPING HINGE

AH6629/6628/6627



主要材质: 不锈钢  
适用门板厚度: 14-20mm  
开启角度: 100°  
盖位调节: 0-5mm  
产品功能: 内置阻尼, 轻松拆卸, 缓冲闭合, 超强防锈

Main material: Stainless Steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: 0-5mm  
Product Features: The built-in damper ,easy to remove soft closure ,super anti-rust

产品信息/ Product information



订购编号/ Model: AH6629




订购编号/ Model: AH6628




订购编号/ Model: AH6627

配件 Accessories

A



B



C



D



E



F



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
不锈钢铰链系列

盖位计算表/ Overlay calculation form


全盖 Full overlay

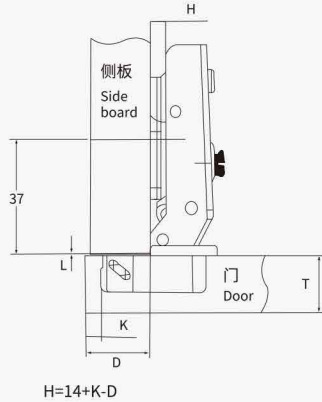

半盖 Half overlay

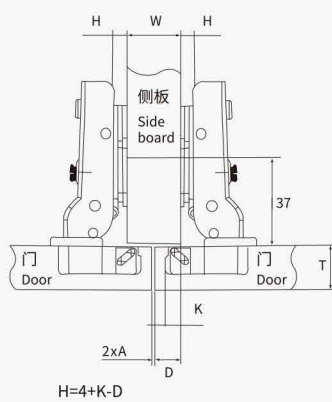

内嵌 Embed

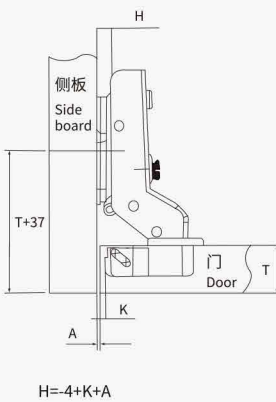

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |

A: 间隙位计算值/gap calculation form

| D | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 7 | 8 | 9 | 10 | 11 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

| A | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 2 | 1 | 0 | -1 | -2 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

铰链的调节/ Hinge adjustment

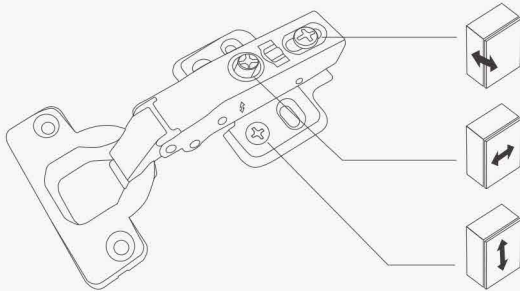

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

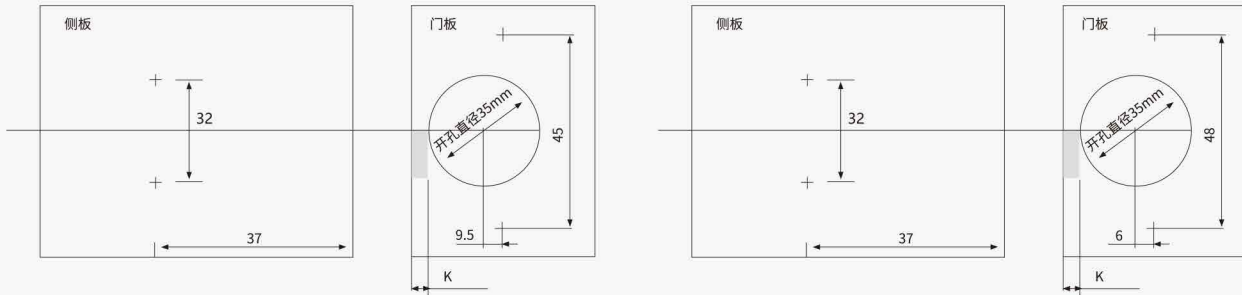

不锈钢三维快装阻尼铰链

STAINLESS STEEL CLIP-ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE

AH6649/6648/6647



主要材质: 不锈钢  
适用门板厚度: 14-20mm  
开启角度: 100°  
盖位调节: 0-5mm  
产品功能: 三维设计, 轻松调节, 小角度缓冲, 安全防夹, 随意开停, 存取方便

Main material: Stainless Steel  
Door thickness: 14-20mm  
Opening angle: 100°  
Overlay position adjustment: 0-5mm  
Product Features: Three-dimensional design, easy to adjust, small-angle buffer, safe and anti-pinch, open and stop at will, easy to get thing

产品信息/ Product information



订购编号/ Model: AH6649



订购编号/ Model: AH6648



订购编号/ Model: AH6647

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
不锈钢铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

半盖 Half overlay

内嵌 Embed

D: 盖位计算值表/overlay calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |
|   |    |    |    |    |    |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 7 | 8 | 9 | 10 | 11 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

A: 间隙位计算值/gap calculation form

| A | H | K | 3 | 4  | 5  | 6 | 7 |
|---|---|---|---|----|----|---|---|
| 0 | 2 | 1 | 0 | -1 | -2 |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |
|   |   |   |   |    |    |   |   |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

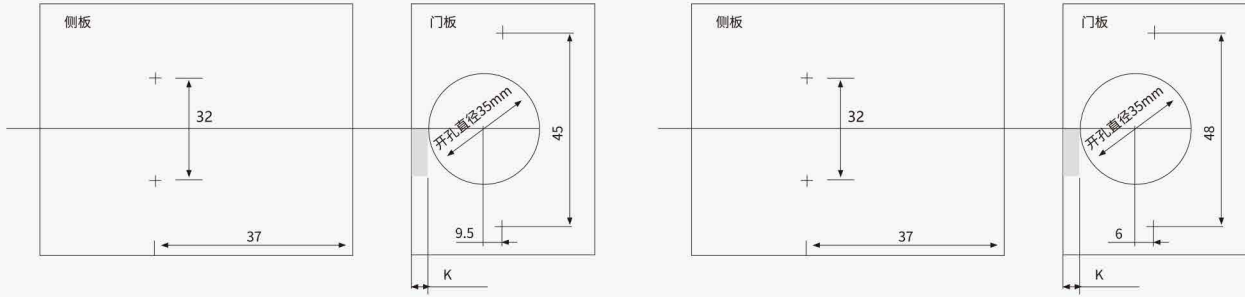

不锈钢固装阻尼铰链

STAINLESS STEEL INSEPARABLE HYDRAULIC DAMPING HINGE

K12



主要材质: 不锈钢  
适用门板厚度: 16-20mm  
开启角度: 100°  
盖位调节: +2-4mm  
产品功能: 内置阻尼, 缓冲闭合, 超强防锈

Main material: Stainless Steel  
Door thickness: 16-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: The built-in damper ,soft closure ,  
super anti-rust

产品信息/ Product information



订购编号/ Model: K12-09



订购编号/ Model: K12-08



订购编号/ Model: K12-07

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
不锈钢铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay

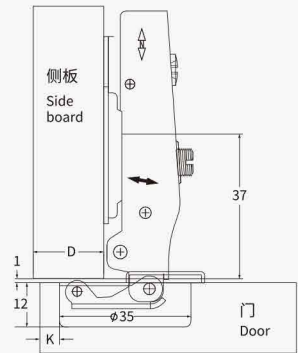


$H=15+K-D$

半盖 Half overlay

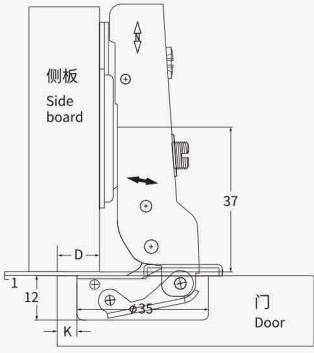

$H=5+K-D$

内嵌 Embed

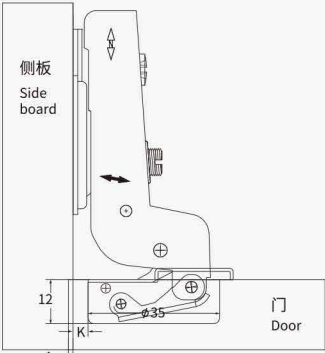

$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 18 | 19 | 20 | 21 | 22 |   |   |
| 2 | 16 | 17 | 18 | 19 | 20 |   |   |
| 4 | 14 | 15 | 16 | 17 | 18 |   |   |

A: 间隙位计算值/gap calculation form

| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 10 | 11 | 12 | 13 | 14 |   |   |
| 2 | 8  | 9  | 10 | 11 | 12 |   |   |
| 4 | 6  | 7  | 8  | 9  | 10 |   |   |

| A | H   | K    | 3    | 4    | 5    | 6 | 7 |
|---|-----|------|------|------|------|---|---|
| 0 | 0.5 | -0.5 | -1.5 | -2.5 | -3.5 |   |   |
| 2 | 2.5 | 1.5  | 0.5  | -0.5 | -1.5 |   |   |
| 4 | 4.5 | 3.5  | 2.5  | 1.5  | 0.5  |   |   |

铰链的调节/ Hinge adjustment

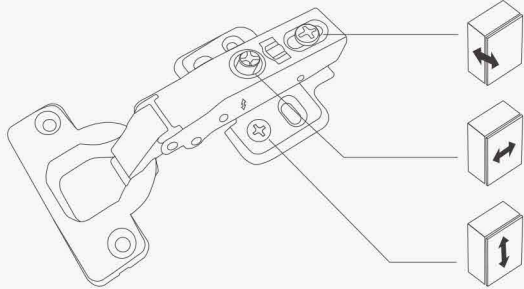

- 深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm


**高度调整**  
通过安装在侧板上的底座进行调节
- Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

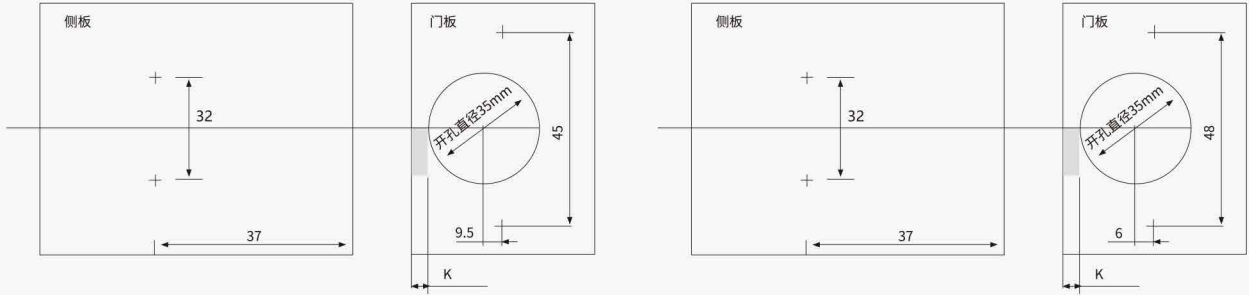

不锈钢快装阻尼铰链

STAINLESS STEEL CLIP-ON HYDRAULIC DAMPING HINGE

K14



主要材质: 不锈钢  
适用门板厚度: 16-20mm  
开启角度: 100°  
盖位调节: +2-4mm  
产品功能: 内置阻尼, 轻松拆卸, 缓冲闭合, 超强防锈

Main material: Stainless Steel  
Door thickness: 16-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: The built-in damper ,easy to remove soft closure ,super anti-rust

产品信息/ Product information



订购编号/ Model: K14-09



订购编号/ Model: K14-08



订购编号/ Model: K14-07

配件 Accessories

A

B

C

D

E

F


A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
不锈钢铰链系列


盖位计算表/ Overlay calculation form

全盖 Full overlay

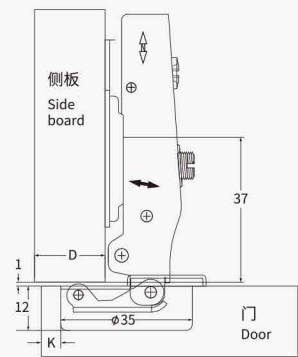


$H=15+K-D$

半盖 Half overlay

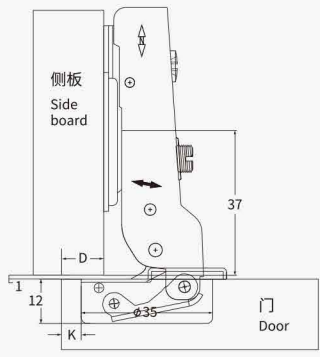

$H=5+K-D$

内嵌 Embed

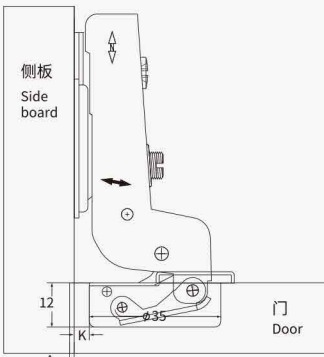

$H=A+K-4$

D: 盖位计算值表/overlay calculation form


| D | H  | K  | 3  | 4  | 5  | 6 | 7 |
|---|----|----|----|----|----|---|---|
| 0 | 17 | 18 | 19 | 20 | 21 |   |   |
| 2 | 15 | 16 | 17 | 18 | 19 |   |   |
| 4 | 13 | 14 | 15 | 16 | 17 |   |   |

A: 间隙位计算值/gap calculation form

| D | H | K | 3  | 4  | 5  | 6 | 7 |
|---|---|---|----|----|----|---|---|
| 0 | 8 | 9 | 10 | 11 | 12 |   |   |
| 2 | 6 | 7 | 8  | 9  | 10 |   |   |
| 4 | 4 | 5 | 6  | 7  | 8  |   |   |

| A | H   | K   | 3    | 4    | 5    | 6 | 7 |
|---|-----|-----|------|------|------|---|---|
| 0 | 1.5 | 0.5 | -0.5 | -1.5 | -2.5 |   |   |
| 2 | 3.5 | 2.5 | 1.5  | 0.5  | -0.5 |   |   |
| 4 | 5.5 | 4.5 | 3.5  | 2.5  | 1.5  |   |   |

铰链的调节/ Hinge adjustment

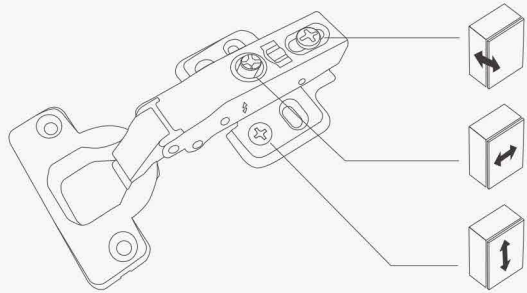

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

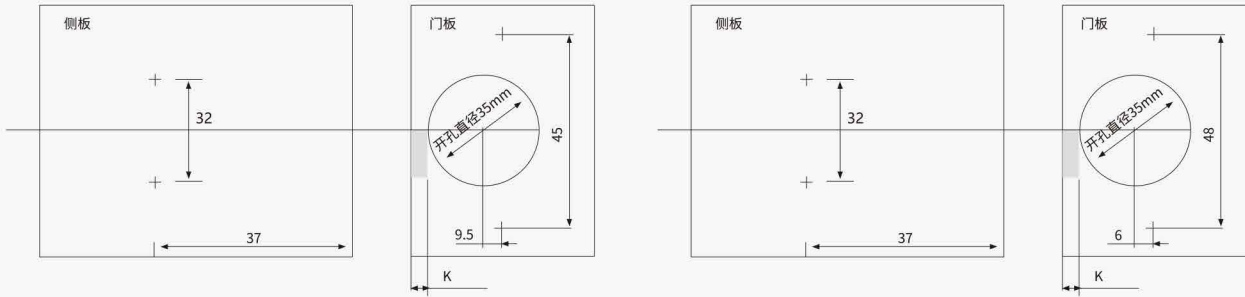

40杯固装阻尼铰链

40MM CUP INSEPARABLE HYDRAULIC DAMPING HINGE

AH4019/4018/4017



主要材质:冷轧钢板  
适用门板厚度:16-25mm  
开启角度:100°  
盖位调节:0-7mm  
产品功能:适用于厚门板, 静音缓冲

Main material: Cold rolled steel  
Door thickness: 16-25mm  
Opening angle: 100°  
Overlay position adjustment: 0-7mm  
Product Features: Suitable for thick door panels, quiet soft closing

产品信息/ Product information



订购编号/ Model: AH4019



订购编号/ Model: AH4018



订购编号/ Model: AH4017

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw

E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap

AOSITE®

HINGE  
40杯铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

半盖 Half overlay

内嵌 Embed

D: 盖位计算值表/overlay calculation form

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | 23 | 24 | 25 | 26 | 27 | ... | 31 |
| 2 |   |   | 21 | 22 | 23 | 24 | 25 | ... | 29 |
| 4 |   |   | 19 | 20 | 21 | 22 | 23 | ... | 27 |

A: 间隙位计算值表/gap calculation form

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | 13 | 14 | 15 | 16 | 17 | ... | 21 |
| 2 |   |   | 11 | 12 | 13 | 14 | 15 | ... | 19 |
| 4 |   |   | 9  | 10 | 11 | 12 | 13 | ... | 17 |

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | -3 | -4 | -1 | 0  | 1  | ... | 5  |
| 2 |   |   | -5 | -4 | -3 | -2 | -1 | ... | 3  |
| 4 |   |   | -7 | -6 | -5 | -4 | -3 | ... | 1  |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

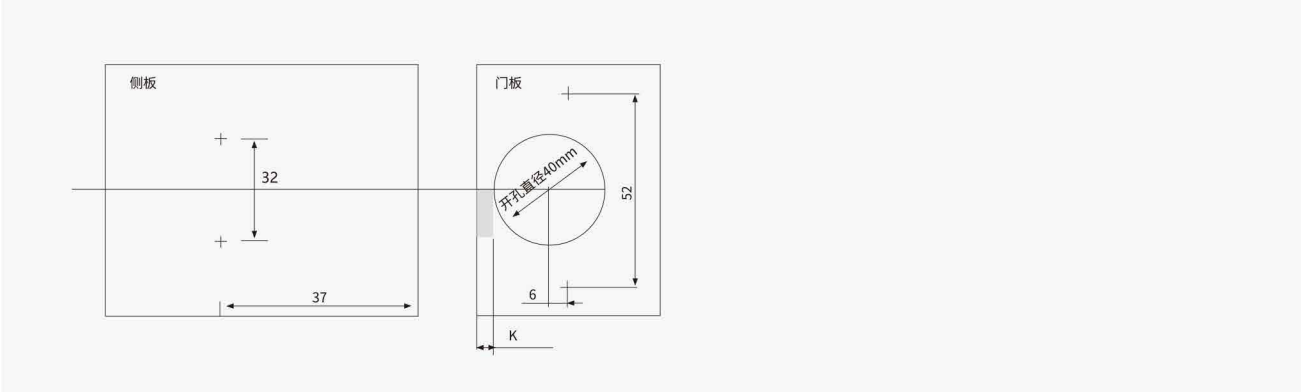

40杯快装三维阻尼铰链

40MM CUP CLIP-ON 3D ADJUSTABLE HYDRAULIC DAMPING HINGE

AH4039/4038/4037



主要材质:冷轧钢板  
适用门板厚度:16-25mm  
开启角度:100°  
盖位调节:0-7mm  
产品功能:适用于厚门板, 静音缓冲

Main material: Cold rolled steel  
Door thickness: 16-25mm  
Opening angle: 100°  
Overlay position adjustment: 0-7mm  
Product Features: Suitable for thick door panels, quiet soft closing

产品信息/ Product information



订购编号/ Model: AH4039



订购编号/ Model: AH4038



订购编号/ Model: AH4037

配件 Accessories

**A**

**B**

**C**

**D**

**E**

**F**

A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw  
E: 杯装饰盖/Cup Cap  
F: 臂装饰盖/Arm Cap



HINGE  
40杯铰链系列

盖位计算表/ Overlay calculation form

全盖 Full overlay

半盖 Half overlay

内嵌 Embed

D: 盖位计算值表/overlay calculation form

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | 23 | 24 | 25 | 26 | 27 | ... | 31 |
| 2 |   |   | 21 | 22 | 23 | 24 | 25 | ... | 29 |
| 4 |   |   | 19 | 20 | 21 | 22 | 23 | ... | 27 |

A: 间隙位计算值表/gap calculation form

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | 13 | 14 | 15 | 16 | 17 | ... | 21 |
| 2 |   |   | 11 | 12 | 13 | 14 | 15 | ... | 19 |
| 4 |   |   | 9  | 10 | 11 | 12 | 13 | ... | 17 |

| D | H | K | 3  | 4  | 5  | 6  | 7  | ... | 11 |
|---|---|---|----|----|----|----|----|-----|----|
| 0 |   |   | -3 | -4 | -1 | 0  | 1  | ... | 5  |
| 2 |   |   | -5 | -4 | -3 | -2 | -1 | ... | 3  |
| 4 |   |   | -7 | -6 | -5 | -4 | -3 | ... | 1  |

铰链的调节/ Hinge adjustment

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

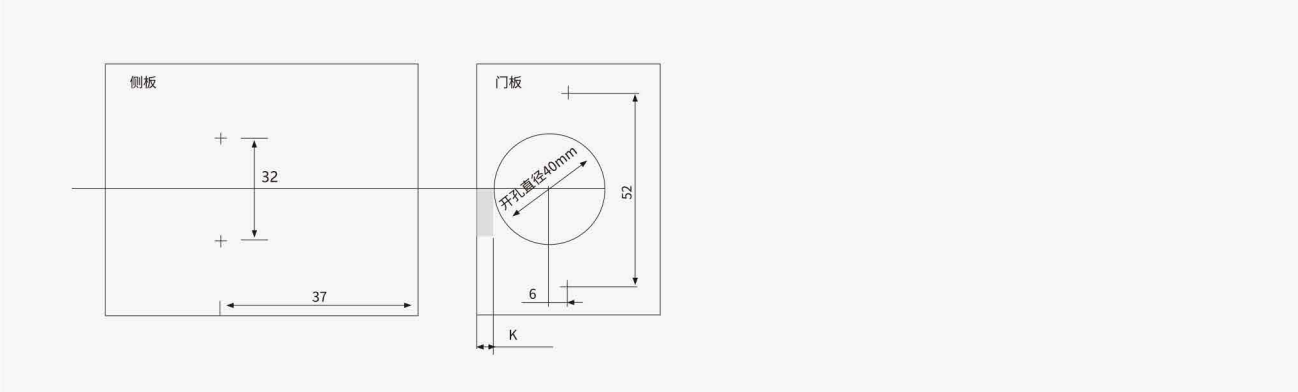

固装铝框阻尼铰链

INSEPERABLE ALUMINUM FRAME HYDRAULIC DAMPING HINGE

Q28A



主要材质:冷轧钢+锌合金  
适用门板厚度:18-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:适用于铝框门,缓冲静音

Main material: Cold rolled steel + zinc alloy  
Door thickness: 18-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Suitable for aluminum frame doors, soft closing

产品信息/ Product information



订购编号/ Model: Q28A-09




订购编号/ Model: Q28A-08




订购编号/ Model: Q28A-07

配件 Accessories

A



B



C



D



E



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
铝框铰链系列

盖位计算表/ Overlay calculation form


全盖 Full overlay



半盖 Half overlay



内嵌 Embed



D: 盖位计算值表/overlay calculation form

H: 底座高度/Plate Height


V: 铝材高度/Aluminum Height

| D | H  | V  | 18 | 19 | 20 | 21 | 22 |
|---|----|----|----|----|----|----|----|
| 0 | 17 | 18 | 19 | 20 | 21 |    |    |
| 2 | 15 | 16 | 17 | 18 | 19 |    |    |
| 4 | 13 | 14 | 15 | 16 | 17 |    |    |

| D | H  | V  | 18 | 19 | 20 | 21 | 22 |
|---|----|----|----|----|----|----|----|
| 0 | 10 | 11 | 12 | 23 | 14 |    |    |
| 2 | 8  | 9  | 10 | 11 | 12 |    |    |
| 4 | 6  | 7  | 8  | 9  | 10 |    |    |

| D | H | V  | 18 | 19 | 20 | 21 | 22 |
|---|---|----|----|----|----|----|----|
| 0 | 0 | -1 | -2 | -3 | -4 |    |    |
| 2 | 2 | 1  | 0  | -1 | -2 |    |    |
| 4 | 4 | 3  | 2  | 1  | 0  |    |    |

铰链的调节/ Hinge adjustment

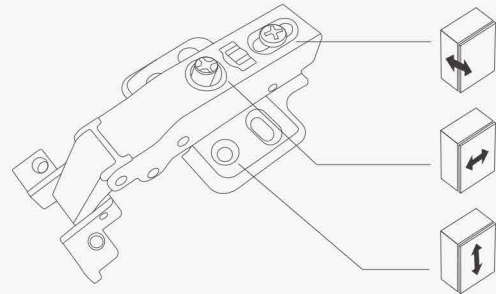

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

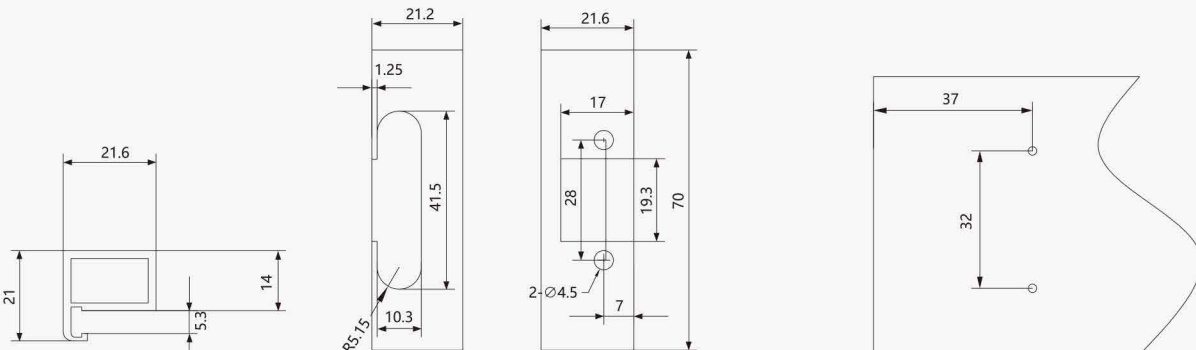

固装铝框阻尼铰链(玛瑙黑)

INSEPERABLE ALUMINUM FRAME HYDRAULIC DAMPING HINGE  
(AGATE BLACK) Q28



主要材质:冷轧钢+锌合金  
适用门板厚度:18-20mm  
开启角度:100°  
盖位调节:+2-4mm  
产品功能:适用于铝框门,缓冲静音

Main material: Cold rolled steel + zinc alloy  
Door thickness: 18-20mm  
Opening angle: 100°  
Overlay position adjustment: +2-4mm  
Product Features: Suitable for aluminum frame doors, soft closing

产品信息/ Product information



订购编号/ Model: Q28-09




订购编号/ Model: Q28-08




订购编号/ Model: Q28-07

配件 Accessories

A



B



C



D



E



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 臂装饰盖/Arm Cap

AOSITE®


HINGE  
铝框铰链系列

盖位计算表/ Overlay calculation form


全盖 Full overlay

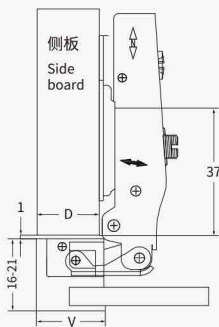

半盖 Half overlay

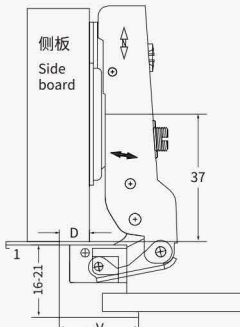

内嵌 Embed



D: 盖位计算值表/overlay calculation form

H: 底座高度/Plate Height


V: 铝材高度/Aluminum Height

| D | H  | V  | 18 | 19 | 20 | 21 | 22 |
|---|----|----|----|----|----|----|----|
| 0 | 17 | 18 | 19 | 20 | 21 |    |    |
| 2 | 15 | 16 | 17 | 18 | 19 |    |    |
| 4 | 13 | 14 | 15 | 16 | 17 |    |    |

| D | H  | V  | 18 | 19 | 20 | 21 | 22 |
|---|----|----|----|----|----|----|----|
| 0 | 10 | 11 | 12 | 23 | 14 |    |    |
| 2 | 8  | 9  | 10 | 11 | 12 |    |    |
| 4 | 6  | 7  | 8  | 9  | 10 |    |    |

| D | H | V  | 18 | 19 | 20 | 21 | 22 |
|---|---|----|----|----|----|----|----|
| 0 | 0 | -1 | -2 | -3 | -4 |    |    |
| 2 | 2 | 1  | 0  | -1 | -2 |    |    |
| 4 | 4 | 3  | 2  | 1  | 0  |    |    |

铰链的调节/ Hinge adjustment

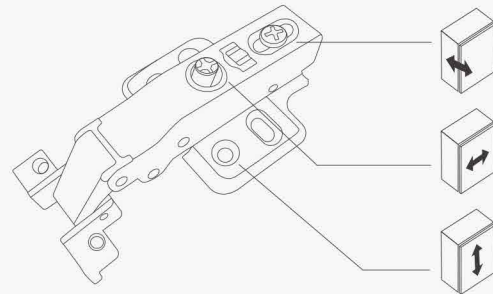

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

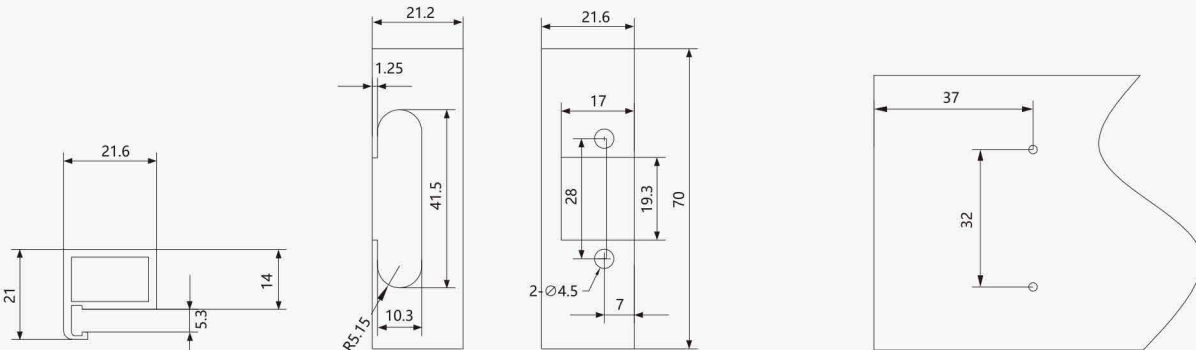

二段力固装铝框阻尼铰链

TWO WAY INSEPERABLE ALUMINUM FRAME HYDRAULIC DAMPING

HINGE(AGATE BLACK) AQ88



主要材质:冷轧钢+锌合金  
适用门板厚度:18-20mm  
开启角度:110°  
盖位调节:+2-4mm  
产品功能:适用于铝框门,缓冲静音

Main material: Cold rolled steel + zinc alloy  
Door thickness: 18-20mm  
Opening angle: 110°  
Overlay position adjustment: +2-4mm  
Product Features: Suitable for aluminum frame doors, soft closing

产品信息/ Product information



订购编号/ Model: AQ88-09




订购编号/ Model: AQ88-08




订购编号/ Model: AQ88-07

配件 Accessories


A



B



C



D



E



A: M8 胶粒/M8 Dowel  
B: M10 胶粒/M10 Dowel  
C: 木牙螺丝/Wood Screw  
D: 欧式螺丝/Euro Screw


E: 臂装饰盖/Arm Cap

AOSITE


HINGE  
铝框铰链系列

盖位计算表/ Overlay calculation form


全盖 Full overlay



半盖 Half overlay



内嵌 Embed



D: 盖位计算值表/overlay calculation form

H: 底座高度/Plate Height


V: 铝材高度/Aluminum Height

| D | H | V | 18 | 19 | 20 | 21 | 22 |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 17 | 18 | 19 | 20 | 21 |
| 2 |   |   | 15 | 16 | 17 | 18 | 19 |
| 4 |   |   | 13 | 14 | 15 | 16 | 17 |

| D | H | V | 18 | 19 | 20 | 21 | 22 |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 10 | 11 | 12 | 23 | 14 |
| 2 |   |   | 8  | 9  | 10 | 11 | 12 |
| 4 |   |   | 6  | 7  | 8  | 9  | 10 |

| D | H | V | 18 | 19 | 20 | 21 | 22 |
|---|---|---|----|----|----|----|----|
| 0 |   |   | 0  | -1 | -2 | -3 | -4 |
| 2 |   |   | 2  | 1  | 0  | -1 | -2 |
| 4 |   |   | 4  | 3  | 2  | 1  | 0  |

铰链的调节/ Hinge adjustment

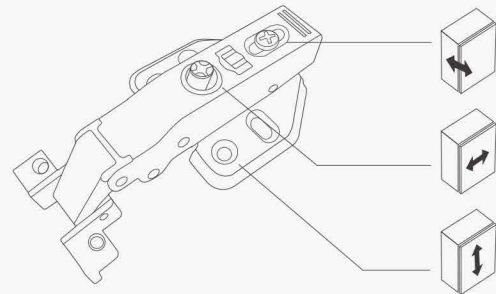

**深度调整**  
调整后方螺丝以调节柜门间隙  
总调节量为: 6mm

**水平调整**  
旋转调节螺丝以增加或减少门板覆盖量  
总调节量为: 6mm

**高度调整**  
通过安装在侧板上的底座进行调节


**Depth adjustment**  
Rotate depth screw to adjust door gap.  
Adjustment range: 6mm

**Overlay adjustment**  
Rotate lateral screw to increase or decrease door overlay.  
Adjustment range: 6mm

**Height adjustment**  
Adjust the mounting plate on panel to adjust the door's height.

建议: 调节参数为产品设计参数, 柜体实际尺寸和钻孔及安装方式可能对参数产生影响。  
Notice: the reference adjustment range is the product design range, the actual size of the cabinet and the drilling method may have a certain impact on the parameters.

铰杯钻孔/ Cup drilling dimension

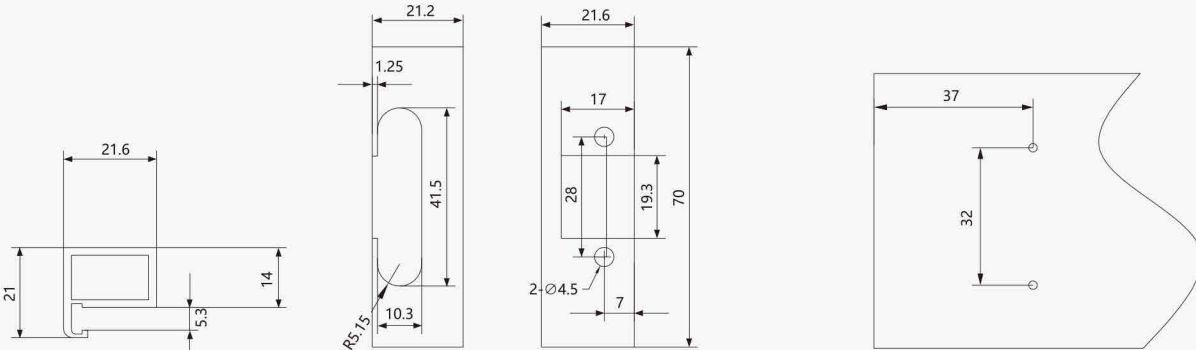

隐藏式铰链

CONCEALED HINGE

A5110



主要材质: 锌合金  
门板调节 : 3D调节  
开启角度: 105°  
产品功能: 静音效果, 内置缓冲装置使铝框门关闭轻柔静音


Main material: Zinc alloy  
Door adjustable: 3D Adjustable  
Opening angle: 105°  
Product Features: Silent system, The built-in damper makes the aluminum door close gentle and quietly

产品信息/ Product information



订购编号/ Model: A5110

配件 Accessories

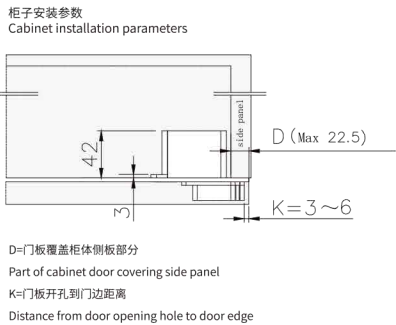


AOSITE®


HINGE  
铝框铰链系列

安装尺寸/ Installation dimension

柜体开孔尺寸图  
Cabinet drilling dimension picture

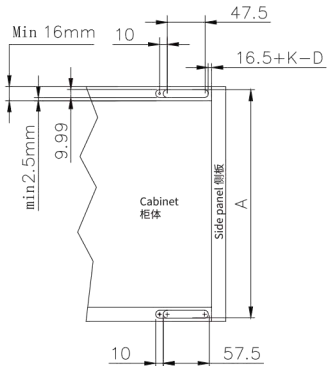


木门和铝门框开孔尺寸图  
Wood door and aluminum door drilling dimension picture

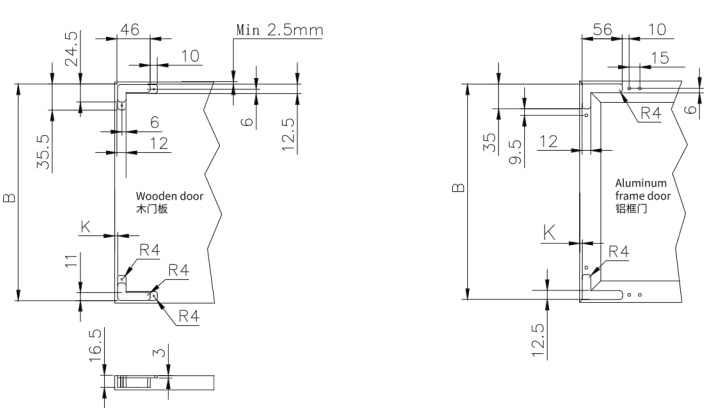


安装步骤/ Installation step


1. 铰链安装在门板上  
Hinge installed on the door panel

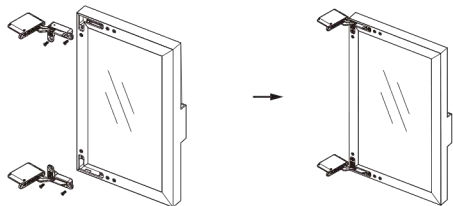


2. 门板与柜体安装 (A=B)  
Installation of door panel and cabinet (A=B)

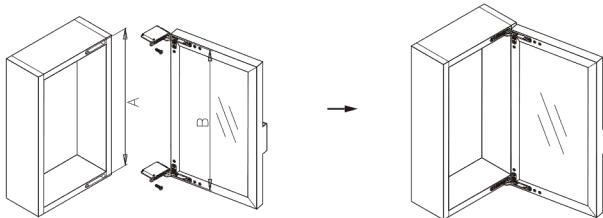


1. 左右方向调节  
Left and right adjustment

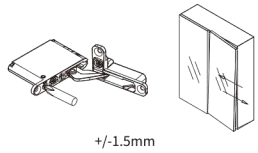


2. 闭合力度调节  
Closing strength adjustment

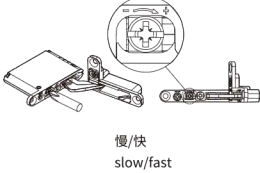


3. 前后方向调节  
Forward and backward adjustment

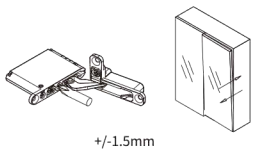

4. 上下方向调节  
Up and down adjustment

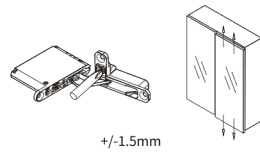

1. 柜子左右倾斜自检  
Cabinet left and right tilting self-check

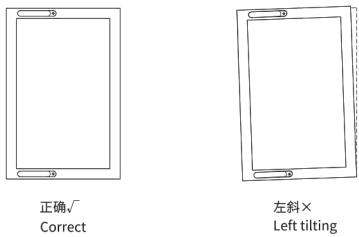

2. 柜子前后倾斜自检  
Cabinet forward and backward tilting self-check

