



PE-1200



Portable Power Station

3-Year Warranty

Features

- Automotive grade battery cells
- Pure sine wave,appliances friendly
- Long battery cycle life:>3000times
- Bidirectional inverter technology
- Recharging 80% within 1 hour
- ECO mode (can set at APP)
- 8 safety BMS protection modes
- 3 recharge ways
- 4 output modes
- 7 output ports
- Ergonomically designed easy to carry

AC Output Socket

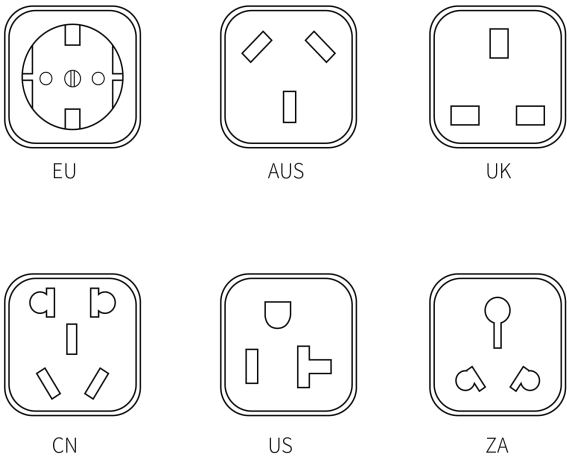

Charging Methods



Charging Times



TECHNICAL SPECIFICATION	
Model	PE-1200
Capacity	1024Wh (8S2P) 25.6 V 40 Ah
Battery Cell	LFP (LiFePO4)
Cycle Life	2000 (80% DOD)
Monitor	LCD
Housing Material	PC+ABS
Color	Optional
OUTPUT	
AC Output EU/AU/UK	2*AC outlets 230 V 50 Hz
Rated Ac Output/Peak AC Output	1200 W / 1800 W
USB-A Output	1*5 W and 1*18 W
USB-C Output	2*100 W
Cigarette lighter	1*13.6 V/ 8A 10 A Max.
Recharge and Charge simultaneously	Support
INPUT	
AC Charging Power	1*200 ~ 240 V 50 Hz 800 W
Solar	1*11 ~ 55 V
Car Recharge	300 W MPPT
LED LIGHT	
LED Power	5 W
BMS MLUTI PROTECTION	
Over voltage, over current, over charge, over discharge, overload, short circuit, high temperature, low temperature	
OTHERS	
Certifications	TUV-UL2743 , CE, FCC, PSE, MIC, ROHS, UN38.3, MSDS
Dimension(L*W*H)	365 *225 *265 mm
N.W. / G.W.	13.6 kg / 16 kg
Charging Temperature	0°C to +45 °C(32°F to 113°F)
Discharging Temperature	-20°C to +45°C (-4°F to113°F)
Storage Temperature	-20°C to+60°C (-4°F to 140°F)
Packing List	Power station, AC charging cable, Car charging cable, User manual