TOPELE

Contact: Mr. Jeff Xu
Tel: 86-0571-82151572/ 86-15924157229 Email: sales@ topele.com QQ/Wechat: 893532773 Whatsapp: 0086-15924157229
Address: Room 1106, No.438 JingCheng road, Hangzhou, Zhejiang, China.55

TOPELE


Empowering Electrical Solutions

Hangzhou Topele Electrical Co.,Limited

www.topele.com



AMERICAN STANDARD
CONDUIT & ACCESSORIES

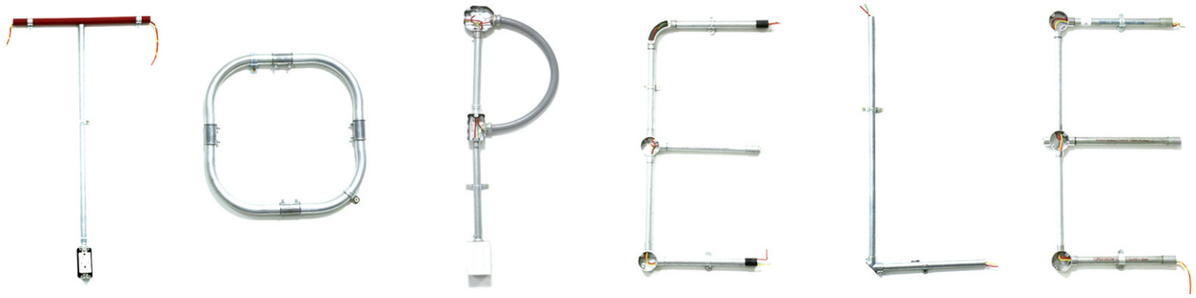

A Aluminum Conduit & Fittings

B EMT Conduit & Fittings

C Rigid & IMC Conduit & Fittings

D Flexible Conduit & Fittings

E Conduit Bodies &Proof Boxes


F Metal BOX & Covers


G GFCI & USB Outlet

H Hangers & Supports





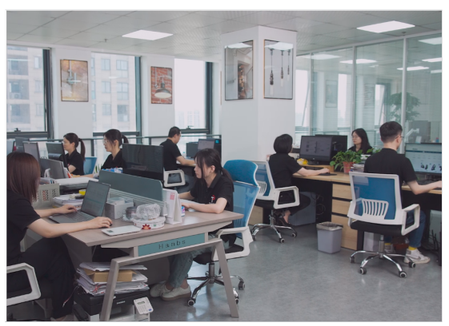

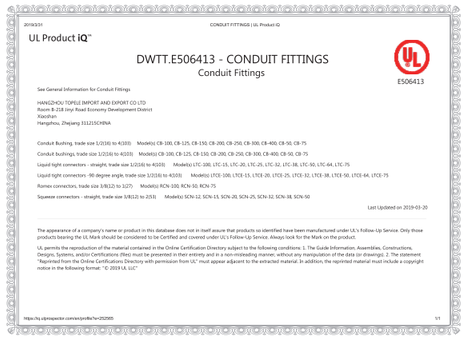

UL Product iQ™

DWTT.E506413 - CONDUIT FITTINGS
Conduit Fittings

E506413

See General Information for Conduit Fittings

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215CHINA

Conduit Bushing, trade size 1/2(16) to 4(103) Model(s) CB-100, CB-125, CB-150, CB-200, CB-250, CB-300, CB-400, CB-50, CB-75

Conduit bushings, trade size 1/2(16) to 4(103) Model(s) CB-100, CB-125, CB-150, CB-200, CB-250, CB-300, CB-400, CB-50, CB-75

Liquid-tight connectors - straight, trade size 1/2(16) to 4(103) Model(s) LTC-100, LTC-15, LTC-20, LTC-25, LTC-32, LTC-38, LTC-50, LTC-64, LTC-75

Liquid-tight connectors - 90 degree angle, trade size 1/2(16) to 4(103) Model(s) LTCE-100, LTCE-15, LTCE-20, LTCE-25, LTCE-32, LTCE-38, LTCE-50, LTCE-64, LTCE-75


Romex connectors, trade size 3/8(12) to 1(27) Model(s) RCN-100, RCN-50, RCN-75

Squeeze connectors - straight, trade size 3/8(12) to 2(53) Model(s) SCN-12, SCN-15, SCN-20, SCN-25, SCN-32, SCN-38, SCN-50

Last Updated on 2019-03-20

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

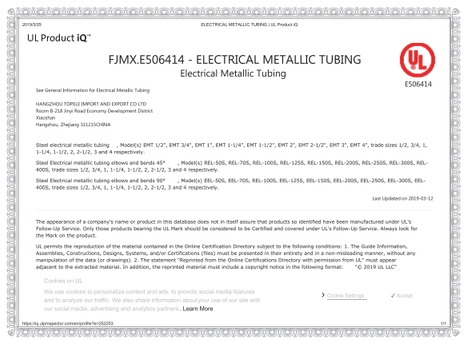

UL Product iQ™

FJMX.E506414 - ELECTRICAL METALLIC TUBING
Electrical Metallic Tubing

E506414

See General Information for Electrical Metallic Tubing

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215CHINA

Steel electrical metallic tubing , Model(s) EMT 1/2", EMT 3/4", EMT 1", EMT 1-1/4", EMT 1-1/2", EMT 2", EMT 2-1/2", EMT 3", EMT 4", trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3 and 4 respectively.


Steel Electrical metallic tubing elbows and bends 45° , Model(s) REL-505, REL-705, REL-1005, REL-1255, REL-1505, REL-2005, REL-2505, REL-3005, REL-4005, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3 and 4 respectively.

Steel Electrical metallic tubing elbows and bends 90° , Model(s) EEL-505, EEL-705, REL-1005, EEL-1255, EEL-1505, EEL-2005, EEL-2505, EEL-3005, EEL-4005, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3 and 4 respectively.

Last Updated on 2019-03-12

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

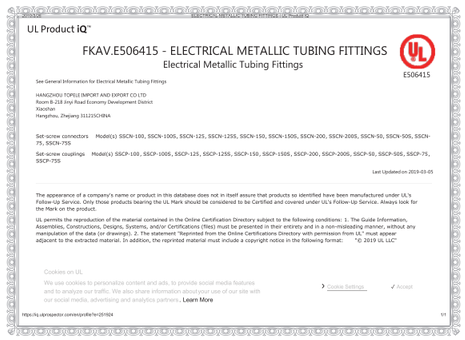

UL Product iQ™

FKAV.E506415 - ELECTRICAL METALLIC TUBING FITTINGS
Electrical Metallic Tubing Fittings

E506415

See General Information for Electrical Metallic Tubing Fittings

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215CHINA


Set-screw connectors Model(s) SSCN-100, SSCN-100S, SSCN-125, SSCN-125S, SSCN-150, SSCN-150S, SSCN-200, SSCN-200S, SSCN-50, SSCN-50S, SSCN-75, SSCN-75S

Set-screw couplings Model(s) SSCP-100, SSCP-100S, SSCP-125, SSCP-125S, SSCP-150, SSCP-150S, SSCP-200, SSCP-200S, SSCP-50, SSCP-50S, SSCP-75, SSCP-75S

Last Updated on 2019-03-05

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

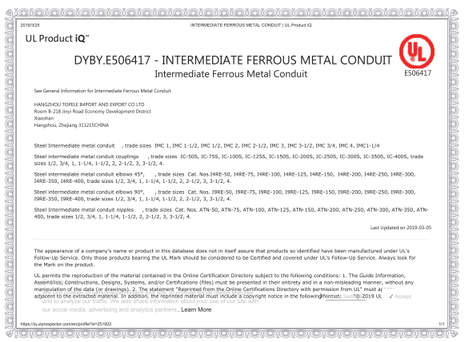

UL Product iQ™

DYBY.E506417 - INTERMEDIATE FERROUS METAL CONDUIT
Intermediate Ferrous Metal Conduit

E506417

See General Information for Intermediate Ferrous Metal Conduit

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215CHINA

Steel Intermediate metal conduit , trade sizes IMC 1, IMC 1-1/2, IMC 1/2, IMC 2, IMC 2-1/2, IMC 3, IMC 3-1/2, IMC 3/4, IMC 4, IMC1-1/4

Steel intermediate metal conduit couplings , trade sizes IC-505, IC-755, IC-1005, IC-1255, IC-1505, IC-2005, IC-2505, IC-3005, IC-3505, IC-4005, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 3-1/2, 4.

Steel intermediate metal conduit elbows 45° , trade sizes Cat. Nos.1ARE-50, 1ARE-75, 1ARE-100, 1ARE-125, 1ARE-150, 1ARE-200, 1ARE-250, 1ARE-300, 1ARE-350, 1ARE-400, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 3-1/2, 4.

Steel intermediate metal conduit elbows 90° , trade sizes Cat. Nos. 1REE-50, 1REE-75, 1REE-100, 1REE-125, 1REE-150, 1REE-200, 1REE-250, 1REE-300, 1REE-350, 1REE-400, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 3-1/2, 4.

Steel Intermediate metal conduit nipples , trade sizes Cat. Nos. ATN-50, ATN-75, ATN-100, ATN-125, ATN-150, ATN-200, ATN-250, ATN-300, ATN-350, ATN-400, trade sizes 1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 3-1/2, 4.

Last Updated on 2019-03-05

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL



UL Product iQ™

DYIX.E506418 - RIGID FERROUS METAL CONDUIT
Rigid Ferrous Metal Conduit

E506418

See General Information for Rigid Ferrous Metal Conduit

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215CHINA

Steel Electrical Rigid Metal conduit , trade sizes RGD-1, RGD-1-1/2, RGD-1-1/4, RGD-1/2, RGD-2, RGD-2-1/2, RGD-3, RGD-3-1/2, RGD-3/4, RGD-4, RGD-5, RGD-6

Steel rigid metal conduit couplings , trade sizes RIC-2152, trade size 1/2 , RIC-2152, trade size 3/4 , RIC-2153, trade size 1 , RIC-2154, trade size 1-1/4 , RIC-2155, trade size 1-1/2 , RIC-2156, trade size 2 , RIC-2157, trade size 2-1/2 , RIC-2158, trade size 3 , RIC-2159, trade size 3-1/2 , RIC-2160, trade size 4 , RIC-2170, trade size 5 , RIC-2180, trade size 6


Steel rigid metal conduit elbows 45° , trade sizes REL-211, trade size 1/2 , REL-212, trade size 3/4 , REL-213, trade size 1 , REL-214, trade size 1-1/4 , REL-215, trade size 1-1/2 , REL-216, trade size 2 , REL-217, trade size 2-1/2 , REL-218, trade size 3 , REL-219, trade size 3-1/2 , REL-220, trade size 4 , REL-501, trade size 5 , REL-601, trade size 6

Steel rigid metal conduit elbows 90° , trade sizes REL-311, trade size 1/2 , REL-312, trade size 3/4 , REL-313, trade size 1 , REL-314, trade size 1-1/4 , REL-315, trade size1-1/2 , REL-316, trade size 2 , REL-317, trade size 2-1/2 , REL-318, trade size 3 , REL-319, trade size 3-1/2 , REL-320, trade size 4 , REL-511, trade size 5 , REL-611, trade size 6

Last Updated on 2019-03-05

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

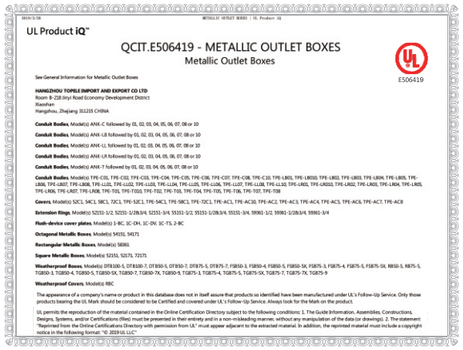

UL Product iQ™

QCIT.E506419 - METALLIC OUTLET BOXES
Metallic Outlet Boxes

E506419

See General Information for Metallic Outlet Boxes

HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou, Zhejiang 311215 CHINA

Conduit Bodies, Model(s) ANK-C followed by 01, 02, 03, 04, 05, 06, 07, 08 or 10

Conduit Bodies, Model(s) ANK-LB followed by 01, 02, 03, 04, 05, 06, 07, 08 or 10

Conduit Bodies, Model(s) ANK-LL followed by 01, 02, 03, 04, 05, 06, 07, 08 or 10

Conduit Bodies, Model(s) ANK-LR followed by 01, 02, 03, 04, 05, 06, 07, 08 or 10

Conduit Bodies, Model(s) ANK-T followed by 01, 02, 03, 04, 05, 06, 07, 08 or 10

Conduit Bodies, Model(s) TPE-C01, TPE-C02, TPE-C03, TPE-C04, TPE-C05, TPE-C06, TPE-C07, TPE-C08, TPE-C10, TPE-LB01, TPE-LB02, TPE-LB03, TPE-LB04, TPE-LB05, TPE-LB06, TPE-LB07, TPE-LB08, TPE-LL01, TPE-LL02, TPE-LL03, TPE-LL04, TPE-LL05, TPE-LL06, TPE-LL07, TPE-LL08, TPE-LL10, TPE-LR01, TPE-LR02, TPE-LR03, TPE-LR04, TPE-LR05, TPE-LR06, TPE-LR07, TPE-LR08, TPE-T01, TPE-T02, TPE-T03, TPE-T04, TPE-T05, TPE-T06, TPE-T07, TPE-T08

Covers, Model(s) 52C1, 54C1, 58C1, 72C1, TPE-52C1, TPE-54C1, TPE-58C1, TPE-72C1, TPE-AC1, TPE-AC2, TPE-AC3, TPE-AC4, TPE-AC5, TPE-AC6, TPE-AC7, TPE-AC8

Extension Rings, Model(s) 52533-1/2, 52533-1/2&3/4, 52533-3/4, 55353-1/2, 55353-1/2&3/4, 55353-3/4, 59360-1/2, 59360-1/2&3/4, 59360-3/4

Flush-device cover plates, Model(s) 1-BC, 1C-DH, 1C-DV, 1C-TS, 2-BC

Octagonal Metallic Boxes, Model(s) 54331, 54171

Rectangular Metallic Boxes, Model(s) 58361


Square Metallic Boxes, Model(s) 52551, 52571, 72571

Weatherproof Boxes, Model(s) DTB100-5, DTB100-7, DTB50-5, DTB50-7, DTB75-5, DTB75-7, FSB50-3, FSB50-4, FSB50-5, FSB50-5X, FSB75-3, FSB75-4, FSB75-5, FSB75-5X, MB50-5, MB75-5, TGB50-3, TGB50-4, TGB50-5, TGB50-5X, TGB50-7, TGB50-7X, TGB90-5, TGB75-3, TGB75-4, TGB75-5, TGB75-5X, TGB75-7, TGB75-7X, TGB75-9

Weatherproof Covers, Model(s) RBC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

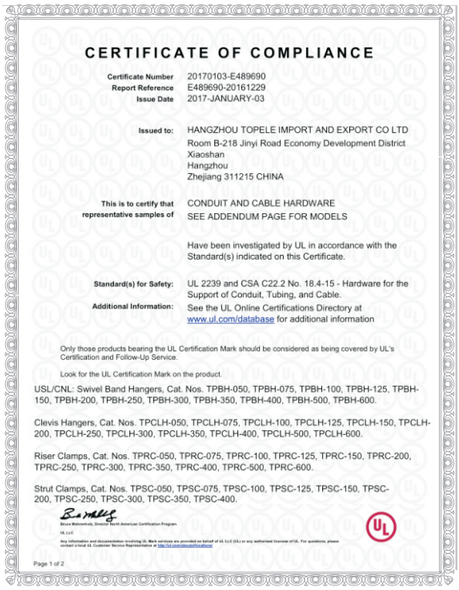

CERTIFICATE OF COMPLIANCE

Certificate Number 20170103-E489690
Report Reference E489690-20161229
Issue Date 2017-JANUARY-03

Issued to: HANGZHOU TOPELE IMPORT AND EXPORT CO LTD
Room B-218 Jinyi Road Economy Development District
Xiaoshan
Hangzhou
Zhejiang 311215 CHINA

This is to certify that representative samples of CONDUIT AND CABLE HARDWARE
SEE ADDENDUM PAGE FOR MODELS

Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: UL 2239 and CSA C22.2 No. 18.4-15 - Hardware for the Support of Conduit, Tubing, and Cable.

Additional Information: See the UL Online Certifications Directory at www.ul.com/database for additional information

Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.

Look for the UL Certification Mark on the product.

USL/CNL: Swivel Band Hangers, Cat. Nos. TPBH-050, TPBH-075, TPBH-100, TPBH-125, TPBH-150, TPBH-200, TPBH-250, TPBH-300, TPBH-350, TPBH-400, TPBH-500, TPBH-600.

Clevis Hangers, Cat. Nos. TPCLH-050, TPCLH-075, TPCLH-100, TPCLH-125, TPCLH-150, TPCLH-200, TPCLH-250, TPCLH-300, TPCLH-350, TPCLH-400, TPCLH-500, TPCLH-600.

Riser Clamps, Cat. Nos. TPRC-050, TPRC-075, TPRC-100, TPRC-125, TPRC-150, TPRC-200, TPRC-250, TPRC-300, TPRC-350, TPRC-400, TPRC-500, TPRC-600.


Strut Clamps, Cat. Nos. TPSC-050, TPSC-075, TPSC-100, TPSC-125, TPSC-150, TPSC-200, TPSC-250, TPSC-300, TPSC-350, TPSC-400.

Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations/

Page 1 of 2











Aluminum Rigid Conduit

RAC Dimensions and Weights chart (standard:UL6A ANSI S80.8 WW-C-540C)

Trade Size	Metric Designator	Nominal Outside in	Nominal Outside mm	Nominal Wall Thickness in	Nominal Wall Thickness mm	Approcx.Wt.Per 100 Ft. (30.5M) ib.	Approcx.Wt.Per 100 Ft. (30.5M) kg	Qty.In Master Bundle pcs
1/2	16	0.84	21.3	0.104	2.6	12.7	28.1	127
3/4	21	1.05	26.7	0.107	2.7	17.0	37.4	91
1	27	1.315	33.4	0.126	3.2	24.7	54.5	61
1-1/4	35	1.66	42.2	0.133	3.4	32.5	71.6	61
1-1/2	41	1.9	48.3	0.138	3.5	40.2	88.7	37
2	53	2.375	60.3	0.146	3.7	53.8	118.5	37
2-1/2	63	2.875	73	0.193	4.9	85.8	189.2	19
3	78	3.5	88.9	0.205	5.2	111.7	246.3	19
3-1/2	91	4	101.6	0.215	5.5	134.1	295.6	10
4	103	4.5	114.3	0.225	5.7	158.9	350.2	10
5	129	5.563	141.3	0.245	6.2	217.3	479.0	7
6	155	6.625	168.3	0.266	6.8	286.0	630.5	7

Outside diameter tolerances:

+/-.005 in.(.13mm) for trade sizes 1/2"(16mm)through 2"(53mm) ;+/-.010in.(.25mm)for trade sizes 2-1/2"(63mm)

+/-.015 in.(.38mm) for trade sizes 3"(78mm) ;+/-.020in.(.51mm)for trade sizes 3-1/2"(91mm)and4"(103mm)

Note: Length=10ft.(3.05m)with a tolerance of +/-.25"(6.35mm)

Aluminum EMT Conduit

EMT Dimensions and Weights chart (standard:UL797 ANSI S80.3)

Trade Size	Metric Designator	Nominal Outside in	Nominal Outside mm	Nominal Wall Thickness in	Nominal Wall Thickness mm	Approcx.Wt.Per 100 Ft. (30.5M) ib.	Approcx.Wt.Per 100 Ft. (30.5M) kg	Qty.In Master Bundle ft.	Qty.In Master Bundle m
1/2	16	0.706	17. 9	0. 042	1. 07	10.3	4.7	7000	2135
3/4	21	0. 922	23. 4	0. 049	1. 25	15.8	7.2	5000	1525
1	27	1. 163	29. 5	0. 057	1. 45	23.3	10.6	3000	915
1-1/4	35	1. 51	38. 4	0. 065	1. 65	34.7	15.8	2000	610
1-1/2	41	1. 74	44. 2	0. 065	1. 65	40.2	18.3	1500	457.5
2	53	2. 197	55. 8	0. 065	1. 65	51.2	23.3	1200	366
2-1/2	63	2. 875	73	0. 072	1. 83	74.6	33.9	610	186.1
3	78	3. 5	88. 9	0. 072	1. 83	91.1	41.4	510	155.6
3-1/2	91	4	101. 6	0. 083	2. 11	120.1	54.6	370	112.9
4	103	4. 5	114. 3	0. 083	2. 11	135.5	61.6	300	91.5

Outside diameter tolerances:

+/-.005 in.(.13mm) for trade sizes 1/2"(16mm)through 2"(53mm) ;+/-.010in.(.25mm)for trade sizes 2-1/2"(63mm)

+/-.015 in.(.38mm) for trade sizes 3"(78mm) ;+/-.020in.(.51mm)for trade sizes 3-1/2"(91mm)and 4"(103mm)

Note: Length=10ft.(3.05m)with a tolerance of +/-.25"(6.35mm)

The length of straight conduit,and the weight of finished zinc-coated conduit or bare threaded tube to be coated with an Alternate corrosion-resistant coating with one coupling.

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Conduit Nipples

Size	OD (in)	Length Close(in)	Pipe Nipple lengths(in)													
1/2	0.840	1-1/8	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3/4	1.015	1-3/8	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1	1.315	1-1/2		2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1-1/4	1.660	1-5/8		2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1-1/2	1.900	1-3/4		2	2-1/2	3	2-1/2	4	4-1/2	5	5-1/2	6	8	10	10
2	2.375	2			2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
2-1/2	2.875	2-1/2				3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3	3.500	2-5/8				3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3-1/2	4.000	2-3/4						4	4-1/2	5	5-1/2	6	8	10	10
4	4.500	2-7/8						4	4-1/2	5	5-1/2	6	8	10	10
5	5.563	3							4-1/2	5	5-1/2	6	8	10	10
6	6.625	3-1/8							4-1/2	5	5-1/2	6	8	10	10


Rigid Standard Elbows

Standard Radius				
Size	Radius	90°	45°	
		B Dim.	B Dim.	C Dim.
1/2	4	6-3/16	7-13/16	3-1/4
3/4	4-1/2	6-3/4	8-11/16	3-5/8
1	5-3/4	8-5/8	9-3/16	3-13/16
1-1/4	7-1/4	10-1/16	10-11/16	4-7/16
1-1/2	8-1/4	11-9/16	11-13/16	4-7/8
2	9-1/2	14-1/16	14-7/8	6-1/8
2-1/2	10-1/2	16	18-15/16	7-9/16
3	13	19-11/16	20-9/16	8-1/2
3-1/2	15	22-3/16	23-3/16	9-5/8
4	16	23-1/8	24-1/2	10-1/8
5	24	36-1/8	38-1/4	15-7/8
6	30	42-15/16	42	17-3/8

EMT Special Elbows

Standard Radius				
Radius	Radius	90°	45°	
		B Dim.	B Dim.	C Dim.
12	1 thru 2-1/2	21	23-7/8	9-7/8
15	1 thru 3	24	26	10-3/4
18	1 thru 4	28	29-3/4	12-3/8
24	1 thru 4	35	35-3/43	14-13/16
30	1 thru 5	41	40	16-9/16
36	1 thru 6	47	44-1/4	18-5/16
42	1 thru 6	54	50-1/8	20-13/16
48	1 thru 6	60	54-3/8	22-9/16

Conduit Couplings



Size	Threads per inch	O.D.	Min Length
1/2	14	1.010	1-5/8
3/4	14	1.250	1-41/64
1	11-1/2	1.525	1-31/32
1-1/4	11-1/2	1.869	2-1/32
1-1/2	11-1/2	2.155	2-1/16
2	11-1/2	2.650	2-1/8
2-1/2	8	3.250	3-2/16
3	8	3.870	3-5/16
3-1/2	8	4.500	3-13/32
4	8	4.875	3-33/64
5	8	6.000	3-61/64
6	8	7.100	4-1/4

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

EMT CONDUIT & FITTINGS





EMT - Electrical Metallic Tubing



Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3
Application: Used as an unthreaded steel raceway for protection and routing of electrical wiring

Trade Size	Metric Designator	Outside Diameter		Thickness A		Thickness B		Length		QTY/Bundle
		Inch	mm	Inch	mm	Inch	mm	Feet	meter	
1/2"	16	0.706	17.93	0.042	1.07	0.033	0.85	10	3.05	20
3/4"	21	0.922	23.42	0.049	1.25	0.039	1.00	10	3.05	15
1"	27	1.163	29.54	0.057	1.45	0.043	1.10	10	3.05	10
1-1/4"	35	1.510	38.35	0.065	1.65	0.051	1.30	10	3.05	5
1-1/2"	41	1.740	44.20	0.065	1.65	0.051	1.30	10	3.05	5
2"	53	2.197	55.80	0.065	1.65	0.055	1.40	10	3.05	5
2-1/2"	63	2.875	73.03	0.072	1.83	*	*	10	3.05	3
3"	78	3.500	88.90	0.072	1.83	*	*	10	3.05	3
4"	103	4.500	114.30	0.083	2.11	*	*	10	3.05	1

Tolerances: Length ± 0.25"(6.35 mm), Outside Diameter 1/2" through 2" ± 0.005"(0.13 mm), 2 1/2" through 4" ± 0.016"(0.41 mm),
Note: If you need different thickness or length, please contact


EMT Elbow 90°



Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3
Material: Steel
Application: for use to couple two ends of EMT to form 90 degree bend

TOPELE#	Trade Size	Shelf QTY	Master QTY	Radius(inch)	Offset(inch)
EEL-50s	1/2"	*	150	4.000	6.250
EEL-70s	3/4"	*	100	4.500	7.000
EEL-100s	1"	*	50	5.750	9.250
EEL-125s	1-1/4"	*	30	7.250	10.500
EEL-150s	1-1/2"	*	25	8.250	12.500
EEL-200s	2"	*	20	9.500	14.250
EEL-250s	2-1/2"	*	2	10.500	19.000
EEL-300s	3"	*	2	13.000	20.000
EEL-400s	4"	*	2	16.000	26.000


EMT Connector Set Screw Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond EMT to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCW-50	1/2"	50	500	1.125	0.722
SSCW-75	3/4"	25	250	1.405	0.945
SSCW-100	1"	20	200	1.594	1.181
SSCW-125	1-1/4"	*	200	1.907	1.535
SSCW-150	1-1/2"	*	100	2.217	1.772
SSCW-200	2"	*	60	2.486	2.217
SSCW-250	2-1/2"	*	30	3.125	2.913
SSCW-300	3"	*	30	3.346	3.563
SSCW-400	4"	*	24	3.740	4.488


EMT Coupling Set Screw Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to couple two ends of EMT

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50	1/2"	50	500	1.500	0.720
SSCP-75	3/4"	25	250	1.880	0.945
SSCP-100	1"	20	200	2.059	1.181
SSCP-125	1-1/4"	*	150	2.504	1.522
SSCP-150	1-1/2"	*	150	2.883	1.753
SSCP-200	2"	*	60	3.405	2.220
SSCP-250	2-1/2"	*	30	4.000	2.913
SSCP-300	3"	*	30	4.488	3.563
SSCP-400	4"	*	24	5.236	4.488


EMT Connector Set Screw Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to bond EMT to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCN-50S	1/2"	40	400	1.452	0.722
SSCN-75S	3/4"	25	250	1.525	0.961
SSCN-100S	1"	*	250	1.625	1.185
SSCN-125S	1-1/4"	*	120	2.250	1.541
SSCN-150S	1-1/2"	*	100	2.520	1.785
SSCN-200S	2"	*	75	2.760	2.217
SSCN-250S	2-1/2"	*	12	3.315	2.818
SSCN-300S	3"	*	8	3.750	3.550
SSCN-400S	4"	*	6	4.185	4.550

EMT Coupling Set Screw Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to couple two ends of EMT

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50S	1/2"	50	500	1.680	0.722
SSCP-75S	3/4"	25	250	2.120	0.961
SSCP-100S	1"	*	200	2.498	1.185
SSCP-125S	1-1/4"	*	100	3.250	1.541
SSCP-150S	1-1/2"	*	80	3.745	1.785
SSCP-200S	2"	*	50	4.000	2.217
SSCP-250S	2-1/2"	*	12	4.248	2.818
SSCP-300S	3"	*	8	4.500	3.550
SSCP-400S	4"	*	6	5.000	4.550


EMT Connector Comperssion Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond EMT to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
570	1/2"	50	500	1.268	0.724
571	3/4"	25	250	1.343	0.945
572	1"	20	200	1.463	1.181
573	1-1/4"	*	100	1.795	1.527
574	1-1/2"	*	100	1.894	1.756
575	2"	*	60	2.063	2.217


EMT Coupling Comperssion Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to couple two ends of EMT

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
580	1/2"	50	500	1.539	0.734
581	3/4"	25	250	1.589	0.939
582	1"	20	200	1.622	1.181
583	1-1/4"	*	100	2.063	1.528
584	1-1/2"	*	100	2.228	1.760
585	2"	*	60	2.315	2.213

EMT Connector Compression Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to bond EMT to a box or enclosure


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
651S	1/2"	*	300	1.748	0.722
652S	3/4"	*	250	1.800	0.961
653S	1"	*	200	2.000	1.185
654S	1-1/4"	*	75	2.760	1.541
655S	1-1/2"	*	75	3.000	1.785
656S	2"	*	50	3.190	2.217
657S: :	2-1/2"	*	12	3.878	2.818
658S: :	3"	*	8	4.375	3.550
660S: :	4"	*	6	4.745	4.550

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service TOPELE Powerful Solution

B
EMT CONDUIT & FITTINGS


EMT Coupling Compression Type



Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for use to couple two ends of EMT

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
661S	1/2"	*	300	1.685	0.722
662S	3/4"	*	200	2.000	0.961
663S	1"	*	150	2.124	1.185
664S	1-1/4"	*	75	3.065	1.541
665S	1-1/2"	*	75	3.125	1.785
666S	2"	*	50	3.374	2.217
667S	2-1/2"	*	12	4.876	2.818
668S	3"	*	8	5.200	3.550
670S	4"	*	6	5.725	4.550


EMT Connector Set Screw Type



Material: Aluminum
Application: for use to bond EMT to a boc or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
1530	½"	100	1000	1.124	0.722
1531	3/4"	50	500	1.385	0.945
1532	1"	40	400	1.545	1.181
1533	1-1/4"	*	200	1.905	1.535
1534	1-1/2"	*	125	2.215	1.772
1535	2"	*	100	2.485	2.217
1537	3"	*	30	3.368	3.550
1539	4"	*	24	3.745	4.550

EMT Coupling Set Screw Type




Material: Aluminum
Application: for use to couple two ends of EMT

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
1540	½"	100	1000	1.500	0.720
1541	3/4"	50	500	1.875	0.945
1542	1"	40	300	2.000	1.181
1543	1-1/4"	*	200	2.500	1.522
1544	1-1/2"	*	125	2.850	1.753
1545	2"	*	100	3.400	2.220
1547	3"	*	30	4.650	3.550
1549	4"	*	24	5.465	4.550

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


EMT to Flex Coupling



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to couple EMT to flexible metal conduit or armored cable

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
EF01	1/2"--3/8"	50	500	1.260	0.58~0.62
EF02	1/2"	30	300	1.520	0.74~0.95
EF03	3/4"	20	200	1.830	0.88~1.12
EF04	1"	20	200	1.970	1.14~1.38


EMT Strap One Hole



Standard: UL 2239 and CSA C22.2 No. 18.4-04
Material: Steel
Application: for use to mount EMT to any surface

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
DSP50	1/2"	150	1500	1.788	0.565
DSP75	3/4"	100	1000	1.950	0.622
DSP100	1"	50	500	2.245	0.750
DSP125	1-1/4"	25	250	2.852	0.882
DSP150	1-1/2"	20	250	3.158	1.000
DSP200	2"	15	150	3.928	1.100
DSP250	2-1/2"	*	120	5.000	1.300
DSP300	3"	*	100	5.551	1.300
DSP400	4"	*	60	6.860	1.300

EMT Strap Two Hole



Standard: UL 2239 and CSA C22.2 No. 18.4-04
Material: Steel
Application: for use to mount EMT to any surface

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TSP50	1/2"	100	1000	2.115	0.565
TSP75	3/4"	100	1000	2.650	0.622
TSP100	1"	50	500	3.000	0.750
TSP125	1-1/4"	25	250	3.650	0.882
TSP150	1-1/2"	20	200	4.200	1.000
TSP200	2"	15	150	4.900	1.100
TSP250	2-1/2"	*	100	5.900	1.300
TSP300	3"	*	100	6.680	1.300
TSP400	4"	*	80	8.285	1.300

Inside corner Pull Elbow




Material: Zinc
Application: for use to couple two ends of EMT to form 90 degree bend

CAT#	Size
ICPE-50	1/2"
ICPE-75	3/4"
ICPE-100	1"

Satisfied Service TOPELE Powerful Solution

B
EMT CONDUIT & FITTINGS


EMT Pull Elbow



Material: Zinc
Application: for use to couple two ends of EMT to form 90 degree bend

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE01	½"	20	200	2.500	1.320
PE02	3/4"	12	120	2.755	1.450
PE03	1"	*	100	3.862	1.950

Pull Elbow Combination Type



Material: Zinc
Application: for use to couple two ends of EMT, rigid conduit or IMC to form 90 degree bend

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE31	½"	20	200	2.500	1.320
PE32	3/4"	12	120	2.755	1.450
PE33	1"	*	100	3.862	1.950


EMT to Romex Connector



Material: Zinc
Application: for connecting EMT and cable

TOPELE#	Trade Size	Shelf QTY	Master QTY
ERC-50	1/2"	*	200
ERC-75	3/4"	*	120
ERC-100	1"	*	100

Service Entrance Cap Clamp Type




Material: Aluminum
Application: for use to bring overhead electrical service into buildings

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SEC01	1/2"	*	100	2.615	2.000
SEC02	3/4"	*	100	2.752	2.368
SEC03	1"	*	100	3.246	2.621
SEC04	1-1/4"	*	50	3.248	3.000
SEC05	1-1/2"	*	50	4.752	3.312
SEC06	2"	*	25	6.000	4.618
SEC07	2-1/2"	1	4	7.500	6.000
SEC08	3"	1	4	9.000	8.000
SEC10	4"	1	4	9.000	8.000

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


EMT Connector Set Screw Type 90°



Material: Zinc
Application: for connecting EMT to a box or enclosure when 90 degree turns are needed

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90531	3/4"	*	150	2.638	0.945
90532	1"	*	100	2.992	1.181
90533	1-1/4"	*	50	3.543	1.535

EMT Connector Compression Type 90°



Material: Zinc
Application: for connecting EMT to a box or enclosure when 90 degree turns are needed

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90571	3/4"	*	150	2.638	0.945
90572	1"	*	100	2.913	1.181
90573	1-1/4"	*	50	3.425	1.527

Conduit Bender



Material: Aluminum
Application: for bending steel conduit to form a bend fast and easily

TOPELE#	Trade Size	Shelf QTY	Master QTY
CB01	1/2"EMT	*	10
CB02	3/4"EMT, 1/2"Rigid	*	5
CB03	1"EMT, 3/4"Rigid	*	5

Conduit Bender



Material: Malleable Iron
Application: for bending steel conduit to form a bend fast and easily

TOPELE#	Trade Size	Shelf QTY	Master QTY
MCB01	1/2"EMT	*	5
MCB02	3/4"EMT, 1/2"Rigid	*	5
MCB03	1"EMT, 3/4"Rigid	*	5

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com



IMC - Intermediate Metal Conduit




Standard: UL 1242, ANSI C80.6
Application: Used as a threadable steel raceway for protection and routing of electrical wiring

Trade Size	Metric Designator	Threads Per Inch	Outside Diameter Inch	Outside Diameter mm	Thickness Inch	Thickness mm	Length Feet	Length meter	QTY/Bundle
1/2"	16	14.0	0.815	20.70	0.070	1.79	10	3.05	10
3/4"	21	14.0	1.028	26.10	0.075	1.90	10	3.05	10
1"	27	11.5	1.291	32.80	0.085	2.16	10	3.05	5
1-1/4"	35	11.5	1.638	41.60	0.085	2.16	10	3.05	3
1-1/2"	41	11.5	1.882	47.80	0.090	2.29	10	3.05	3
2"	53	11.5	2.358	59.90	0.095	2.41	10	3.05	3
2-1/2"	63	8.0	2.858	72.60	0.140	3.56	10	3.05	2
3"	78	8.0	3.476	88.30	0.140	3.56	10	3.05	2
4"	103	8.0	4.465	113.40	0.140	3.56	10	3.05	1

Tolerances: Length ± 0.25"(6.35mm), Outside Diameter 1/2" through 1-1/2" ± 0.005"(0.38mm), 2" through 4" ± 1%
Note: The length 10'(3.05m)is for conduit when a standard coupling is attached. If you need different thickness or length, please contact us.

RMC - Rigid Metal Conduit



Standard: UL 6, CSA C22.2 NO.45.1 and ANSI C80.1
Application: Used as a threadable steel raceway for protection and routing of electrical wiring

Trade Size	Metric Designator	Threads Per Inch	Outside Diameter Inch	Outside Diameter mm	Thickness Inch	Thickness mm	Length Feet	Length meter	QTY/Bundle
1/2"	16	14.0	0.840	21.34	0.104	2.64	10	3.05	10
3/4"	21	14.0	1.050	26.67	0.107	2.72	10	3.05	10
1"	27	11.5	1.315	33.40	0.126	3.20	10	3.05	5
1-1/4"	35	11.5	1.660	42.16	0.133	3.38	10	3.05	3
1-1/2"	41	11.5	1.900	48.26	0.138	3.51	10	3.05	3
2"	53	11.5	2.375	60.33	0.146	3.71	10	3.05	2
2-1/2"	63	8.0	2.875	73.03	0.193	4.90	10	3.05	2
3"	78	8.0	3.500	88.90	0.205	5.21	10	3.05	1
4"	103	8.0	4.500	114.30	0.225	2.72	10	3.05	1
5"	129	8.0	5.563	141.30	0.245	6.22	10	3.05	1
6"	155	8.0	6.625	168.28	0.266	6.76	10	3.05	1

Tolerances: Length ± 0.25"(6.35mm), Outside Diameter 1/2" through 1-1/2" ± 0.015"(0.38mm), 2" through 6" ± 1%
Note: The length 10'(3.05m)is for conduit when a standard coupling is attached. If you need different thickness or length, please contact us.

IMC Conduit Elbow 90°



TOPELE#	Trade Size	Thickness(mm)
IQRE-50	1/2"	1.79
IQRE-75	3/4"	1.90
IQRE-100	1"	2.16
IQRE-125	1-1/4"	2.16
IQRE-150	1-1/2"	2.29
IQRE-200	2"	2.41
IQRE-250	2-1/2"	3.56
IQRE-300	3"	3.56
IQRE-400	4"	3.56

Rigid Conduit Elbow 90°




TOPELE#	Trade Size	Thickness(mm)
REL-311	½"	2.64
REL-312	3/4"	2.72
REL-313	1"	3.20
REL-314	1-1/4"	3.38
REL-315	1-1/2"	3.51
REL-316	2"	3.71
REL-317	2-1/2"	4.90
REL-318	3"	5.21
REL-320	4"	2.72
REL-511	5"	6.22
REL-611	6"	6.76

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service Powerful Solution

RIGID & IMC CONDUIT & FITTINGS

Water-tight Hub



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond Rigid or IMC conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
C-1	1/2"	25	250	1.328	1.325
C-2	3/4"	20	200	1.448	1.512
C-3	1"	16	160	1.450	1.788
C-4	1-1/4"	*	90	1.575	2.295
C-5	1-1/2"	*	60	1.700	2.445
C-6	2"	*	60	1.700	2.875
C-7	2-1/2"	*	24	2.050	3.325
C-8	3"	*	24	2.150	4.050
C-10	4"	*	18	2.450	5.050

IMC Conduit Coupling




TOPELE#	Trade Size	Thickness(mm)	Heigth(mm)
IC-50S	1/2"	2	34
IC-75S	3/4"	2	37
IC-100S	1"	2	45
IC-125S	1-1/4"	2.5	49
IC-150S	1-1/2"	2.5	49
IC-200S	2"	2.5	54
IC-250S	2-1/2"	4	75
IC-300S	3"	4	80
IC-400S	4"	4	85

Rigid Conduit Coupling



TOPELE#	Trade Size	Thickness(mm)	Heigth(mm)
RIC-2151	1/2"	3	40
RIC-2152	3/4"	3.5	42
RIC-2153	1"	4	50
RIC-2154	1-1/4"	4	52
RIC-2155	1-1/2"	4	52
RIC-2156	2"	4.5	60
RIC-2157	2-1/2"	6	80
RIC-2158	3"	5.5	85
RIC-2160	4"	6	89
RIC-2170	5"	6.5	98
RIC-2180	6"	7	108

Conduit Connector Set Screw Type



Material: Steel
Application: for use to bond unthreaded IMC or RIGID conduit to a box or enclosure


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RSC01	1/2"	50	500	1.180	0.800
RSC02	3/4"	25	250	1.200	0.810
RSC03	1"	25	250	1.500	1.000
RSC04	1-1/4"	*	100	1.700	1.200
RSC05	1-1/2"	*	100	1.940	1.380
RSC06	2"	*	50	2.000	1.380
637S	2-1/2"	*	12	3.315	2.818
638S	3"	*	8	3.750	3.550
640S	4"	*	6	4.185	4.550

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Conduit Coupling Set Screw Type

Material: Steel

Application: for use to bouple two ends of unthreaded IMC or rigid conduits



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RSK01	1/2"	50	500	1.500	1.180
RSK02	3/4"	25	250	1.500	1.400
RSK03	1"	20	200	1.880	1.690
RSK04	1-1/4"	*	100	2.210	2.130
RSK05	1-1/2"	*	100	2.600	2.370
RSK06	2"	*	50	2.700	2.870
647S::	2-1/2"	*	12	4.248	2.818
648S::	3"	*	8	4.500	3.550
650S::	4"	*	6	5.000	4.550

:: for EMT,IMC and Rigid

Conduit Connector Compression Type

Material: Steel

Application: for use to bond unthreaded IMC or rigid conduit to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RCC01	1/2"	50	500	1.352	1.171
RCC02	3/4"	25	250	1.478	1.428
RCC03	1"	20	200	1.580	1.750
RCC04	1-1/4"	*	100	1.860	2.150
RCC05	1-1/2"	*	100	1.941	2.382
RCC06	2"	*	50	2.488	3.382
657S::	2-1/2"	*	12	3.878	2.818
658S::	3"	*	8	4.375	3.550
660S::	4"	*	6	4.745	4.550

:: for EMT,IMC and Rigid

Conduit Coupling Compression Type

Material: Steel

Application: for use to couple two ends of unthreaded IMC or rigid conduits



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RCK01	1/2"	50	500	1.742	1.171
RCK02	3/4"	25	250	1.821	1.428
RCK03	1"	20	200	1.949	1.750
RCK04	1-1/4"	*	100	2.652	2.150
RCK05	1-1/2"	*	100	2.700	2.382
RCK06	2"	*	50	2.927	3.382
667S	2-1/2"	*	12	4.876	2.818
668S	3"	*	8	5.200	3.550
670S	4"	*	6	5.725	4.550


Satisfied Service TOPELE Powerful Solution

RIGID & IMC CONDUIT & FITTINGS

Conduit Pull Elbow

Material: Zinc

Application: for use to couple two ends of threaded rigid conduit or IMC to form 90 degree bend




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE11	1/2"	20	200	2.500	1.320
PE12	3/4"	12	120	2.755	1.450
PE13	1"	*	100	3.862	1.950

Pull Elbow Combination Type

Material: Zinc

Application: for use to couple two ends of EMT, rigid conduit or IMC to form 90 degree bend




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE31	1/2"	20	200	2.500	1.320
PE32	3/4"	12	120	2.755	1.450
PE33	1"	*	100	3.862	1.950

Pull Elbow Conduit to Box

Material: Zinc

Application: for connecting rigid conduit or IMC to a box or enclosure when 90 degree turns are needed




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE61	1/2"	*	200	2.500	1.320
PE62	3/4"	*	120	2.755	1.450
PE63	1"	*	100	3.862	1.950

Pull Elbow to Box Combination Type

Material: Zinc

Application: for connecting EMT, rigid conduit or IMC to a box or enclosure when 90 degree turns are needed




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE81	1/2"	*	200	2.500	1.320
PE82	3/4"	*	120	2.755	1.450
PE83	1"	*	100	3.862	1.950

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Conduit Connector 90°

Material: Zinc
Application: for use to bond Rigid or IMC conduit to a box or enclosure when 90 degree turns are needed



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90631	3/4"	*	150	1.732	0.985
90632	1"	*	100	1.969	1.258
90633	1-1/4"	*	50	2.362	1.595

Service Entrance Cap Threaded Type

Material: Aluminum
Application: for use to bring overhead electrical service into buildings



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SEC11	1/2"	*	100	2.610	2.000
SEC12	3/4"	*	100	2.715	2.368
SEC13	1"	*	100	3.108	2.621
SEC14	1-1/4"	*	50	3.220	3.000
SEC15	1-1/2"	*	50	4.351	3.312
SEC16	2"	*	25	5.442	4.618
SEC17	2-1/2"	1	4	7.505	6.000
SEC18	3"	1	4	8.021	8.000
SEC20	4"	1	4	8.510	8.000






Satisfied Service TOPELE Powerful Solution

RIGID & IMC CONDUIT & FITTINGS

Conduit Strap One Hole


Standard: UL 2239 and CSA C2 2.2 No. 18.4-04
Material: Steel
Application: for use to mount Rigid or IMC conduit to any surface



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
ROHS-50	1/2"	150	1500	1.911	0.876
ROHS-75	3/4"	100	1000	2.226	1.045
ROHS-100	1"	50	500	2.615	1.292
ROHS-125	1-1/4"	25	250	2.978	1.631
ROHS-150	1-1/2"	20	200	3.658	1.858
ROHS-200	2"	15	150	4.151	2.242
ROHS-250	2-1/2"	*	120	5.000	1.300
ROHS-300	3"	*	100	5.551	1.300
ROHS-400	4"	*	60	6.860	1.300

Conduit Strap Two Hole

Standard: UL 2239 and CSA C2 2.2 No. 18.4-04
Material: Steel
Application: for use to mount Rigid or IMC conduit to any surface



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RTHS-50	1/2"	100	1000	2.435	0.898
RTHS-75	3/4"	50	500	2.800	1.062
RTHS-100	1"	50	500	3.355	1.366
RTHS-125	1-1/4"	25	250	4.108	1.698
RTHS-150	1-1/2"	20	200	4.448	1.958
RTHS-200	2"	15	150	5.351	2.242
RTHS-250	2-1/2"	*	100	5.900	1.300
RTHS-300	3"	*	100	6.680	1.300
RTHS-400	4"	*	80	8.285	1.300

Conduit Lock Nut


Standard: UL 514B and C22.2 No. 18.3-12
Material: Steel
Application: for securing Rigid, IMC conduit or any threaded fitting to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SLN-50	1/2"	400	4000	1.148	0.787
SLN-75	3/4"	200	2000	1.452	0.988
SLN-100	1"	150	1500	1.747	1.260
SLN-125	1-1/4"	80	800	2.100	1.594
SLN-150	1-1/2"	50	500	2.400	1.835
SLN-200	2"	40	400	2.952	2.318
SLN-250	2-1/2"	*	400	3.546	2.776
SLN-300	3"	*	300	3.551	3.454
SLN-350	3-1/2"	*	200	4.200	3.895
SLN-400	4"	*	200	4.749	4.445

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Conduit Strap One Hole




Material: Malleable Iron

Application: for securing Rigid or IMC conduit to any surface where greater load bearing is required

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
MS01	1/2"	*	1000	2.252	0.942
MS02	3/4"	*	500	2.556	1.221
MS03	1"	*	250	3.061	1.500
MS04	1-1/4"	*	200	3.692	1.878
MS05	1-1/2"	*	100	4.000	2.056
MS06	2"	*	25	5.062	2.561
MS07	2-1/2"	*	25	5.938	3.062
MS08	3"	*	25	7.442	3.808
MS10	4"	*	10	8.691	5.000

Conduit Strap Back Spacer



Material: Malleable Iron

Application: for use with one hole strap to provide space between conduit and mounting surface

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
MB01	1/2"	*	250	2.055	1.000
MB02	3/4"	*	250	2.382	1.061
MB03	1"	*	250	2.942	1.252
MB04	1-1/4"	*	100	3.500	1.880
MB05	1-1/2"	*	100	3.805	1.440
MB06	2"	*	50	4.751	1.936
MB07	2-1/2"	*	25	5.752	2.445
MB08	3"	*	10	6.688	2.625
MB10	4"	*	10	8.880	3.062

Conduit Bushing



Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc


Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
CB-50	1/2"	150	4500	1.051	0.788
CB-75	3/4"	100	1000	1.325	0.984
CB-100	1"	50	500	1.585	1.260
CB-125	1-1/4"	50	500	1.950	1.594
CB-150	1-1/2"	35	350	2.200	1.831
CB-200	2"	20	200	2.695	2.323
CB-250	2-1/2"	*	200	3.235	2.776
CB-300	3"	*	150	3.885	3.464
CB-350	3-1/2"	*	100	4.360	3.895
CB-400	4"	*	80	5.010	4.448

Satisfied Service TOPELE Powerful Solution

RIGID & IMC CONDUIT & FITTINGS

Insulated Conduit Bushing




Material: Zinc

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
ICB-50	1/2"	150	1500	1.051	0.788
ICB-75	3/4"	100	1000	1.325	0.984
ICB-100	1"	50	500	1.585	1.260
ICB-125	1-1/4"	50	500	1.950	1.594
ICB-150	1-1/2"	35	350	2.200	1.831
ICB-200	2"	20	200	2.695	2.323
ICB-250	2-1/2"	*	200	3.235	2.776
ICB-300	3"	*	150	3.885	3.464
ICB-350	3-1/2"	*	100	4.360	3.895
ICB-400	4"	*	80	5.010	4.448

Conduit Bushing




Material: Plastic

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PCB-50	1/2"	100	1000	1.056	0.786
PCB-75	3/4"	100	1000	1.318	0.985
PCB-100	1"	50	250	1.588	1.260
PCB-125	1-1/4"	25	250	1.955	1.594
PCB-150	1-1/2"	25	250	2.190	1.831
PCB-200	2"	25	125	2.681	2.323
PCB-250	2-1/2"	10	50	3.248	2.776
PCB-300	3"	10	50	3.871	3.465
PCB-350	3-1/2"	10	40	4.365	3.895
PCB-400	4"	10	40	5.012	4.449

Insulated Grounding Bushing



Material: Malleable Iron

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure and quick installation of bonding jumper

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
IGB-50	1/2"	*	500	1.260	0.787
IGB-75	3/4"	*	500	1.481	0.986
IGB-100	1"	*	300	1.800	1.262
IGB-125	1-1/4"	*	200	2.405	1.595
IGB-150	1-1/2"	*	200	2.500	1.832
IGB-200	2"	*	125	3.028	2.325
IGB-250	2-1/2"	*	100	3.600	2.778
IGB-300	3"	*	60	4.162	3.466
IGB-350	3-1/2"	*	60	4.748	3.898
IGB-400	4"	*	60	5.298	4.450

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Reducing Bushing




Material: Steel

Application: for reducing the threaded opening in conduit bodies or any female threaded fitting

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RDB01	3/4"*1/2"	100	1000	0.921	0.645
RDB02	1"*1/2"	50	500	1.124	0.715
RDB03	1"*3/4	50	500	1.124	0.715
RDB04	1-1/4"*1/2"	*	210	1.472	0.818
RDB05	1-1/4"*3/4"	*	210	1.472	0.818
RDB06	1-1/4"*1"	*	210	1.472	0.818
RDB07	1-1/2"*1/2"	*	120	1.700	0.850
RDB08	1-1/2"*3/4"	*	120	1.700	0.850
RDB09	1-1/2"*1"	*	120	1.700	0.850
RDB10	1-1/2"*1-1/4"	*	120	1.700	0.850
RDB11	2"*1/2"	*	75	2.228	0.972
RDB12	2"*3/4"	*	75	2.228	0.972
RDB13	2"*1"	*	75	2.228	0.972
RDB14	2"*1-1/4"	*	75	2.228	0.972
RDB15	2"*1-1/2"	*	75	2.228	0.972

Bushed Nipple




Material: Zinc

Application: for use to connect box to conduit coupling, or box to box

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
BNP-50	1/2"	100	1000	1.025	0.585
BNP-75	3/4"	50	500	1.300	0.614
BNP-100	1"	25	250	1.616	0.654
BNP-125	1-1/4"	*	250	1.978	0.810
BNP-150	1-1/2"	*	100	2.410	0.835
BNP-200	2"	*	50	2.945	0.888

Conduit Nipple - Close



Material: Steel

Application: when screwed tightly between two female fittings, very little of the nipple remains exposed.

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
CNC-50	1/2"	100	1000	1.532	0.785
CNC-75	3/4"	50	500	1.571	0.982
CNC-100	1"	25	300	1.890	1.258
CNC-125	1-1/4"	*	250	2.045	1.593
CNC-150	1-1/2"	*	120	2.205	1.831
CNC-200	2"	*	60	2.360	2.322

Satisfied Service TOPELE Powerful Solution

Conduit Nipple



Material: Steel

Application: for use to extend a length of rigid conduit or IMC, or use to connect two boxes or enclosures

TOPELE#	Trade Size	Shelf QTY	Master QTY
CN01	1/2"_1-1/2"	*	500
CN02	1/2"_2"	*	350
CN03	1/2"_3"	*	250
CN04	1/2"_4"	*	150
CN05	1/2"_6"	*	100
CN06	1/2"_8"	*	80
CN07	1/2"_10"	*	50
CN08	1/2"_12"	*	50
CN11	3/4"_1-1/2"	*	500
CN12	3/4"_2"	*	250
CN13	3/4"_3"	*	180
CN14	3/4"_4"	*	150
CN15	3/4"_6"	*	100
CN16	3/4"_8"	*	60
CN17	3/4"_10"	*	50
CN18	3/4"_12"	*	40

TOPELE#	Trade Size	Shelf QTY	Master QTY
CN21	1"_2"	*	150
CN22	1"_3"	*	100
CN23	1"_4"	*	70
CN24	1"_6"	*	50
CN25	1"_8"	*	40
CN26	1"_10"	*	30
CN27	1"_12"	*	25
CN31	1-1/4"_2"	*	150
CN32	1-1/4"_3"	*	100
CN33	1-1/4"_4"	*	70
CN34	1-1/4"_6"	*	40
CN35	1-1/4"_8"	*	30
CN36	1-1/4"_10"	*	25
CN37	1-1/4"_12"	*	20

TOPELE#	Trade Size	Shelf QTY	Master QTY
CN41	1-1/2"_2"	*	150
CN42	1-1/2"_3"	*	70
CN43	1-1/2"_4"	*	50
CN44	1-1/2"_6"	*	40
CN45	1-1/2"_8"	*	30
CN46	1-1/2"_10"	*	20
CN47	1-1/2"_12"	*	20
CN51	2"_2-1/2"	*	70
CN52	2"_3"	*	60
CN53	2"_4"	*	40
CN54	2"_6"	*	30
CN35	2"_8"	*	20
CN56	2"_10"	*	15
CN57	2"_12"	*	15

RIGID & IMC CONDUIT & FITTINGS


HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com













Galvanized Flexible Conduit - Super Flexible Type



Material: Steel

Application: used primarily in dry areas where it would be impractical to install EMT or other non-flexible conduit

TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
GFC01	3/8"	12	10.82	12.09	14.22	15.49	25	100
GFC02	1/2"	16	18.44	19.97	21.84	23.37	38	100
GFC03	3/4"	21	22.64	24.17	26.54	28.07	45	50
GFC04	1"	27	28.82	30.85	33.02	35.05	55	50
GFC05	1-1/4"	35	34.47	36.50	39.37	41.40	62	25
GFC06	1-1/2"	41	41.79	44.33	46.99	49.53	90	25
GFC07	2"	53	54.29	56.83	59.69	62.23	110	20
GFC08	2-1/2"	63	65.44	70.52	72.64	77.72	130	20
GFC09	3"	78	78.14	83.22	85.34	90.42	160	10
GFC10	4"	103	103.54	108.62	110.74	115.85	210	10

Galvanized Flexible Conduit - Greenfield Type




Material: Steel

Application: used primarily in dry areas where it would be impractical to install EMT or other non-flexible conduit

TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
FMC01	3/8"	12	9.52	9.96	14.22	15.49	50	100
FMC02	1/2"	16	15.88	16.38	21.84	23.37	75	100
FMC03	3/4"	21	20.62	21.21	26.54	28.07	100	50
FMC04	1"	27	25.40	26.42	33.02	35.05	125	50
FMC05	1-1/4"	35	31.75	33.02	39.37	41.40	160	25
FMC06	1-1/2"	41	38.10	40.01	46.99	49.53	190	25
FMC07	2"	53	50.80	52.83	59.69	62.23	225	20
FMC08	2-1/2"	63	63.50	66.04	72.64	77.72	320	20
FMC09	3"	78	76.20	78.74	85.34	90.42	*	10
FMC10	4"	103	101.60	104.14	110.74	115.82	*	10

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


Squeeze Connector Greenfield Straight



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond flexible metal conduit or armored cable to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
SCN-12	3/8"	100	1000	1.000	0.58~0.62
SCN-15	1/2"	50	500	1.468	0.74~0.95
SCN-20	3/4"	25	250	1.581	0.88~1.12
SCN-25	1"	20	200	1.750	1.14~1.38
SCN-32	1-1/4"	*	200	1.912	1.42~1.65
SCN-38	1-1/2"	*	100	2.090	1.68~1.95
SCN-50	2"	*	100	2.341	2.08~2.56
SCN-60	2-1/2"	*	25	2.811	2.85~3.25
SCN-70	3"	*	20	3.840	3.33~3.65
SCN-80	4"	*	10	4.562	4.18~4.58


Squeeze Connector Greenfield 90°



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond flexible metal conduit or armored cable to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
SACN-25	3/8"	50	500	1.740	0.43~0.69
SACN-50	1/2"	30	300	2.110	0.64~0.98
SACN-75	3/4"	20	200	2.400	0.76~1.12
SACN-100	1"	10	100	2.870	1.08~1.68
SACN-125	1-1/4"	*	80	4.000	1.35~1.85
SACN-150	1-1/2"	*	30	6.000	1.56~2.54
SACN-200	2"	*	30	6.000	1.68~2.56
SACN-250	2-1/2"	*	10	7.187	2.45~2.95
SACN-300	3"	*	10	7.875	2.95~3.35
SACN-400	4"	*	5	10.200	3.75~4.45

"U" Shaped Connector




Material: Steel
Application: for use with armored cable and flexible metal conduit

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
P2	1/2"	25	250	1.380	1.249
P3	3/4"	20	200	1.382	1.438
P4	1"	12	120	1.558	1.807

Satisfied Service TOPELE Powerful Solution

D
FLEXIBLE CONDUIT & FITTINGS


EMT to Flex Coupling



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to couple EMT to flexible metal conduit or armored cable

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
EF-25	1/2"--3/8"	50	500	1.260	0.58~0.62
EF-50	1/2"	30	300	1.520	0.74~0.95
EF-75	3/4"	20	200	1.830	0.88~1.12
EF-100	1"	20	200	1.970	1.14~1.38


Interior Flex Connector



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond flexible metal conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
IFC-25	3/8"	150	1500	1.035	0.484
IFC-50	1/2"	100	1000	1.118	0.610
IFC-75	3/4"	50	500	1.248	0.815
IFC-100	1"	30	300	1.366	0.965

Romex Connector for Nonmetallic Cable



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond nonmetallic cable to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCN-25	3/8"	100	1000	0.825	0.421
RCN-50	1/2"	100	1000	0.825	0.421
RCN-75	3/4"	50	500	1.000	0.482
RCN-100	1"	25	250	1.285	0.780
RCN-125	1-1/4"	25	250	1.312	0.710
RCN-150	1-1/2"	15	150	1.453	0.817
RCN-200	2"	10	100	1.590	0.823

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


Liquid Tight Conduit



Material: Steel, with heavy PVC coated
Application: can be used in both dry and wet locations where it would be impractical to install EMT or other non-flexible conduit

TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
LTC11	3/8"	12	12.29	12.80	17.50	18.00	50	100
LTC12	1/2"	16	15.80	16.31	20.80	21.30	80	100
LTC13	3/4"	21	20.83	21.34	25.20	26.70	105	50
LTC14	1"	27	26.44	27.08	32.80	33.40	165	50
LTC15	1-1/4"	35	35.05	35.81	41.40	42.20	200	25
LTC16	1-1/2"	41	40.01	40.64	47.40	48.30	225	25
LTC17	2"	53	51.31	51.94	59.40	60.30	280	20
LTC18	2-1/2"	63	62.99	63.63	72.10	73.00	370	20
LTC19	3"	78	77.98	78.74	87.90	88.90	440	10
LTC21	4"	103	101.60	102.62	113.30	114.30	600	10

PVC Coated Flexible Conduit



Material: Steel, with light PVC coated
Application: can be used in both dry and wet locations where it would be impractical to install EMT or other non-flexible conduit

TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
PFC01	3/8"	12	12.29	12.80	16.70	17.20	35	100
PFC02	1/2"	16	15.80	16.31	20.20	20.70	65	100
PFC03	3/4"	21	20.83	21.34	25.50	26.10	75	50
PFC04	1"	27	26.44	27.08	31.60	32.20	100	50
PFC05	1-1/4"	35	35.05	35.81	40.80	41.50	125	25
PFC06	1-1/2"	41	40.01	40.64	46.60	47.20	150	25
PFC07	2"	53	51.31	51.94	58.10	58.70	175	20
PFC08	2-1/2"	63	62.99	63.63	71.80	72.40	200	20
PFC09	3"	78	77.98	78.74	87.20	87.90	225	10
PFC10	4"	103	101.60	102.62	111.20	112.30	275	10


HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service TOPELE Powerful Solution

D

FLEXIBLE CONDUIT & FITTINGS


Liquid Tight Connector Straight



Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond liquid tight conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
LTC-100	3/8"	35	350	1.440	1.260
LTC-15	1/2"	40	400	1.440	1.385
LTC-20	3/4"	25	250	1.562	1.720
LTC-25	1"	15	150	1.825	1.900
LTC-32	1-1/4"	*	100	2.068	2.176
LTC-38	1-1/2"	*	100	2.068	2.507
LTC-50	2"	*	60	2.103	3.178
LTC-55	2-1/2"	*	25	3.269	4.218
LTC-64	3"	*	20	4.060	4.919
LTC-75	4"	*	10	4.323	5.948

Liquid Tight Connector 90°




Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for use to bond liquid tight conduit to a box or enclosure

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
LTCE-100	3/8"	20	200	2.055	2.335
LTCE-15	1/2"	25	250	2.215	2.345
LTCE-20	3/4"	15	150	2.545	3.550
LTCE-25	1"	10	100	2.815	3.785
LTCE-32	1-1/4"	*	50	3.360	3.960
LTCE-38	1-1/2"	*	60	3.450	4.130
LTCE-50	2"	*	25	4.035	4.700
LTCE-55	2-1/2"	*	10	5.215	5.375
LTCE-64	3"	*	10	6.100	6.500
LTCE-75	4"	*	5	6.780	8.000

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Flexible Conduit Connector For Philippines

Material: Aluminum/Zinc
Application: use to connect flexible metallic conduit, AC and MC cable to a box or enclosure



Aluminum Zinc

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
TSSC-50	1/2"	100	1000	1.435	0.63~0.81
TSSC-75	3/4"	50	500	1.500	0.83~1.09
TSSC-100	1"	25	250	1.750	1.00~1.36

Compression to screw in Flex Connector

Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for connecting EMT and Flexible conduit

TOPELE#	Trade Size
CSFC-50	1/2"
CSFC-75	3/4"
CSFC-100	1"



Flexible screw-in Connector

Standard: UL 514B and C22.2 No. 18.3-12
Material: Zinc
Application: for connecting Flexible to Flexible conduit

TOPELE#	Trade Size
FSIC-50	1/2"
FSIC-75	3/4"
FSIC-100	1"




HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service Powerful Solution
TOPELE
D
FLEXIBLE CONDUIT & FITTINGS

Liquid Tight Connector Straight


Material: Malleable Iron
Application: for use to bond liquid tight conduit to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38	3/8"	*	500	1.685	1.385
LTCM-50	1/2"	*	400	1.685	1.385
LTCM-75	3/4"	*	250	1.805	1.600
LTCM-100	1"	*	150	2.100	1.905
LTCM-125	1-1/4"	*	125	2.200	2.435
LTCM-150	1-1/2"	*	100	2.435	2.715
LTCM-200	2"	*	50	2.850	3.245

Liquid Tight Connector 45°


Material: Malleable Iron
Application: for use to bond liquid tight conduit to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38F	3/8"	*	200	1.000	1.381
LTCM-50F	1/2"	*	250	1.055	1.381
LTCM-75F	3/4"	*	125	1.188	1.500
LTCM-100F	1"	*	100	1.382	1.690
LTCM-125F	1-1/4"	*	50	1.628	1.939
LTCM-150F	1-1/2"	*	25	1.810	2.252
LTCM-200F	2"	*	25	1.939	2.750

Liquid Tight Connector 90°

Material: Malleable Iron
Application: for use to bond liquid tight conduit to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38N	3/8"	*	200	1.805	1.305
LTCM-50N	1/2"	*	250	1.878	1.398
LTCM-75N	3/4"	*	125	2.058	1.625
LTCM-100N	1"	*	100	2.252	2.058
LTCM-125N	1-1/4"	*	50	2.751	2.125
LTCM-150N	1-1/2"	*	50	3.125	2.700
LTCM-200N	2"	*	25	3.880	2.950


HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Female Flexible Conduit Connector-Zinc

typeA



typeB



CAT#	SIZE
DPN-15	1/2"
DPN-20	3/4"
DPN-25	1"
DPN-32	1"
DPN-38	1-1/4"
DPN-50	1-1/2"
DPN-64	2"
DPN-75	2-1/2"
DPN-100	3"

Flex Conduit Compression Connector-Zinc

typeA




typeB



CAT#	SIZE
DGJ-15/FF/TT	1/2"
DGJ-20/FF/TT	3/4"
DGJ-25/FF/TT	1"
DGJ-32/FF/TT	1-1/4"
DGJ-38/FF/TT	1-1/2"
DGJ-50/FF/TT	2"
DGJ-64/FF/TT	2-1/2"
DGJ-75/FF/TT	3"
DGJ-100/FF/TT	4"

Plum Type Male Flexible Conduit Connector-Zinc






CAT#	SIZE
MPJ-15	1/2"
MPJ-20	3/4"
MPJ-25	1"
MPJ-32	1-1/4"
MPJ-38	1-1/2"
MPJ-50	2"
MPJ-64	2-1/2"
MPJ-75	3"
MPJ-100	4"

Plum Type Flexible Conduit Coupling-Zinc





CAT#	SIZE
MKJ-15	1/2"
MKJ-20	3/4"
MKJ-25	1"
MKJ-32	1-1/4"
MKJ-38	1-1/2"
MKJ-50	2"
MKJ-64	2-1/2"
MKJ-75	3"
MKJ-100	4"

90° Flexible Conduit Connector-Zinc

typeA



typeB



CAT#	SIZE
DWJ-15	1/2"
DWJ-20	3/4"
DWJ-25	1"
DWJ-32	1-1/4"
DWJ-38	1-1/2"
DWJ-50	2"
DWJ-64	2-1/2"
DWJ-75	3"
DWJ-100	4"

45° Flexible Conduit Connector-Zinc





CAT#	SIZE
DNJ-15	1/2"
DNJ-20	3/4"
DNJ-25	1"
DNJ-32	1-1/4"
DNJ-38	1-1/2"
DNJ-50	2"
DNJ-64	2-1/2"
DNJ-75	3"
DNJ-100	4"

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service TOPELE Powerful Solution

FLEXIBLE CONDUIT& FITTINGS

Liquid Tight Non-Metallic Flexible Conduit

Temperature : -18℃~+80℃Dry,60℃Wet,70℃ Oil
IP68, Grey
Flexibility : Medium
Fire Retardant : Self-extinguishing
UV Resistance : Yes



TOPELE#	Size	I.D.(mm)		O.D.(mm)		Bending Radius (mm)	Packing(m)
NMLTFC-38	3/8"	12.29	12.80	17.53	18.03	51	50
NMLTFC-50	1/2"	15.80	16.31	20.83	21.34	82.5	50
NMLTFC-75	3/4"	20.83	21.34	26.16	26.67	108	40
NMLTFC-100	1"	26.44	27.08	32.77	33.40	165	30
NMLTFC-125	1-1/4"	35.05	35.81	41.40	42.16	203	30
NMLTFC-150	1-1/2"	40.01	40.64	47.37	48.26	228.5	20
NMLTFC-200	2"	51.31	51.94	59.44	60.33	282	10

Non-Metallic Flexible Conduit Connector

Temperature Range : Medium
IP Rating : IP 68
Fire Retardant : Self-extinguishing
Certificate : cULus

typeA



typeB



Straight

CAT#	SIZE
NMCS-38	3/8"
NMCS-50	1/2"
NMCS-75	3/4"
NMCS-100	1"
NMCS-125	1-1/4"
NMCS-150	1-1/2"
NMCS-200	2"

typeA



typeB




90℃ Angle

CAT#	SIZE
NMCA-38	1/2"
NMCA-50	1/2"
NMCA-75	3/4"
NMCA-100	1"
NMCA-125	1-1/4"
NMCA-150	1-1/2"
NMCA-200	2"


HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com



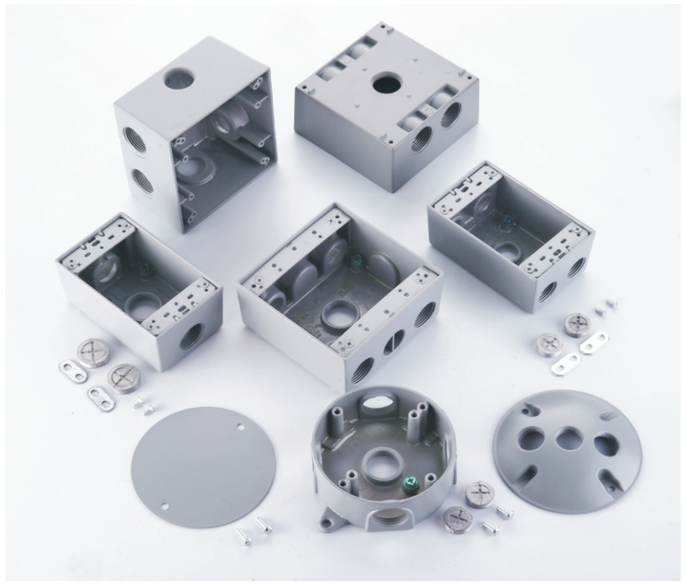

EMT Type Available Material:malleable iron available


Ⓣ Rigid Conduit Body - LB Type



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC,allow access for inspection,pulling and maintenance

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LB01	1/2"	1	100	3.504	1.378
TPE-LB02	3/4"	1	50	4.154	1.614
TPE-LB03	1"	1	50	4.921	1.890
TPE-LB04	1-1/4"	1	20	6.496	2.496
TPE-LB05	1-1/2"	1	20	6.496	2.496
TPE-LB06	2"	1	10	8.563	3.346
TPE-LB07	3"				
TPE-LB07	4"				


Ⓣ Rigid Conduit Body - LL Type



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC, allow access for inspection,pulling and maintenance

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LL01	1/2"	1	100	3.504	1.378
TPE-LL02	3/4"	1	50	4.154	1.614
TPE-LL03	1"	1	50	4.921	1.890
TPE-LL04	1-1/4"	1	20	6.496	2.496
TPE-LL05	1-1/2"	1	20	6.496	2.496
TPE-LL06	2"	1	10	8.563	3.346
TPE-LL07	3"				
TPE-LL08	4"				

Ⓣ Rigid Conduit Body - LR Type




Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC, allow access for inspection,pulling and maintenance

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LR01	1/2"	1	100	3.504	1.378
TPE-LR02	3/4"	1	50	4.154	1.614
TPE-LR03	1"	1	50	4.921	1.890
TPE-LR04	1-1/4"	1	20	6.496	2.496
TPE-LR05	1-1/2"	1	20	6.496	2.496
TPE-LR06	2"	1	10	8.563	3.346

E

CONDUIT BODIES &PROOF BOXES


Rigid Conduit Body - C Type



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for rigid conduit or IMC,allow access for inspection,pulling and maintenance

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-C01	1/2"	1	100	3.504	1.378
TPE-C02	3/4"	1	50	4.154	1.614
TPE-C03	1"	1	50	4.921	1.890
TPE-C04	1-1/4"	1	20	6.496	2.496
TPE-C05	1-1/2"	1	20	6.496	2.496
TPE-C06	2"	1	10	8.563	3.346
TPE-C07	3"				
TPE-C08	4"				

Rigid Conduit Body - T Type



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for rigid conduit or IMC,allow access for inspection,pulling and maintenance

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-T01	1/2"	1	100	3.504	1.378
TPE-T02	3/4"	1	50	4.154	1.614
TPE-T03	1"	1	50	4.921	1.890
TPE-T04	1-1/4"	1	20	6.496	2.496
TPE-T05	1-1/2"	1	20	6.496	2.496
TPE-T06	2"	1	10	8.563	3.346
TPE-T07	3"				
TPE-T08	4"				

Weatherproof Box Three Gang



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for use in branch circuit wiring in wet, damp or dry locations

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
3GB71	1/2"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB72	3/4"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB73	1"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml

Note: Boxes supplied with 2 closure plugs, 2 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey, unless any other color is specified.

Weatherproof Box Round



Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for use in branch circuit wiring in wet, damp or dry locations

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Height (inch)	Max.Capacity
RB50-5	1/2"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml
RB75-5	3/4"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml

Note: Boxes supplied with 4 closure plugs, 1 green grounding screw and 2 mounting screws for covers.
The color of boxes will be in grey, unless any other color is specified.

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service
TOPELE
Powerful Solution

E

CONDUIT BODIES &PROOF BOXES


Weatherproof Box One Gang


E506419

Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for use in branch circuit wiring in wet, damp or dry locations


3 HOLES


4 HOLES


5 HOLES


5X HOLES

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
FSB50-3	1/2"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-3	3/4"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB100-3	1"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-4	1/2"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-4	3/4"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5X	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5X	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
DB50-3	1/2"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-3	3/4"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-3	1"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-4	1/2"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-4	3/4"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-5X	1/2"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-5X	3/4"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-5X	1"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml

Note: Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey,unless any other color is specified.

Weatherproof Box Two Gang


E506419

Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application: for use in branch circuit wiring in wet, damp or dry locations


3 HOLES


4 HOLES


5 HOLES


5X HOLES


7 HOLES


7X HOLES


9 HOLES

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
TGB50-3	1/2"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-3	3/4"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-4	1/2"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-4	3/4"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5X	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5X	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5X	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7X	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7X	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-9	1/2"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-9	3/4"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
DTB50-5	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-5X	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5X	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5X	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-7X	1/2"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-7X	3/4"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-7X	1"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml

Note: Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey,unless any other color is specified.

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Round Cover With Gasket & Screws

1 HOLES



CAT#	SIZE
RC-1	1/2"

2 HOLES



CAT#	SIZE
RC-2	1/2"

3 HOLES



CAT#	SIZE
RC-3	1/2"



Lamp holder with interior gasket
Lamp:150W par 38

Rectangular Cover with Gasket & Screws

1 HOLES



CAT#	SIZE
RE-1	1/2"

2 HOLES



CAT#	SIZE
RE-2	1/2"

3 HOLES




CAT#	SIZE
RE-3	1/2"

Aluminum Stamped Cover with Gasket & Screws



CAT# SBC-2



CAT# DBC-4




CAT# RBC-2

Satisfied Service TOPELE Powerful Solution


E

CONDUIT BODIES &PROOF BOXES


Weatherproof Self-closing Outlet Covers




GFV-1




GFH-1




SDV-1




SSV-1




SDH-2



SPO-50



SPO-60



SPO-70



DDV-2



DSV-2




DSD-2



DGF-2




Steel
SBCS-2



Steel
DBCS-4




SGF-2



GFV-2

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

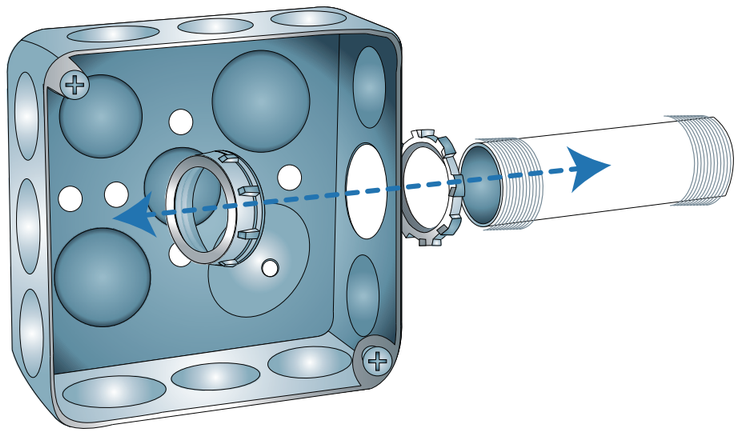



4"Square Boxes


E506419

1-1/2"DEEP BOXES




CAT#
52151-1/2"
52151-3/4"
52151-1/2"&3/4"
52151-concentric1/2"&3/4"

2-1/8"DEEP BOXES



CAT#
52171-1/2"
52171-3/4"
52151-1/2"&3/4"
52151-1"

1-1/2"DEEP EXTENSIONS



CAT#
52151-1/2"
52151-3/4"
52151-1/2"&3/4"

4"Square Boxes covers




CAT# 52C1



CAT# 52C6

CAT#	DESCRIPTION
52C1	Flat,Blank
52C6	Flat,1/2"K.O.



CAT# 52C62



CAT# 52C21

CAT#	DESCRIPTION	RAISED
52C0	Flat,for One Device	-
52C62	for One Device	1/4"
52C13	for One Device	1/2"
52C14	for One Device	3/4"
52C15	for One Device	1"
52C16	for One Device	1-1/4"

CAT#	DESCRIPTION	RAISED
52C00	Flat,for One Device	-
52C20	for Two Device	1/4"
52C17	for Two Device	1/2"
52C18	for Two Device	3/4"
52C19	for Two Device	1"
52C21	for Two Device	1-1/8"

Rectangular Boxes & covers


Depth:1-7/8",2-1/8"

CAT#
58361-1/2"
58361-3/4"
58361-1/2"&3/4"



Extension
Deep: 1-7/8"

CAT#
59361-1/2"
59361-3/4"
59361-1/2"&3/4"





CAT# 58C1



CAT# 58C36



CAT# 58C7



CAT# 58C16



CAT# 58C6



CAT# 58C5



CAT# 58C4

CAT#	DESCRIPTION
58C1	BLANK
58C36	TOGGLE SWITCH
58C7	DUPLEX RECEPTACLE
58C2	GFCI

CAT#	DESCRIPTION
58C6	1/2"K.O.
58C5	1-13/32"
58C4	1-19?32"

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

4"OCTAGONAL BOXES

E506419

1-1/2"DEEP BOXES




CAT#
54151-1/2"
54151-3/4"
52151-1/2"&3/4"
54151-1/2"&3/4"

2-1/8"DEEP BOXES



CAT#
54171-1/2"
54171-3/4"
54151-1/2"&3/4"

1-1/2"DEEP EXTENSIONS



CAT#
55151-1/2"
55151-1/2"&3/4"

4"OCTAGONAL BOXES COVERS



CAT# 54C1R



CAT# 54C6R

CAT#	DESCRIPTION
54C1R	Blank
54C6R	1/2"K.O.
54C1	Blank
54C6	1/2"K.O.



CAT# 54C1



CAT# 54C6

4-11/16"SQUARE BOXES

1-1/2"DEEP BOXES




CAT#
72151-1/2"
72151-3/4"
72151-1/2"&3/4"

2-1/8"DEEP BOXES



CAT#
72171-1/2"&3/4"
72171-1
72171-11/4
72171-3/4&1

4-11/16"SQUARE COVER



CAT#	DESCRIPTION	RAISED
72-C-1	Flat blank	-
72-C-6	Flat with 1/2"K.O.	-
72-C-3	Center blanked	5/8"
72-C-3-1/B2	With tapped ears	1/2"
72-C-3-3/4	on-2-23/32" centers	3/4"
72-C-3-1		1"

4-11/16"SQUARE COVERS




CAT# 72C1




CAT# 72C6

CAT#	DESCRIPTION
72C1	Flat,Blank
72C6	Flat,1/2"K.O.



CAT# 72C13



CAT# 72C18

CAT#	DESCRIPTION	RAISED
72C0	Flat,for One Device	-
72C62	for One Device	1/4"
72C13	for One Device	1/2"
72C14	for One Devices	3/4"

CAT#	DESCRIPTION	RAISED
72C00	Flat,for Two Devices	-
72C20	for Two Device	1/4"
72C17	for Two Device	1/2"
72C18	for Two Devices	3/4"

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


Satisfied Service TOPELE Powerful Solution

F

STEEL BOXES & COVERS


Cajas Metalicas

Material: Steel
Application:for use with conduit as junction box




TOPELE#		Trade Size(mm)			Concentric Knockours		Master QTY
PG	HDG	L	W	H	Size	Numbers	
SJB01	SJB11	118	76	40	3/8"&1/2"	6	80
SJB02	SJB12	100	65	65	1/2"&3/4"	6	60
SJB03	SJB13	100	100	65	1/2"&3/4"	8	60
SJB04	SJB14	150	150	100	3/4"&1"	8	20
SJB05	SJB15	200	100	100	3/4"&1"	8	20
SJB06	SJB16	200	200	100	3/4"&1"	12	10
SJB07	SJB17	300	200	100	3/4"&1"	14	10
SJB08	SJB18	300	200	150	3/4"&1"	14	8
SJB09	SJB19	400	300	150	3/4"&1"	20	4
SJB31	SJB41	100	100	100	3/4"&1"	8	40
SJB32	SJB42	150	100	100	3/4"&1"	8	40


Note: PG abbr.for pre-galvanized,**HDG** abbr.for Hot Dip Galvanized

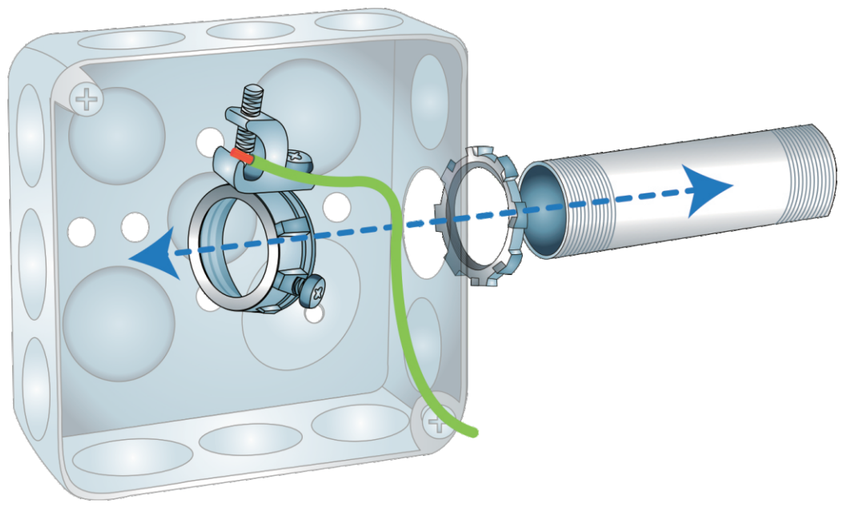


HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

















USB Receptacle




UR-15
15A Receptacle,Class 2 5VDC 4.2A USB Rating




UR-20
20A Receptacle,Class 2 5VDC 4.2A USB Rating

Smart Lock GFCI

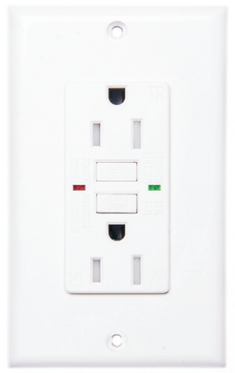

15TR/15TRWR
15A TR/TR WR with LED Light Indicator
Voltage:125v/250v Available

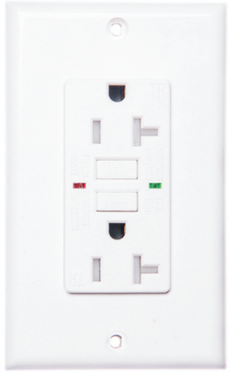

20TR/20TRWR
20A TR/TR WR with LED Light Indicator
Voltage:125v/250v Available

Floor Outlet

Material : brass



BR-USB



BS-GFCI

Material : Aluminum



AR-USB



AS-GFCI

USB outlet / common outlet are available.
Material: Stainless is available

G

GFCI & USB OUTLET

Toggle Switch



LD-2101
Single Pole



LD-2102
Three Way



LD-2103
20A, 120/277VAC
Commercial grade,
Single pole toggle switch

Decora Rocker Switch



LD-2001 —— Single Pole
LD-2002 —— Three Way



LD-2202 —— Single Pole



LD-2203 —— Single Pole

Single Receptacle



LD-3102

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service TOPELE Powerful Solution

G

GFCI & USB OUTLET

Standard Duplex Receptacle



LD-3010



LD-3016



LD-3011



LD-3014

Dimmer



LD-4001 Single pole, 600W
LD-4002 Single pole, 1000W
LD-4003 Three way, 600W
LD-4004 Three way, 1000W




LD-4001LA Single pole, 600W with light
LD-4002LA Single pole, 1000W with light
LD-4003LA Three way, 600W with light
LD-4004LA Three way, 1000W with light



LD-4040 single pole, 700W
LD-4041 single pole, 600W
LD-4042 Three Way, 700W
LD-4043 Three Way, 600W

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Wallplate

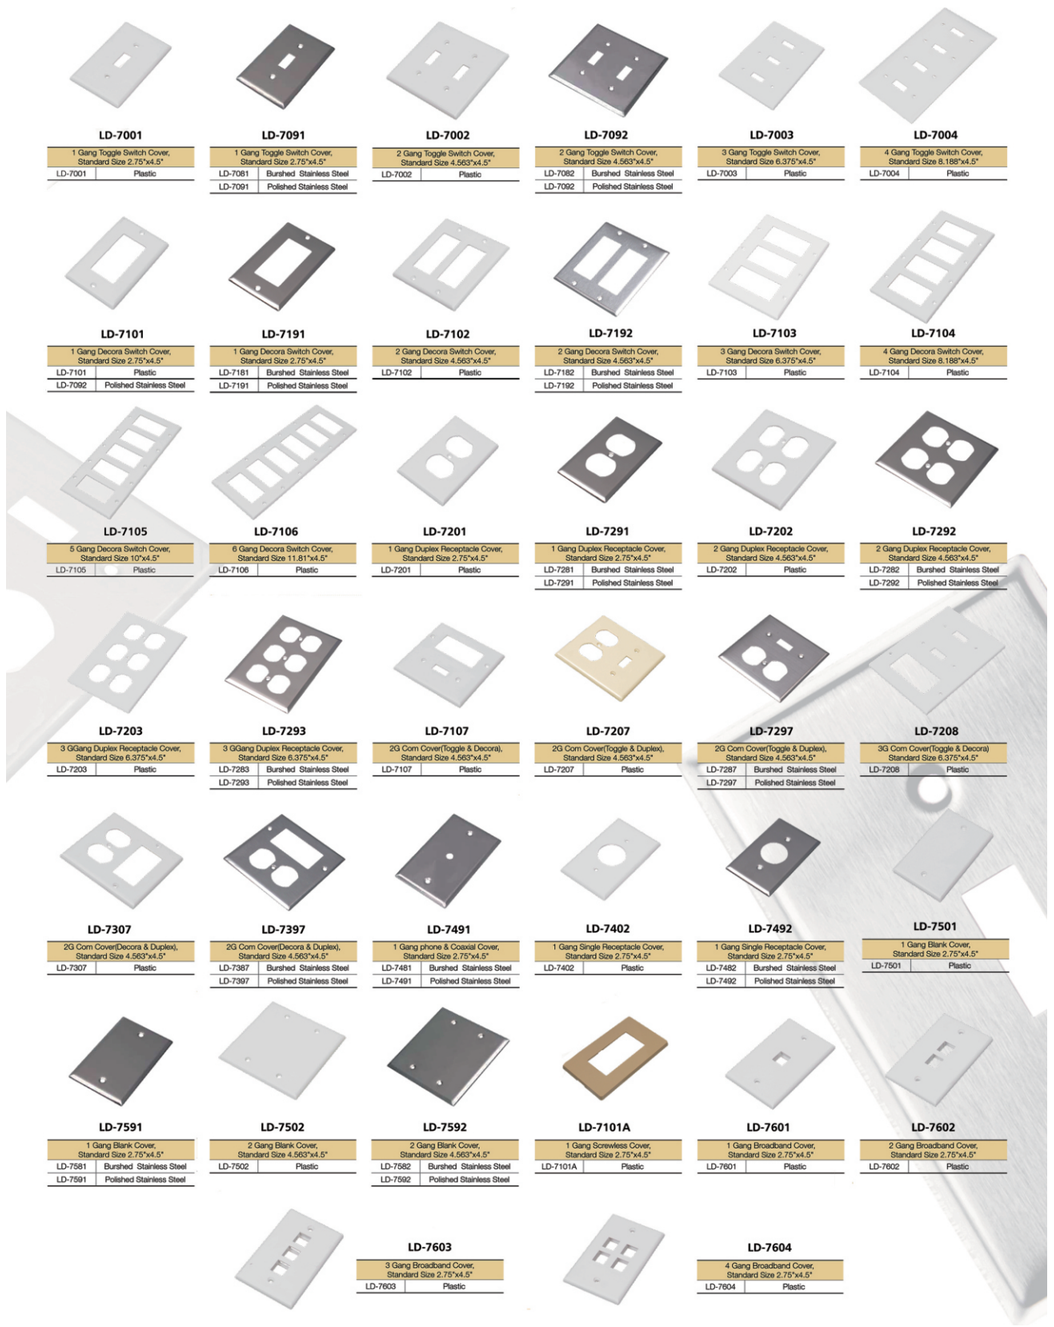

LD-7001	LD-7091	LD-7002	LD-7092	LD-7003	LD-7004
1 Gang Toggle Switch Cover, Standard Size 2.75"x4.5"	1 Gang Toggle Switch Cover, Standard Size 2.75"x4.5"	2 Gang Toggle Switch Cover, Standard Size 4.563"x4.5"	2 Gang Toggle Switch Cover, Standard Size 4.563"x4.5"	3 Gang Toggle Switch Cover, Standard Size 6.375"x4.5"	4 Gang Toggle Switch Cover, Standard Size 8.188"x4.5"
LD-7001 Plastic	LD-7081 Burshed Stainless Steel	LD-7002 Plastic	LD-7082 Burshed Stainless Steel	LD-7003 Plastic	LD-7004 Plastic
	LD-7091 Polished Stainless Steel		LD-7092 Polished Stainless Steel		

LD-7101	LD-7191	LD-7102	LD-7192	LD-7103	LD-7104
1 Gang Decora Switch Cover, Standard Size 2.75"x4.5"	1 Gang Decora Switch Cover, Standard Size 2.75"x4.5"	2 Gang Decora Switch Cover, Standard Size 4.563"x4.5"	2 Gang Decora Switch Cover, Standard Size 4.563"x4.5"	3 Gang Decora Switch Cover, Standard Size 6.375"x4.5"	4 Gang Decora Switch Cover, Standard Size 8.188"x4.5"
LD-7101 Plastic	LD-7181 Burshed Stainless Steel	LD-7102 Plastic	LD-7182 Burshed Stainless Steel	LD-7103 Plastic	LD-7104 Plastic
LD-7092 Polished Stainless Steel	LD-7191 Polished Stainless Steel		LD-7192 Polished Stainless Steel		

LD-7105	LD-7106	LD-7201	LD-7291	LD-7202	LD-7292
5 Gang Decora Switch Cover, Standard Size 10"x4.5"	6 Gang Decora Switch Cover, Standard Size 11.81"x4.5"	1 Gang Duplex Receptacle Cover, Standard Size 2.75"x4.5"	1 Gang Duplex Receptacle Cover, Standard Size 2.75"x4.5"	2 Gang Duplex Receptacle Cover, Standard Size 4.563"x4.5"	2 Gang Duplex Receptacle Cover, Standard Size 4.563"x4.5"
LD-7105 Plastic	LD-7106 Plastic	LD-7201 Plastic	LD-7281 Burshed Stainless Steel	LD-7202 Plastic	LD-7282 Burshed Stainless Steel
			LD-7291 Polished Stainless Steel		LD-7292 Polished Stainless Steel

LD-7203	LD-7293	LD-7107	LD-7207	LD-7297	LD-7208
3 GGang Duplex Receptacle Cover, Standard Size 6.375"x4.5"	3 GGang Duplex Receptacle Cover, Standard Size 6.375"x4.5"	2G Com Cover(Toggle & Decora), Standard Size 4.563"x4.5"	2G Com Cover(Toggle & Duplex), Standard Size 4.563"x4.5"	2G Com Cover(Toggle & Duplex), Standard Size 4.563"x4.5"	3G Com Cover(Toggle & Decora) Standard Size 6.375"x4.5"
LD-7203 Plastic	LD-7283 Burshed Stainless Steel	LD-7107 Plastic	LD-7207 Plastic	LD-7287 Burshed Stainless Steel	LD-7208 Plastic
	LD-7293 Polished Stainless Steel			LD-7297 Polished Stainless Steel	

LD-7307	LD-7397	LD-7491	LD-7402	LD-7492	LD-7501
2G Com Cover(Decora & Duplex), Standard Size 4.563"x4.5"	2G Com Cover(Decora & Duplex), Standard Size 4.563"x4.5"	1 Gang phone & Coaxial Cover, Standard Size 2.75"x4.5"	1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5"	1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5"	1 Gang Blank Cover, Standard Size 2.75"x4.5"
LD-7307 Plastic	LD-7387 Burshed Stainless Steel	LD-7481 Burshed Stainless Steel	LD-7402 Plastic	LD-7482 Burshed Stainless Steel	LD-7501 Plastic
	LD-7397 Polished Stainless Steel	LD-7491 Polished Stainless Steel		LD-7492 Polished Stainless Steel	

LD-7591	LD-7502	LD-7592	LD-7101A	LD-7601	LD-7602
1 Gang Blank Cover, Standard Size 2.75"x4.5"	2 Gang Blank Cover, Standard Size 4.563"x4.5"	2 Gang Blank Cover, Standard Size 4.563"x4.5"	1 Gang Screwless Cover, Standard Size 2.75"x4.5"	1 Gang Broadband Cover, Standard Size 2.75"x4.5"	2 Gang Broadband Cover, Standard Size 2.75"x4.5"
LD-7581 Burshed Stainless Steel	LD-7502 Plastic	LD-7582 Burshed Stainless Steel	LD-7101A Plastic	LD-7601 Plastic	LD-7602 Plastic
LD-7591 Polished Stainless Steel		LD-7592 Polished Stainless Steel			

LD-7603	LD-7604
3 Gang Broadband Cover, Standard Size 2.75"x4.5"	4 Gang Broadband Cover, Standard Size 2.75"x4.5"
LD-7603 Plastic	LD-7604 Plastic

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

HANGERS & SUPPORTS




H

HANGERS & SUPPORTS

Heavy-Duty Clevis Hanger

Material: Carbon Steel
Finished: Electro-Galvanzed & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 24"
UL Approved






Cat.No.	Conduit Size IN	Conduit Size R	Ø (MM)	Max Load LBS	Max Load KG	A (MM)	E (MM)	d (UNC)
TPCLH-050	1/2"	12.5	11.0	610	277	68	36	1/4"
TPCLH-075	3/4"	15.5	11.0	610	277	83	36	1/4"
TPCLH-100	1"	18.5	11.0	610	277	84	42	1/4"
TPCLH-125	1 1/4"	22.5	11.0	610	277	102	45	1/4"
TPCLH-150	1 1/2"	27.0	11.0	610	277	108	50	1/4"
TPCLH-200	2"	32.5	11.0	610	277	122	56	1/4"
TPCLH-250	2 1/2"	39.0	14.2	1130	513	142	80	3/8"
TPCLH-300	3"	47.5	14.2	1130	513	162	78	3/8"
TPCLH-350	3 1/2"	54.5	14.2	1130	513	171	80	3/8"
TPCLH-400	4"	62.0	17.2	1130	513	205	92	3/8"
TPCLH-500	5"	75.0	17.2	1430	649	222	80	1/2"
TPCLH-600	6"	87.7	21.0	1940	880	262	92	1/2"
TPCLH-800	8"	114	23.0	2000	907	316	85	5/8"
TPCLH-1000	10"	142	23.0	3600	1633	392	120	3/4"
TPCLH-1200	12"	168	23.0	3800	1724	457	120	3/4"
TPCLH-1400	14"	180	26.0	4200	1905	511	114	7/8"
TPCLH-1600	16"	205	26.0	4200	1905	557	114	1"
TPCLH-1800	18"	230	29.0	4800	2177	635	135	1-1/8"
TPCLH-2000	20"	255	32.0	4800	2177	699	135	1-1/4"
TPCLH-2400	24"	307	32.0	4800	2177	806	155	1-1/4"

Light-Duty Clevis Hanger

Material: Carbon Steel
Finished: Electro-Galvanzed & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 4"
UL Approved





Cat.No.	Conduit Size IN	Conduit Size R	Ø (MM)	Max Load LBS	Max Load KG	A (MM)	E (MM)	d (UNC)
LDCH-050L	1/2"	12.5	11.0	250	113	60	24	1/4"
LDCH-075L	3/4"	15.5	11.0	250	113	67	30	1/4"
LDCH-100L	1"	18.5	11.0	250	113	75	30	1/4"
LDCH-125L	1 1/4"	22.5	11.0	250	113	84	30	1/4"
LDCH-150L	1 1/2"	27.0	11.0	250	113	92	30	1/4"
LDCH-200L	2"	32.5	11.0	250	113	103	30	1/4"
LDCH-250L	2 1/2"	39.0	14.2	350	159	136	51	3/8"
LDCH-300L	3"	47.5	14.2	350	159	152	51	3/8"
LDCH-350L	3 1/2"	54.5	14.2	350	159	168	52	3/8"
LDCH-400L	4"	62.0	17.2	400	181	190	52	3/8"

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Satisfied Service TOPELE Powerful Solution


H

HANGERS & SUPPORTS

Swivel Band Hanger

Material: Carbon Steel
Finished: Pre-Galvanzed & Electro-Galvanized Copper Plated &Colored Epoxy Plated
Size Range: 1/2" through 8"
UL Approved
UNC and Metric Thread for choose






Cat.No.	Conduit Size IN	Conduit Size MM	Road Size IN	Road Size MM	A (MM)	8 (MM)	Max Load LBS	Max Load KG	Width & Thick (mm)
TPBH-050	1/2"	21.34	3/8"	M10	54.50	41.50	300	136	16X1.2
TPBH-075	3/4"	26.67	3/8"	M10	60.50	45.34	300	136	16X1.2
TPBH-100	1"	33.40	3/8"	M10	64.16	47.73	300	136	16X1.2
TPBH-125	1 1/4"	42.16	3/8"	M10	70.74	54.31	300	136	16X1.2
TPBH-150	1 1/2"	48.26	3/8"	M10	74.01	57.58	300	136	16X1.2
TPBH-200	2"	60.33	3/8"	M10	82.59	66.16	300	136	16X1.2
TPBH-250	2 1/2"	73.03	3/8"	M10	104.5	88.69	600	270	22X1.5
TPBH-300	3"	88.90	3/8"	M10	112.5	96.12	600	270	22X1.5
TPBH-350	3 1/2"	101.6	3/8"	M10	120.5	100.5	600	270	22X1.5
TPBH-400	4"	114.3	3/8"	M10	126.9	110.7	1000	453	22X1.5
TPBH-500	5"	141.3	1/2"	M12	145.5	135.7	1000	453	19X2.5
TPBH-600	6"	168.3	1/2"	M12	173.2	154.1	1200	544	19X2.5
TPBH-800	8"	219.3	1/2"	M12	211.5	192.4	1200	544	19X2.5

Riser Clamps

Material: Carbon Steel
Finished: Electro-Galvanized & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 24"
UL Approved






Cat.No.	Conduit Size IN	Conduit Size MM	Width IN	Width MM	Thick GA	Thick MM	Length(L) IN	Length(L) MM	Max Load LBS	Max Load KG	Bolt Size (Inch)
TP-050	1/2"	21.34	1.0	25	8Ga	4.0	8-5/8"	219	220	100	3/8"x1-1/4"
TP-075	3/4"	26.67	1.0	25	8Ga	4.0	8-13/16"	223	220	100	3/8"x1-1/4"
TP-100	1"	33.40	1.0	25	8Ga	4.0	9"	228	220	100	3/8"x1-1/4"
TP-125	1 1/4"	42.16	1.0	25	8Ga	4.0	9-1/4"	234	250	110	3/8"x1-1/4"
TP-150	1 1/2"	48.26	1.0	25	8Ga	4.0	10"	254	250	110	3/8"x1-1/2"
TP-200	2"	60.33	1.0	25	8Ga	4.0	10-1/4"	260	300	136	3/8"x1-1/2"
TP-250	2 1/2"	73.03	1.0	25	3Ga	6.0	11	279	400	180	3/8"x1-1/2"
TP-300	3"	88.90	1.0	25	3Ga	6.0	11-3/4"	298	500	220	3/8"x1-1/2"
TP-350	3 1/2"	101.6	1.0	25	3Ga	6.0	12-1/2"	317	600	270	1/2"x1-3/4"
TP-400	4"	114.3	1.0	25	3Ga	6.0	13	330	750	330	1/2"x1-3/4"
TP-500	5"	141.3	1.5	38	3Ga	6.0	14-1/8"	258	1500	670	1/2"x1-3/4"
TP-600	6"	168.3	1.5	38	3Ga	6.0	15-3/8"	390	1600	720	1/2"x2
TP-800	8"	219.3	1.5	38	3/8"	10.0	18-5/8"	473	2500	1100	5/8"x2-1/2"
TP-1000	10"	273.1	2.0	50	3/8"	10.0	20-5/8"	523	2500	1100	5/8"x2-1/2"
TP-1200	12"	325.8	2.0	50	1/2"	12.0	23"	584	2700	1200	5/8"x2-1/2"
TP-1400	14"	357.8	2.0	50	1/2"	12.0	24-1/2"	622	2700	1200	5/8"x2-1/2"
TP-1600	16"	409.9	2.5	64	5/8"	16.0	27"	685	2900	1300	3/4"x3"
TP-1800	18"	459.9	2.5	64	5/8"	16.0	29"	736	2900	1300	3/4"x3"
TP-2000	20"	512.0	3.0	64	5/8"	16.0	31-5/8"	803	2900	1300	3/4"x3"

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com

Strut Channel




Material: Steel **Finish:** HDG,Pre-Galvanized
Application:for use to support conduits, fixtures, and ventilation systems form beams and other structural systems

Cross Section		Wall Thickness		Length		Available Option			
Metric	US	Metric	US	Metric	US	Model		Surface Finish	
41mmX41mm	1-5/8" X 1-5/8"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip

Tolerances: Length ± 0.25"(6.35 mm)
Note: Customized thickness or length will also be produced upon special request


Riel RC



Material: Steel
Application: for use with RC Clamp to support EMT and Conduits

Trade Size	Thickness	Available Option			
		Length		Surface Finish	
19mmX35mm	1.2/1.5/2.0mm	1meter	3meter	Color Zinc	White Zinc


Riel Din



Material: Steel
Application: for component installation together with end brackets for holding and isolating the components.

Trade Size	Thickness	Short-circuit Strength	Available Option					
			Length		Model		Surface Finish	
35mmX7.5mm	1mm	16mm²	1meter	2meter	Slotted	Plain	Color Zinc	White Zinc

Beam Clamp



Material: Malleable Iron
Application: Clamps on beam, girder or similar structure to provide a mounting base

TOPELE#	Trade Size	Load Rating	Master QTY	Dim A (inch)	Dim B (inch)
BC01	1"	250 LBS	200	1.000	1.250
BC02	2"	750 LBS	50	2.000	2.000
BC03	2-1/2"	1250 LBS	30	2.500	2.375

Note: Load Ratings are based on bottom hole of Beam Clamp.

Satisfied Service TOPELE Powerful Solution

HANGERS & SUPPORTS

Threaded Rod




Material: Steel
Application:brings versatility to jobsite, form hanging and mounting to retrofitting and bracing

Trade Size	Diameter		Thread Size	Specification	Length	Strength (PSI)		Each Bundle	
	Inch	mm			(Meter)	Yield	Tensile	QTY	Wt.(kg)
1/4"	0.250	6.35	1/4"-20	ASTM A307 Grade 2	3	40,000	60,000	50	25
3/8"	0.375	9.53	3/8"-16	ASTM A307 Grade 2	3	40,000	60,000	25	30
1/2"	0.500	12.70	1/2" -13	ASTM A307 Grade 2	3	40,000	60,000	10	22
M6	0.236	6	1	DIN 975 Class 4.6	3	34,000	58,000	50	23
M8	0.315	8	1.25	DIN 975 Class 4.6	3	34,000	58,000	25	20
M10	0.394	10	1.5	DIN 975 Class 4.6	3	34,000	58,000	20	25
M12	0.472	12	1.75	DIN 975 Class 4.6	3	34,000	58,000	15	29
M14	0.551	14	2	DIN 975 Class 4.6	3	34,000	58,000	10	25
M16	0.630	16	2	DIN 975 Class 4.6	3	34,000	58,000	10	34
M18	0.709	18	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	23
M20	0.787	20	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	29
M22	0.866	22	2.5	DIN 975 Class 4.6	3	34,000	58,000	3	22
M24	0.945	24	3	DIN 975 Class 4.6	3	34,000	58,000	3	25
M27	1.063	27	3	DIN 975 Class 4.6	3	95,000	120,000	3	32
M30	1.181	30	3.5	DIN 975 Class 4.6	3	95,000	120,000	2	27
M33	1.299	33	3.5	DIN 975 Class 4.6	3	95,000	120,000	1	17
M36	1.417	36	4	DIN 975 Class 4.6	3	95,000	120,000	1	19

Note: Customized length will also be produced upon special request

Channel Nut with Spring




Material: Steel
Application:for use to attach strut fittings to the open fach of channels

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
CNS1	M6	*	200	1.339	0.748
CNS2	M8	*	200	1.339	0.748
CNS3	M10	*	200	1.339	0.748
CNS4	M12	*	200	1.339	0.748
CNS9	1/4"	*	200	1.339	0.748
CNS10	5/16"	*	200	1.339	0.748
CNS11	3/8"	*	200	1.339	0.748
CNS12	1/2"	*	200	1.339	0.748

Note: If you need short type or without spring,please contact us.

Top Beam Clamp



Material: Malleable Iron
Application: Clamps on beam, girder or similar structure to provide a mounting base

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
BC11	M8	1200LBS	100	19.30	20.00
BC12	M10	2500LBS	100	20.40	23.00
BC13	M12	3500LBS	100	26.60	27.00

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com


Pipe Clamp with Rubber



Material: Steel
Application: mounting element with rubber insulation for EMT,IMC and Rigid

TOPELE#	Trade Size	Shelf QTY	Master QTY	Top Thread	OD RANGE
PCWR-50	1/2"	20	200	M8+M10	17-23
PCWR-75	3/4"	16	160	M8+M10	23-29
PCWR-100	1"	16	160	M8+M10	29-35
PCWR-125	1-1/4"	*	*	M8+M10	37-43
PCWR-150	1-1/2"	10	100	M8+M10	43-49
PCWR-200	2"	10	100	M8+M10	55-61
PCWR-250	2-1/2"	*	*	M8+M10	70-75
PCWR-300	3"	*	*	M8+M10	85-90
PCWR-350	3-1/2"	*	*	M8+M10	99-103
PCWR-400	4"	*	*	M8+M10	110-115

Conduit Hanger



Standard: UL 2239 and CSA C22.2 No.18.4-04
Material: Steel
Application: for use to suspend conduit from overhead supports

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
CH-50	1/2"	*	400	1.878	0.751
CH-75	3/4"	*	400	2.125	0.751
CH-100	1"	*	300	2.435	0.875
CH-125	1-1/4"	*	300	2.752	0.875
CH-150	1-1/2"	*	50	3.125	1.000
CH-200	2"	*	50	3.875	1.000
CH-250	2-1/2"	*	50	4.625	1.250
CH-300	3"	*	25	5.500	1.250
CH-350	3-1/2"	*	25	5.752	1.250
CH-400	4"	*	10	6.245	1.250

Conduit Fasteners




Material: Steel
Application: provides for fast and easy installation with pliers

TOPELE#	Trade Size	Shelf QTY	Master QTY	Vertical load	Horizontal Load
CF-50/75	1/2"&3/4"	*	800	100 LBS	25 LBS
CF-100	1"	*	500	100 LBS	25 LBS
CF-125	1-1/4"	*	250	100 LBS	25 LBS
CF-150	1-1/2"	*	250	100 LBS	25 LBS
CF-200	2"	*	250	100 LBS	25 LBS

Satisfied Service TOPELE Powerful Solution

H HANGERS & SUPPORTS


U Bolt



Material: Steel
Application: for use to run and support EMT,IMC and Rigid in electrical systems

TOPELE#	Trade Size	Thread Size	Dim A		Dim B		Dim C	
			Inch	mm	Inch	mm	Inch	mm
U50	1/2"	5/16"-18	1.25	31.75	2.38	60.45	1.50	38.10
U75	3/4"	5/16"-18	1.44	36.58	2.75	69.85	1.50	38.10
U100	1"	5/16"-18	1.69	42.93	3.00	76.20	1.50	38.10
U125	1-1/4"	5/16"-18	2.06	52.32	3.13	79.50	1.50	38.10
U150	1-1/2"	5/16"-18	2.31	58.67	3.50	88.90	1.50	38.10
U200	2"	5/8"-16	2.81	71.37	4.38	111.25	1.88	47.75
U250	2-1/2"	5/8"-16	3.38	85.85	4.75	120.65	1.88	47.75
U300	3"	5/8"-16	4.00	101.60	5.38	136.65	1.88	47.75
U350	3-1/2"	5/8"-16	4.50	114.30	5.75	146.05	1.88	47.75
U400	4"	5/8"-16	5.00	127.00	6.63	168.40	1.88	47.75


Strut Clamp



Standard: UL 2239 and CSA C22.2 No.18.4-04
Material: Steel
Application: for use to support EMT, Rigid or IMC conduit to the strut channel

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
TPSC-050	1/2"	*	400	2.302	1.241
TPSC-075	3/4"	*	350	2.458	1.241
TPSC-100	1"	*	300	2.680	1.241
TPSC-125	1-1/4"	*	300	3.210	1.241
TPSC-150	1-1/2"	*	250	3.415	1.241
TPSC-200	2"	*	200	4.000	1.241
TPSC-250	2-1/2"	*	150	5.000	1.241
TPSC-300	3"	*	150	5.555	1.241
TPSC-350	3-1/2"	*	*	6.000	1.241
TPSC-400	4"	*	100	6.500	1.241

RC Clamp



Material: streel
Application: for use to support EMT and Conduits to tne Riel RC 19X35

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCC-50	1/2"	*	600	1.984	1.024
RCC-75	3/4"	*	600	2.283	1.024
RCC-100	1"	*	500	2.626	1.024
RCC-125	1-1/4"	*	350	3.055	1.024
RCC-150	1-1/2"	*	350	3.181	1.024
RCC-200	2"	*	300	3.780	1.024
RCC-250	2-1/2"	*	*	4.488	1.024
RCC-300	3"	*	*	5.197	1.024
RCC-400	4"	*	*	*	1.024

HANGZHOU TOPELE ELECTRICAL CO.,LTD
Tel :+86-571-83733315 www.topele.com Email:sales@topele.com