


Contact: Mr. Jeff Xu

Tel: 86-0571-82151572/ 86-15924157229 Email: sales@topele.com QQ/Wechat: 893532773 Whatsapp: 0086-15924157229

Address: Room 1106, No.438 JingCheng road, Hangzhou, Zhejiang, China.55

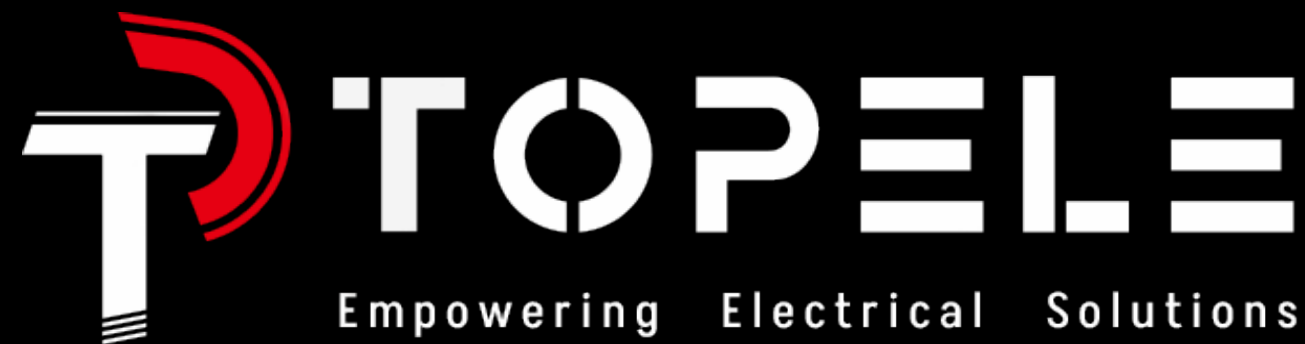

Hangzhou Topele Electrical Co.,Limited

www.topele.com



AMERICAN STANDARD
CONDUIT & ACCESSORIES



Contact: Mr. Jeff Xu

Tel: 86-0571-82151572/ 86-15924157229

Email: sales@topele.com

QQ/Wechat: 893532773

Whatsapp: 0086-15924157229

Address: Room 1106, No.438 JingCheng road, Hangzhou, Zhejiang, China.55



Hangzhou Topele Electrical Co., Limited

www.topele.com



TOPELE

Empowering Electrical Solutions



AMERICAN STANDARD
CONDUIT & ACCESSORIES

Satisfied Service




Powerful Solution

Satisfied Service



Powerful Solution

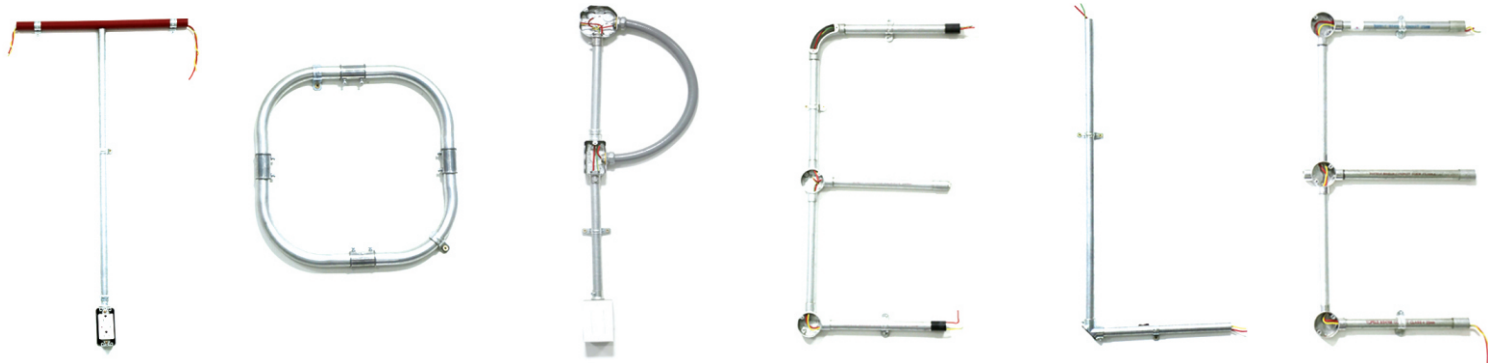

A Aluminum Conduit & Fittings

B EMT Conduit & Fittings

C Rigid & IMC Conduit & Fittings








D Flexible Conduit & Fittings

E Conduit Bodies & Proof Boxes

F Metal BOX & Covers

G GFCI & USB Outlet

H Hangers & Supports

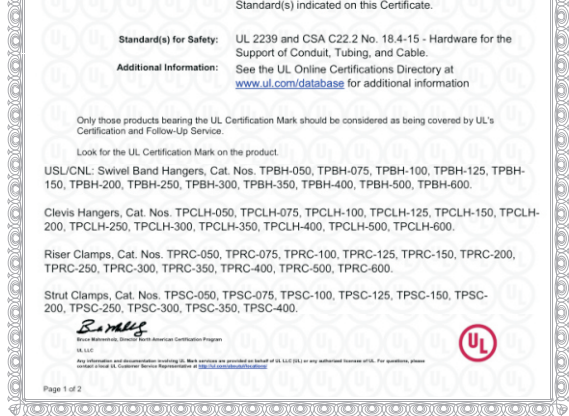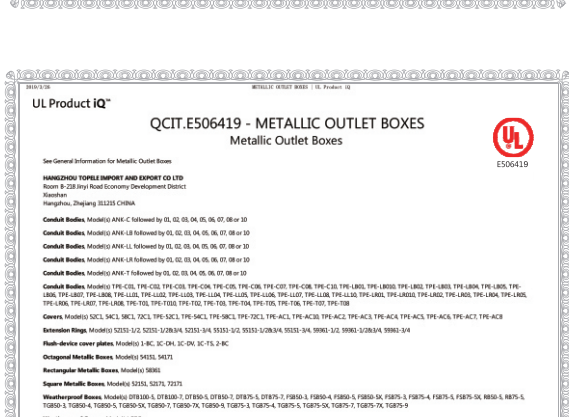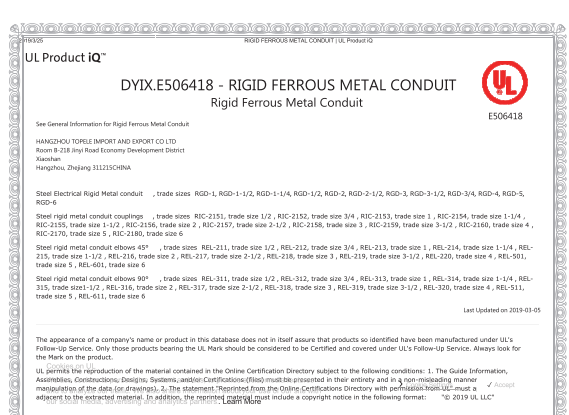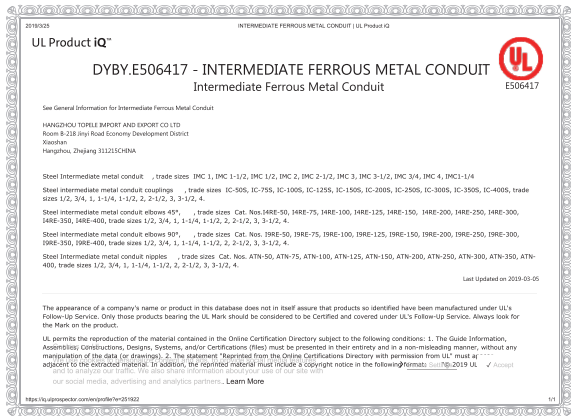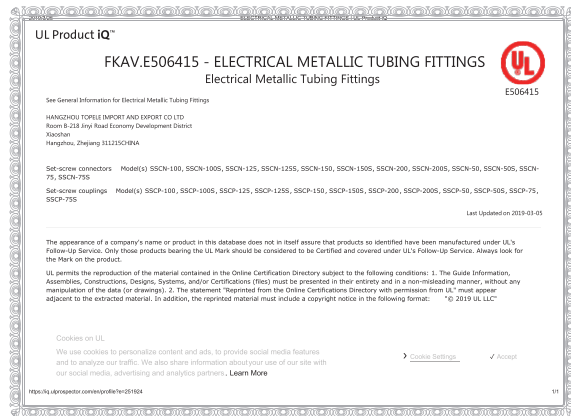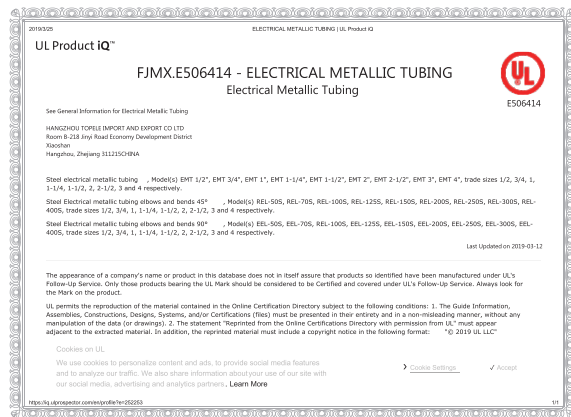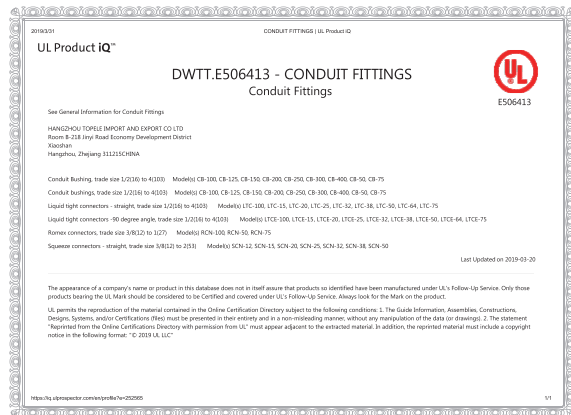



ⓘ Aluminum Rigid Conduit

RAC Dimensions and Weights chart (standard:UL6A ANSI S80.8 WW-C-540C)								
Trade Size	Metric Designator	Nominal in	Outside mm	Nominal Wall Thickness in mm		Approx.Wt.Per 100 Ft. (30.5M) ib. kg		Qty.In Master Bundle pcs
1/2	16	0.84	21.3	0.104	2.6	12.7	28.1	127
3/4	21	1.05	26.7	0.107	2.7	17.0	37.4	91
1	27	1.315	33.4	0.126	3.2	24.7	54.5	61
1-1/4	35	1.66	42.2	0.133	3.4	32.5	71.6	61
1-1/2	41	1.9	48.3	0.138	3.5	40.2	88.7	37
2	53	2.375	60.3	0.146	3.7	53.8	118.5	37
2-1/2	63	2.875	73	0.193	4.9	85.8	189.2	19
3	78	3.5	88.9	0.205	5.2	111.7	246.3	19
3-1/2	91	4	101.6	0.215	5.5	134.1	295.6	10
4	103	4.5	114.3	0.225	5.7	158.9	350.2	10
5	129	5.563	141.3	0.245	6.2	217.3	479.0	7
6	155	6.625	168.3	0.266	6.8	286.0	630.5	7

Outside diameter tolerances:
+/- .005 in.(.13mm) for trade sizes 1/2"(16mm)through 2"(53mm) ; +/- .010in.(.25mm)for trade sizes 2-1/2"(63mm)
+/- .015 in.(.38mm) for trade sizes 3"(78mm) ; +/- .020in.(.51mm)for trade sizes 3-1/2"(91mm)and 4"(103mm)
Note: Length=10ft.(3.05m)with a tolerance of +/- .25"(6.35mm)

ⓘ Aluminum EMT Conduit

EMT Dimensions and Weights chart (standard:UL797 ANSI S80.3)								
Trade Size	Metric Designator	Nominal in	Outside mm	Nominal Wall Thickness in mm		Approx.Wt.Per 100 Ft. (30.5M) ib. kg		Qty.In Master Bundle ft. m
1/2	16	0.706	17.9	0.042	1.07	10.3	4.7	7000 2135
3/4	21	0.922	23.4	0.049	1.25	15.8	7.2	5000 1525
1	27	1.163	29.5	0.057	1.45	23.3	10.6	3000 915
1-1/4	35	1.51	38.4	0.065	1.65	34.7	15.8	2000 610
1-1/2	41	1.74	44.2	0.065	1.65	40.2	18.3	1500 457.5
2	53	2.197	55.8	0.065	1.65	51.2	23.3	1200 366
2-1/2	63	2.875	73	0.072	1.83	74.6	33.9	610 186.1
3	78	3.5	88.9	0.072	1.83	91.1	41.4	510 155.6
3-1/2	91	4	101.6	0.083	2.11	120.1	54.6	370 112.9
4	103	4.5	114.3	0.083	2.11	135.5	61.6	300 91.5

Outside diameter tolerances:
+/- .005 in.(.13mm) for trade sizes 1/2"(16mm)through 2"(53mm) ; +/- .010in.(.25mm)for trade sizes 2-1/2"(63mm)
+/- .015 in.(.38mm) for trade sizes 3"(78mm) ; +/- .020in.(.51mm)for trade sizes 3-1/2"(91mm)and 4"(103mm)
Note: Length=10ft.(3.05m)with a tolerance of +/- .25"(6.35mm)
The length of straight conduit, and the weight of finished zinc-coated conduit or bare threaded tube to be coated with an Alternate corrosion-resistant coating with one coupling.



Conduit Nipples

Size	OD (in)	Length Close(in)	Pipe Nipple lengths(in)												
1/2	0.840	1-1/8	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3/4	1.015	1-3/8	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1	1.315	1-1/2		2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1-1/4	1.660	1-5/8		2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
1-1/2	1.900	1-3/4		2	2-1/2	3	2-1/2	4	4-1/2	5	5-1/2	6	8	10	10
2	2.375	2			2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
2-1/2	2.875	2-1/2				3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3	3.500	2-5/8				3	3-1/2	4	4-1/2	5	5-1/2	6	8	10	10
3-1/2	4.000	2-3/4						4	4-1/2	5	5-1/2	6	8	10	10
4	4.500	2-7/8						4	4-1/2	5	5-1/2	6	8	10	10
5	5.563	3							4-1/2	5	5-1/2	6	8	10	10
6	6.625	3-1/8							4-1/2	5	5-1/2	6	8	10	10


Rigid Standard Elbows

Standard Radius				
Size	Radius	90° B Dim.	45° B Dim.	45° C Dim.
1/2	4	6-3/16	7-13/16	3-1/4
3/4	4-1/2	6-3/4	8-11/16	3-5/8
1	5-3/4	8-5/8	9-3/16	3-13/16
1-1/4	7-1/4	10-1/16	10-11/16	4-7/16
1-1/2	8-1/4	11-9/16	11-13/16	4-7/8
2	9-1/2	14-1/16	14-7/8	6-1/8
2-1/2	10-1/2	16	18-15/16	7-9/16
3	13	19-11/16	20-9/16	8-1/2
3-1/2	15	22-3/16	23-3/16	9-5/8
4	16	23-1/8	24-1/2	10-1/8
5	24	36-1/8	38-1/4	15-7/8
6	30	42-15/16	42	17-3/8

EMT Special Elbows

Standard Radius				
Radius	Radius	90° B Dim.	45° B Dim.	45° C Dim.
12	1 thru 2-1/2	21	23-7/8	9-7/8
15	1 thru 3	24	26	10-3/4
18	1 thru 4	28	29-3/4	12-3/8
24	1 thru 4	35	35-3/4	14-13/16
30	1 thru 5	41	40	16-9/16
36	1 thru 6	47	44-1/4	18-5/16
42	1 thru 6	54	50-1/8	20-13/16
48	1 thru 6	60	54-3/8	22-9/16

Conduit Couplings

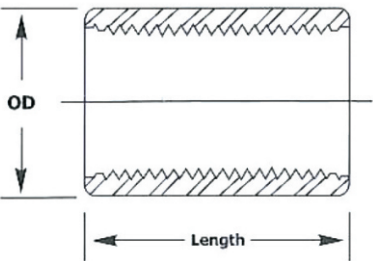

Size	Threads per inch	O.D.	Min Length
1/2	14	1.010	1-5/8
3/4	14	1.250	1-41/64
1	11-1/2	1.525	1-31/32
1-1/4	11-1/2	1.869	2-1/32
1-1/2	11-1/2	2.155	2-1/16
2	11-1/2	2.650	2-1/8
2-1/2	8	3.250	3-2/16
3	8	3.870	3-5/16
3-1/2	8	4.500	3-13/32
4	8	4.875	3-33/64
5	8	6.000	3-61/64
6	8	7.100	4-1/4

EMT CONDUIT & FITTINGS



① EMT - Electrical Metallic Tubing

Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3

Application: Used as an unthreaded steel raceway for protection and routing of electrical wiring



Trade Size	Metric Designator	Outside Diameter		Thickness A		Thickness B		Length		QTY/Bundle
		Inch	mm	Inch	mm	Inch	mm	Feet	meter	
1/2"	16	0.706	17.93	0.042	1.07	0.033	0.85	10	3.05	20
3/4"	21	0.922	23.42	0.049	1.25	0.039	1.00	10	3.05	15
1"	27	1.163	29.54	0.057	1.45	0.043	1.10	10	3.05	10
1-1/4"	35	1.510	38.35	0.065	1.65	0.051	1.30	10	3.05	5
1-1/2"	41	1.740	44.20	0.065	1.65	0.051	1.30	10	3.05	5
2"	53	2.197	55.80	0.065	1.65	0.055	1.40	10	3.05	5
2-1/2"	63	2.875	73.03	0.072	1.83	*	*	10	3.05	3
3"	78	3.500	88.90	0.072	1.83	*	*	10	3.05	3
4"	103	4.500	114.30	0.083	2.11	*	*	10	3.05	1

Tolerances: Length $\pm 0.25"$ (6.35 mm), Outside Diameter 1/2" through 2" $\pm 0.005"$ (0.13 mm), 2 1/2" through 4" $\pm 0.016"$ (0.41 mm),

Note: If you need different thickness or length, please contact

① EMT Elbow 90°

Standard: UL 797, CSA C22.2 NO.83.1 and ANSI C80.3

Material: Steel

Application: for use to couple two ends of EMT to form 90 degree bend



TOPELE#	Trade Size	Shelf QTY	Master QTY	Radius(inch)	Offset(inch)
EEL-50s	1/2"	*	150	4.000	6.250
EEL-70s	3/4"	*	100	4.500	7.000
EEL-100s	1"	*	50	5.750	9.250
EEL-125s	1-1/4"	*	30	7.250	10.500
EEL-150s	1-1/2"	*	25	8.250	12.500
EEL-200s	2"	*	20	9.500	14.250
EEL-250s	2-1/2"	*	2	10.500	19.000
EEL-300s	3"	*	2	13.000	20.000
EEL-400s	4"	*	2	16.000	26.000

① EMT Connector Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond EMT to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCW-50	1/2"	50	500	1.125	0.722
SSCW-75	3/4"	25	250	1.405	0.945
SSCW-100	1"	20	200	1.594	1.181
SSCW-125	1-1/4"	*	200	1.907	1.535
SSCW-150	1-1/2"	*	100	2.217	1.772
SSCW-200	2"	*	60	2.486	2.217
SSCW-250	2-1/2"	*	30	3.125	2.913
SSCW-300	3"	*	30	3.346	3.563
SSCW-400	4"	*	24	3.740	4.488

① EMT Coupling Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to couple two ends of EMT

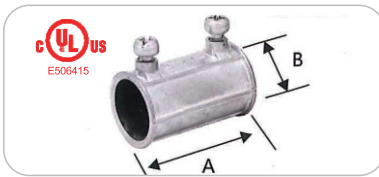


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50	1/2"	50	500	1.500	0.720
SSCP-75	3/4"	25	250	1.880	0.945
SSCP-100	1"	20	200	2.059	1.181
SSCP-125	1-1/4"	*	150	2.504	1.522
SSCP-150	1-1/2"	*	150	2.883	1.753
SSCP-200	2"	*	60	3.405	2.220
SSCP-250	2-1/2"	*	30	4.000	2.913
SSCP-300	3"	*	30	4.488	3.563
SSCP-400	4"	*	24	5.236	4.488

① EMT Connector Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to bond EMT to a box or enclosure

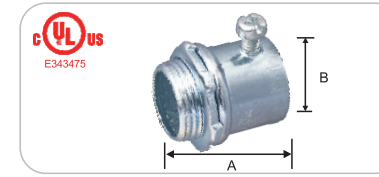


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCN-50S	1/2"	40	400	1.452	0.722
SSCN-75S	3/4"	25	250	1.525	0.961
SSCN-100S	1"	*	250	1.625	1.185
SSCN-125S	1-1/4"	*	120	2.250	1.541
SSCN-150S	1-1/2"	*	100	2.520	1.785
SSCN-200S	2"	*	75	2.760	2.217
SSCN-250S	2-1/2"	*	12	3.315	2.818
SSCN-300S	3"	*	8	3.750	3.550
SSCN-400S	4"	*	6	4.185	4.550

① EMT Coupling Set Screw Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to couple two ends of EMT

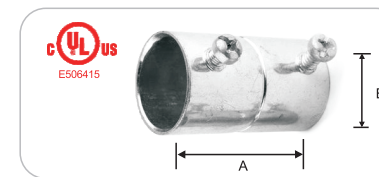


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SSCP-50S	1/2"	50	500	1.680	0.722
SSCP-75S	3/4"	25	250	2.120	0.961
SSCP-100S	1"	*	200	2.498	1.185
SSCP-125S	1-1/4"	*	100	3.250	1.541
SSCP-150S	1-1/2"	*	80	3.745	1.785
SSCP-200S	2"	*	50	4.000	2.217
SSCP-250S	2-1/2"	*	12	4.248	2.818
SSCP-300S	3"	*	8	4.500	3.550
SSCP-400S	4"	*	6	5.000	4.550

① EMT Connector Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond EMT to a box or enclosure

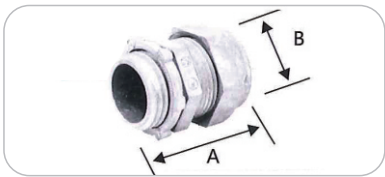

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
570	1/2"	50	500	1.268	0.724
571	3/4"	25	250	1.343	0.945
572	1"	20	200	1.463	1.181
573	1-1/4"	*	100	1.795	1.527
574	1-1/2"	*	100	1.894	1.756
575	2"	*	60	2.063	2.217

① EMT Coupling Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to couple two ends of EMT



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
580	1/2"	50	500	1.539	0.734
581	3/4"	25	250	1.589	0.939
582	1"	20	200	1.622	1.181
583	1-1/4"	*	100	2.063	1.528
584	1-1/2"	*	100	2.228	1.760
585	2"	*	60	2.315	2.213

① EMT Connector Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to bond EMT to a box or enclosure



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
651S	1/2"	*	300	1.748	0.722
652S	3/4"	*	250	1.800	0.961
653S	1"	*	200	2.000	1.185
654S	1-1/4"	*	75	2.760	1.541
655S	1-1/2"	*	75	3.000	1.785
656S	2"	*	50	3.190	2.217
657S::	2-1/2"	*	12	3.878	2.818
658S::	3"	*	8	4.375	3.550
660S::	4"	*	6	4.745	4.550

① EMT Coupling Compression Type

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to couple two ends of EMT




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
661S	1/2"	*	300	1.685	0.722
662S	3/4"	*	200	2.000	0.961
663S	1"	*	150	2.124	1.185
664S	1-1/4"	*	75	3.065	1.541
665S	1-1/2"	*	75	3.125	1.785
666S	2"	*	50	3.374	2.217
667S	2-1/2"	*	12	4.876	2.818
668S	3"	*	8	5.200	3.550
670S	4"	*	6	5.725	4.550

① EMT Connector Set Screw Type

Material: Aluminum

Application: for use to bond EMT to a boc or enclosure

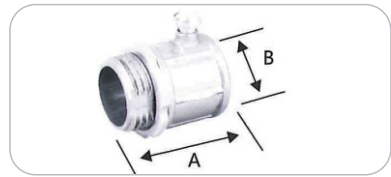


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
1530	1/2"	100	1000	1.124	0.722
1531	3/4"	50	500	1.385	0.945
1532	1"	40	400	1.545	1.181
1533	1-1/4"	*	200	1.905	1.535
1534	1-1/2"	*	125	2.215	1.772
1535	2"	*	100	2.485	2.217
1537	3"	*	30	3.368	3.550
1539	4"	*	24	3.745	4.550

① EMT Coupling Set Screw Type

Material: Aluminum

Application: for use to couple two ends of EMT

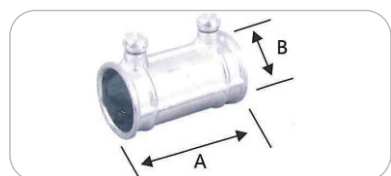

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
1540	1/2"	100	1000	1.500	0.720
1541	3/4"	50	500	1.875	0.945
1542	1"	40	300	2.000	1.181
1543	1-1/4"	*	200	2.500	1.522
1544	1-1/2"	*	125	2.850	1.753
1545	2"	*	100	3.400	2.220
1547	3"	*	30	4.650	3.550
1549	4"	*	24	5.465	4.550


Ⓢ EMT to Flex Coupling

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to couple EMT to flexible metal conduit or armored cable

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
EF01	1/2"--3/8"	50	500	1.260	0.58~0.62
EF02	1/2"	30	300	1.520	0.74~0.95
EF03	3/4"	20	200	1.830	0.88~1.12
EF04	1"	20	200	1.970	1.14~1.38

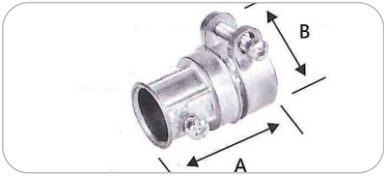


Ⓢ EMT Strap One Hole

Standard: UL 2239 and CSA C22.2 No. 18.4-04

Material: Steel

Application: for use to mount EMT to any surface

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
DSP50	1/2"	150	1500	1.788	0.565
DSP75	3/4"	100	1000	1.950	0.622
DSP100	1"	50	500	2.245	0.750
DSP125	1-1/4"	25	250	2.852	0.882
DSP150	1-1/2"	20	250	3.158	1.000
DSP200	2"	15	150	3.928	1.100
DSP250	2-1/2"	*	120	5.000	1.300
DSP300	3"	*	100	5.551	1.300
DSP400	4"	*	60	6.860	1.300

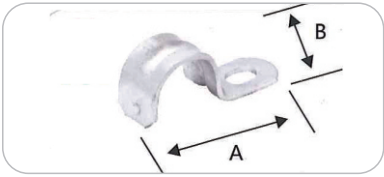


Ⓢ EMT Strap Two Hole

Standard: UL 2239 and CSA C22.2 No. 18.4-04

Material: Steel

Application: for use to mount EMT to any surface

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TSP50	1/2"	100	1000	2.115	0.565
TSP75	3/4"	100	1000	2.650	0.622
TSP100	1"	50	500	3.000	0.750
TSP125	1-1/4"	25	250	3.650	0.882
TSP150	1-1/2"	20	200	4.200	1.000
TSP200	2"	15	150	4.900	1.100
TSP250	2-1/2"	*	100	5.900	1.300
TSP300	3"	*	100	6.680	1.300
TSP400	4"	*	80	8.285	1.300

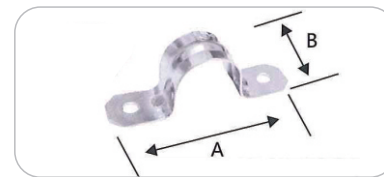

Ⓢ Inside corner Pull Elbow

Material: Zinc

Application: for use to couple two ends of EMT to form 90 degree bend

CAT#	Size
ICPE-50	1/2"
ICPE-75	3/4"
ICPE-100	1"




Ⓢ EMT Pull Elbow

Material: Zinc

Application: for use to couple two ends of EMT to form 90 degree bend

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE01	1/2"	20	200	2.500	1.320
PE02	3/4"	12	120	2.755	1.450
PE03	1"	*	100	3.862	1.950

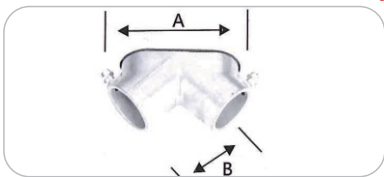


Ⓢ Pull Elbow Combination Type

Material: Zinc

Application: for use to couple two ends of EMT, rigid conduit or IMC to form 90 degree bend

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE31	1/2"	20	200	2.500	1.320
PE32	3/4"	12	120	2.755	1.450
PE33	1"	*	100	3.862	1.950

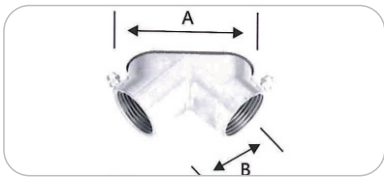

Ⓢ EMT to Romex Connector

Material: Zinc

Application: for connecting EMT and cable

TOPELE#	Trade Size	Shelf QTY	Master QTY
ERC-50	1/2"	*	200
ERC-75	3/4"	*	120
ERC-100	1"	*	100




Ⓢ Service Entrance Cap Clamp Type

Material: Aluminum

Application: for use to bring overhead electrical service into buildings

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SEC01	1/2"	*	100	2.615	2.000
SEC02	3/4"	*	100	2.752	2.368
SEC03	1"	*	100	3.246	2.621
SEC04	1-1/4"	*	50	3.248	3.000
SEC05	1-1/2"	*	50	4.752	3.312
SEC06	2"	*	25	6.000	4.618
SEC07	2-1/2"	1	4	7.500	6.000
SEC08	3"	1	4	9.000	8.000
SEC10	4"	1	4	9.000	8.000

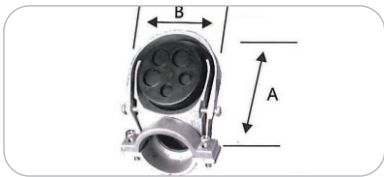




① EMT Connector Set Screw Type 90°

Material: Zinc

Application: for connecting EMT to a box or enclosure when 90 degree turns are needed

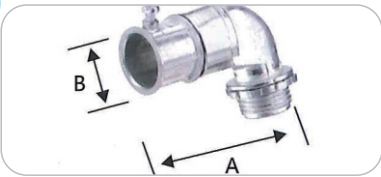


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90531	3/4"	*	150	2.638	0.945
90532	1"	*	100	2.992	1.181
90533	1-1/4"	*	50	3.543	1.535

① EMT Connector Compression Type 90°

Material: Zinc

Application: for connecting EMT to a box or enclosure when 90 degree turns are needed

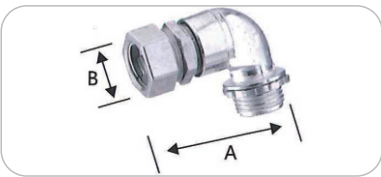

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90571	3/4"	*	150	2.638	0.945
90572	1"	*	100	2.913	1.181
90573	1-1/4"	*	50	3.425	1.527

① Conduit Bender

Material: Aluminum

Application: for bending steel conduit to form a bend fast and easily



TOPELE#	Trade Size	Shelf QTY	Master QTY
CB01	1/2"EMT	*	10
CB02	3/4"EMT, 1/2"Rigid	*	5
CB03	1" EMT, 3/4"Rigid	*	5

① Conduit Bender

Material: Malleable Iron

Application:for bending steel conduit to form a bend fast and easily



TOPELE#	Trade Size	Shelf QTY	Master QTY
MCB01	1/2"EMT	*	5
MCB02	3/4"EMT, 1/2"Rigid	*	5
MCB03	1" EMT, 3/4"Rigid	*	5



IMC - Intermediate Metal Conduit

Standard: UL 1242, ANSI C80.6

Application: Used as a threadable steel raceway for protection and routing of electrical wiring



Trade Size	Metric Designator	Threads Per Inch	Outside Diameter Inch	Outside Diameter mm	Thickness Inch	Thickness mm	Length Feet	Length meter	QTY/Bundle
1/2"	16	14.0	0.815	20.70	0.070	1.79	10	3.05	10
3/4"	21	14.0	1.028	26.10	0.075	1.90	10	3.05	10
1"	27	11.5	1.291	32.80	0.085	2.16	10	3.05	5
1-1/4"	35	11.5	1.638	41.60	0.085	2.16	10	3.05	3
1-1/2"	41	11.5	1.882	47.80	0.090	2.29	10	3.05	3
2"	53	11.5	2.358	59.90	0.095	2.41	10	3.05	3
2-1/2"	63	8.0	2.858	72.60	0.140	3.56	10	3.05	2
3"	78	8.0	3.476	88.30	0.140	3.56	10	3.05	2
4"	103	8.0	4.465	113.40	0.140	3.56	10	3.05	1

Tolerances: Length $\pm 0.25"$ (6.35mm), Outside Diameter 1/2" through 1-1/2" $\pm 0.005"$ (0.38mm), 2" through 4" $\pm 1\%$
Note: The length 10'(3.05m) is for conduit when a standard coupling is attached. If you need different thickness or length, please contact us.

RMC - Rigid Metal Conduit

Standard: UL 6, CSA C22.2 NO.45.1 and ANSI C80.1

Application: Used as a threadable steel raceway for protection and routing of electrical wiring



Trade Size	Metric Designator	Threads Per Inch	Outside Diameter Inch	Outside Diameter mm	Thickness Inch	Thickness mm	Length Feet	Length meter	QTY/Bundle
1/2"	16	14.0	0.840	21.34	0.104	2.64	10	3.05	10
3/4"	21	14.0	1.050	26.67	0.107	2.72	10	3.05	10
1"	27	11.5	1.315	33.40	0.126	3.20	10	3.05	5
1-1/4"	35	11.5	1.660	42.16	0.133	3.38	10	3.05	3
1-1/2"	41	11.5	1.900	48.26	0.138	3.51	10	3.05	3
2"	53	11.5	2.375	60.33	0.146	3.71	10	3.05	2
2-1/2"	63	8.0	2.875	73.03	0.193	4.90	10	3.05	2
3"	78	8.0	3.500	88.90	0.205	5.21	10	3.05	1
4"	103	8.0	4.500	114.30	0.225	5.71	10	3.05	1
5"	129	8.0	5.563	141.30	0.245	6.22	10	3.05	1
6"	155	8.0	6.625	168.28	0.266	6.76	10	3.05	1

Tolerances: Length $\pm 0.25"$ (6.35mm), Outside Diameter 1/2" through 1-1/2" $\pm 0.015"$ (0.38mm), 2" through 6" $\pm 1\%$
Note: The length 10'(3.05m) is for conduit when a standard coupling is attached. If you need different thickness or length, please contact us.

IMC Conduit Elbow 90°



TOPELE#	Trade Size	Thickness(mm)
IQRE-50	1/2"	1.79
IQRE-75	3/4"	1.90
IQRE-100	1"	2.16
IQRE-125	1-1/4"	2.16
IQRE-150	1-1/2"	2.29
IQRE-200	2"	2.41
IQRE-250	2-1/2"	3.56
IQRE-300	3"	3.56
IQRE-400	4"	3.56

Rigid Conduit Elbow 90°




TOPELE#	Trade Size	Thickness(mm)
REL-311	1/2"	2.64
REL-312	3/4"	2.72
REL-313	1"	3.20
REL-314	1-1/4"	3.38
REL-315	1-1/2"	3.51
REL-316	2"	3.71
REL-317	2-1/2"	4.90
REL-318	3"	5.21
REL-320	4"	2.72
REL-511	5"	6.22
REL-611	6"	6.76

Water-tight Hub

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond Rigid or IMC conduit to a box or enclosure

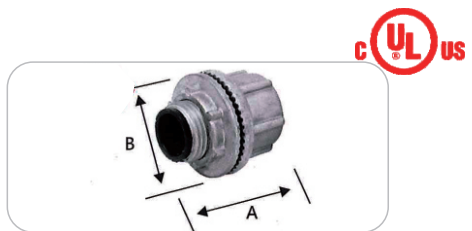

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
C-1	1/2"	25	250	1.328	1.325
C-2	3/4"	20	200	1.448	1.512
C-3	1"	16	160	1.450	1.788
C-4	1-1/4"	*	90	1.575	2.295
C-5	1-1/2"	*	60	1.700	2.445
C-6	2"	*	60	1.700	2.875
C-7	2-1/2"	*	24	2.050	3.325
C-8	3"	*	24	2.150	4.050
C-10	4"	*	18	2.450	5.050

IMC Conduit Coupling



TOPELE#	Trade Size	Thickness(mm)	Height(mm)
IC-50S	1/2"	2	34
IC-75S	3/4"	2	37
IC-100S	1"	2	45
IC-125S	1-1/4"	2.5	49
IC-150S	1-1/2"	2.5	49
IC-200S	2"	2.5	54
IC-250S	2-1/2"	4	75
IC-300S	3"	4	80
IC-400S	4"	4	85

Rigid Conduit Coupling




TOPELE#	Trade Size	Thickness(mm)	Height(mm)
RIC-2151	1/2"	3	40
RIC-2152	3/4"	3.5	42
RIC-2153	1"	4	50
RIC-2154	1-1/4"	4	52
RIC-2155	1-1/2"	4	52
RIC-2156	2"	4.5	60
RIC-2157	2-1/2"	6	80
RIC-2158	3"	5.5	85
RIC-2160	4"	6	89
RIC-2170	5"	6.5	98
RIC-2180	6"	7	108

Conduit Connector Set Screw Type

Material: Steel

Application: for use to bond unthreaded IMC or RIGID conduit to a box or enclosure

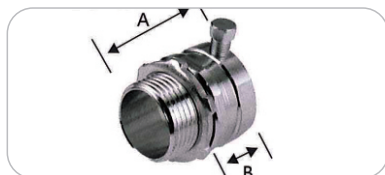


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RSC01	1/2"	50	500	1.180	0.800
RSC02	3/4"	25	250	1.200	0.810
RSC03	1"	25	250	1.500	1.000
RSC04	1-1/4"	*	100	1.700	1.200
RSC05	1-1/2"	*	100	1.940	1.380
RSC06	2"	*	50	2.000	1.380
637S	2-1/2"	*	12	3.315	2.818
638S	3"	*	8	3.750	3.550
640S	4"	*	6	4.185	4.550

① Conduit Coupling Set Screw Type

Material: Steel

Application:for use to bouple two ends of unthreaded IMC or rigid conduits

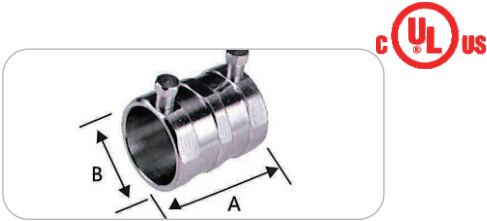

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RSK01	1/2"	50	500	1.500	1.180
RSK02	3/4"	25	250	1.500	1.400
RSK03	1"	20	200	1.880	1.690
RSK04	1-1/4"	*	100	2.210	2.130
RSK05	1-1/2"	*	100	2.600	2.370
RSK06	2"	*	50	2.700	2.870
647S::	2-1/2"	*	12	4.248	2.818
648S::	3"	*	8	4.500	3.550
650S::	4"	*	6	5.000	4.550

:: for EMT,IMC and Rigid

① Conduit Connector Compression Type

Material: Steel

Application:for use to bond unthreaded IMC or rigid conduit to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RCC01	1/2"	50	500	1.352	1.171
RCC02	3/4"	25	250	1.478	1.428
RCC03	1"	20	200	1.580	1.750
RCC04	1-1/4"	*	100	1.860	2.150
RCC05	1-1/2"	*	100	1.941	2.382
RCC06	2"	*	50	2.488	3.382
657S::	2-1/2"	*	12	3.878	2.818
658S::	3"	*	8	4.375	3.550
660S::	4"	*	6	4.745	4.550

:: for EMT,IMC and Rigid

① Conduit Coupling Compression Type

Material: Steel

Application:for use to couple two ends of unthreaded IMC or rigid conduits

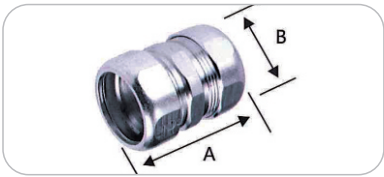


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RCK01	1/2"	50	500	1.742	1.171
RCK02	3/4"	25	250	1.821	1.428
RCK03	1"	20	200	1.949	1.750
RCK04	1-1/4"	*	100	2.652	2.150
RCK05	1-1/2"	*	100	2.700	2.382
RCK06	2"	*	50	2.927	3.382
667S	2-1/2"	*	12	4.876	2.818
668S	3"	*	8	5.200	3.550
670S	4"	*	6	5.725	4.550

① Conduit Pull Elbow

Material: Zinc

Application:for use to couple two ends of threaded rigid conduit or IMC to form 90 degree bend

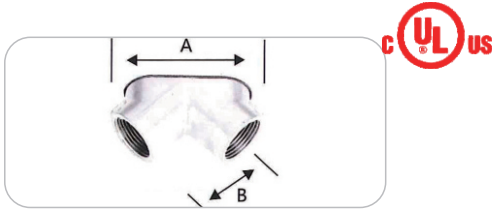


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE11	1/2"	20	200	2.500	1.320
PE12	3/4"	12	120	2.755	1.450
PE13	1"	*	100	3.862	1.950

① Pull Elbow Combination Type

Material: Zinc

Application: for use to couple two ends of EMT, rigid conduit or IMC to form 90 degree bend

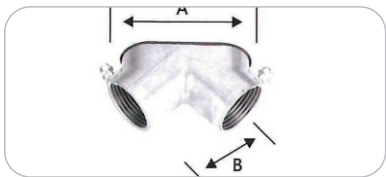


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE31	1/2"	20	200	2.500	1.320
PE32	3/4"	12	120	2.755	1.450
PE33	1"	*	100	3.862	1.950

① Pull Elbow Conduit to Box

Material: Zinc

Application: for connecting rigid conduit or IMC to a box or enclosure when 90 degree turns are needed

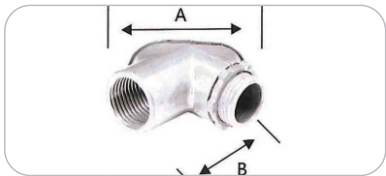


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE61	1/2"	*	200	2.500	1.320
PE62	3/4"	*	120	2.755	1.450
PE63	1"	*	100	3.862	1.950

① Pull Elbow to Box Combination Type

Material: Zinc

Application: for connecting EMT, rigid conduit or IMC to a box or enclosure when 90 degree turns are needed

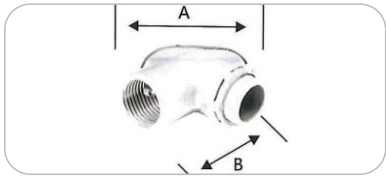

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PE81	1/2"	*	200	2.500	1.320
PE82	3/4"	*	120	2.755	1.450
PE83	1"	*	100	3.862	1.950

① Conduit Connector 90°

Material: Zinc

Application: for use to bond Rigid or IMC conduit to a box or enclosure when 90 degree turns are needed



TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
90631	3/4"	*	150	1.732	0.985
90632	1"	*	100	1.969	1.258
90633	1-1/4"	*	50	2.362	1.595

① Service Entrance Cap Threaded Type

Material: Aluminum

Application: for use to bring overhead electrical service into buildings




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SEC11	1/2"	*	100	2.610	2.000
SEC12	3/4"	*	100	2.715	2.368
SEC13	1"	*	100	3.108	2.621
SEC14	1-1/4"	*	50	3.220	3.000
SEC15	1-1/2"	*	50	4.351	3.312
SEC16	2"	*	25	5.442	4.618
SEC17	2-1/2"	1	4	7.505	6.000
SEC18	3"	1	4	8.021	8.000
SEC20	4"	1	4	8.510	8.000

① Conduit Strap One Hole

Standard: UL 2239 and CSA C2 2.2 No. 18.4-04

Material: Steel

Application: for use to mount Rigid or IMC conduit to any surface

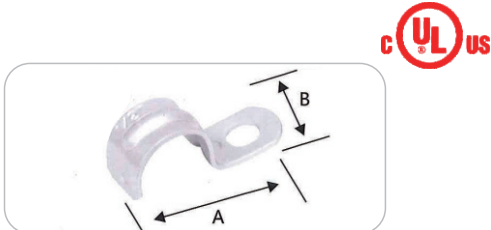


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
ROHS-50	1/2"	150	1500	1.911	0.876
ROHS-75	3/4"	100	1000	2.226	1.045
ROHS-100	1"	50	500	2.615	1.292
ROHS-125	1-1/4"	25	250	2.978	1.631
ROHS-150	1-1/2"	20	200	3.658	1.858
ROHS-200	2"	15	150	4.151	2.242
ROHS-250	2-1/2"	*	120	5.000	1.300
ROHS-300	3"	*	100	5.551	1.300
ROHS-400	4"	*	60	6.860	1.300

① Conduit Strap Two Hole

Standard: UL 2239 and CSA C2 2.2 No. 18.4-04

Material: Steel

Application: for use to mount Rigid or IMC conduit to any surface

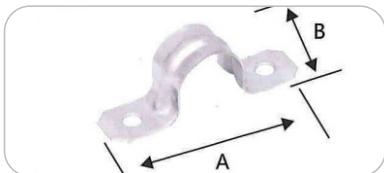

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RTHS-50	1/2"	100	1000	2.435	0.898
RTHS-75	3/4"	50	500	2.800	1.062
RTHS-100	1"	50	500	3.355	1.366
RTHS-125	1-1/4"	25	250	4.108	1.698
RTHS-150	1-1/2"	20	200	4.448	1.958
RTHS-200	2"	15	150	5.351	2.242
RTHS-250	2-1/2"	*	100	5.900	1.300
RTHS-300	3"	*	100	6.680	1.300
RTHS-400	4"	*	80	8.285	1.300

① Conduit Lock Nut

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for securing Rigid, IMC conduit or any threaded fitting to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
SLN-50	1/2"	400	4000	1.148	0.787
SLN-75	3/4"	200	2000	1.452	0.988
SLN-100	1"	150	1500	1.747	1.260
SLN-125	1-1/4"	80	800	2.100	1.594
SLN-150	1-1/2"	50	500	2.400	1.835
SLN-200	2"	40	400	2.952	2.318
SLN-250	2-1/2"	*	400	3.546	2.776
SLN-300	3"	*	300	3.551	3.454
SLN-350	3-1/2"	*	200	4.200	3.895
SLN-400	4"	*	200	4.749	4.445

① Conduit Strap One Hole

Material: Malleable Iron

Application:for securing Rigid or IMC conduit to any surface where greater load bearing is required

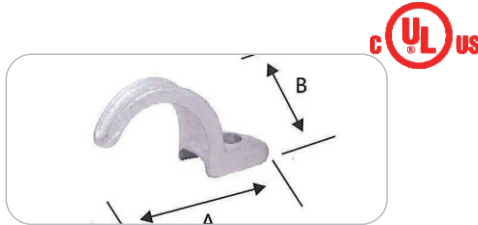


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
MS01	1/2"	*	1000	2.252	0.942
MS02	3/4"	*	500	2.556	1.221
MS03	1"	*	250	3.061	1.500
MS04	1-1/4"	*	200	3.692	1.878
MS05	1-1/2"	*	100	4.000	2.056
MS06	2"	*	25	5.062	2.561
MS07	2-1/2"	*	25	5.938	3.062
MS08	3"	*	25	7.442	3.808
MS10	4"	*	10	8.691	5.000

① Conduit Strap Back Spacer

Material: Malleable Iron

Application: for use with one hole strap to provide space between conduit and mounting surface

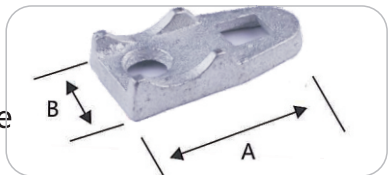

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
MB01	1/2"	*	250	2.055	1.000
MB02	3/4"	*	250	2.382	1.061
MB03	1"	*	250	2.942	1.252
MB04	1-1/4"	*	100	3.500	1.880
MB05	1-1/2"	*	100	3.805	1.440
MB06	2"	*	50	4.751	1.936
MB07	2-1/2"	*	25	5.752	2.445
MB08	3"	*	10	6.688	2.625
MB10	4"	*	10	8.880	3.062

① Conduit Bushing

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application:for use with locknut to terminate Rigid or IMC conduit to a box or enclosure




TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
CB-50	1/2"	150	4500	1.051	0.788
CB-75	3/4"	100	1000	1.325	0.984
CB-100	1"	50	500	1.585	1.260
CB-125	1-1/4"	50	500	1.950	1.594
CB-150	1-1/2"	35	350	2.200	1.831
CB-200	2"	20	200	2.695	2.323
CB-250	2-1/2"	*	200	3.235	2.776
CB-300	3"	*	150	3.885	3.464
CB-350	3-1/2"	*	100	4.360	3.895
CB-400	4"	*	80	5.010	4.448

① Insulated Conduit Bushing

Material: Zinc

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure

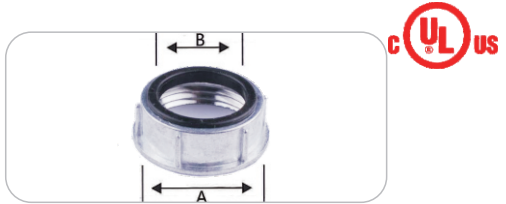


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
ICB-50	1/2"	150	1500	1.051	0.788
ICB-75	3/4"	100	1000	1.325	0.984
ICB-100	1"	50	500	1.585	1.260
ICB-125	1-1/4"	50	500	1.950	1.594
ICB-150	1-1/2"	35	350	2.200	1.831
ICB-200	2"	20	200	2.695	2.323
ICB-250	2-1/2"	*	200	3.235	2.776
ICB-300	3"	*	150	3.885	3.464
ICB-350	3-1/2"	*	100	4.360	3.895
ICB-400	4"	*	80	5.010	4.448

① Conduit Bushing

Material: Plastic

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure

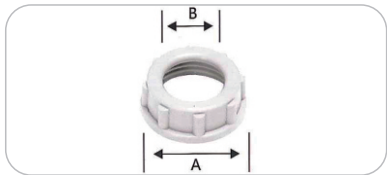


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
PCB-50	1/2"	100	1000	1.056	0.786
PCB-75	3/4"	100	1000	1.318	0.985
PCB-100	1"	50	250	1.588	1.260
PCB-125	1-1/4"	25	250	1.955	1.594
PCB-150	1-1/2"	25	250	2.190	1.831
PCB-200	2"	25	125	2.681	2.323
PCB-250	2-1/2"	10	50	3.248	2.776
PCB-300	3"	10	50	3.871	3.465
PCB-350	3-1/2"	10	40	4.365	3.895
PCB-400	4"	10	40	5.012	4.449

① Insulated Grounding Bushing

Material: Malleable Iron

Application:for use with locknut to terminate Rigid or IMC conduit to a box or enclosure and quick installation of bonding jumper

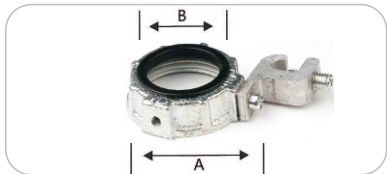


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
IGB-50	1/2"	*	500	1.260	0.787
IGB-75	3/4"	*	500	1.481	0.986
IGB-100	1"	*	300	1.800	1.262
IGB-125	1-1/4"	*	200	2.405	1.595
IGB-150	1-1/2"	*	200	2.500	1.832
IGB-200	2"	*	125	3.028	2.325
IGB-250	2-1/2"	*	100	3.600	2.778
IGB-300	3"	*	60	4.162	3.466
IGB-350	3-1/2"	*	60	4.748	3.898
IGB-400	4"	*	60	5.298	4.450

Reducing Bushing

Material: Steel

Application: for reducing the threaded opening in conduit bodies or any female threaded fitting

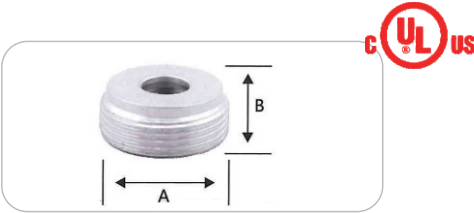


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
RDB01	3/4" * 1/2"	100	1000	0.921	0.645
RDB02	1" * 1/2"	50	500	1.124	0.715
RDB03	1" * 3/4"	50	500	1.124	0.715
RDB04	1-1/4" * 1/2"	*	210	1.472	0.818
RDB05	1-1/4" * 3/4"	*	210	1.472	0.818
RDB06	1-1/4" * 1"	*	210	1.472	0.818
RDB07	1-1/2" * 1/2"	*	120	1.700	0.850
RDB08	1-1/2" * 3/4"	*	120	1.700	0.850
RDB09	1-1/2" * 1"	*	120	1.700	0.850
RDB10	1-1/2" * 1-1/4"	*	120	1.700	0.850
RDB11	2" * 1/2"	*	75	2.228	0.972
RDB12	2" * 3/4"	*	75	2.228	0.972
RDB13	2" * 1"	*	75	2.228	0.972
RDB14	2" * 1-1/4"	*	75	2.228	0.972
RDB15	2" * 1-1/2"	*	75	2.228	0.972

Bushed Nipple

Material: Zinc

Application: for use to connect box to conduit coupling, or box to box

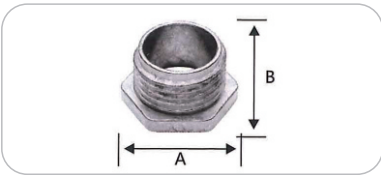


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
BNP-50	1/2"	100	1000	1.025	0.585
BNP-75	3/4"	50	500	1.300	0.614
BNP-100	1"	25	250	1.616	0.654
BNP-125	1-1/4"	*	250	1.978	0.810
BNP-150	1-1/2"	*	100	2.410	0.835
BNP-200	2"	*	50	2.945	0.888

Conduit Nipple - Close

Material: Steel

Application: when screwed tightly between two female fittings, very little of the nipple remains exposed.

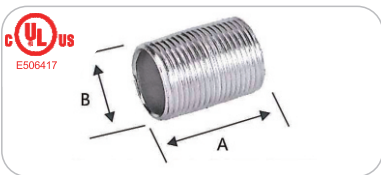

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
CNC-50	1/2"	100	1000	1.532	0.785
CNC-75	3/4"	50	500	1.571	0.982
CNC-100	1"	25	300	1.890	1.258
CNC-125	1-1/4"	*	250	2.045	1.593
CNC-150	1-1/2"	*	120	2.205	1.831
CNC-200	2"	*	60	2.360	2.322

Conduit Nipple

Material: Steel

Application: for use to extend a length of rigid conduit or IMC, or use to connect two boxes or enclosures




TOPELE#	Trade Size	Shelf QTY	Master QTY
CN01	1/2" _ 1-1/2"	*	500
CN02	1/2" _ 2"	*	350
CN03	1/2" _ 3"	*	250
CN04	1/2" _ 4"	*	150
CN05	1/2" _ 6"	*	100
CN06	1/2" _ 8"	*	80
CN07	1/2" _ 10"	*	50
CN08	1/2" _ 12"	*	50
CN11	3/4" _ 1-1/2"	*	500
CN12	3/4" _ 2"	*	250
CN13	3/4" _ 3"	*	180
CN14	3/4" _ 4"	*	150
CN15	3/4" _ 6"	*	100
CN16	3/4" _ 8"	*	60
CN17	3/4" _ 10"	*	50
CN18	3/4" _ 12"	*	40

TOPELE#	Trade Size	Shelf QTY	Master QTY
CN21	1" _ 2"	*	150
CN22	1" _ 3"	*	100
CN23	1" _ 4"	*	70
CN24	1" _ 6"	*	50
CN25	1" _ 8"	*	40
CN26	1" _ 10"	*	30
CN27	1" _ 12"	*	25

CN31	1-1/4" _ 2"	*	150
CN32	1-1/4" _ 3"	*	100
CN33	1-1/4" _ 4"	*	70
CN34	1-1/4" _ 6"	*	40
CN35	1-1/4" _ 8"	*	30
CN36	1-1/4" _ 10"	*	25
CN37	1-1/4" _ 12"	*	20


TOPELE#	Trade Size	Shelf QTY	Master QTY
CN41	1-1/2" _ 2"	*	150
CN42	1-1/2" _ 3"	*	70
CN43	1-1/2" _ 4"	*	50
CN44	1-1/2" _ 6"	*	40
CN45	1-1/2" _ 8"	*	30
CN46	1-1/2" _ 10"	*	20
CN47	1-1/2" _ 12"	*	20

CN51	2" _ 2-1/2"	*	70
CN52	2" _ 3"	*	60
CN53	2" _ 4"	*	40
CN54	2" _ 6"	*	30
CN35	2" _ 8"	*	20
CN56	2" _ 10"	*	15
CN57	2" _ 12"	*	15

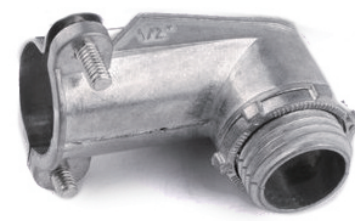

Galvanized Flexible Conduit - Super Flexible Type

Material: Steel
Application: used primarily in dry areas where it would be impractical to install EMT or other non-flexible conduit

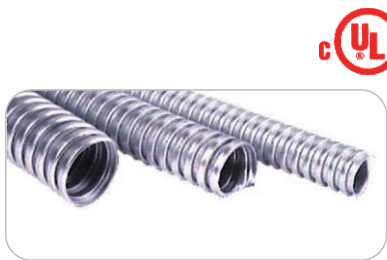

TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
GFC01	3/8"	12	10.82	12.09	14.22	15.49	25	100
GFC02	1/2"	16	18.44	19.97	21.84	23.37	38	100
GFC03	3/4"	21	22.64	24.17	26.54	28.07	45	50
GFC04	1"	27	28.82	30.85	33.02	35.05	55	50
GFC05	1-1/4"	35	34.47	36.50	39.37	41.40	62	25
GFC06	1-1/2"	41	41.79	44.33	46.99	49.53	90	25
GFC07	2"	53	54.29	56.83	59.69	62.23	110	20
GFC08	2-1/2"	63	65.44	70.52	72.64	77.72	130	20
GFC09	3"	78	78.14	83.22	85.34	90.42	160	10
GFC10	4"	103	103.54	108.62	110.74	115.85	210	10

Galvanized Flexible Conduit - Greenfield Type

Material: Steel
Application: used primarily in dry areas where it would be impractical to install EMT or other non-flexible conduit




TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
FMC01	3/8"	12	9.52	9.96	14.22	15.49	50	100
FMC02	1/2"	16	15.88	16.38	21.84	23.37	75	100
FMC03	3/4"	21	20.62	21.21	26.54	28.07	100	50
FMC04	1"	27	25.40	26.42	33.02	35.05	125	50
FMC05	1-1/4"	35	31.75	33.02	39.37	41.40	160	25
FMC06	1-1/2"	41	38.10	40.01	46.99	49.53	190	25
FMC07	2"	53	50.80	52.83	59.69	62.23	225	20
FMC08	2-1/2"	63	63.50	66.04	72.64	77.72	320	20
FMC09	3"	78	76.20	78.74	85.34	90.42	*	10
FMC10	4"	103	101.60	104.14	110.74	115.82	*	10

① Squeeze Connector Greenfield Straight

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond flexible metal conduit or armored cable to a box or enclosure

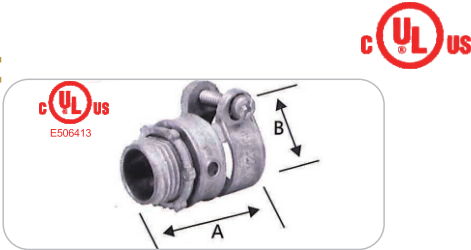


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
SCN-12	3/8"	100	1000	1.000	0.58~0.62
SCN-15	1/2"	50	500	1.468	0.74~0.95
SCN-20	3/4"	25	250	1.581	0.88~1.12
SCN-25	1"	20	200	1.750	1.14~1.38
SCN-32	1-1/4"	*	200	1.912	1.42~1.65
SCN-38	1-1/2"	*	100	2.090	1.68~1.95
SCN-50	2"	*	100	2.341	2.08~2.56
SCN-60	2-1/2"	*	25	2.811	2.85~3.25
SCN-70	3"	*	20	3.840	3.33~3.65
SCN-80	4"	*	10	4.562	4.18~4.58

① Squeeze Connector Greenfield 90°

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond flexible metal conduit or armored cable to a box or enclosure

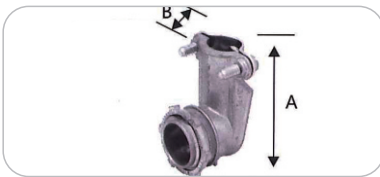


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
SACN-25	3/8"	50	500	1.740	0.43~0.69
SACN-50	1/2"	30	300	2.110	0.64~0.98
SACN-75	3/4"	20	200	2.400	0.76~1.12
SACN-100	1"	10	100	2.870	1.08~1.68
SACN-125	1-1/4"	*	80	4.000	1.35~1.85
SACN-150	1-1/2"	*	30	6.000	1.56~2.54
SACN-200	2"	*	30	6.000	1.68~2.56
SACN-250	2-1/2"	*	10	7.187	2.45~2.95
SACN-300	3"	*	10	7.875	2.95~3.35
SACN-400	4"	*	5	10.200	3.75~4.45

① "U" Shaped Connector

Material: Steel

Application: for use with armored cable and flexible metal conduit

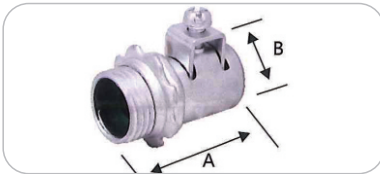


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
P2	1/2"	25	250	1.380	1.249
P3	3/4"	20	200	1.382	1.438
P4	1"	12	120	1.558	1.807

① EMT to Flex Coupling

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to couple EMT to flexible metal conduit or armored cable

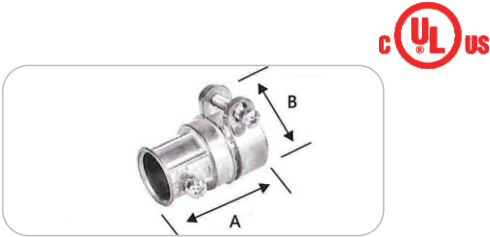


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
EF-25	1/2"-3/8"	50	500	1.260	0.58~0.62
EF-50	1/2"	30	300	1.520	0.74~0.95
EF-75	3/4"	20	200	1.830	0.88~1.12
EF-100	1"	20	200	1.970	1.14~1.38

① Interior Flex Connector

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond flexible metal conduit to a box or enclosure

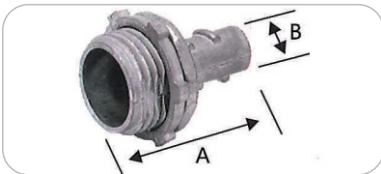


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
IFC-25	3/8"	150	1500	1.035	0.484
IFC-50	1/2"	100	1000	1.118	0.610
IFC-75	3/4"	50	500	1.248	0.815
IFC-100	1"	30	300	1.366	0.965

① Romex Connector for Nonmetallic Cable

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond nonmetallic cable to a box or enclosure

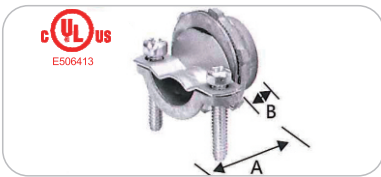

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCN-25	3/8"	100	1000	0.825	0.421
RCN-50	1/2"	100	1000	0.825	0.421
RCN-75	3/4"	50	500	1.000	0.482
RCN-100	1"	25	250	1.285	0.780
RCN-125	1-1/4"	25	250	1.312	0.710
RCN-150	1-1/2"	15	150	1.453	0.817
RCN-200	2"	10	100	1.590	0.823

D

FLEXIBLE CONDUIT & FITTINGS

① Liquid Tight Conduit

Material: Steel, with heavy PVC coated

Application: can be used in both dry and wet locations where it would be impractical to install EMT or other non-flexible conduit



TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
LTC11	3/8"	12	12.29	12.80	17.50	18.00	50	100
LTC12	1/2"	16	15.80	16.31	20.80	21.30	80	100
LTC13	3/4"	21	20.83	21.34	25.20	26.70	105	50
LTC14	1"	27	26.44	27.08	32.80	33.40	165	50
LTC15	1-1/4"	35	35.05	35.81	41.40	42.20	200	25
LTC16	1-1/2"	41	40.01	40.64	47.40	48.30	225	25
LTC17	2"	53	51.31	51.94	59.40	60.30	280	20
LTC18	2-1/2"	63	62.99	63.63	72.10	73.00	370	20
LTC19	3"	78	77.98	78.74	87.90	88.90	440	10
LTC21	4"	103	101.60	102.62	113.30	114.30	600	10

① PVC Coated Flexible Conduit

Material: Steel, with light PVC coated

Application: can be used in both dry and wet locations where it would be impractical to install EMT or other non-flexible conduit



TOPELE#	Trade Size	Metric Designator	Inside Diameter		Outside Diameter		Min. Bend Radius(mm)	Meters / Coil
			Min(mm)	Max(mm)	Min(mm)	Max(mm)		
PFC01	3/8"	12	12.29	12.80	16.70	17.20	35	100
PFC02	1/2"	16	15.80	16.31	20.20	20.70	65	100
PFC03	3/4"	21	20.83	21.34	25.50	26.10	75	50
PFC04	1"	27	26.44	27.08	31.60	32.20	100	50
PFC05	1-1/4"	35	35.05	35.81	40.80	41.50	125	25
PFC06	1-1/2"	41	40.01	40.64	46.60	47.20	150	25
PFC07	2"	53	51.31	51.94	58.10	58.70	175	20
PFC08	2-1/2"	63	62.99	63.63	71.80	72.40	200	20
PFC09	3"	78	77.98	78.74	87.20	87.90	225	10
PFC10	4"	103	101.60	102.62	111.20	112.30	275	10


D4

① Liquid Tight Connector Straight

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond liquid tight conduit to a box or enclosure

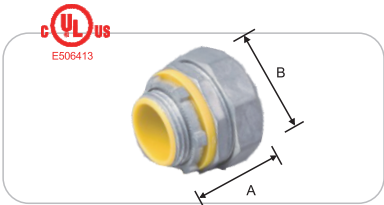


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
LTC-100	3/8"	35	350	1.440	1.260
LTC-15	1/2"	40	400	1.440	1.385
LTC-20	3/4"	25	250	1.562	1.720
LTC-25	1"	15	150	1.825	1.900
LTC-32	1-1/4"	*	100	2.068	2.176
LTC-38	1-1/2"	*	100	2.068	2.507
LTC-50	2"	*	60	2.103	3.178
LTC-55	2-1/2"	*	25	3.269	4.218
LTC-64	3"	*	20	4.060	4.919
LTC-75	4"	*	10	4.323	5.948

① Liquid Tight Connector 90°

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to bond liquid tight conduit to a box or enclosure

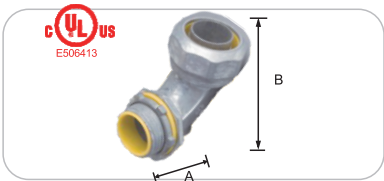

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
LTCE-100	3/8"	20	200	2.055	2.335
LTCE-15	1/2"	25	250	2.215	2.345
LTCE-20	3/4"	15	150	2.545	3.550
LTCE-25	1"	10	100	2.815	3.785
LTCE-32	1-1/4"	*	50	3.360	3.960
LTCE-38	1-1/2"	*	60	3.450	4.130
LTCE-50	2"	*	25	4.035	4.700
LTCE-55	2-1/2"	*	10	5.215	5.375
LTCE-64	3"	*	10	6.100	6.500
LTCE-75	4"	*	5	6.780	8.000

D

FLEXIBLE CONDUIT & FITTINGS


D5

① Flexible Conduit Connector For Philippines



Material: Aluminum/Zinc

Application: use to connect flexible metallic conduit, AC and MC cable to a box or enclosure

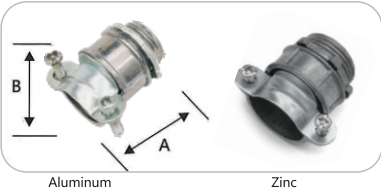

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B(inch)
TSSC-50	1/2"	100	1000	1.435	0.63~0.81
TSSC-75	3/4"	50	500	1.500	0.83~1.09
TSSC-100	1"	25	250	1.750	1.00~1.36

① Compression to screw in Flex Connector

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for connecting EMT and Flexible conduit

TOPELE#	Trade Size
CSFC-50	1/2"
CSFC-75	3/4"
CSFC-100	1"



① Flexible screw-in Connector

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for connecting Flexible to Flexible conduit

TOPELE#	Trade Size
FSIC-50	1/2"
FSIC-75	3/4"
FSIC-100	1"




① Liquid Tight Connector Straight



Material: Malleable Iron

Application: for use to bond liquid tight conduit to a box or enclosure

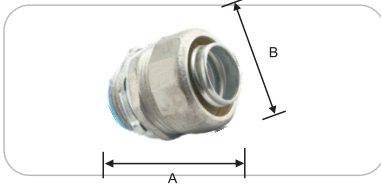


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38	3/8"	*	500	1.685	1.385
LTCM-50	1/2"	*	400	1.685	1.385
LTCM-75	3/4"	*	250	1.805	1.600
LTCM-100	1"	*	150	2.100	1.905
LTCM-125	1-1/4"	*	125	2.200	2.435
LTCM-150	1-1/2"	*	100	2.435	2.715
LTCM-200	2"	*	50	2.850	3.245

① Liquid Tight Connector 45°

Material: Malleable Iron

Application: for use to bond liquid tight conduit to a box or enclosure

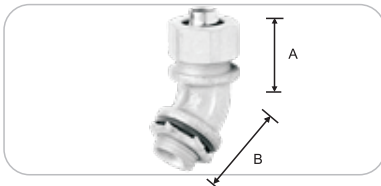


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38F	3/8"	*	200	1.000	1.381
LTCM-50F	1/2"	*	250	1.055	1.381
LTCM-75F	3/4"	*	125	1.188	1.500
LTCM-100F	1"	*	100	1.382	1.690
LTCM-125F	1-1/4"	*	50	1.628	1.939
LTCM-150F	1-1/2"	*	25	1.810	2.252
LTCM-200F	2"	*	25	1.939	2.750

① Liquid Tight Connector 90°

Material: Malleable Iron

Application: for use to bond liquid tight conduit to a box or enclosure

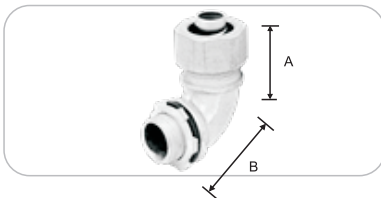

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
LTCM-38N	3/8"	*	200	1.805	1.305
LTCM-50N	1/2"	*	250	1.878	1.398
LTCM-75N	3/4"	*	125	2.058	1.625
LTCM-100N	1"	*	100	2.252	2.058
LTCM-125N	1-1/4"	*	50	2.751	2.125
LTCM-150N	1-1/2"	*	50	3.125	2.700
LTCM-200N	2"	*	25	3.880	2.950

Female Flexible Conduit Connector-Zinc



CAT#	SIZE
DPN-15	1/2"
DPN-20	3/4"
DPN-25	1"
DPN-32	1"
DPN-38	1-1/4"
DPN-50	1-1/2"
DPN-64	2"
DPN-75	2-1/2"
DPN-100	3"

Flex Conduit Compression Connector-Zinc



CAT#	SIZE
DGJ-15/FF/TT	1/2"
DGJ-20/FF/TT	3/4"
DGJ-25/FF/TT	1"
DGJ-32/FF/TT	1-1/4"
DGJ-38/FF/TT	1-1/2"
DGJ-50/FF/TT	2"
DGJ-64/FF/TT	2-1/2"
DGJ-75/FF/TT	3"
DGJ-100/FF/TT	4"

Plum Type Male Flexible Conduit Connector-Zinc Plum Type Flexible Conduit Coupling-Zinc



CAT#	SIZE
MPJ-15	1/2"
MPJ-20	3/4"
MPJ-25	1"
MPJ-32	1-1/4"
MPJ-38	1-1/2"
MPJ-50	2"
MPJ-64	2-1/2"
MPJ-75	3"
MPJ-100	4"



CAT#	SIZE
MKJ-15	1/2"
MKJ-20	3/4"
MKJ-25	1"
MKJ-32	1-1/4"
MKJ-38	1-1/2"
MKJ-50	2"
MKJ-64	2-1/2"
MKJ-75	3"
MKJ-100	4"

90° Flexible Conduit Connector-Zinc



CAT#	SIZE
DWJ-15	1/2"
DWJ-20	3/4"
DWJ-25	1"
DWJ-32	1-1/4"
DWJ-38	1-1/2"
DWJ-50	2"
DWJ-64	2-1/2"
DWJ-75	3"
DWJ-100	4"

45° Flexible Conduit Connector-Zinc



CAT#	SIZE
DNJ-15	1/2"
DNJ-20	3/4"
DNJ-25	1"
DNJ-32	1-1/4"
DNJ-38	1-1/2"
DNJ-50	2"
DNJ-64	2-1/2"
DNJ-75	3"
DNJ-100	4"

Liquid Tight Non-Metallic Flexible Conduit

Temperature : -18℃--+80℃Dry,60℃Wet,70℃Oil
IP68, Grey
Flexibility : Medium
Fire Retardant : Self-extinguishing
UV Resistance : Yes



TOPELE#	Size	I.D.(mm)		O.D.(mm)		Bending Radius (mm)	Packing(m)
NMLTFC-38	3/8"	12.29	12.80	17.53	18.03	51	50
NMLTFC-50	1/2"	15.80	16.31	20.83	21.34	82.5	50
NMLTFC-75	3/4"	20.83	21.34	26.16	26.67	108	40
NMLTFC-100	1"	26.44	27.08	32.77	33.40	165	30
NMLTFC-125	1-1/4"	35.05	35.81	41.40	42.16	203	30
NMLTFC-150	1-1/2"	40.01	40.64	47.37	48.26	228.5	20
NMLTFC-200	2"	51.31	51.94	59.44	60.33	282	10

Non-Metallic Flexible Conduit Connector

Temperature Range : Medium
IP Rating : IP 68
Fire Retardant : Self-extinguishing
Certificate : cULus



Straight

CAT#	SIZE
NMCS-38	3/8"
NMCS-50	1/2"
NMCS-75	3/4"
NMCS-100	1"
NMCS-125	1-1/4"
NMCS-150	1-1/2"
NMCS-200	2"



90° Angle


CAT#	SIZE
NMCA-38	1/2"
NMCA-50	1/2"
NMCA-75	3/4"
NMCA-100	1"
NMCA-125	1-1/4"
NMCA-150	1-1/2"
NMCA-200	2"



EMT Type Available Material:malleable iron available

Ⓡ Rigid Conduit Body - LB Type


Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC,allow access for inspection,pulling and maintenance

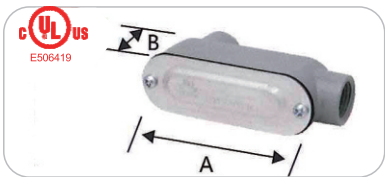

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LB01	1/2"	1	100	3.504	1.378
TPE-LB02	3/4"	1	50	4.154	1.614
TPE-LB03	1"	1	50	4.921	1.890
TPE-LB04	1-1/4"	1	20	6.496	2.496
TPE-LB05	1-1/2"	1	20	6.496	2.496
TPE-LB06	2"	1	10	8.563	3.346
TPE-LB07	3"				
TPE-LB07	4"				

Ⓡ Rigid Conduit Body - LL Type


Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC, allow access for inspection,pulling and maintenance

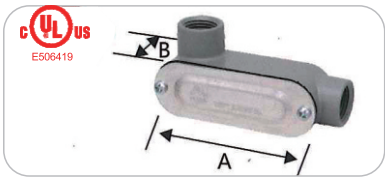

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LL01	1/2"	1	100	3.504	1.378
TPE-LL02	3/4"	1	50	4.154	1.614
TPE-LL03	1"	1	50	4.921	1.890
TPE-LL04	1-1/4"	1	20	6.496	2.496
TPE-LL05	1-1/2"	1	20	6.496	2.496
TPE-LL06	2"	1	10	8.563	3.346
TPE-LL07	3"				
TPE-LL08	4"				

Ⓡ Rigid Conduit Body - LR Type

Standard: UL 514A and CSA C22.2. No. 18.1-13
Material: Aluminum
Application:for rigid conduit or IMC, allow access for inspection,pulling and maintenance

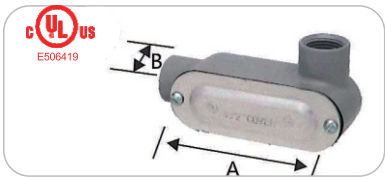


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LR01	1/2"	1	100	3.504	1.378
TPE-LR02	3/4"	1	50	4.154	1.614
TPE-LR03	1"	1	50	4.921	1.890
TPE-LR04	1-1/4"	1	20	6.496	2.496
TPE-LR05	1-1/2"	1	20	6.496	2.496
TPE-LR06	2"	1	10	8.563	3.346

Ⓡ Rigid Conduit Body - C Type

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for rigid conduit or IMC,allow access for inspection,pulling and maintenance

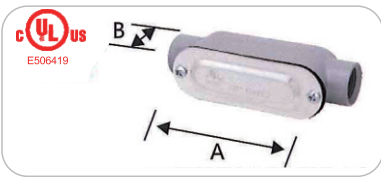


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-C01	1/2"	1	100	3.504	1.378
TPE-C02	3/4"	1	50	4.154	1.614
TPE-C03	1"	1	50	4.921	1.890
TPE-C04	1-1/4"	1	20	6.496	2.496
TPE-C05	1-1/2"	1	20	6.496	2.496
TPE-C06	2"	1	10	8.563	3.346
TPE-C07	3"				
TPE-C08	4"				

Ⓡ Rigid Conduit Body - T Type

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for rigid conduit or IMC,allow access for inspection,pulling and maintenance

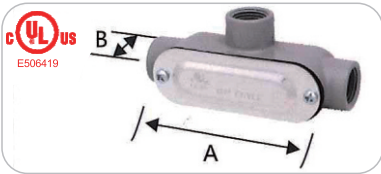

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-T01	1/2"	1	100	3.504	1.378
TPE-T02	3/4"	1	50	4.154	1.614
TPE-T03	1"	1	50	4.921	1.890
TPE-T04	1-1/4"	1	20	6.496	2.496
TPE-T05	1-1/2"	1	20	6.496	2.496
TPE-T06	2"	1	10	8.563	3.346
TPE-T07	3"				
TPE-T08	4"				

Ⓡ Weatherproof Box Three Gang

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
3GB71	1/2"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB72	3/4"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB73	1"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml

Note: Boxes supplied with 2 closure plugs, 2 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey, unless any other color is specified.

Ⓡ Weatherproof Box Round

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Height (inch)	Max.Capacity
RB50-5	1/2"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml
RB75-5	3/4"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml


Note: Boxes supplied with 4 closure plugs, 1 green grounding screw and 2 mounting screws for covers.
The color of boxes will be in grey, unless any other color is specified.

Ⓡ Weatherproof Box One Gang

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for use in branch circuit wiring in wet, damp or dry locations

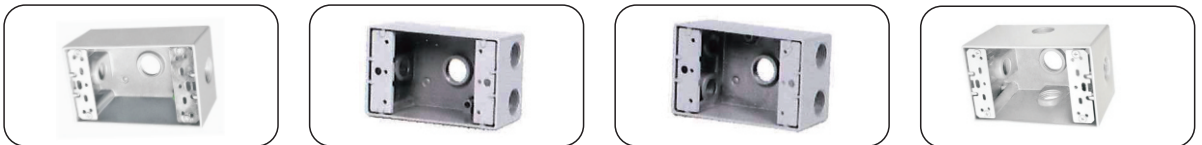

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
FSB50-3	1/2"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-3	3/4"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB100-3	1"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-4	1/2"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-4	3/4"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5X	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5X	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
DB50-3	1/2"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-3	3/4"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-3	1"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-4	1/2"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-4	3/4"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-5X	1/2"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-5X	3/4"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-5X	1"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml


Note: Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey,unless any other color is specified.

Ⓡ Weatherproof Box Two Gang

Standard: UL 514A and CSA C22.2. No. 18.1-13

Material: Aluminum

Application: for use in branch circuit wiring in wet, damp or dry locations

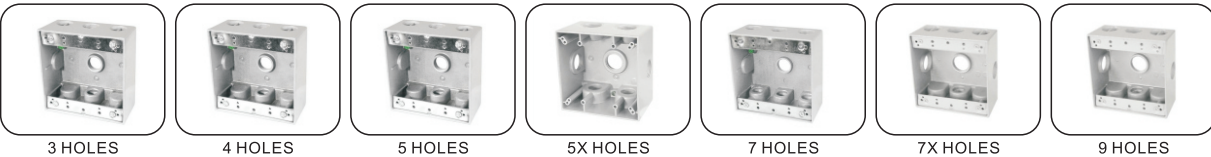

TOPELE#	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Depth(inch)	Max.Capacity
TGB50-3	1/2"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-3	3/4"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-4	1/2"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-4	3/4"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5X	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5X	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5X	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7X	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7X	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-9	1/2"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-9	3/4"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
DTB50-5	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-5X	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5X	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5X	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-7X	1/2"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-7X	3/4"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-7X	1"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml

Note: Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws.
The color of boxes will be in grey,unless any other color is specified.

① Round Cover With Gasket & Screws



1 HOLES



CAT#	SIZE
RC-1	1/2"

2 HOLES



CAT#	SIZE
RC-2	1/2"

3 HOLES



CAT#	SIZE
RC-3	1/2"



Lamp holder with
interior gasket
Lamp:150W par 38

① Rectangular Cover with Gasket & Screws

1 HOLES



CAT#	SIZE
RE-1	1/2"

2 HOLES



CAT#	SIZE
RE-2	1/2"

3 HOLES



CAT#	SIZE
RE-3	1/2"

① Aluminum Stamped Cover with Gasket & Screws



CAT#	SIZE
SBC-2	




CAT#	SIZE
DBC-4	



CAT#	SIZE
RBC-2	

① Weatherproof Self-closing Outlet Covers



GFV-1



GFH-1



SDV-1




SSV-1



SDH-2



SPO-50



SPO-60



SPO-70



DDV-2



DSV-2



DSD-2



DGF-2



Steel
SBSCS-2




Steel
DBCS-4



SGF-2



GFV-2

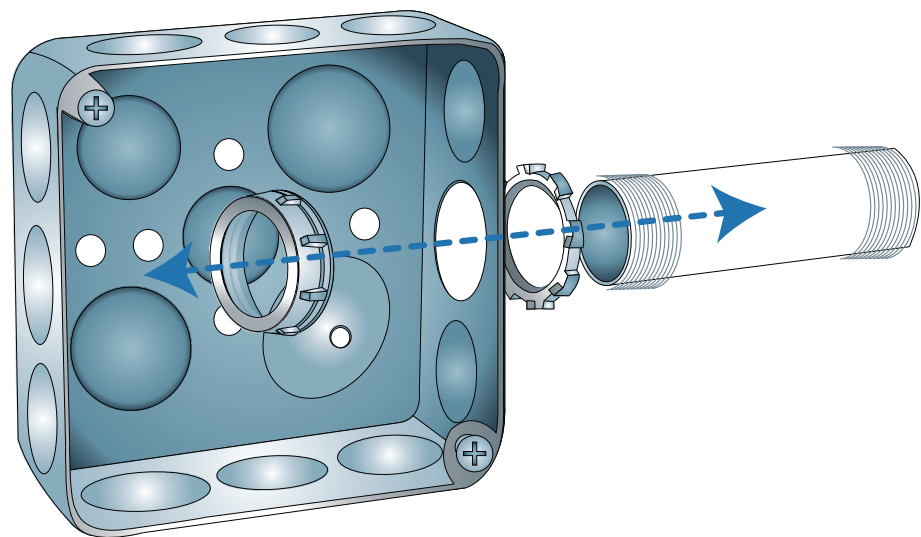


4" Square Boxes

1-1/2" DEEP BOXES




CAT#
52151-1/2"
52151-3/4"
52151-1/2"&3/4"
52151-concentric1/2"&3/4"

2-1/8" DEEP BOXES



CAT#
52171-1/2"
52171-3/4"
52151-1/2"&3/4"
52151-1"

1-1/2" DEEP EXTENSIONS



CAT#
52151-1/2"
52151-3/4"
52151-1/2"&3/4"



4" Square Boxes covers




CAT# 52C1



CAT# 52C6

CAT#	DESCRIPTION
52C1	Flat, Blank
52C6	Flat, 1/2" K.O.



CAT# 52C62



CAT# 52C21

CAT#	DESCRIPTION	RAISED
52C0	Flat, for One Device	-
52C62	for One Device	1/4"
52C13	for One Device	1/2"
52C14	for One Device	3/4"
52C15	for One Device	1"
52C16	for One Device	1-1/4"
CAT#	DESCRIPTION	RAISED
52C00	Flat, for One Device	-
52C20	for Two Device	1/4"
52C17	for Two Device	1/2"
52C18	for Two Device	3/4"
52C19	for Two Device	1"
52C21	for Two Device	1-1/8"

Rectangular Boxes & covers


Depth: 1-7/8", 2-1/8"

CAT#
58361-1/2"
58361-3/4"
58361-1/2"&3/4"



Extension
Deep: 1-7/8"

CAT#
59361-1/2"
59361-3/4"
59361-1/2"&3/4"



CAT# 58C1	CAT# 58C36	CAT# 58C7	CAT# 58C16	CAT# 58C6	CAT# 58C5	CAT# 58C4	CAT# 58C4

CAT#	DESCRIPTION
58C1	BLANK
58C36	TOGGLE SWITCH
58C7	DUPLEX RECEPTACLE
58C2	GFCI

CAT#	DESCRIPTION
58C6	1/2" K.O.
58C5	1-13/32"
58C4	1-19/32"

④ 4"OCTAGONAL BOXES

1-1/2"DEEP BOXES



CAT#

54151-1/2"

54151-3/4"

52151-1/2"&3/4"

54151-1/2"&3/4"

2-1/8"DEEP BOXES




CAT#

54171-1/2"

54171-3/4"

54151-1/2"&3/4"

1-1/2"DEEP EXTENSIONS



CAT#

55151-1/2"

55151-1/2"&3/4"



④ 4"OCTAGONAL BOXES COVERS



CAT# 54C1R



CAT# 54C6R

CAT#	DESCRIPTION
54C1R	Blank
54C6R	1/2"K.O.
54C1	Blank
54C6	1/2"K.O.



CAT# 54C1



CAT# 54C6

④ 4-11/16" SQUARE BOXES

1-1/2"DEEP BOXES




CAT#

72151-1/2"

72151-3/4"

72151-1/2"&3/4"

2-1/8"DEEP BOXES



CAT#

72171-1/2"&3/4"

72171-1

72171-11/4

72171-3/4&1

4-11/16" SQUARE COVER



CAT#	DESCRIPTION	RAISED
72-C-1	Flat blank	-
72-C-6	Flat with 1/2"K.O.	-
72-C-3	Center blanked	5/8"
72-C-3-1/B2	With tapped ears	1/2"
72-C-3-3/4	on-2-23/32" centers	3/4"
72-C-3-1		1"


④ 4-11/16" SQUARE COVERS




CAT# 72C1



CAT# 72C6



CAT# 72C13



CAT# 72C18

CAT#	DESCRIPTION	RAISED
72C0	Flat,for One Device	-
72C62	for One Device	1/4"
72C13	for One Device	1/2"
72C14	for One Devices	3/4"

CAT#	DESCRIPTION	RAISED
72C00	Flat,for Two Devices	-
72C20	for Two Device	1/4"
72C17	for Two Device	1/2"
72C18	for Two Devices	3/4"

④ Cajas Metalicas


Material: Steel


Application:for use with conduit as junction box



TOPELE#		Trade Size(mm)			Concentric Knockours		Master QTY
PG	HDG	L	W	H	Size	Numbers	
SJB01	SJB11	118	76	40	3/8"&1/2"	6	80
SJB02	SJB12	100	65	65	1/2"&3/4"	6	60
SJB03	SJB13	100	100	65	1/2"&3/4"	8	60
SJB04	SJB14	150	150	100	3/4"&1"	8	20
SJB05	SJB15	200	100	100	3/4"&1"	8	20
SJB06	SJB16	200	200	100	3/4"&1"	12	10
SJB07	SJB17	300	200	100	3/4"&1"	14	10
SJB08	SJB18	300	200	150	3/4"&1"	14	8
SJB09	SJB19	400	300	150	3/4"&1"	20	4
SJB31	SJB41	100	100	100	3/4"&1"	8	40
SJB32	SJB42	150	100	100	3/4"&1"	8	40

Note: PG abbr.for pre-galvanized,HDG abbr.for Hot Dip Galvanized

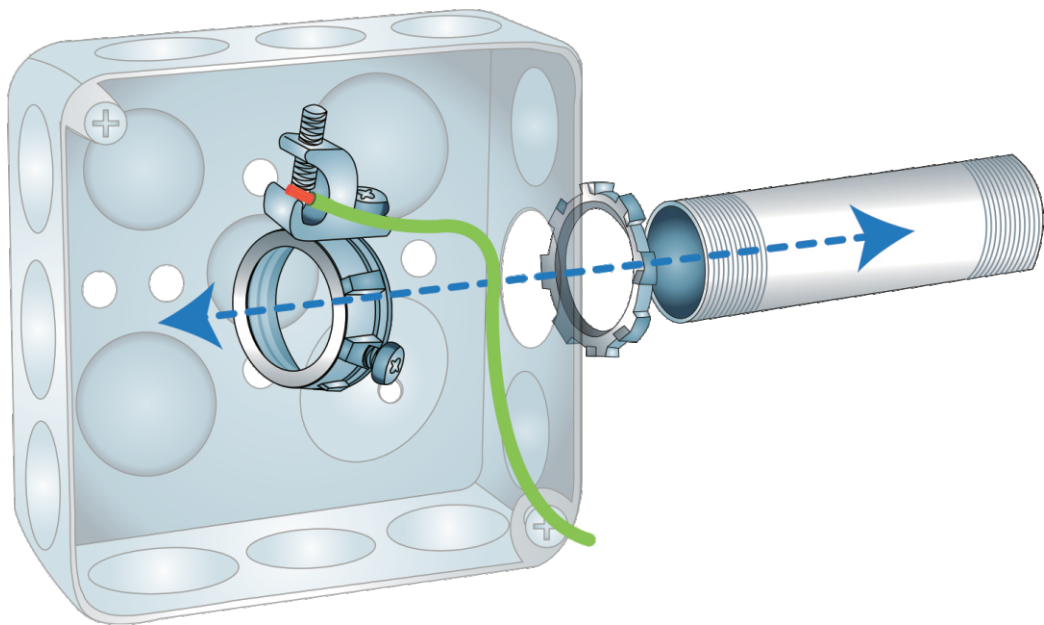

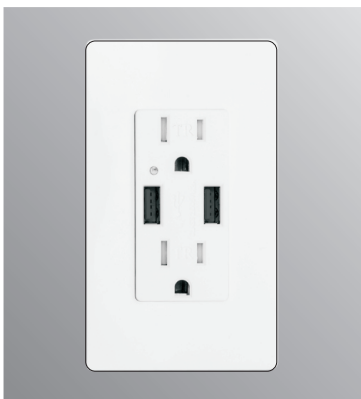


① USB Receptacle



UR-15

15A Receptacle, Class 2 5VDC 4.2A USB Rating

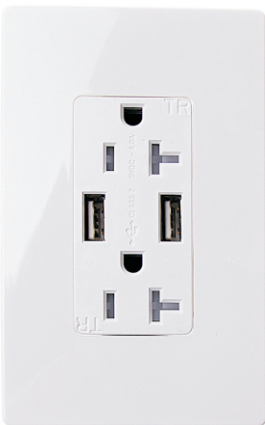

UR-20

20A Receptacle, Class 2 5VDC 4.2A USB Rating

① Smart Lock GFCI



15TR/15TRWR

15A TR/TR WR with LED Light Indicator
Voltage: 125v/250v Available



20TR/20TRWR

20A TR/TR WR with LED Light Indicator
Voltage: 125v/250v Available

① Floor Outlet

Material : brass



BR-USB



BS-GFCI

Material : Aluminum



AR-USB



AS-GFCI

USB outlet / common outlet are available.
Material: Stainless is available

Ⓢ Toggle Switch



LD-2101
Single Pole



LD-2102
Three Way



LD-2103
20A, 120/277VAC
Commercial grade,
Single pole toggle switch

Ⓢ Standard Duplex Receptacle



LD-3010



LD-3016



LD-3011



LD-3014

Ⓢ Dimmer

Ⓢ Decora Rocker Switch

Ⓢ Single Receptacle



LD-2001 — Single Pole
LD-2002 — Three Way



LD-2202 — Single Pole



LD-2203 — Single Pole



LD-3102



LD-4001 Single pole, 600W
LD-4002 Single pole, 1000W
LD-4003 Three way, 600W
LD-4004 Three way, 1000W



LD-4001LA Single pole, 600W with light
LD-4002LA Single pole, 1000W with light
LD-4003LA Three way, 600W with light
LD-4004LA Three way, 1000W with light



LD-4040 single pole, 700W
LD-4041 single pole, 600W
LD-4042 Three Way, 700W
LD-4043 Three Way, 600W

Satisfied Service





Powerful Solution

HANGERS & SUPPORTS

Wallplate



 LD-7001 1 Gang Toggle Switch Cover, Standard Size 2.75"x4.5" LD-7001 Plastic	 LD-7091 1 Gang Toggle Switch Cover, Standard Size 2.75"x4.5" LD-7091 Burshed Stainless Steel	 LD-7002 2 Gang Toggle Switch Cover, Standard Size 4.563"x4.5" LD-7002 Plastic	 LD-7092 2 Gang Toggle Switch Cover, Standard Size 4.563"x4.5" LD-7092 Burshed Stainless Steel	 LD-7003 3 Gang Toggle Switch Cover, Standard Size 6.375"x4.5" LD-7003 Plastic	 LD-7004 4 Gang Toggle Switch Cover, Standard Size 8.188"x4.5" LD-7004 Plastic
 LD-7101 1 Gang Decora Switch Cover, Standard Size 2.75"x4.5" LD-7101 Plastic	 LD-7191 1 Gang Decora Switch Cover, Standard Size 2.75"x4.5" LD-7191 Burshed Stainless Steel	 LD-7102 2 Gang Decora Switch Cover, Standard Size 4.563"x4.5" LD-7102 Plastic	 LD-7192 2 Gang Decora Switch Cover, Standard Size 4.563"x4.5" LD-7192 Burshed Stainless Steel	 LD-7103 3 Gang Decora Switch Cover, Standard Size 6.375"x4.5" LD-7103 Plastic	 LD-7104 4 Gang Decora Switch Cover, Standard Size 8.188"x4.5" LD-7104 Plastic
 LD-7105 5 Gang Decora Switch Cover, Standard Size 10"x4.5" LD-7105 Plastic	 LD-7106 6 Gang Decora Switch Cover, Standard Size 11.81"x4.5" LD-7106 Plastic	 LD-7201 1 Gang Duplex Receptacle Cover, Standard Size 2.75"x4.5" LD-7201 Plastic	 LD-7291 1 Gang Duplex Receptacle Cover, Standard Size 2.75"x4.5" LD-7291 Burshed Stainless Steel	 LD-7202 2 Gang Duplex Receptacle Cover, Standard Size 4.563"x4.5" LD-7202 Plastic	 LD-7292 2 Gang Duplex Receptacle Cover, Standard Size 4.563"x4.5" LD-7292 Burshed Stainless Steel
 LD-7203 3 Gang Duplex Receptacle Cover, Standard Size 6.375"x4.5" LD-7203 Plastic	 LD-7293 3 Gang Duplex Receptacle Cover, Standard Size 6.375"x4.5" LD-7293 Burshed Stainless Steel	 LD-7107 2G Com Cover(Toggle & Decora), Standard Size 4.563"x4.5" LD-7107 Plastic	 LD-7207 2G Com Cover(Toggle & Duplex), Standard Size 4.563"x4.5" LD-7207 Plastic	 LD-7297 2G Com Cover(Toggle & Duplex), Standard Size 4.563"x4.5" LD-7297 Burshed Stainless Steel	 LD-7208 3G Com Cover(Toggle & Decora), Standard Size 6.375"x4.5" LD-7208 Plastic
 LD-7307 2G Com Cover(Decora & Duplex), Standard Size 4.563"x4.5" LD-7307 Plastic	 LD-7397 2G Com Cover(Decora & Duplex), Standard Size 4.563"x4.5" LD-7397 Burshed Stainless Steel	 LD-7491 1 Gang phone & Coaxial Cover, Standard Size 2.75"x4.5" LD-7491 Burshed Stainless Steel	 LD-7402 1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5" LD-7402 Plastic	 LD-7492 1 Gang Single Receptacle Cover, Standard Size 2.75"x4.5" LD-7492 Burshed Stainless Steel	 LD-7501 1 Gang Blank Cover, Standard Size 2.75"x4.5" LD-7501 Plastic
 LD-7591 1 Gang Blank Cover, Standard Size 2.75"x4.5" LD-7591 Burshed Stainless Steel	 LD-7502 2 Gang Blank Cover, Standard Size 4.563"x4.5" LD-7502 Plastic	 LD-7592 2 Gang Screwless Cover, Standard Size 4.563"x4.5" LD-7592 Burshed Stainless Steel	 LD-7101A 1 Gang Screwless Cover, Standard Size 2.75"x4.5" LD-7101A Plastic	 LD-7601 1 Gang Broadband Cover, Standard Size 2.75"x4.5" LD-7601 Plastic	 LD-7602 2 Gang Broadband Cover, Standard Size 2.75"x4.5" LD-7602 Plastic
	 LD-7603 3 Gang Broadband Cover, Standard Size 2.75"x4.5" LD-7603 Plastic		 LD-7604 4 Gang Broadband Cover, Standard Size 2.75"x4.5" LD-7604 Plastic		




G

GFCI & USB OUTLET

G4

Heavy-Duty Clevis Hanger


Material: Carbon Steel
Finished: Electro-Galvanized & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 24"
UL Approved

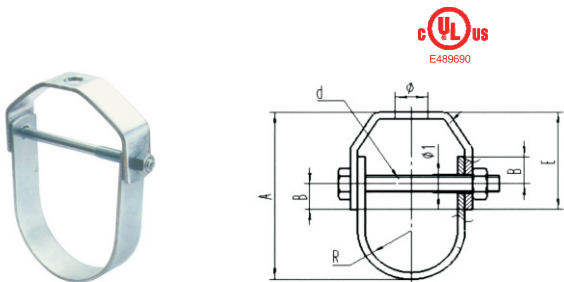

Cat.No.	Conduit Size		Ø (MM)	Max Load		A (MM)	E (MM)	d (UNC)
	IN	R		LBS	KG			
TPCLH-050	1/2"	12.5	11.0	610	277	68	36	1/4"
TPCLH-075	3/4"	15.5	11.0	610	277	83	36	1/4"
TPCLH-100	1"	18.5	11.0	610	277	84	42	1/4"
TPCLH-125	1 1/4"	22.5	11.0	610	277	102	45	1/4"
TPCLH-150	1 1/2"	27.0	11.0	610	277	108	50	1/4"
TPCLH-200	2"	32.5	11.0	610	277	122	56	1/4"
TPCLH-250	2 1/2"	39.0	14.2	1130	513	142	80	3/8"
TPCLH-300	3"	47.5	14.2	1130	513	162	78	3/8"
TPCLH-350	3 1/2"	54.5	14.2	1130	513	171	80	3/8"
TPCLH-400	4"	62.0	17.2	1130	513	205	92	3/8"
TPCLH-500	5"	75.0	17.2	1430	649	222	80	1/2"
TPCLH-600	6"	87.7	21.0	1940	880	262	92	1/2"
TPCLH-800	8"	114	23.0	2000	907	316	85	5/8"
TPCLH-1000	10"	142	23.0	3600	1633	392	120	3/4"
TPCLH-1200	12"	168	23.0	3800	1724	457	120	3/4"
TPCLH-1400	14"	180	26.0	4200	1905	511	114	7/8"
TPCLH-1600	16"	205	26.0	4200	1905	557	114	1"
TPCLH-1800	18"	230	29.0	4800	2177	635	135	1-1/8"
TPCLH-2000	20"	255	32.0	4800	2177	699	135	1-1/4"
TPCLH-2400	24"	307	32.0	4800	2177	806	155	1-1/4"

Light-Duty Clevis Hanger


Material: Carbon Steel
Finished: Electro-Galvanized & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 4"
UL Approved

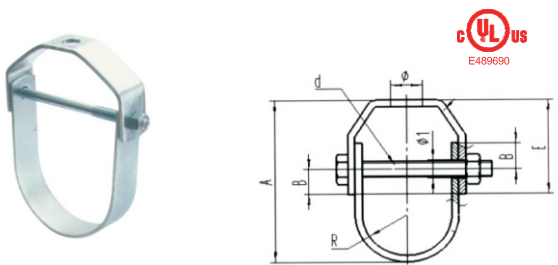

Cat.No.	Conduit Size		Ø (MM)	Max Load		A (MM)	E (MM)	d (UNC)
	IN	R		LBS	KG			
LDCH-050L	1/2"	12.5	11.0	250	113	60	24	1/4"
LDCH-075L	3/4"	15.5	11.0	250	113	67	30	1/4"
LDCH-100L	1"	18.5	11.0	250	113	75	30	1/4"
LDCH-125L	1 1/4"	22.5	11.0	250	113	84	30	1/4"
LDCH-150L	1 1/2"	27.0	11.0	250	113	92	30	1/4"
LDCH-200L	2"	32.5	11.0	250	113	103	30	1/4"
LDCH-250L	2 1/2"	39.0	14.2	350	159	136	51	3/8"
LDCH-300L	3"	47.5	14.2	350	159	152	51	3/8"
LDCH-350L	3 1/2"	54.5	14.2	350	159	168	52	3/8"
LDCH-400L	4"	62.0	17.2	400	181	190	52	3/8"

Swivel Band Hanger


Material: Carbon Steel
Finished: Pre-Galvanized & Electro-Galvanized Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 8"
UL Approved
UNC and Metric Thread for choose

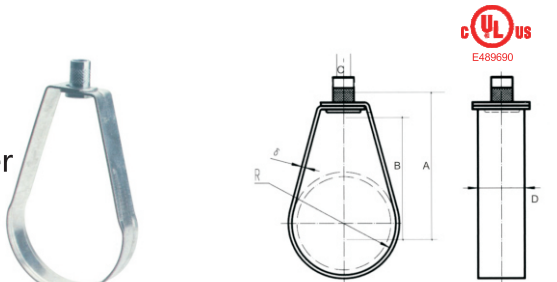

Cat.No.	Conduit Size		Road Size		A (MM)	8 (MM)	Max Load		Width & Thick (mm)
	IN	MM	IN	MM			LBS	KG	
TPBH-050	1/2"	21.34	3/8"	M10	54.50	41.50	300	136	16X1.2
TPBH-075	3/4"	26.67	3/8"	M10	60.50	45.34	300	136	16X1.2
TPBH-100	1"	33.40	3/8"	M10	64.16	47.73	300	136	16X1.2
TPBH-125	1 1/4"	42.16	3/8"	M10	70.74	54.31	300	136	16X1.2
TPBH-150	1 1/2"	48.26	3/8"	M10	74.01	57.58	300	136	16X1.2
TPBH-200	2"	60.33	3/8"	M10	82.59	66.16	300	136	16X1.2
TPBH-250	2 1/2"	73.03	3/8"	M10	104.5	88.69	600	270	22X1.5
TPBH-300	3"	88.90	3/8"	M10	112.5	96.12	600	270	22X1.5
TPBH-350	3 1/2"	101.6	3/8"	M10	120.5	100.5	600	270	22X1.5
TPBH-400	4"	114.3	3/8"	M10	126.9	110.7	1000	453	22X1.5
TPBH-500	5"	141.3	1/2"	M12	145.5	135.7	1000	453	19X2.5
TPBH-600	6"	168.3	1/2"	M12	173.2	154.1	1200	544	19X2.5
TPBH-800	8"	219.3	1/2"	M12	211.5	192.4	1200	544	19X2.5

Riser Clamps


Material: Carbon Steel
Finished: Electro-Galvanized & Copper Plated & Colored Epoxy Plated
Size Range: 1/2" through 24"
UL Approved

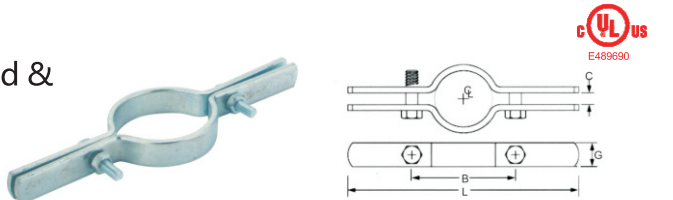

Cat.No.	Conduit Size		Width		Thick		Length(L)		Max Load		Bolt Size (Inch)
	IN	MM	IN	MM	GA	MM	IN	MM	LBS	KG	
TP-050	1/2"	21.34	1.0	25	8Ga	4.0	8-5/8"	219	220	100	3/8"x1-1/4"
TP-075	3/4"	26.67	1.0	25	8Ga	4.0	8-13/16"	223	220	100	3/8"x1-1/4"
TP-100	1"	33.40	1.0	25	8Ga	4.0	9"	228	220	100	3/8"x1-1/4"
TP-125	1 1/4"	42.16	1.0	25	8Ga	4.0	9-1/4"	234	250	110	3/8"x1-1/4"
TP-150	1 1/2"	48.26	1.0	25	8Ga	4.0	10"	254	250	110	3/8"x1-1/2"
TP-200	2"	60.33	1.0	25	8Ga	4.0	10-1/4"	260	300	136	3/8"x1-1/2"
TP-250	2 1/2"	73.03	1.0	25	3Ga	6.0	11	279	400	180	3/8"x1-1/2"
TP-300	3"	88.90	1.0	25	3Ga	6.0	11-3/4"	298	500	220	3/8"x1-1/2"
TP-350	3 1/2"	101.6	1.0	25	3Ga	6.0	12-1/2"	317	600	270	1/2"x1-3/4"
TP-400	4"	114.3	1.0	25	3Ga	6.0	13	330	750	330	1/2"x1-3/4"
TP-500	5"	141.3	1.5	38	3Ga	6.0	14-1/8"	258	1500	670	1/2"x1-3/4"
TP-600	6"	168.3	1.5	38	3Ga	6.0	15-3/8"	390	1600	720	1/2"x2
TP-800	8"	219.3	1.5	38	3/8"	10.0	18-5/8"	473	2500	1100	5/8"x2-1/2"
TP-1000	10"	273.1	2.0	50	3/8"	10.0	20-5/8"	523	2500	1100	5/8"x2-1/2"
TP-1200	12"	325.8	2.0	50	1/2"	12.0	23"	584	2700	1200	5/8"x2-1/2"
TP-1400	14"	357.8	2.0	50	1/2"	12.0	24-1/2"	622	2700	1200	5/8"x2-1/2"
TP-1600	16"	409.9	2.5	64	5/8"	16.0	27"	685	2900	1300	3/4"x3"
TP-1800	18"	459.9	2.5	64	5/8"	16.0	29"	736	2900	1300	3/4"x3"
TP-2000	20"	512.0	3.0	64	5/8"	16.0	31-5/8"	803	2900	1300	3/4"x3"

① Strut Channel

Material: Steel **Finish:** HDG,Pre-Galvanized
Application:for use to support conduits, fixtures, and ventilation systems form beams and other structural systems

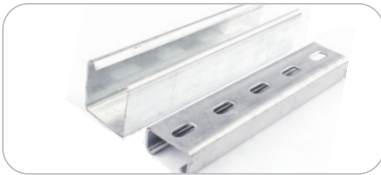

Cross Section		Wall Thickness		Length		Available Option			
Metric	US	Metric	US	Metric	US	Model	Surface Finish		
41mmX41mm	1-5/8" X 1-5/8"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX41mm	1-5/8" X 1-5/8"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.5mm	16Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	1.9mm	14Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.7mm	12Ga.	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.0mm	0.079"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip
41mmX21mm	1-5/8"*13/16"	2.5mm	0.098"	3.05m	10ft	Slotted	Plain	Pre-Galvanized	Hot Dip

Tolerances: Length ± 0.25"(6.35 mm)
Note: Customized thickness or length will also be produced upon special request

① Riel RC


Material: Steel
Application: for use with RC Clamp to support EMT and Conduits



Trade Size		Thickness	Length		Available Option	
			1meter	3meter	Surface Finish	
19mmX35mm		1.2/1.5/2.0mm			Color Zinc	White Zinc

① Riel Din


Material: Steel
Application: for component installation together with end brackets for holding and isolating the components.

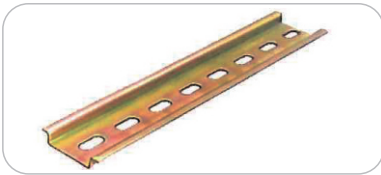

Trade Size		Thickness	Short-circuit Strength	Length		Available Option			
				1meter	2meter	Model	Surface Finish		
35mmX7.5mm		1mm	16mm²			Slotted	Plain	Color Zinc	White Zinc

① Beam Clamp

Material: Malleable Iron
Application: Clamps on beam, girder or similar structure to provide a mounting base

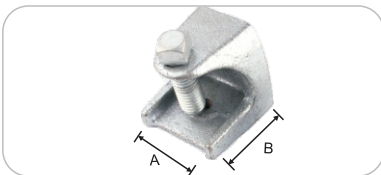

TOPELE#	Trade Size	Load Rating	Master QTY	Dim A (inch)	Dim B (inch)
BC01	1"	250 LBS	200	1.000	1.250
BC02	2"	750 LBS	50	2.000	2.000
BC03	2-1/2"	1250 LBS	30	2.500	2.375

Note: Load Ratings are based on bottom hole of Beam Clamp.

① Threaded Rod

Material: Steel
Application:brings versatility to jobsite, form hanging and mounting to retrofitting and bracing




Trade Size	Diameter		Thread Size	Specification	Length (Meter)	Strength (PSI)		Each Bundle	
	Inch	mm				Yield	Tensile	QTY	Wt.(kg)
1/4"	0.250	6.35	1/4"-20	ASTM A307 Grade 2	3	40,000	60,000	50	25
3/8"	0.375	9.53	3/8"-16	ASTM A307 Grade 2	3	40,000	60,000	25	30
1/2"	0.500	12.70	1/2" -13	ASTM A307 Grade 2	3	40,000	60,000	10	22
M6	0.236	6	1	DIN 975 Class 4.6	3	34,000	58,000	50	23
M8	0.315	8	1.25	DIN 975 Class 4.6	3	34,000	58,000	25	20
M10	0.394	10	1.5	DIN 975 Class 4.6	3	34,000	58,000	20	25
M12	0.472	12	1.75	DIN 975 Class 4.6	3	34,000	58,000	15	29
M14	0.551	14	2	DIN 975 Class 4.6	3	34,000	58,000	10	25
M16	0.630	16	2	DIN 975 Class 4.6	3	34,000	58,000	10	34
M18	0.709	18	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	23
M20	0.787	20	2.5	DIN 975 Class 4.6	3	34,000	58,000	5	29
M22	0.866	22	2.5	DIN 975 Class 4.6	3	34,000	58,000	3	22
M24	0.945	24	3	DIN 975 Class 4.6	3	34,000	58,000	3	25
M27	1.063	27	3	DIN 975 Class 4.6	3	95,000	120,000	3	32
M30	1.181	30	3.5	DIN 975 Class 4.6	3	95,000	120,000	2	27
M33	1.299	33	3.5	DIN 975 Class 4.6	3	95,000	120,000	1	17
M36	1.417	36	4	DIN 975 Class 4.6	3	95,000	120,000	1	19

Note: Customized length will also be produced upon special request

① Channel Nut with Spring

Material: Steel
Application:for use to attach strut fittings to the open fach of channels

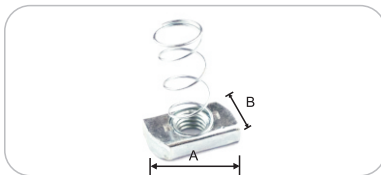


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
CNS1	M6	*	200	1.339	0.748
CNS2	M8	*	200	1.339	0.748
CNS3	M10	*	200	1.339	0.748
CNS4	M12	*	200	1.339	0.748
CNS9	1/4"	*	200	1.339	0.748
CNS10	5/16"	*	200	1.339	0.748
CNS11	3/8"	*	200	1.339	0.748
CNS12	1/2"	*	200	1.339	0.748

Note: If you need short type or without spring,please contact us.

① Top Beam Clamp

Material: Malleable Iron
Application:Clamps on beam, girder or similar structure to provide a mounting base

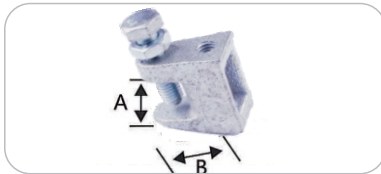

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (mm)	Dim B (mm)
BC11	M8	1200LBS	100	19.30	20.00
BC12	M10	2500LBS	100	20.40	23.00
BC13	M12	3500LBS	100	26.60	27.00

Ⓣ Pipe Clamp with Rubber

Material: Steel

Application:mounting element with rubber insulation for EMT,IMC and Rigid




TOPELE#	Trade Size	Shelf QTY	Master QTY	Top Thread	OD RANGE
PCWR-50	1/2"	20	200	M8+M10	17-23
PCWR-75	3/4"	16	160	M8+M10	23-29
PCWR-100	1"	16	160	M8+M10	29-35
PCWR-125	1-1/4"	*	*	M8+M10	37-43
PCWR-150	1-1/2"	10	100	M8+M10	43-49
PCWR-200	2"	10	100	M8+M10	55-61
PCWR-250	2-1/2"	*	*	M8+M10	70-75
PCWR-300	3"	*	*	M8+M10	85-90
PCWR-350	3-1/2"	*	*	M8+M10	99-103
PCWR-400	4"	*	*	M8+M10	110-115

Ⓣ Conduit Hanger

Standard: UL 2239 and CSA C22.2 No.18.4-04

Material: Steel

Application:for use to suspend conduit from overhead supports

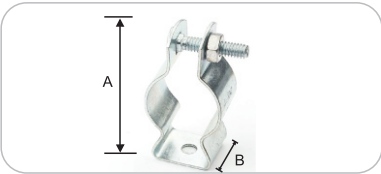

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
CH-50	1/2"	*	400	1.878	0.751
CH-75	3/4"	*	400	2.125	0.751
CH-100	1"	*	300	2.435	0.875
CH-125	1-1/4"	*	300	2.752	0.875
CH-150	1-1/2"	*	50	3.125	1.000
CH-200	2"	*	50	3.875	1.000
CH-250	2-1/2"	*	50	4.625	1.250
CH-300	3"	*	25	5.500	1.250
CH-350	3-1/2"	*	25	5.752	1.250
CH-400	4"	*	10	6.245	1.250

Ⓣ Conduit Fasteners

Material: Steel

Application: provides for fast and easy installation with pliers




TOPELE#	Trade Size	Shelf QTY	Master QTY	Vertical load	Horizontal Load
CF-50/75	1/2" & 3/4"	*	800	100 LBS	25 LBS
CF-100	1"	*	500	100 LBS	25 LBS
CF-125	1-1/4"	*	250	100 LBS	25 LBS
CF-150	1-1/2"	*	250	100 LBS	25 LBS
CF-200	2"	*	250	100 LBS	25 LBS

Ⓣ U Bolt

Material: Steel

Application:for use to run and support EMT,IMC and Rigid in electrical systems

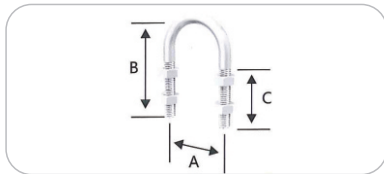


TOPELE#	Trade Size	Thread Size	Dim A		Dim B		Dim C	
			Inch	mm	Inch	mm	Inch	mm
U50	1/2"	5/16"-18	1.25	31.75	2.38	60.45	1.50	38.10
U75	3/4"	5/16"-18	1.44	36.58	2.75	69.85	1.50	38.10
U100	1"	5/16"-18	1.69	42.93	3.00	76.20	1.50	38.10
U125	1-1/4"	5/16"-18	2.06	52.32	3.13	79.50	1.50	38.10
U150	1-1/2"	5/16"-18	2.31	58.67	3.50	88.90	1.50	38.10
U200	2"	5/8"-16	2.81	71.37	4.38	111.25	1.88	47.75
U250	2-1/2"	5/8"-16	3.38	85.85	4.75	120.65	1.88	47.75
U300	3"	5/8"-16	4.00	101.60	5.38	136.65	1.88	47.75
U350	3-1/2"	5/8"-16	4.50	114.30	5.75	146.05	1.88	47.75
U400	4"	5/8"-16	5.00	127.00	6.63	168.40	1.88	47.75

Ⓣ Strut Clamp

Standard: UL 2239 and CSA C22.2 No.18.4-04

Material: Steel

Application:for use to support EMT, Rigid or IMC conduit to the strut channel

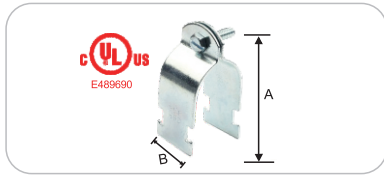


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
TPSC-050	1/2"	*	400	2.302	1.241
TPSC-075	3/4"	*	350	2.458	1.241
TPSC-100	1"	*	300	2.680	1.241
TPSC-125	1-1/4"	*	300	3.210	1.241
TPSC-150	1-1/2"	*	250	3.415	1.241
TPSC-200	2"	*	200	4.000	1.241
TPSC-250	2-1/2"	*	150	5.000	1.241
TPSC-300	3"	*	150	5.555	1.241
TPSC-350	3-1/2"	*	*	6.000	1.241
TPSC-400	4"	*	100	6.500	1.241

Ⓣ RC Clamp

Material: steel

Application: for use to support EMT and Conduits to the Riel RC 19X35

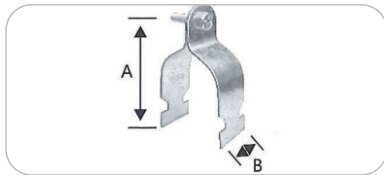

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
RCC-50	1/2"	*	600	1.984	1.024
RCC-75	3/4"	*	600	2.283	1.024
RCC-100	1"	*	500	2.626	1.024
RCC-125	1-1/4"	*	350	3.055	1.024
RCC-150	1-1/2"	*	350	3.181	1.024
RCC-200	2"	*	300	3.780	1.024
RCC-250	2-1/2"	*	*	4.488	1.024
RCC-300	3"	*	*	5.197	1.024
RCC-400	4"	*	*	*	1.024