

东莞市华文新能源有限公司

Dongguan Huawen New Power Co.,Ltd.



Focus On Solving Lithium Battery Pack Management
Technology, A Industry Leader Since 2015- Huawen

www.huawennewpower.com

Company Introduction

Huawen New Power Co., Ltd, established in 2015, with around 1500 square meters, is a professional developer and manufacturer of innovative battery solutions. We devote to producing and supplying high quality rechargeable batteries for today's market.

Our R&D team is well experienced in products design, development and electronic circuits (PCM/BMS) design. Our partners include major OEM/ODM in the consumer electronics, energy storage, home & garden tool, E-Bike, safety/security, medical, personal transportation and data storage etc.

Huawen believes that quality is the cornerstone of corporation development, and our company is strictly following ISO9001:2015 standard in establishing and improving our quality control system. From raw material procurement & inspection, production process control and product shipment, we have a consummate, scientific and systematic operation standard to guarantee the quality and stability of our products. Products by Huawen qualified by UL, CB, KC, PSE, GB31241, 2013/56/EU, 2006/66/EC, UN38.3, MSDS, safty reports by air and by sea.

Fine quality, timely delivery, consummate service and competitive prices enable Huawen to keep attaining praises from our domestic and foreign clients. We, Huawen people with the greatest passion and faithfulness, are willing to strive together with our customers in making common progress and creating a bright future!

公司简介

东莞市华文新能源有限公司成立于2015年，占地面积1500平方，是一家具有创新精神、专业从事提供电池解决方案的开发商和生产厂家。我们致力于高性能高品质充电电池的研发和生产以满足全球迅速发展的市场需求。我们不仅拥有丰富的经验与专业的生产设备、测试设备，而且我们的技术团队同样具有专业的产品设计开发以及PCM/BMS的设计能力。我司的电池产品广泛应用于消费类电子消费、能源储存、家用及园艺工具、电动自行车、安防设备、医用器械、个人交通工具和数据储存等领域。

华文坚信质量是企业发展的根本,公司严格按照ISO9001:2015体系的要求建立和完善自己的品质保证系统,从原材料采购、原材料检验、制程控制到成品出货等都有完善、系统、科学的操作规范,确保产品的质量稳定可靠。产品通过了UL, CB, KC, PSE, GB31241, 2013/56/EU, 2006/66/EC, UN38.3, MSDS, 空运&海运安全运输报告。

良好的品质,准时的交期,完善的服务以及有竞争力的价格,使华文新能源得到了国内外客户的一致好评,我们华文人愿以最大的热情和努力,与客户一起发展,携手共创美好未来!




huawen

Our company culture & team spirit

- We uphold the business philosophy of "people-oriented, customer-oriented, technology-oriented, and integrity-based".
- We adhere to the business philosophy of "reputation first, quality first, and service first".
- We guide our daily business activities with the concepts of honesty, integrity, and openness, respect human rights, and safeguard the legitimate rights and interests of employees, customers, and third parties.
- We are committed to creating and maintaining a safe and healthy working environment for employees, customers, and society.
- We are committed to establishing a health and safety system to ensure employee safety.
- We continuously monitor the production environment and set improvement goals.
- We are committed to preventing pollution and reducing the impact on the environment.
- We provide environmental awareness training courses for employees.

公司文化和企业社会责任

- 我们秉持“以人为本，以客为尊，科技为导，诚信为基”的经营哲学。
 - 我们坚持“信誉第一、质量第一、服务至上”的经营理念。
 - 我们以诚信、正直、开放的理念引导日常经营活动，尊重人权，维护员工、客户及第三方的合法权益。
 - 我们承诺为员工、客户及社会创建并维持安全、健康的工作环境。
 - 我们承诺建立健康与安全制度，确保员工安全。
 - 我们持续监控生产环境并设定改进目标。
 - 我们承诺防止污染，减少对环境的影响。
 - 我们为员工提供环保意识培训课程。
- 

CATALOGUE



目录

OL3/OL4/OL5

- 01** OL3 Dual DC Mini UPS Series ▶ 01-02
- 02** OL3 UBS DC Mini UPS Series ▶ 03-04
- 03** OL4 UBS DC Mini UPS Series ▶ 05-06
- 04** OL4 Dual DC Mini UPS Series ▶ 07-08
- 05** OL5 UBS DC Mini UPS Series ▶ 09-10
- 06** OL3/OL4/OL5 Wide Temperature Range Series ▶ 11-12

USB DC

OL3 Dual DC Mini UPS Series



FUNCTIONS 功能

- Dual DC output interface: Equipped with two DC output interfaces, it can power two devices at the same time to meet the power needs of multiple devices.
双DC输出接口: 配备两个DC输出接口, 可同时为两台设备供电, 满足多设备用电需求。
- Fast switching: The built-in circuit provides parallel power supply. When the mains is disconnected, the 0ms conversion time provides continuous power supply.
快速切换: 内置电路提供并联供电方式, 当市电断开时, 0ms转换时间以提供持续的供电。
- Multiple protections: It has multiple protection functions such as overcharge, over-discharge, overcurrent, short circuit, etc., which effectively prolongs the battery life and ensures the safety of the device.
多重保护: 具备过充、过放、过流、短路等多重保护功能, 有效延长电池寿命, 保障设备安全。
- Compact and portable: It is small in size, light in weight, easy to carry and install, and suitable for various occasions.
小巧便携: 体积小, 重量轻, 便于携带和安装, 适用于各种场合。
- LED indicator: It is equipped with an LED indicator to display the working status and power status in real time, so that users can understand the operating status of the device.
LED指示灯: 配备LED指示灯, 实时显示工作状态和电量情况, 方便用户了解设备运行状态。

Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL3 Dual DC Mini UPS Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL3-C20221	OL3-C26221	OL3-C32221	OL3-C35221	OL3-W20331	OL3-W26331	OL3-W32331	OL3-W35331
Input 输入	8.4V2A 55*21DC				12.6V2A 55*21DC			
Output 输出	Custom 5V/9V/12V CV or 5.5V~8.4V WRV				8.25V ~ 12.6V Wide-Range Voltage (WRV)			
Output port 输出端口	55*21 DC							
Output power(Max) 输出最大功率	5V15W / 9V18W / 12V24W				24W			
Battery type 电池型号	18650 Lithium-ion							
Nominal voltage 标称电压	7.4V				11.1V			
Battery qty & capacity 电池数量与容量	2×2000mAh	2×2600mAh	2×3200mAh	2×3500mAh	3×2000mAh	3×2600mAh	3×3200mAh	3×3500mAh
Rated capacity 额定容量	14.8Wh	19.24Wh	23.68Wh	25.9Wh	22.2Wh	28.86Wh	35.52Wh	38.85Wh
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit							
LED indicator light LED指示灯	1 LED lights up at 0%~25% 2 LEDs light up at 26%~50% 3 LEDs light up at 51%~75% 4 LEDs light up at 76%~100%							
Operating temperature 工作温度	-10℃~50℃							
Storage temperature 储存温度	-20℃~65℃							
Relative humidity 相对湿度	10%- 90% RH							
Dimension 尺寸	3.94×2.38×0.51 inch / 100×60.5×23 mm							
N.W. 净重	approx 150g				approx 190g			
Accessory 配件	1pcs 8.4V2A DC Charger 1pcs 1 meter 22AWG DC Cable				1pcs 12.6V2A DC Charger 1pcs 1 meter 22AWG DC Cable			



FUNCTIONS 功能

- **USB interface:** The device is powered through the USB interface, suitable for USB devices such as mobile phones and tablets.
USB接口:通过USB接口为设备供电, 适用于手机、平板、等USB设备。
- **Fast switching:** The built-in circuit provides parallel power supply. When the mains is disconnected, the 0ms conversion time provides continuous power supply.
快速切换: 内置电路提供并联供电方式, 当市电断开时, 0ms转换时间以提供持续的供电。
- **Multiple protections:** It has multiple protection functions such as overcharge, over-discharge, overcurrent, short circuit, etc., which effectively prolongs the battery life and ensures the safety of the device.
多重保护: 具备过充、过放、过流、短路等多重保护功能, 有效延长电池寿命, 保障设备安全。
- **Compact and portable:** It is small in size, light in weight, easy to carry and install, and suitable for various occasions.
小巧便携: 体积小, 重量轻, 便于携带和安装, 适用于各种场合。
- **LED indicator:** It is equipped with an LED indicator to display the working status and power status in real time, so that users can understand the operating status of the device.
LED指示灯: 配备LED指示灯, 实时显示工作状态和电量情况, 方便用户了解设备运行状态。

Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL3 USB DC Mini UPS Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL3-USB20331	OL3-USB26331	OL3-USB32331	OL3-USB35331
Input 输入	12.6V2A 55*21 DC			
Output 输出	USB 5V2A			
	8.25V ~ 12.6V/3A Wide-Range Voltage (WRV) 55*21DC			
Output power(Max) 输出最大功率	36W			
Battery type 电池型号	18650 Lithium-ion			
Nominal voltage 标称电压	11.1V			
Battery qty & capacity 电池数量与容量	3×2000mAh	3×2600mAh	3×3200mAh	3×3500mAh
Rated capacity 额定容量	22.2Wh	28.86Wh	35.52Wh	38.85Wh
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit			
LED indicator light LED指示灯	1 LED lights up at 0%~25%. 2 LEDs light up at 26%~50%. 3 LEDs light up at 51%~75%. 4 LEDs light up at 76%~100%.			
Operating temperature 工作温度	-10℃~50℃			
Storage temperature 储存温度	-20℃~65℃			
Relative humidity 相对湿度	10%- 90% RH			
Dimension 尺寸	3.94×2.38×0.51 inch / 100×60.5×23 mm			
N.W. 净重	approx 190g			
Accessory 配件	1pcs 12.6V2A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male			



FUNCTIONS 功能

- **USB interface:** The device is powered through the USB interface, suitable for USB devices such as mobile phones and tablets.
USB接口:通过USB接口为设备供电, 适用于手机、平板、等USB设备。
- **Fast switching:** The built-in circuit provides parallel power supply. When the mains is disconnected, the 0ms conversion time provides continuous power supply.
快速切换: 内置电路提供并联供电方式, 当市电断开时, 0ms转换时间以提供持续的供电。
- **Multiple protections:** It has multiple protection functions such as overcharge, over-discharge, overcurrent, short circuit, etc., which effectively prolongs the battery life and ensures the safety of the device.
多重保护: 具备过充、过放、过流、短路等多重保护功能, 有效延长电池寿命, 保障设备安全。
- **Compact and portable:** It is small in size, light in weight, easy to carry and install, and suitable for various occasions.
小巧便携: 体积小, 重量轻, 便于携带和安装, 适用于各种场合。
- **LED indicator:** It is equipped with an LED indicator to display the working status and power status in real time, so that users can understand the operating status of the device.
LED指示灯: 配备LED指示灯, 实时显示工作状态和电量情况, 方便用户了解设备运行状态。

Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL4 USB DC Mini UPS Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL4-USB20632	OL4-USB26632	OL4-USB32632	OL4-USB35632	OL4-USB20661	OL4-USB26661	OL4-USB32661	OL4-USB35661
Input 输入	12.6V2A 55*21DC				25.2V1A 55*21 DC			
Output 输出	USB 5V2A							
	8.25V ~ 12.6V/3A Wide-Range Voltage (WRV) 55*21DC				16.5V ~ 25.2V/3A Wide-Range Voltage (WRV) 55*21DC			
Output power(Max) 输出最大功率	36W				60W			
Battery type 电池型号	18650 Lithium-ion							
Nominal voltage 标称电压	11.1V				22.2V			
Battery qty & capacity 电池数量与容量	6×2000mAh	6×2600mAh	6×3200mAh	6×3500mAh	6×2000mAh	6×2600mAh	6×3200mAh	6×3500mAh
Rated capacity 额定容量	44.4Wh	57.72Wh	71.04Wh	77.7Wh	44.4Wh	57.72Wh	71.04Wh	77.7Wh
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit							
LED indicator light LED指示灯	1 LED lights up at 0%~20% 2 LEDs light up at 21%~40% 3 LEDs light up at 41%~60% 4 LEDs light up at 61%~80% 5 LEDs light up at 81%~100%							
Operating temperature 工作温度	-10℃~50℃							
Storage temperature 储存温度	-20℃~65℃							
Relative humidity 相对湿度	10%- 90% RH							
Dimension 尺寸	5.83×3.33×1.10 inch / 148.0*84.5*28mm							
N.W. 净重	approx 390g							
Accessory 配件	1pcs 12.6V2A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male				1pcs 25.2V1A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male			



FUNCTIONS 功能

- Dual DC output interface: Equipped with two DC output interfaces, it can power two devices at the same time to meet the power needs of multiple devices.
双DC输出接口: 配备两个DC输出接口, 可同时为两台设备供电, 满足多设备用电需求。
- Fast switching: The built-in circuit provides parallel power supply. When the mains is disconnected, the 0ms conversion time provides continuous power supply.
快速切换: 内置电路提供并联供电方式, 当市电断开时, 0ms转换时间以提供持续的供电。
- Multiple protections: It has multiple protection functions such as overcharge, over-discharge, overcurrent, short circuit, etc., which effectively prolongs the battery life and ensures the safety of the device.
多重保护: 具备过充、过放、过流、短路等多重保护功能, 有效延长电池寿命, 保障设备安全。
- Installation method: Small size, light weight, wall-mounted installation, easy to operate.
安装方式: 体积小, 重量轻, 壁挂式安装, 操作简单。
- LED indicator: It is equipped with an LED indicator to display the working status and power status in real time, so that users can understand the operating status of the device.
LED指示灯: 配备LED指示灯, 实时显示工作状态和电量情况, 方便用户了解设备运行状态。

Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL4 Dual DC Mini UPS Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL4W-20632	OL4W-26632	OL4W-32632	OL4W-35632	OL4W-20661	OL4W-26631	OL4W-32661	OL4W-35661
Input 输入	12.6V2A 55*21DC				25.2V1A 55*21 DC			
Output 输出	USB 5V2A							
	8.25V ~ 12.6V/3A Wide-Range Voltage (WRV) DC				16.5V ~ 25.2V/3A Wide-Range Voltage (WRV) DC			
Output power(Max) 输出最大功率	36W				60W			
Battery type 电池型号	18650 Lithium-ion							
Nominal voltage 标称电压	11.1V				22.2V			
Battery qty & capacity 电池数量与容量	6×2000mAh	6×2600mAh	6×3200mAh	6×3500mAh	6×2000mAh	6×2600mAh	6×3200mAh	6×3500mAh
Rated capacity 额定容量	44.4Wh	57.72Wh	71.04Wh	77.7Wh	44.4Wh	57.72Wh	71.04Wh	77.7Wh
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit							
LED indicator light LED指示灯	1 LED lights up at 0%~20% 2 LEDs light up at 21%~40% 3 LEDs light up at 41%~60% 4 LEDs light up at 61%~80% 5 LEDs light up at 81%~100%							
Operating temperature 工作温度	-10℃~50℃							
Storage temperature 储存温度	-20℃~65℃							
Relative humidity 相对湿度	10%- 90% RH							
Installation method 安装方式	Wall-mounted							
Dimension 尺寸	5.83×3.33×1.10 inch / 148.0×84.5×28mm							
N.W. 净重	approx 395g							
Accessory 配件	1pcs 12.6V2A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male				1pcs 25.2V1A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male			



FUNCTIONS 功能

- **USB interface:** The device is powered through the USB interface, suitable for USB devices such as mobile phones and tablets.
USB接口:通过USB接口为设备供电, 适用于手机、平板、等USB设备。
- **Fast switching:** The built-in circuit provides parallel power supply. When the mains is disconnected, the 0ms conversion time provides continuous power supply.
快速切换: 内置电路提供并联供电方式, 当市电断开时, 0ms转换时间以提供持续的供电。
- **Multiple protections:** It has multiple protection functions such as overcharge, over-discharge, overcurrent, short circuit, etc., which effectively prolongs the battery life and ensures the safety of the device.
多重保护: 具备过充、过放、过流、短路等多重保护功能, 有效延长电池寿命, 保障设备安全。
- **Compact and portable:** It is small in size, light in weight, easy to carry and install, and suitable for various occasions.
小巧便携: 体积小, 重量轻, 便于携带和安装, 适用于各种场合。
- **LED indicator:** It is equipped with an LED indicator to display the working status and power status in real time, so that users can understand the operating status of the device.
LED指示灯: 配备LED指示灯, 实时显示工作状态和电量情况, 方便用户了解设备运行状态。

Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL5 USB DC Mini UPS Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL5-USB1234	OL5-USB2438	OL5-USB1261	OL5-USB2464	OL5-USB10101	OL5-USB20102
Input 输入	12.6V2A 55*21DC		25.2V1A 55*21DC		42.0V1A 55*25DC	
Output 输出	USB 5V2A					
	8.25V ~ 12.6V/3A WRV 55*21DC		16.5V ~ 25.2V/3A WRV 55*21DC		27.5V ~ 42.0V/3A WRV 55*25DC	
Output power(Max) 输出最大功率	36W		60W		90W	
Battery type 电池型号	18650 Lithium-ion (1500mAh/2000mAh/2600mAh/3200mAh/3500mAh)					
Nominal voltage 标称电压	11.1V		22.2V		37V	
Battery qty 电池数量	12	24	12	24	10	20
Rated capacity (option) 额定容量	66.6 ~ 155.4(Wh)	133.2~ 310.8(Wh)	66.6 ~ 155.4(Wh)	133.2~ 310.8(Wh)	55.0 ~ 129.5(Wh)	111.0 ~ 259.0(Wh)
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit					
LED indicator light LED指示灯	1 LED lights up at 0%~20% 2 LEDs light up at 21%~40% 3 LEDs light up at 41%~60% 4 LEDs light up at 61%~80% 5 LEDs light up at 81%~100%					
Operating temperature 工作温度	-10℃~50℃					
Storage temperature 储存温度	-20℃~65℃					
Relative humidity 相对湿度	10%- 90% RH					
Dimension 尺寸	9.06×3.94×1.65inch / 230×100×42mm					
N.W. 净重	approx 875g	approx 1500g	approx 875g	approx 1500g	approx 775g	approx 1300g
Accessory 配件	1pcs 12.6V2A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male		1pcs 25.2V1A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male		1pcs 42.0V1A DC Charger 1pcs DC Y-Cable:1 Female to 2 Male	



FUNCTIONS 功能

- Wide temperature range: The built-in lithium battery pack supports a wide temperature operating range of $-40^{\circ}\text{C}\sim 80^{\circ}\text{C}$ (partially supports $-30^{\circ}\text{C}\sim 60^{\circ}\text{C}$), adapts to extreme high and low temperature environments, and meets the needs of special scenarios such as outdoor and industrial. 宽温度范围: 内置锂电池组支持 $-40^{\circ}\text{C}\sim 80^{\circ}\text{C}$ (部分支持 $-30^{\circ}\text{C}\sim 60^{\circ}\text{C}$) 的宽温度工作范围, 适应极端高低温环境, 满足户外、工业等特殊场景需求。
- High energy density: Adopts high-performance lithium battery pack with high energy density, compact size, easy to carry and install. 高能量密度: 采用高性能锂电池组, 能量密度高, 体积小, 便于携带和安装。
- Multiple output interfaces: Provides DC output interface, and some models are also equipped with 5V2A USB-A port to meet the power supply needs of various devices. 多种输出接口: 提供DC输出接口, 部分型号还配备5V2A USB-A端口, 满足多种设备供电需求。
- High power output: The maximum power supports 90W, which can provide sufficient power for high-performance devices. 大功率输出: 最大功率支持90w, 可为高性能设备提供充足电力。
- Large capacity battery: The battery capacity is up to 310.8Wh, with long battery life, meeting the needs of long-term power supply. 大容量电池: 电池容量高达310.8Wh, 续航时间长, 满足长时间供电需求。


Notes:

- * CV: Constant Voltage * WRV: Wide Range Voltage
- * DC port: Generally use 55*21mm or 55*25mm DC port
- * Solutions to adapt to different powered devices can be provided according to customers
- * Support customized voltage/current/capacity/outer packaging/LOGO, etc.

OL3/OL4/OL5 Wide Temperature Range Series

TECHNICAL SPECIFICATION 技术规格

Model 型号	OL3-USB21LT	OL3-DC21LT	OL3-USB31LT	OL3-DC31LT	OL4-632LT	OL4-611LT	OL5-1234LT	OL5-2438LT	OL5-1262LT	OL5-2464LT
Input 输入	8.4V2A 55*21DC		12.6V2A 55*21DC		12.6V2A 55*21DC	25.2V1A 55*21DC	12.6V2A 55*21DC		25.2V1A 55*21DC	
Output 输出	USB 5V2A	5V/9V/12V CV DC	USB 5V2A	5V/9V/12V CV DC	USB 5V2A					
	5.5V ~ 8.4V/2A WRV 55*21DC		8.25V ~ 12.6V/2A WRV 55*21DC		8.25V~12.6V/3A WRV 55*21DC	16.5V~25.2V/3A WRV 55*21DC	8.25V ~ 12.6V/4A WRV 55*21DC		16.5V ~ 25.2V/3A WRV 55*21DC	
Output power(Max) 输出最大功率	18W		24W		36W	60W	60W		90W	
Battery type 电池型号	18650 Lithium-ion: MOLICEL-[2800mAh/3000mAh/3500mAh], YUECHENG-[2000mAh/2900mAh]									
Nominal voltage 标称电压	7.4V		11.1V		11.1V	22.2V	11.1V		22.2V	
Battery qty & capacity 电池数量与容量	2		3		6		12	24	12	24
Rated capacity(option) 额定容量	14.8Wh ~ 25.9Wh		22.2Wh ~ 38.85Wh		44.4Wh ~ 77.7Wh		88.8Wh ~ 155.4Wh	177.6Wh ~ 310.8Wh	88.8Wh ~ 155.4Wh	177.6Wh ~ 310.8Wh
Protection 保护	Over-charge, Over-discharge, Over-current, Overload, Over-temperature and short circuit									
LED indicator light LED指示灯	1 LED lights up at 0%~25% 2 LEDs light up at 26%~50% 3 LEDs light up at 51%~75% 4 LEDs light up at 76%~100%				1 LED lights up at 0%~20% 2 LEDs light up at 21%~40% 3 LEDs light up at 41%~60% 4 LEDs light up at 61%~80% 5 LEDs light up at 81%~100%					
Operating temperature 工作温度	Charging: 0°C to 60°C									
	Discharge: -30°C to 60°C for all models, with some supporting -40°C to 80°C									
Storage temperature 储存温度	-20°C ~ 65°C									
Relative humidity 相对湿度	10%- 90% RH									
Dimension 尺寸	3.94×2.38×0.51 inch / 100×60.5×23 mm				5.83×3.33×1.10 inch 148.0×84.5×28 mm		9.06×3.94×1.65 inch / 230×100×42 mm			
N.W. 净重 (approx)	150g		190g		390g		875g	1500g	875g	1500g
Accessory 配件	1pcs 8.4V2A DC Charger 1pcs 1meter DC Cable		1pcs 12.6V2A DC Charger 1pcs 1meter DC Cable		1pcs 25.2V1A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male		1pcs 12.6V or 25.2V1A DC Charger 1pcs DC Y-Cable: 1 Female to 2 Male			

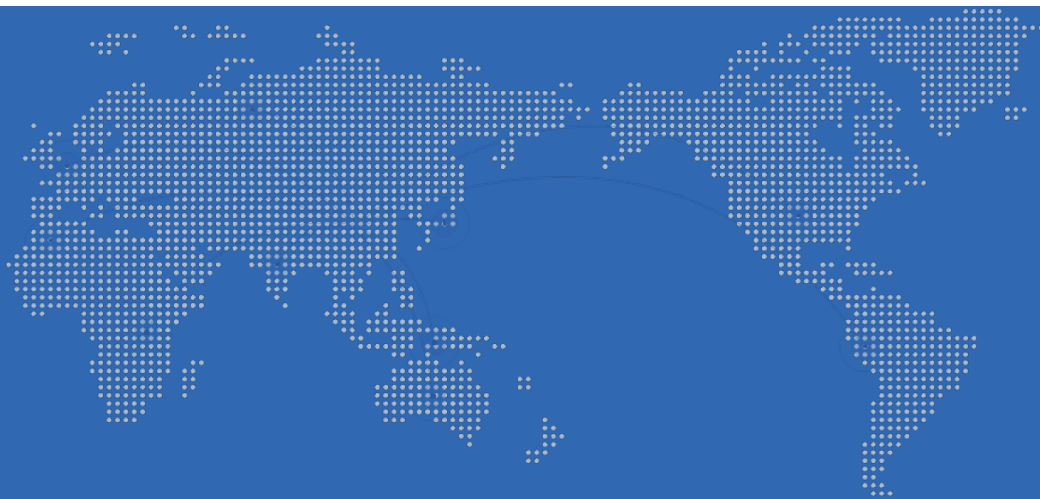

huawen[©]

东莞市华文新能源有限公司

Dongguan Huawen New Power Co.,Ltd.

Add: No.388 Yangxin Road, Dalang Town, Dongguan City, Guangdong Province

TEL: 0086-15992786791

E-mail: info@huawennewpower.com

Web: <https://www.huawennewpower.com>