

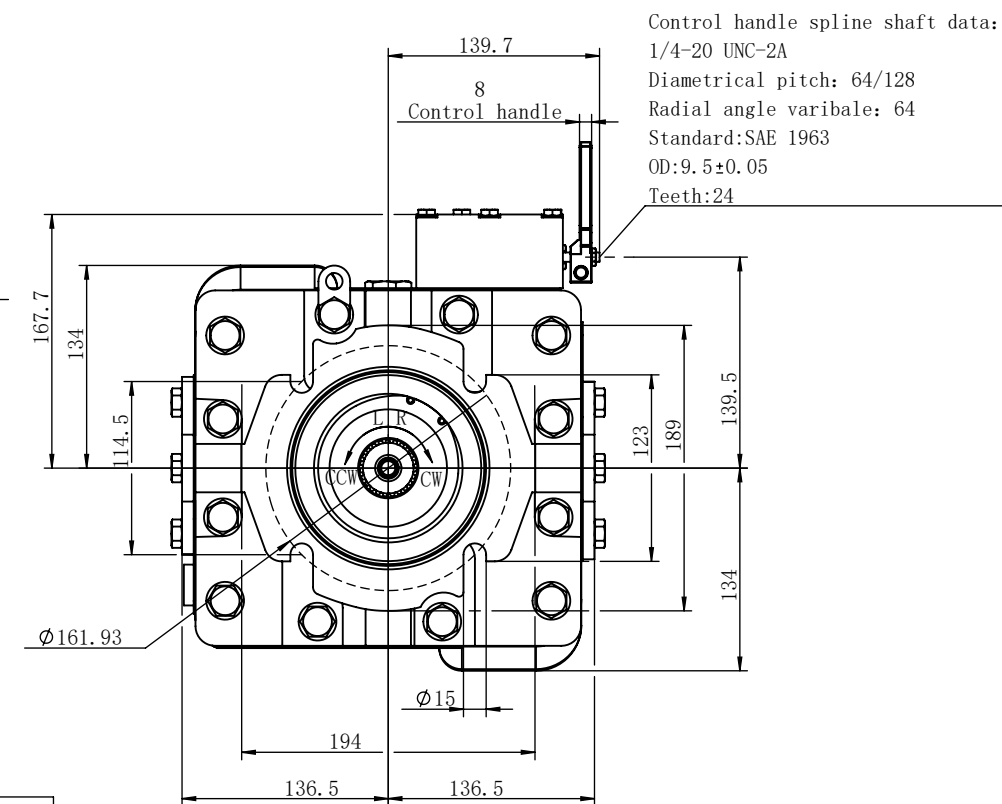
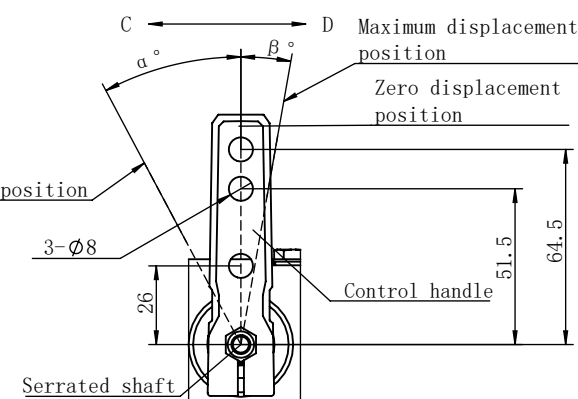



MV23-21

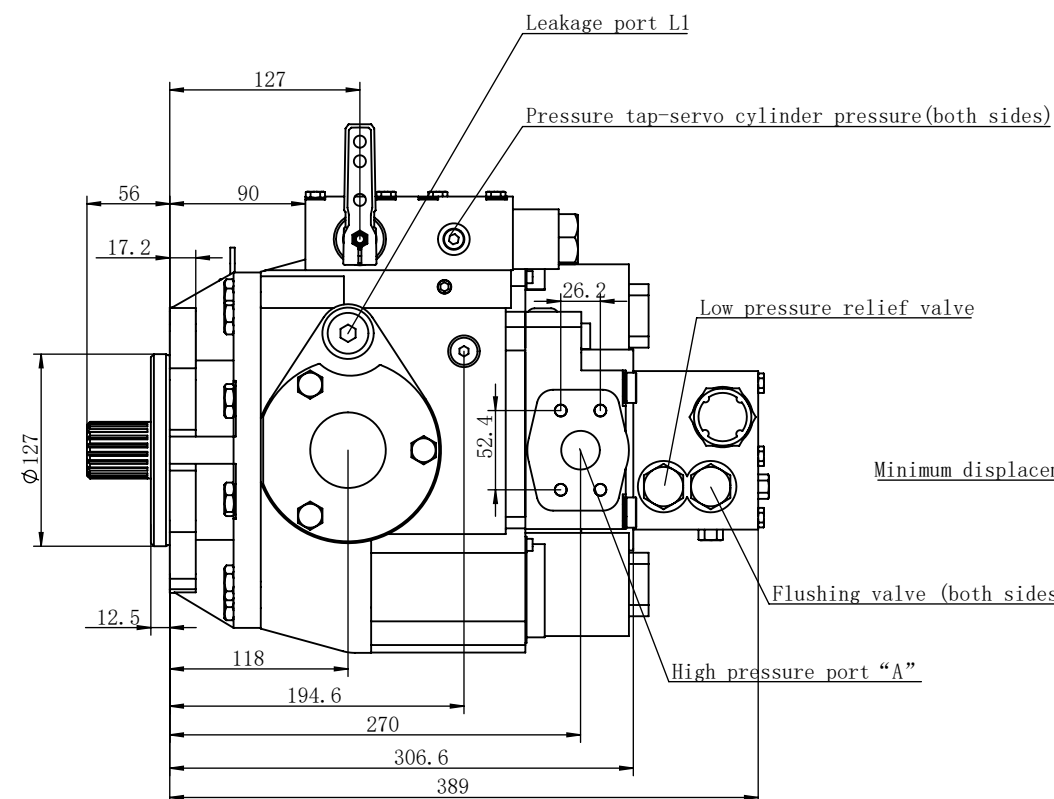

technical requirement	
Minimum speed	500r/min
maximum speed	2600r/min
Rated working pressure	30Mpa

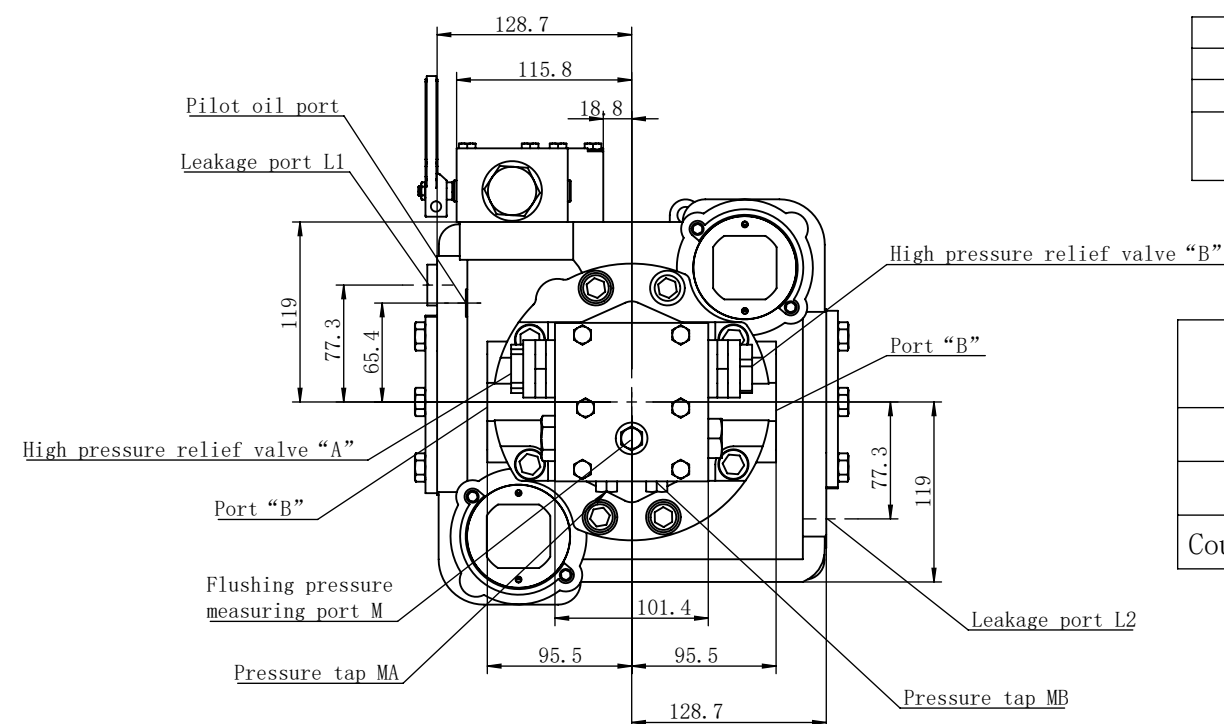

Motor shaft rotation direction		
	Port A	Port B
Clockwise CW	out	enter
Counterclockwise CCW	enter	out

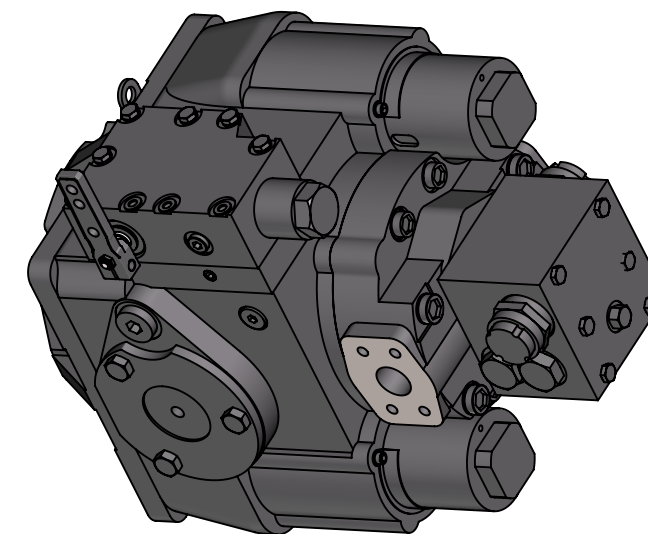

Propeller shaft spline				Conical axis		Displacement	Ports A、B		Ports L1、 L2	Port M	Port MA and MB	High pressure relief valve A、 B
Teeth	Z	21	23	Lock nut	1-20 UNEF-2B wrench: 38	38-89 ml/r	3/8-16 UNC-2B Depth: 25mm		7/8-14 UNF-2B	7/16-20 UNF-2B	35Mpa 42Mpa	
Radial pitch	M	16/32	16/32				A6 mm[in]	A7 mm[in]				
Pressure angle	a	30°	30°									
Dividing circle diameter	D	Ø33.34	Ø36.5				52.4	26.2				

	Product model		MV23-21
	Product name		Closed axial piston motor
Date	Weight (kg)	Proportion	Shangdong Highland Hydraulic Seiko Co., Ltd
	82	1:5	