



X & T Series

Indoor & Outdoor High Level LED Screen

XT Series is a high-end product with high quality and unique designs. Premium quality & novel appearance design, multi cabinet sizes for flexible splicing, beveled cabinets for right angle, various installation ways like hanging, free standing, wall mounting, etc. It's great choice for Indoor and outdoor live shows, music festival, film shooting, exhibition, broadcasting, conference, stage, party, sports activity, wedding, game shows, etc.

Brochure

Product Video

Installation Video

Contact

Ergonomically Designed Handle

Easy to grasp and carry when you build the screen. Only 8KG for easily installation and disassembling.








Front Maintenance Optional

Front maintenance option is necessary when there is no enough space behind the screen for rear service.

You can remove the LED modules by our front maintenance suction tool, easy, quick and convenient.



Support curved cabinet adjustment by yourself. -10°~ +15° ultra-wide and ultra-curved LED Display.

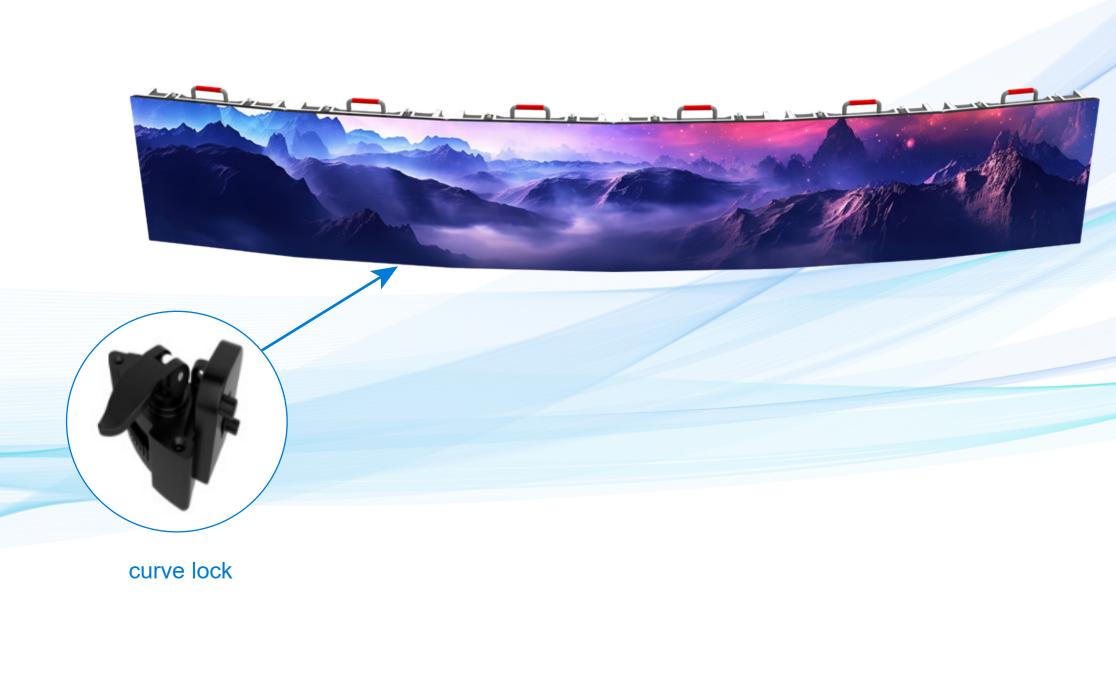





Two rotary knobs make the control box exchangeable in 1 second.

Very fast disassembly and installation with one whole control box included

One Second Exchangeable Control Box

power supply, receiver card, all cables, HUB board inside it. It can save a lot of time to maintain defective parts when the events is going on.



No light leakage design with specific strips on side of

No Light Leakage Trouble

cabinet and behind neighbour module.



Easy & Fast Installation

cabinet for easily and quickly cabinets assembly, 1~3 hours for normal size screen.

Hanging or stacking, X & T series with light and thin features

makes installation faster and easier.4 quick locks on each LED



Help to find the right positions to connect two cabinets together quickly. More accurate, convenient and faster.

Positioning Pin Cabinet Design







A small LCD screen on each LED panel will show the work-

ing hours, temperature, current, voltage, etc. You can control

If you have no idea about how long the panels have worked,

you can know that by status LCD, so that you can balance

the brightness and lifespan of all your panels.

Status LCD

and manage all LED panels well.

This design can prevent the module from slipping or bumping when replacing the module during maintenance.

Climbing structure can help you make convenient Maintenance.



One-stop Solution

Truss, Floor stacking structure, tend and stage, etc. LEDFUL

Provides all kinds of structure to fit your rental LED screen.

Model

IP Rate

Operation Temperature

Operation Humidity

Input Voltage (AC)

Ultra Fast Response


LEDFUL Other


The response speed exceeds the response limit of the naked

eyes while playing the high speed dynamic images in an LED

Screen, it wil have more advantages, there will be no ghosting

or twisting and it will perfectly provide the dynamic images.

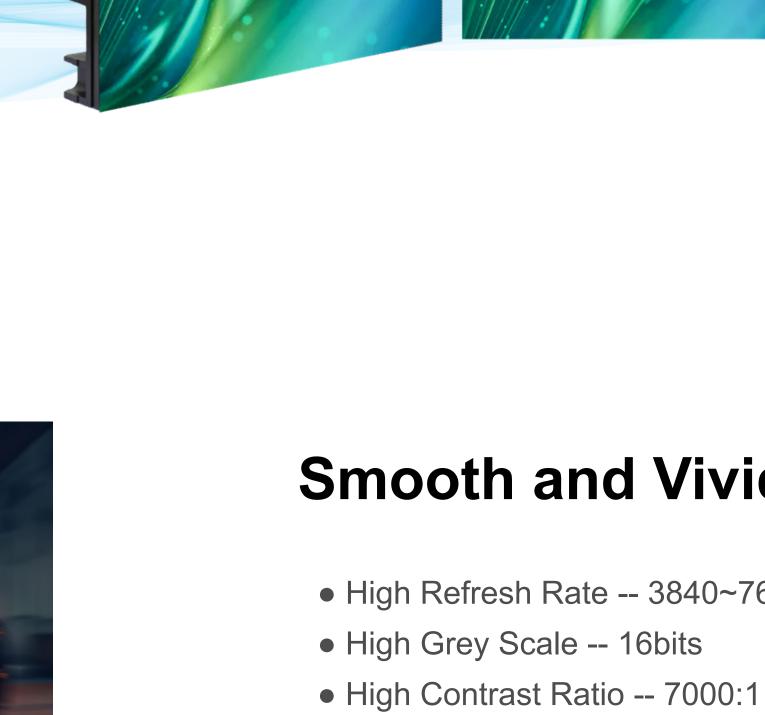

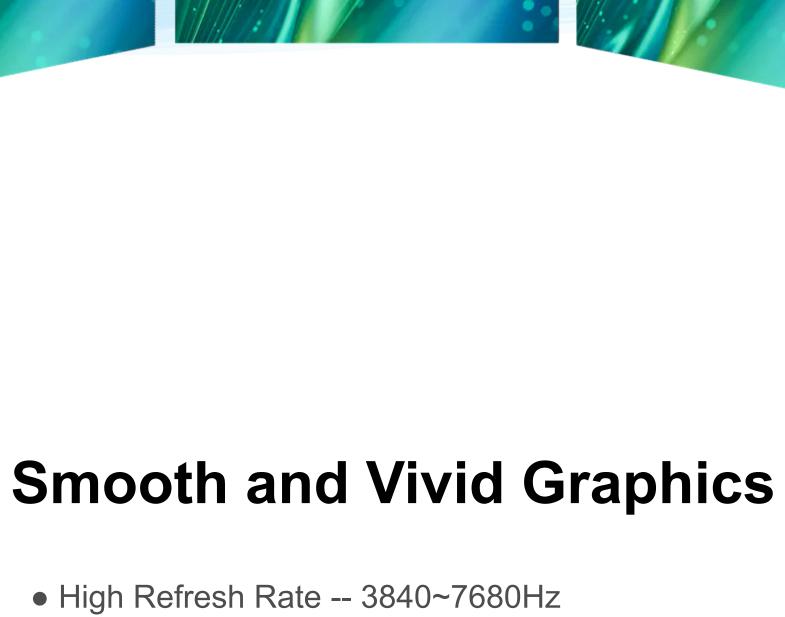


XI3.9 /TI3.9

Wide Viewing Angle -- 160°/ 160°

display gives more possibility.

XI2.9 / TI2.9

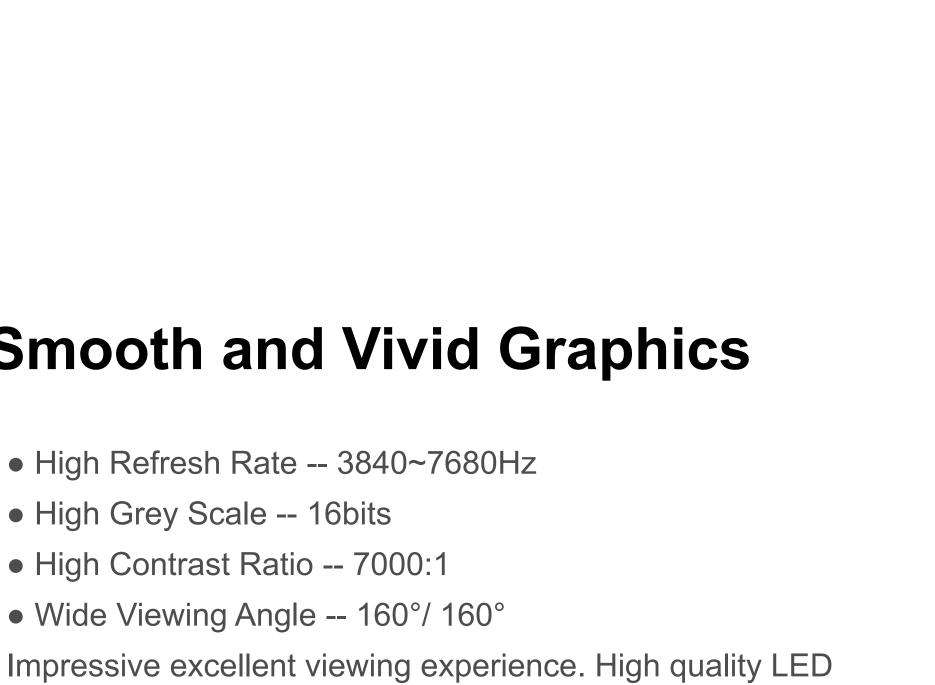

XI4.8 / HI4.8

4.81

43,264

1300

1/13

SMD2121

XI1.9 / TI1.9

XI1.5 GOB

Pixel Pitch(mm)	1.56	1.95	2.5	2.6	2.97	3.91	
Pixel Matrix Per Sq.m	409,600	262,144	160,000	147,456	112,896	65,536	
Pixel Configuration	SMD1212	SMD1515	SMD1515	SMD1515	SMD1515	SMD2121	
Brightness (nits)	800	900	1300	1300	1300	1300	
Scan	1/40	1/32	1/25	1/32	1/28	1/16	
Module Dimension				250x250mm			
Cabinet Dimension				X500x500mm T	X500x500mm T500X1000mm		
Cabinet Material				Die Casting Alumin	Die Casting Aluminum		
Cabinet Weight				X8kg T14KG	X8kg T14KG		
Power Con. (W/sqm.)			Max.800W / Avg.20	Max.800W / Avg.200~300W			
Service Access			Rear Service (Front	Rear Service (Front Service Optional)			
Refresh Rate (HZ)			≥3840	≥3840			
Grey Scale (bit)			16	16			
Viewing Angle (H / V)				160° / 160°	160° / 160°		

XI2.5 / TI2.5

Refresh Rate (HZ)			≥3840			
Grey Scale (bit)			16			
Viewing Angle (H / V)			160° / 160°			
IP Rate			IP43			
Operation Temperature			-20°C ~ +60°C			
Operation Humidity			10% ~ 90%			
Input Voltage (AC)			110V / 240V			
* Specifications and photo	os are subject to change without prior n	otice.				
Model	XO2.6 /TO2.6	XO2.9 / TO2.9	XO3.9 / TO3.9	XO4.8 / TO4.8		
Pixel Pitch(mm)			3.91	4.81		
Pixel Matrix Per Sq.m	2.6	2.97	65,536	43,264		
· · · · · · · · · · · · · · · · · · ·	147,456	112,896 CMD4.445	SMD1921	SMD1921		
Prightness (pits)	SMD1415	SMD1415	5000			
Brightness (nits)	4000	4000		5000		
Scan Modulo Dimonsion	1/32	1/28	1/16	1/13		
			250x250mm X			
Cabinet Material			X500x500mm T500X1000mm			
			Die Casting Aluminum X8.5kg T14KG			
Cabinet Weight						
			Max.800W / Avg.200~300W Rear Service (Front Service Optional)			
			≥3840 16			
Grey Scale (bit)		16				
Viewing Angle (H / V)		160° / 160°				

IP43

-20°C ~ +60°C

10% ~ 90%

110V / 240V

Parameters

XI2.6 / TI2.6

* Specifications and photos are subject to change without prior notice.