

RK500-07 Turbidity sensor is an instrument which uses optical principle to measure the degree of turbidity of water. Turbidity is caused by suspended particles in water. The suspended particles reflect the incident light. Usually, the scattered light in the direction of 90° is used as the test signal, so the unit tested is called NTU. This method is suitable for testing low to medium range, ranging from 0.01 to 4000FNU. According to EN27027 and ISO7027 standards, infrared light of 860 nm is used as light source, which cannot be disturbed by the chromaticity of samples.

FEATURES

- On-line & real-time monitoring
- With temperature compensation
- High accuracy
- Easy operation and high reliability
- No external module, a whole design
- Multiple output signal is optional
- Measurement of scattered and attenuated radiation.



APPLICATIONS


- Environmental protection
- Water quality monitoring
- Aquaculture
- Clean in place (CIP)
- Sewage treatment
- Industrial wastewater treatment

TECHNICAL SPECIFICATION

Item	Technical Specification
Range	0-100NTU,0-1000NTU,0-4000NTU
Accuracy	±1.5%FS
Resolution	0.1%
Supply	12-24VDC
Output	RS485,4-20mA
Pressure resistance	<0.4MPa
Measuring principle	optical
Power consumption	<0.2W
Operating temperature	0-+60°C
Wavelength of falling radiation	860nm
Spectral band width	<60nm
Diapason choosing	automatically
Dimension	Φ20*145mm
Main material	316L

Ingress protection	IP68
Storage	10-60°C @ 20%-90%RH
Cable length	5m default

DEMENSION

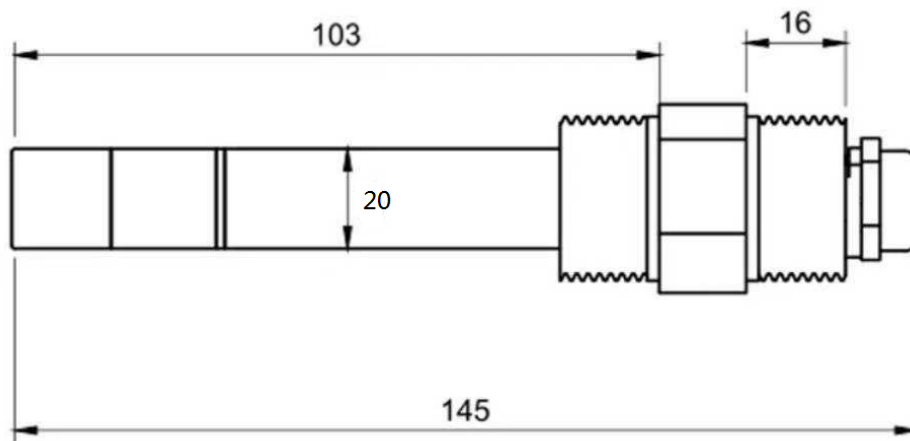

Complies with applicable CE directives.
 Specifications subject to change without notice. Version 3.1
 Copyright © 2015 Hunan Rika Electronic Tech Co.,Ltd

Hunan Rika Electronic Tech Co., Ltd

Add: 10th Bd, International Enterprise Center,
 No.268 Xinxing Rd, Yuhua Dist, Changsha,
 410116 Hunan, China.

+86-731-85132979

info@rikasensor.com

www.rikasensor.com