

The RK100-01G wind speed sensor adopts aluminum alloy precision die casting technology, with small dimensional tolerances, high surface accuracy, built-in high-performance circuits, high strength, strong weather resistance, strong corrosion resistance, and good waterproof performance. This sensor is widely used in places where wind speed needs to be measured, such as solar farm, meteorology, ships, docks, tower cranes, ports, agriculture, etc.

## FEATURES

- Easy to carry and install
- High measurement accuracy and good stability
- IP65 protection class
- Strong anti-electromagnetic interference ability
- Aluminum alloy material is light in weight and high in strength
- Unique internal treatment, strong anti-vibration ability



## APPLICATIONS

- Weather monitoring stations
- Safety monitoring of high-altitude equipment
- Ports
- Solar and wind power generation
- Mobile weather monitoring vehicles
- Marine vessels
- Remote airports & helipads
- Road & rail tunnels

## SPECIFICATIONS

| Item                  | Technical Specification                        |   |
|-----------------------|--|---|
| Supply voltage        | 12-24VDC                                       | 5-24VDC   |
| Output                | RS485,4-20mA                                   | Pulse(Pulse high level depends on the supply voltage) |
| Range                 | 0-30m/s,0-50m/s,0-60m/s                        |   |
| Starting threshold    | 0.2m/s   |   |
| Limit wind speed      | 70m/s  |   |
| Accuracy              | $\pm (0.3+0.03V)m/s$                           |   |
| Resolution            | 0.1m/s   |   |
| Response time         | <1s  |   |
| Power consumption     | 20mA@12V                                       |   |
| Ingress protection    | IP65   |   |
| Operating temperature | -30℃-+70℃                                      |   |
| Main material         | Aluminum alloy                                 |   |
| Connector             | M12 waterproof connector                       |   |
| Finish                | Polyester powder electrostatic spraying(black) |   |
| Weight(unpacked)      | 410g(Excluding wires)                          |   |
| Storage condition     | 10℃-60℃@20%-90%RH                              |   |

## OUTPUT CHARACTERISTICS

### ● Current

Characteristic transfer function:

$$V = (I - 4) / (20 - 4) * 50 \text{ (Range: 0-50m/s)}$$

(where V = wind speed (m/s), I = output Current(mA))


### ● Pulse

$$V = 0.5 + 0.169 * F$$

V: Wind speed, m/s;

F: Number of pulses within 1 second




Range: 0-50m/s

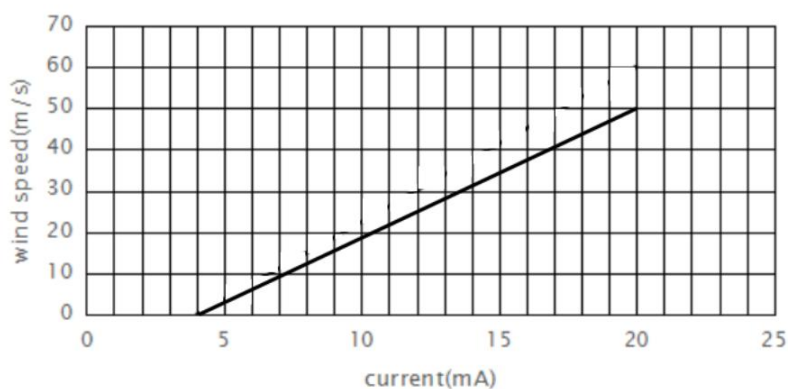

## DIMENSION & MOUNTING

Flange mounted, fix four screws on the bracket and keep the product horizontal.

Unit:mm

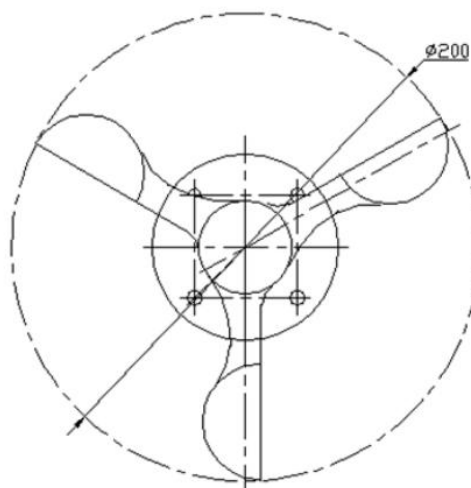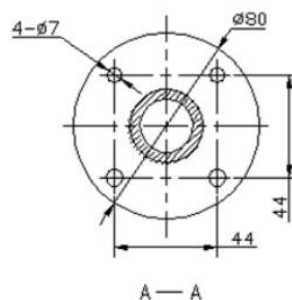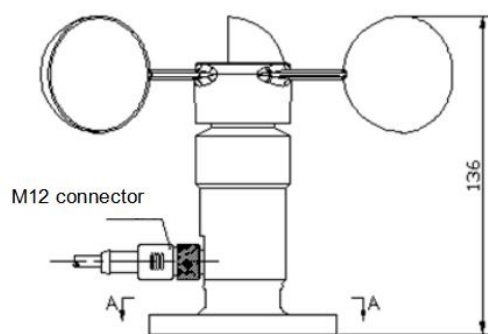

**Appendix: wind speed-wind scale table**

| Scale | Speed |         |           | Name            | Conditions at Sea  | Conditions on Land  |
|-------|-------|---------|-----------|-----------------|--|---|
|       | knots | km/h    | m/s       |                 |  |   |
| 0     | < 1   | < 2     | 0-0.2     | Calm            | Sea like a mirror.   | Smoke rises vertically.   |
| 1     | 1-3   | 1-5     | 0.3-1.5   | Light air       | Ripples only.  | Smoke drifts and leaves rustle.   |
| 2     | 4-6   | 6-11    | 1.6-3.3   | Light breeze    | Small wavelets (0.2 m). Crests have a glassy appearance.                             | Wind felt on face.  |
| 3     | 7-10  | 12-19   | 3.4-5.4   | Gentle breeze   | Large wavelets (0.6 m), crests begin to break.                                       | Flags extended; leaves move.  |
| 4     | 11-16 | 20-29   | 5.5-7.9   | Moderate breeze | Small waves (1 m), some whitecaps.   | Dust and small branches move.   |
| 5     | 17-21 | 30-39   | 8-10.7    | Fresh breeze    | Moderate waves (1.8 m), many whitecaps.  | Small trees begin to sway.  |
| 6     | 22-27 | 40-50   | 10.8-13.8 | Strong breeze   | Large waves (3 m), probably some spray.  | Large branches move, wires whistle, umbrellas are difficult to control.   |
| 7     | 28-33 | 51-61   | 13.9-17.1 | Near gale       | Mounting sea (4 m) with foam blown in streaks downwind.                              | Whole trees in motion, inconvenience in walking.                          |
| 8     | 34-40 | 62-74   | 17.2-20.7 | Gale            | Moderately high waves (5.5 m), crests break into spindrift.                          | Difficult to walk against wind. Twigs and small branches blown off trees. |
| 9     | 41-47 | 76-87   | 20.8-24.4 | Strong gale     | High waves (7 m), dense foam, visibility affected.                                   | Minor structural damage may occur (shingles blown off roofs).             |
| 10    | 48-55 | 88-102  | 24.5-28.4 | Storm           | Very high waves (9 m), heavy sea roll, visibility impaired. Surface generally white. | Trees uprooted; structural damage likely.                                 |
| 11    | 56-63 | 103-118 | 28.5-32.6 | Violent storm   | Exceptionally high waves (11 m), visibility poor.                                    | Widespread damage to structures.  |
| 12    | 64-71 | 119-133 | 32.7-36.9 | Hurricane       | 14 m waves, air filled with foam and spray, visibility bad.                          | Severe structural damage to buildings, wide spread devastation.           |
| 13    | 72-80 | 134-149 | 37-41.4   | -               | -  | -   |
| 14    | 81-89 | 150-166 | 41.5-46.1 | -               | -  | -   |
| 15    | 90-99 | 167-183 | 46.2-50.9 | -               | -  | -   |
| 16    | 100+  | 184+    | 51+       | -               | -  | -   |

| Revision time | Reviser | Current Version | Remarks |
|---------------|---------|-----------------|---------|
| 20250428      | Lee     | V5.0            |         |