

## FEATURES

- IP68 protection
- Stable and easy to maintain
- Support RS-485&4-20mA
- Modbus-RTU protocol
- Convenient, fast



## APPLICATIONS


- Drinking water treatment plant
- Drinking water distribution network
- Swimming pool
- Cooling circulating water treatment

## SPECIFICATIONS


Item	Specification
Range	0~2ppm,0~5ppm(typ.),0-10ppm
Principle	Constant voltage method
Working temperature	0-50°C
Accuracy	±5%FS
Resolution	0.01ppm
Power	7~30VDC
Power consumption	<0.5W
Output	4-20mA&RS485(Modbus-RTU)
Main material	ABS
Protection class	IP68
Pressure of work	< 0.5MPa
Velocity of flow	>15cm <sup>3</sup> /S(Need to maintain a constant flow rate)
Cable length	5 m(default), customizable
Installation thread	3/4" NPT

## INSTALLATION AND FIXED

Mounting bracket(length=1m) is optional

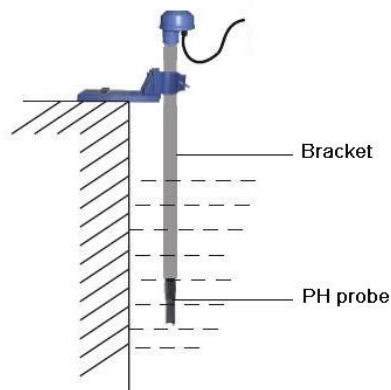

In liquid, probe submersible installation.

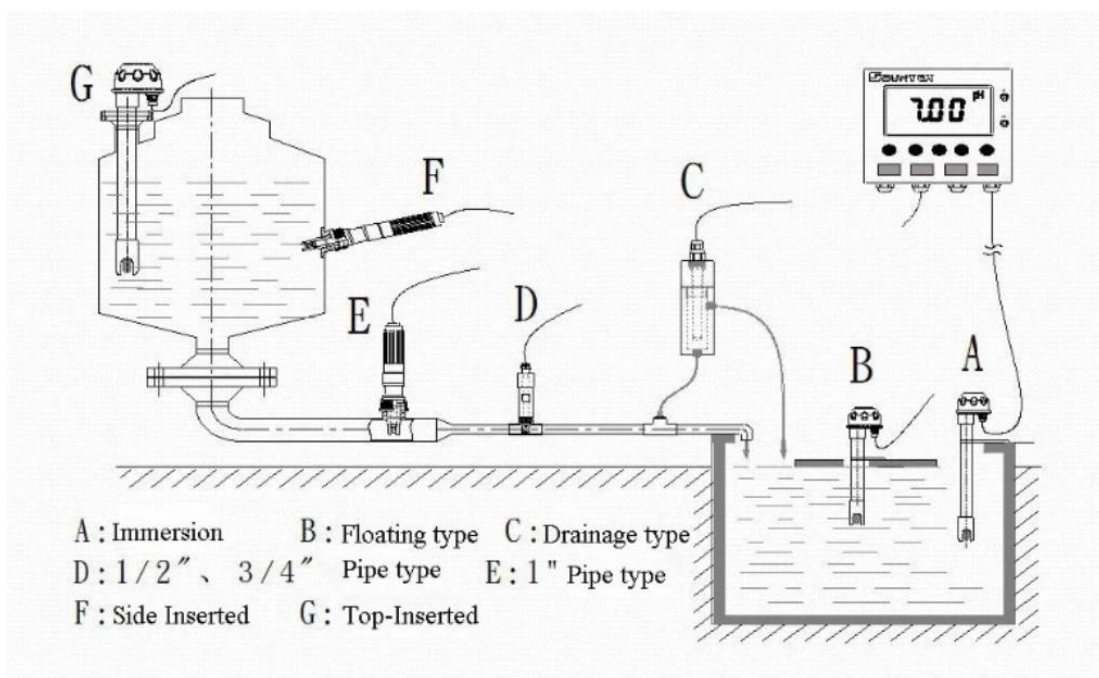

Complies with applicable CE directives.

Specifications subject to change without notice. Version 1.0

Copyright © 2015 Hunan Rika Electronic Tech Co.,Ltd

### Hunan Rika Electronic Tech Co., Ltd

Add: 10th Bd, International Enterprise Center,  
No.268 Xinxing Rd, Yuhua Dist, Changsha,  
410116 Hunan, China.



+86-731-85132979



info@rikasensor.com



www.rikasensor.com