

CHz[®]



CHZ-GD02

SERIES GARDEN LIGHT

Made by die casting aluminum

Durable anti-rust and anti-erosion

Highpressure die castng aluminum housing, Patented Ribbon-Free housing" technology, Excellent thermal management



long life



Waterproof
lightning protection



High quality LED wick

SMD 3030/3535/5050

Fast heat dissipation

Good conductivity

Anti-oxidation



Efficient and stable drive

Multiple protection

Fast heat dissipation

Long life



MW Driver



INV Driver

Interface screw is fixed

Easy to install, strong and tight, stable




Applications

Urban Road, Parking, bike path and etc.
Different road, super white linen finish glass can reduce the glare







Parameter:

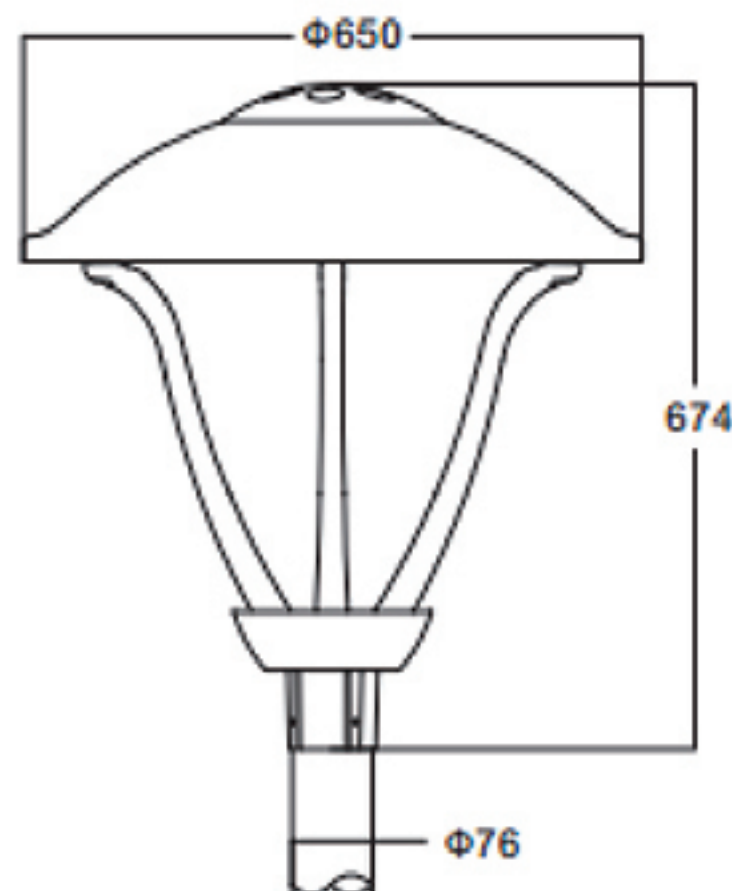

MODEL	CHZ-GD02-35W	CHZ-GD02-45W	CHZ-GD02-50W	CHZ-GD02-60W
Rated Power	35W	45W	50W	60W
LED Qty	16pcs	20pcs	24pcs	28pcs
Luminous Flux	3850lm	4950lm	5500lm	6600lm
G.W/N.W	12.5/10.4kgs	12.5/10.4kgs	12.5/10.4kgs	12.5/10.4kgs
Packing Size	700x700x720mm	700x700x720mm	700x700x720mm	700x700x720mm
Working volt	100-277V	100-277V	100-277V	100-277V
Power factor	>0.95	>0.95	>0.95	>0.95
CRI	>75	>75	>75	>75
CCT	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Working temp	-40~50℃	-40~50℃	-40~50℃	-40~50℃
Material	AL Body and PC	AL Body and PC	AL Body and PC	AL Body and PC
Product Size	650X650X674mm	650X650X674mm	650X650X674mm	650X650X674mm
Insulation class/IP degree	Class I/IP65	Class I/IP65	Class I/IP65	Class I/IP65
Lifetime/Warranty	50000hrs/5 years	50000hrs/5years	50000hrs/5years	50000hrs/5 years

Package diagram :

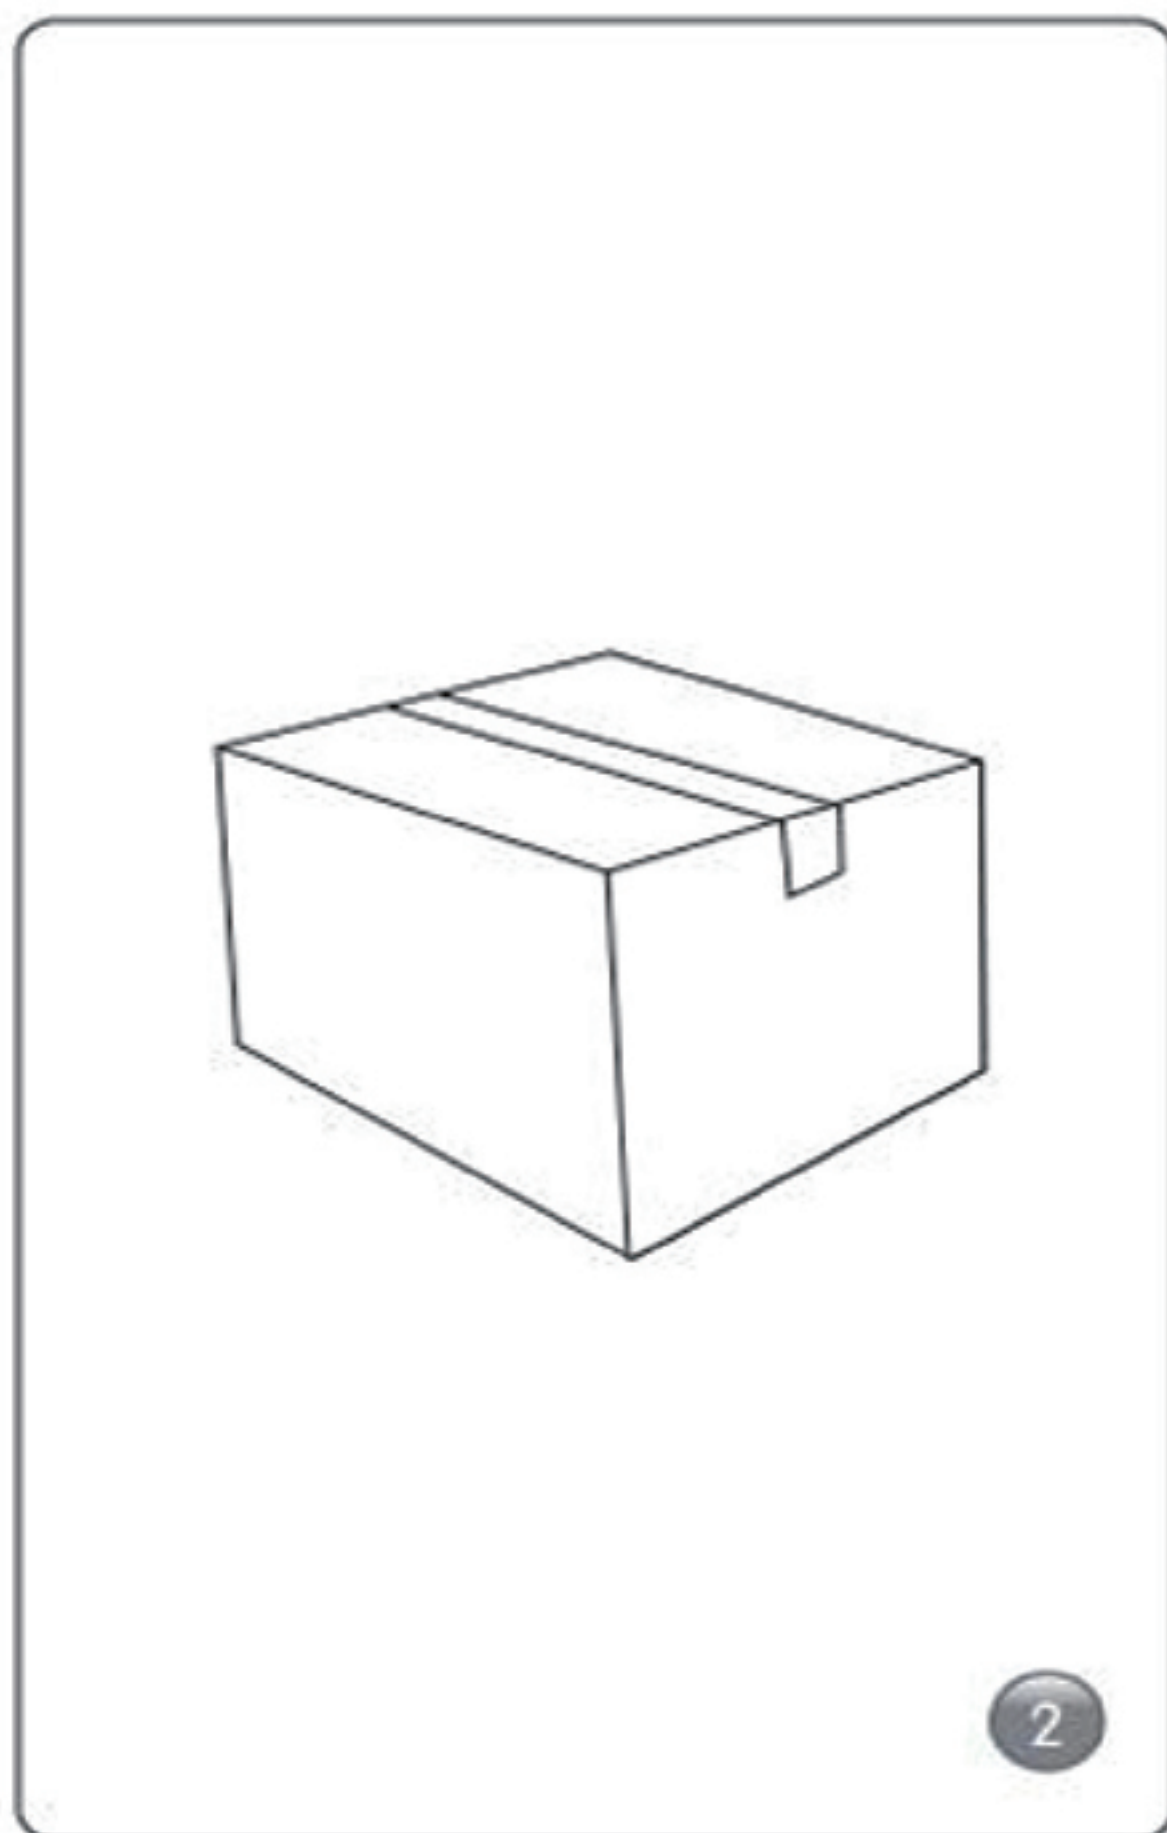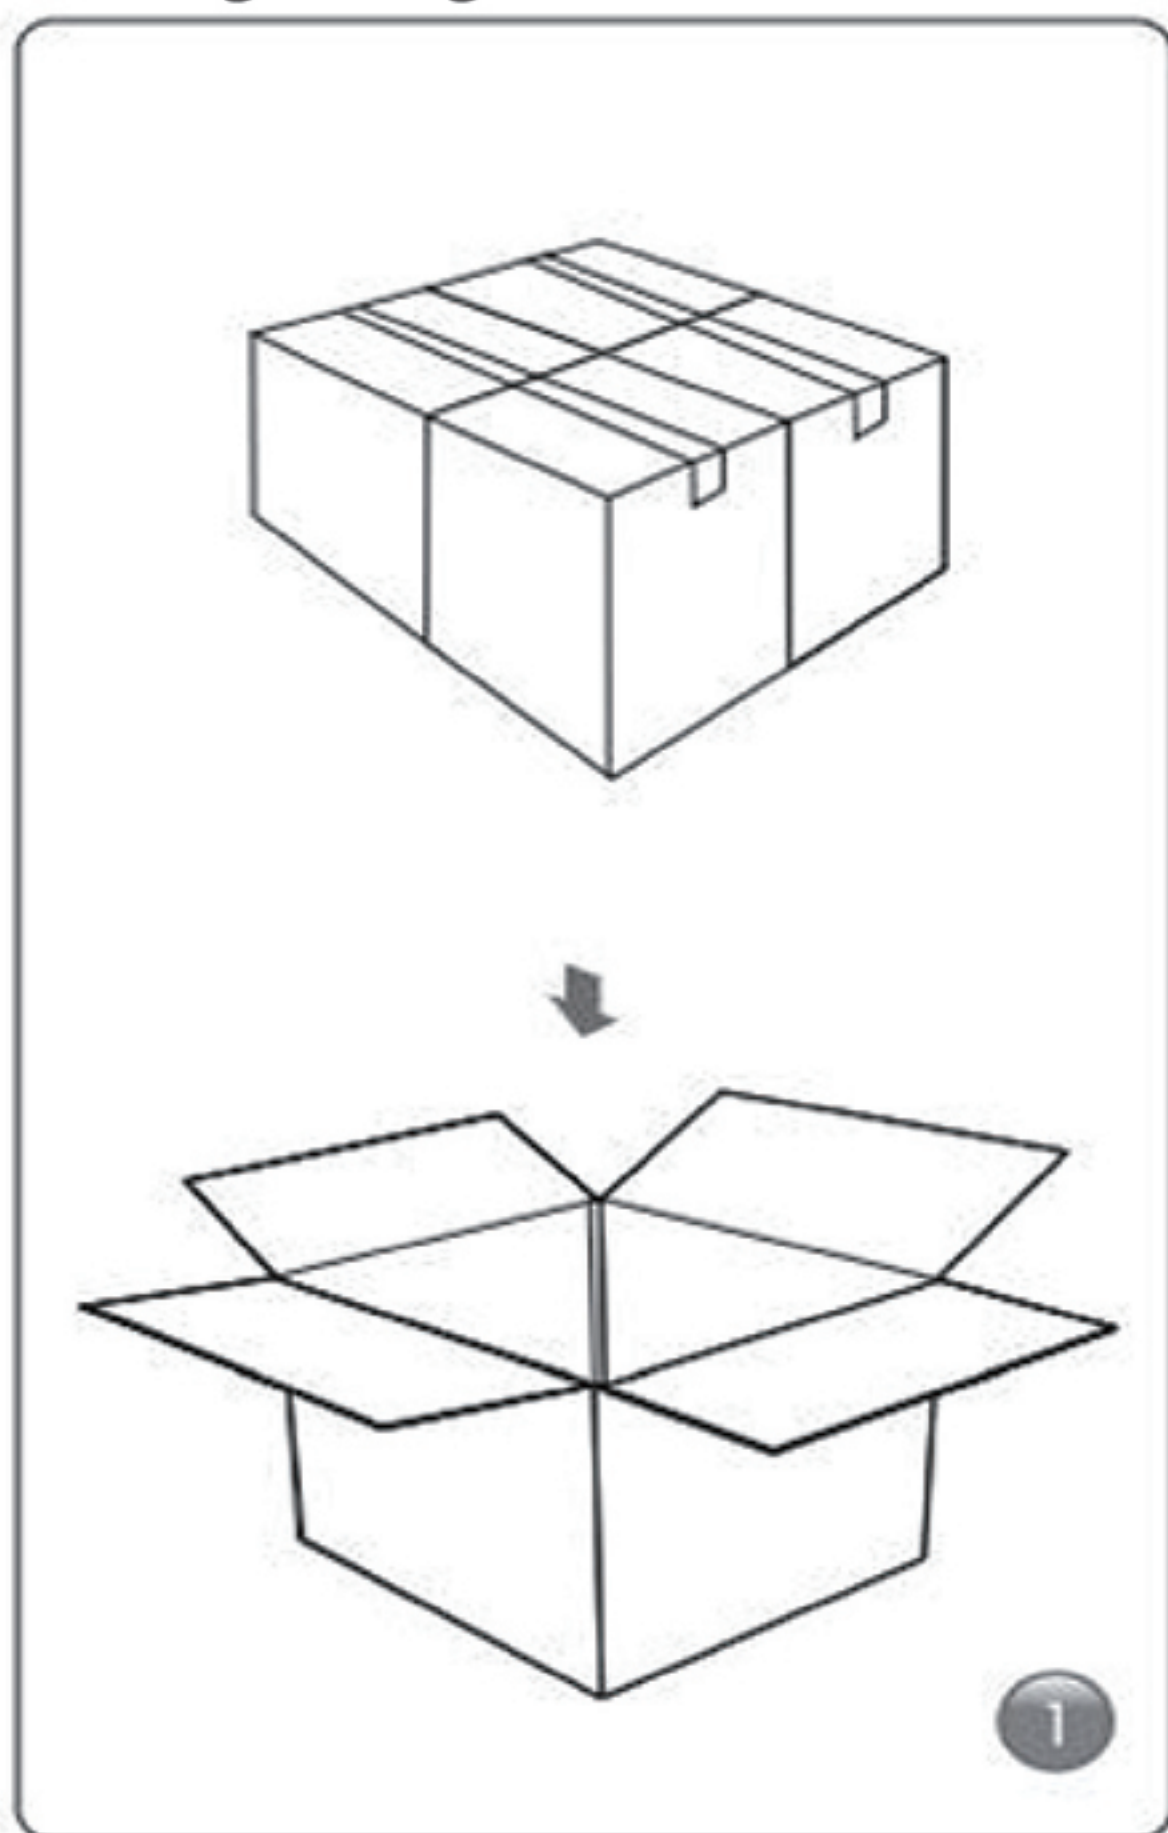

Package data:

Model	Light size/mm (L*W*H)	Packing Size /mm (L*W*H)	PCS /CTN	N.W/G.W (KG)
CHZ-GD02-35W	650X650X674	700x700x720	1	10.4/12.5
CHZ-GD02-45W	650X650X674	700x700x720	1	10.4/12.5
CHZ-GD02-50W	650X650X674	700x700x720	1	10.4/12.5
CHZ-GD02-60W	650X650X674	700x700x720	1	10.4/12.5