

SF02A Series Tri-proof Light




Features:

1. The lamp body is stretched out of a whole aluminum profile, with a beautiful shape;
2. Protection class IP65, suitable for indoor/outdoor humid and dusty environment;
3. Using high-quality 2835 LED chips, high light efficiency, low light decay, and low glare;
4. Using Taiwan Mingwei driver, high efficiency, stable performance, the whole light effect is as high as 130LM/W;
5. Compared with the tube-type three-proof lamp, the protection level is better, and the energy-saving effect is increased by more than 15%;
6. Available in lengths of 0.6/0.9/1.2/1.5 meters, installation can be hoisted or ceiling mounted, wiring can be single lamp or spliced.

Applications:

Factory, warehouse, library, indoor gymnasium, airport aisle, hotel and other places.

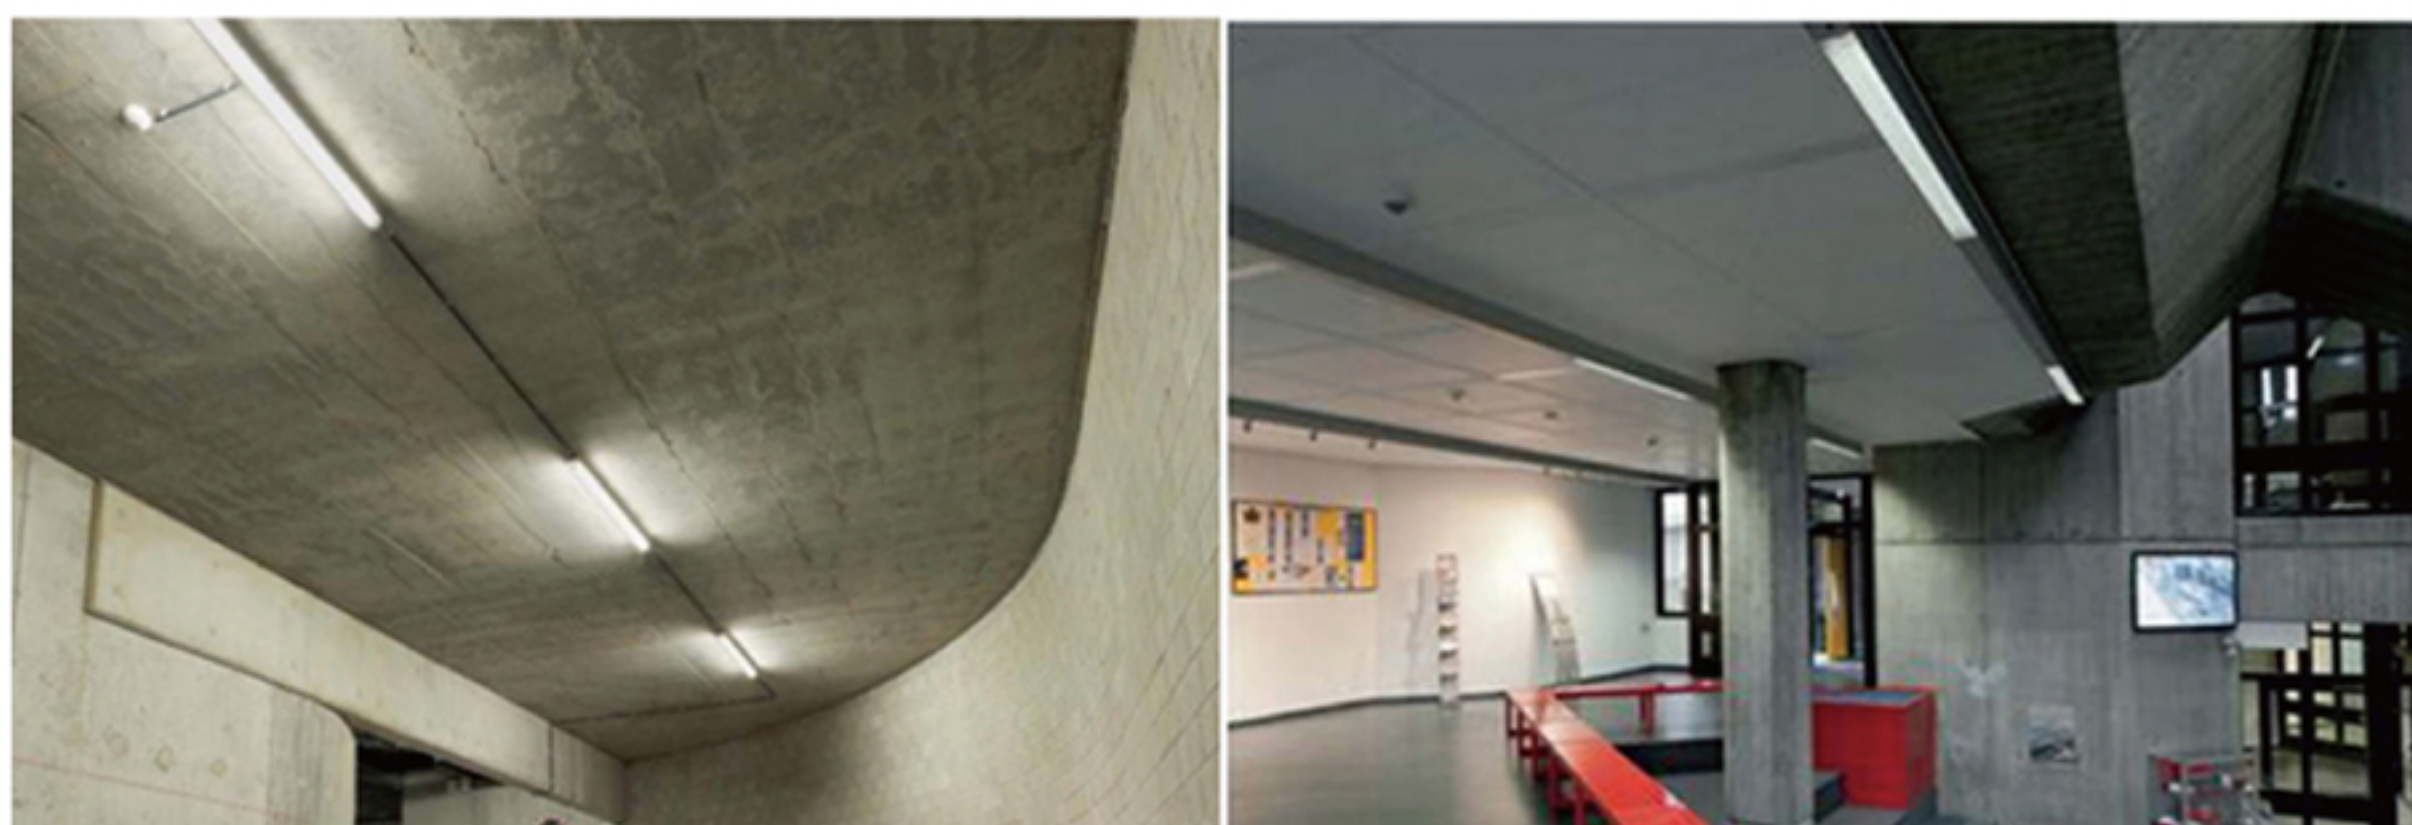




Parameter:

Product number	SF02-600-20WA	SF02-600-30WA	SF02-1200-40WA	SF02-1200-50WA	SF02-1500-50WA	SF02-1500-60WA
rated power	20W	30W	40W	50W	50W	60W
Lamp body length	60cm	60cm	120cm	120cm	150cm	150cm
Lamp bead model	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Number of lamp beads	120 PCS	180 PCS	240 PCS	360 PCS	360 PCS	360 PCS
Serial and parallel	10P12S	15P12S	20P12S	30P12S	30P12S	30P12S
Protection level	IP65	IP65	IP65	IP65	IP65	IP65
Drive brand	BOKE	BOKE	BOKE	BOKE	BOKE	BOKE
Input voltage	200-240VAC	200-240VAC	200-240VAC	200-240VAC	200-240VAC	200-240VAC
The output voltage	36V	36V	36V	36V	36V	36V
Drive function	Conventional/1-10V dimming/DALI dimming, optional					
Color temperature CCT	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Color rendering CRI	>80	>80	>80	>80	>80	>80
Luminous flux	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W
Lamp body size	L600*W76*H67(mm)		L1200*W76*H67(mm)		L1500*W76*H67(mm)	
Lamp body material	Die-casting aluminum + high light transmission PC cover					
Lampshade material	High light transmission PC cover, milky white/transparent optional					
Service life/warranty period	50000hrs / 5 years		50000hrs / 5 years		50000hrs / 5 years	
certified product	TUV/CB/ROHS/ISO9001		TUV/CB/ROHS/ISO9001		TUV/CB/ROHS/ISO9001	



Product size drawing (unit: mm):

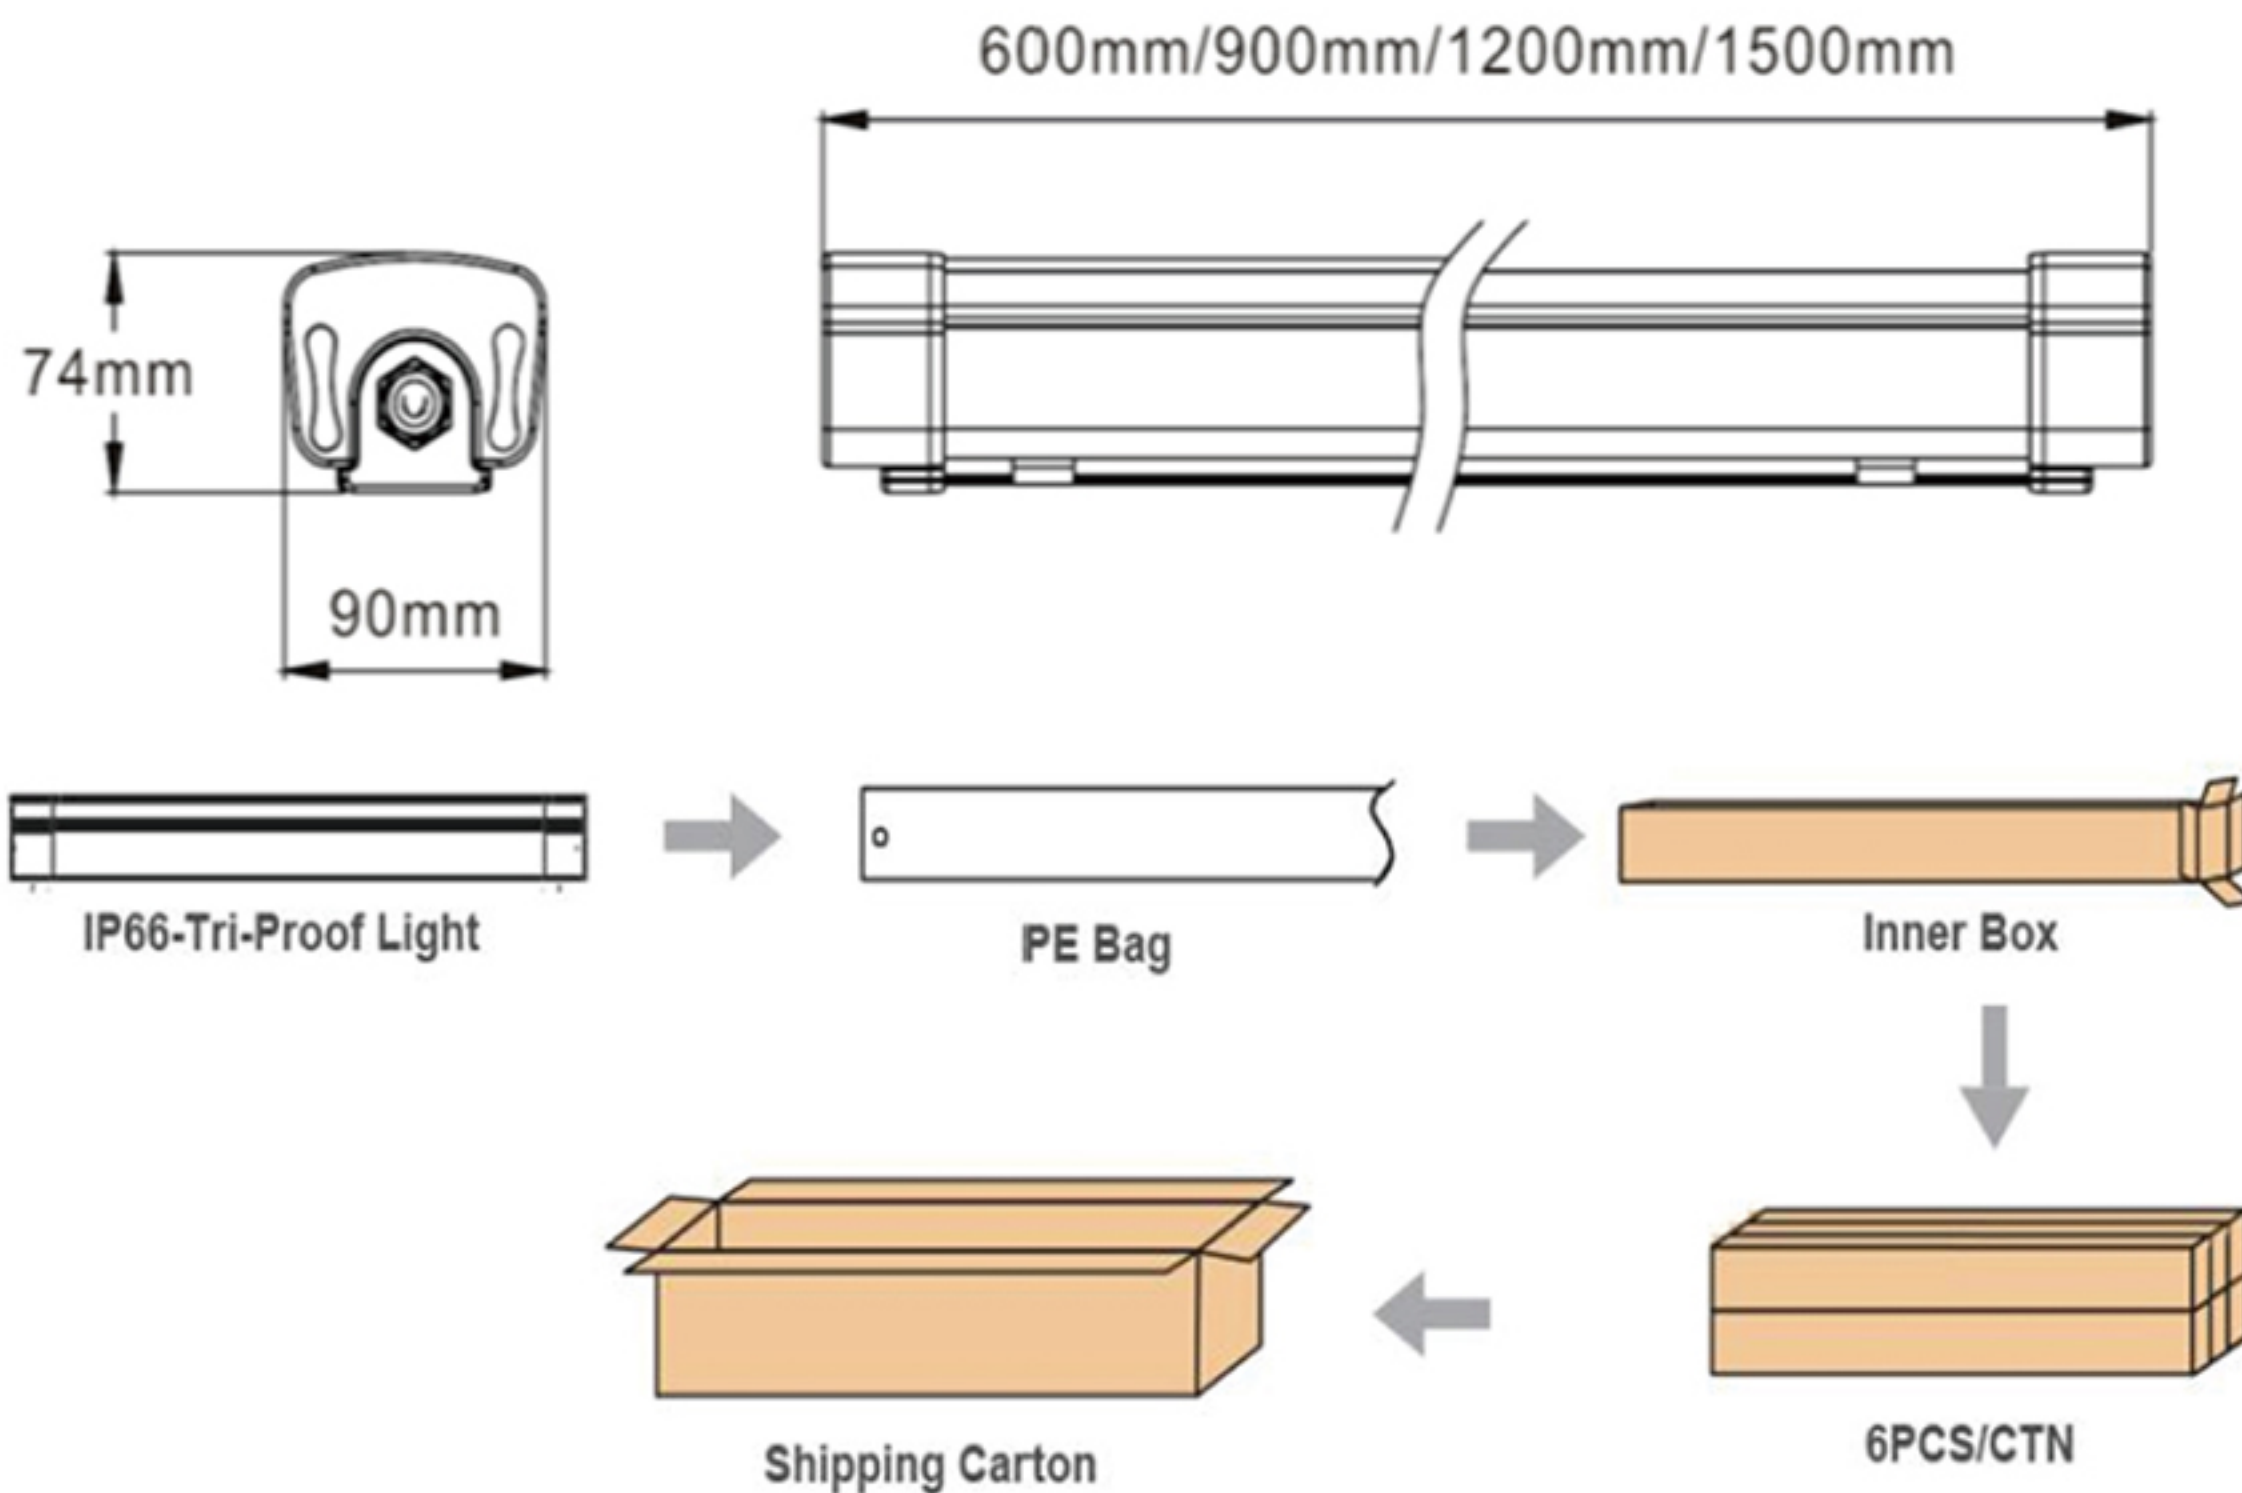

Packing data:

Model	Product size (L*W*H)/mm	Single N.W/KG	QTY	Big package (L*W*H)/mm	G.W /KG
SF02-600-20WA	600x76X67	1.5	6	700x210x255	10
SF02-600-30WA	600x76X67	1.5	6	700x210x255	10
SF02-1200-40WA	1200x76X67	2.7	6	1300x210x255	17
SF02-1200-50WA	1200x76X67	2.7	6	1300x210x255	17
SF02-1500-50WA	1500x76X67	3.5	6	1600x210x255	22
SF02-1500-60WA	1500x76X67	3.5	6	1600x210x255	22