



Features :




1. Light body with whole aluminum stretching, sleek.
2. Protection class IP65, suitable for indoor / outdoor humidity and dusty environment.
3. 2835 using high quality LED chips, high luminous efficiency, the light fades, low glare;
4. Taiwan MW driver, high efficiency, stable performance, the entire lighting efficiency up to 150LM / W.
5. Compared to the three anti-lamp type lamp, superior degree of protection, promotion of energy-saving effect more than 15%.
6. There are 0.6/1.2/1.5 m lengths, lifting or ceiling can be installed, the wiring can be a single lamp or stitching.

2、Installation and Wiring

Installation


(1) Hanging/Suspension

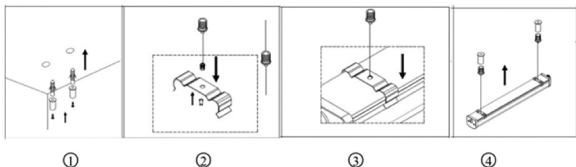

Steps:

1. Dig 2 small holes on the ceiling and install the rubber plugs and connectors to the ceiling.
2. Connect the rope to the clips
3. Push the tri-proof light into the clips
4. Connect the other side of the rope to the connectors

(2) Surface mounted






Steps:


1. Dig 2 holes on the ceiling
2. Install the rubber plugs into the holes
3. Fix the clips to be ceiling by screws
4. Push led tri-proof light into the clips

Wiring

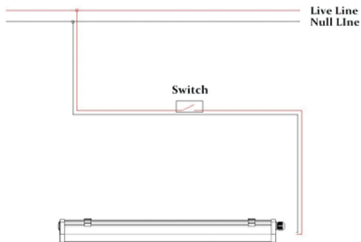

Applications:

Factories, warehouses, libraries, indoor stadiums, airports aisle, hotels and other places.

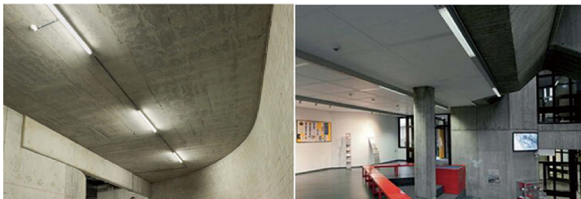






Parameter:

Product number	SF02-600-20W	SF02-600-30W	SF02-1200-40W	SF02-1200-50W	SF02-1500-50W	SF02-1500-60W
Rated power	20W	30W	40W	50W	50W	60W
Lamp body length	60cm	60cm	120cm	1200m	150cm	150cm
Lamp bead model	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Number of lamp beads	120 PCS	120 PCS	240 PCS	240 PCS	288 PCS	288 PCS
Serial and parallel	10P12S	10P12S	20P12S	20P12S	24P12S	24P12S
Protection level	IP65	IP65	IP65	IP65	IP65	IP65
Drive brand	BOKE/LFD	BOKE/LFD	BOKE/LFD	BOKE/LFD	BOKE/LFD	BOKE/LFD
Operating Voltage	200~240VAC	200~240VAC	200~240VAC	200~240VAC	200~240VAC	200~240VAC
Light source voltage	36V	36V	36V	36V	36V	36V
Drive function	Conventional non-dimming/1-10V dimming/DALI dimming, optional					
Color temperature CCT	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Color rendering CRI	>80	>80	>80	>80	>80	>80
Luminous flux	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W	>130 lm/W
Beam angle	120°	120°	120°	120°	120°	120°
Lamp body size	L600*W74*H64(mm)	L600*W74*H64(mm)	L1200*W74*H64(mm)	L1200*W74*H64(mm)	L1500*W74*H64(mm)	L1500*W74*H64(mm)
Lamp body material	Whole PC material injection molding					
Lampshade material	High light transmission PC cover, milky white/transparent optional					
Service life/warranty period	50000hrs / 5 years					
certified product	TUV/CB/ROHS/ISO9001		TUV/CB/ROHS/ISO9001		TUV/CB/ROHS/ISO9001	



Product size drawing (unit: mm):



Packing data:

Model	Product size (L*W*H)/mm	Single N.W/KG	QTY	Big package (L*W*H)/cm	G.W/KG
SF02-600-20W	600x74x64	0.7	9	72x27x24	7.4
SF02-600-30W	600x74x64	0.7	9	72x27x24	7.4
SF02-1200-40W	1200x74x64	1.1	9	132x27x24	12.5
SF02-1200-50W	1200x74x64	1.1	9	132x27x24	12.5
SF02-1500-50W	1500x74x64	1.3	9	162x27x24	13.6
SF02-1500-60W	1500x74x64	1.3	9	162x27x24	13.6