



纵览全局·共赢未来

overview of the glbal win-win future



**YIFAN CONVEYOR**

**Ningbo YiFan Conveyor Equipment Co.,Ltd.**

Room 1011,South 10-1,No.288 Xilu Road, Zhuangshi Street,  
Zhenhai District, Ningbo, China

Tel: +86 574 86961021

Fax: +86 574 86863021

24 Hours Hot Line:+86 13958248487

E-mail: sales@yfconveyor.com

Web:www.yfconveyor.com

More Safe, More Easy, More Efficient

Loading unloading all kinds of vehicles & containers



**YIFAN CONVEYOR**

[www.yfconveyor.com](http://www.yfconveyor.com)

# 企业文化

## ENTERPRISE CULTURE

品质第一、开拓创新  
诚信务实、顾客至上、和谐发展  
Quality First, Innovation  
Integrity and pragmatic, Customer first, Harmonious development

# 企业概况


## Basic situation

宁波壹帆输送设备有限公司创立于2016年，是一家专业的装柜、仓储、物流输送设备供应商。我们的主要产品：联合爬坡机，多楔带电动单辊伸缩机，皮带伸缩机，无动力滚筒卸货机，福来轮伸缩机，铝合金皮带机，垂直提升机，平顶链等。

我们的客户主要来自：快递电商、仓储物流、食品饮料、纺织服装、家电家具、光学电子等行业。我们拥有深厚的技术沉淀，精准解决方案的专业知识和多年的出口经验，全面分析，为客户提供完善的建议。

Ningbo YiFan Conveyor Equipment Co., Ltd. is a professional conveyor supplier located in Ningbo, China. The company boasts an experienced technical R&D team which can independently develop a series of conveyor systems, such as: telescopic belt conveyors, truck loading conveyors, flexible powered roller conveyor, vertical lifting conveyors, top chain conveyors, aluminum PVC belt conveyors, motorized roller conveyors and so on. Many of our clients hail from the e-commerce, express, food, beverage, garment, textile, furniture and home appliances industry. With our strong engineering background and many years of experience, we can advise you on the right products. Our goal is to provide cost effective conveyors which add value to your business.

# 业务流程 OPERATIONAL PROCESS

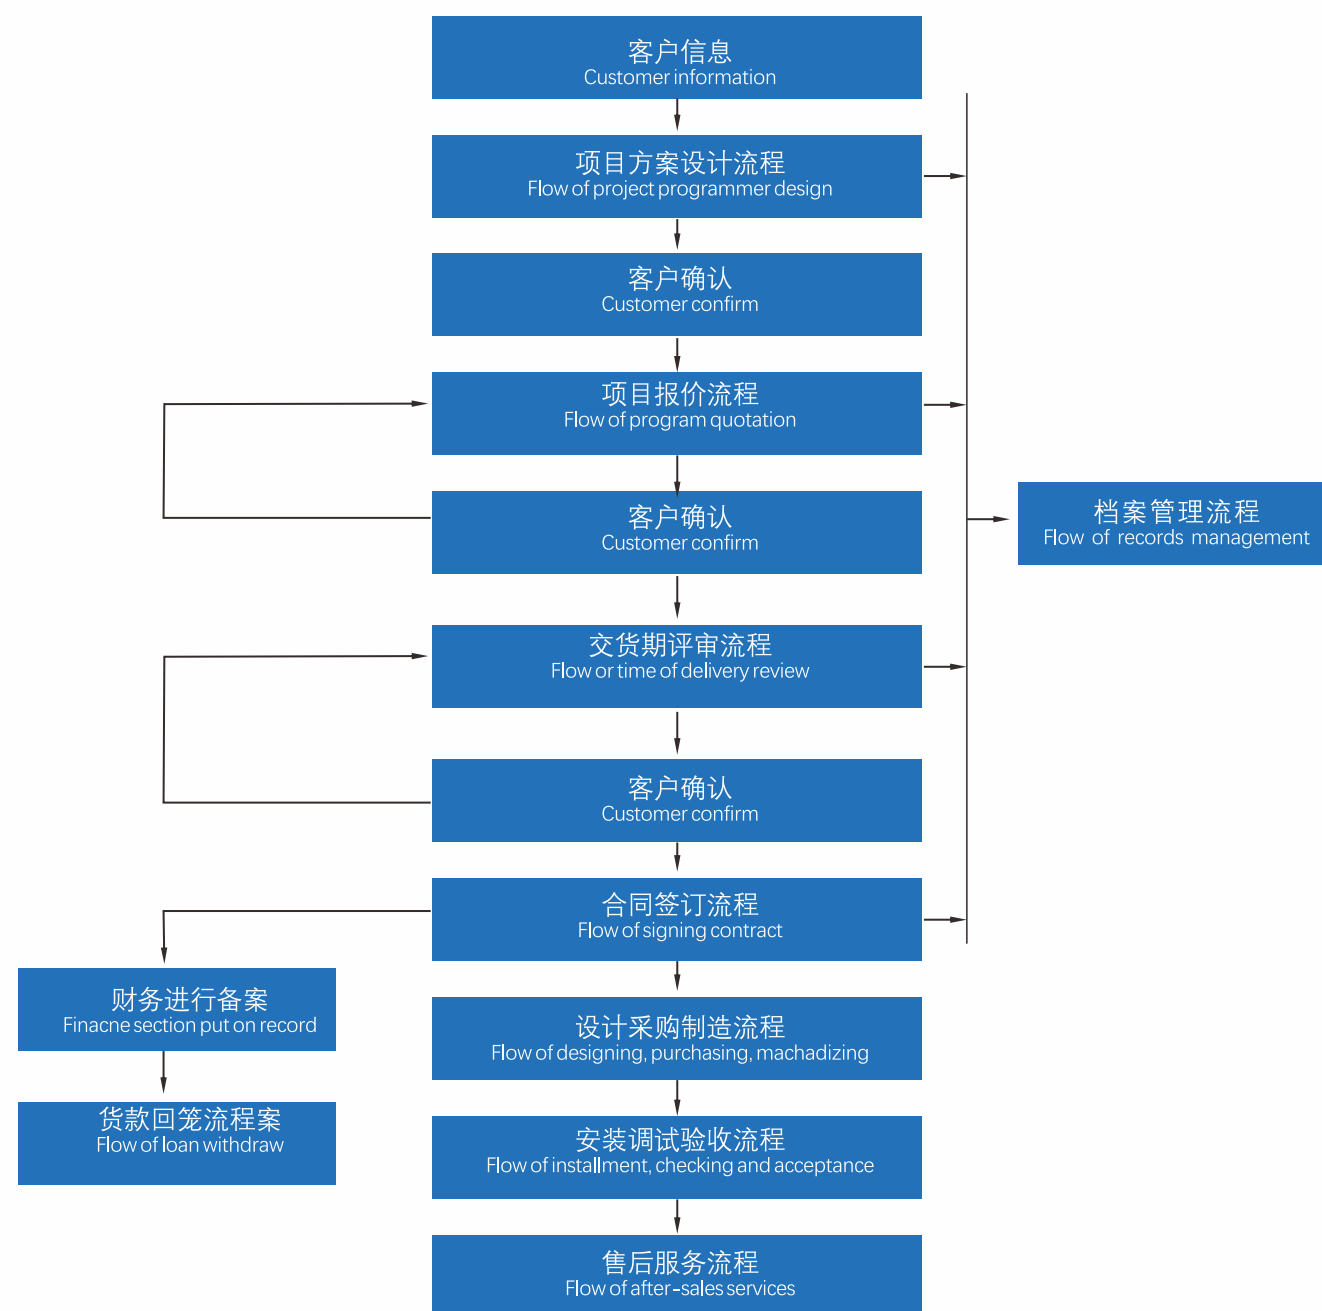

## 目录 CONTENTS

联合爬坡机 TLC-P600 Truck Loading Conveyor	01/02
联合爬坡机 CBLC-600 Truck Loading Conveyor	03/04
皮带伸缩机 Telescopic Belt Conveyor	05/06
滚筒卸货机 Telescopic Gravity Unloading Roller Conveyor	07/08
O带电动单辊伸缩机 Flexible Powered Roller Conveyor-O belt	09/10
多楔带电动单辊伸缩机 Flexible Powered Roller Conveyor-V belt	11/12
多楔带包胶电动单辊伸缩机 Flexible Powered Rubber Coated Roller Conveyor-V belt	13/14
无动力单辊伸缩机 Flexible Gravity Roller Conveyor	15/16
福来轮伸缩机 Flexible Skate Wheel Conveyor	17/18
垂直提升机 Vertical Lifting Conveyor	19/20
其他输送机 Other Optional Conveyors	21/22



本着双赢的宗旨，坚持用户第一的理念，以客户的需求和工作质量为目标，严格按照计划有条不紊的执行。使工程安装按期完成投产，全心全力服务每一位客户。

With the tenet of win-win and the idea of "User first we target on customers' requirements and working quality, carrying out the project orderly and strictly under the plan so that the installation engineering can be completed on schedule with high quality and put into production. We serve every customer with all our hearts and efforts



01  
02

# 联合爬坡机 Truck Loading Conveyor

Model : TLC-P600

**NINGBO YIFAN**  
CONVEYOR EQUIPMENT CO.,LTD

**YIFAN CONVEYOR**



联合爬坡机普遍应用于港口、码头、车站、机场、仓库、快递、电商等行业。完成货物的传输、装卸工作。机械化的装卸作业在提高物资配送效率，缩短物流时间，减轻劳动强度方面具有显著效果。为企业先进的生产，现代化的管理，安全的作业带来优势。

Truck Loading Conveyor is quite welcome to automatically load or unload goods in and out of trailers /vans/ trucks/containers in warehouse, harbor, airport, dock, etc. It solves the problems of no shipping docks when loading or unloading. The mechanized operation largely increases work efficiency, relieves labor intensity and also reduces cost for modern enterprises in a wide range of applications. It facilitates goods handling work and also provides advantages to advanced production, modernized management and safe operation.



● 20升油桶卸货  
Unloading 20L jerry cans




● 仓库成品纸箱出货  
Finished cartons loading container



● 25KG袋子装柜  
Loading 25KG powder bags from warehouse to container



● 联合滚筒伸缩机卸货  
Combine with flexible conveyor

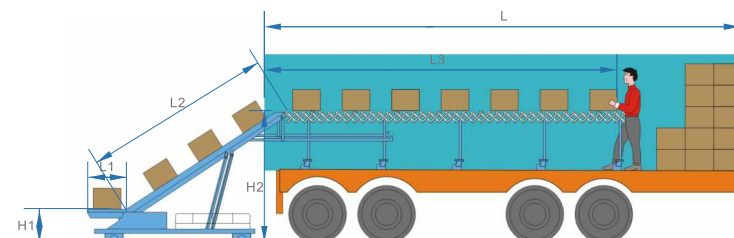

## 技术参数 Technical Parameters

Model	Belt Width (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L (mm)	H1 (mm)	H2 (mm)
TLC-P600	600	900	3700	1800	4200	700	700-2500
TLC-P800	800	900	3700	1800	4200	700	700-2500

## YiFan's Truck Loader Options



● Model: TLC-P600  
Front Part: 4.2m flexible powered roller conveyor



● Model: CBLC-600  
Front Part: 7.2m flexible powered roller conveyor



● Model: TLC-S600  
(small version of TLC-P600)  
Front Part: 2m flexible powered roller conveyor



● Model: TLC-G600  
Front Part: 6.9m flexible skate wheel conveyor



● Model: TLC-600  
No Front Tongue



● Model: TLC-F600  
Foldable Type



● Model: TLC-W800  
Auto-walking type



● Model: TLC-L600  
With operator platform



● Model: TLC-E600  
Economic Type



03  
04

# 联合爬坡机 Truck Loading Conveyor

Model: CBLC-600

NINGBO YIFAN  
CONVEYOR EQUIPMENT CO.,LTD

 YIFAN CONVEYOR



壹帆的CBLC-600联合爬坡机，在老款爬坡机TLC-P600的基础上做了改进和升级，头部配有7.2m重型多楔带电动单辊伸缩机，电机功率加大，承重能力更强。升降装置由原来的丝杆升降改为液压升降，高度调节速度更快。

YiFan's CBLC-600 truck loading conveyor is an upgraded senior model with 7.2m heavy duty flexible powered roller conveyor as stretch arm. It is very popular to automatically load/unload goods in and out containers in warehouse without loading docks.The mechanized operation largely increases work efficiency, relieves labor intensity and also reduces cost for modern enterprises in a wide range of applications. It facilitates goods handling work and also provides advantages to advanced production, modernized management and safe operation.



● 头部伸缩装置可拆卸  
The front part can be removed when not use



● 头部托架安装状态  
Condition after install the front bracket



● 如输送袋子，可选包胶滚筒  
For load bags, adopt rubber coated rollers



● 头部加长动力伸缩装置  
Front Motorized Tongue:  
2800-7200mm




● 尾部带手轮调节高度  
Tail height adjustable by  
handwheel



● 液压调节高度  
Loading height adjustable by  
hydraulic



● 头部伸缩装置配独立电控柜  
Flexible conveyor with  
independent control box

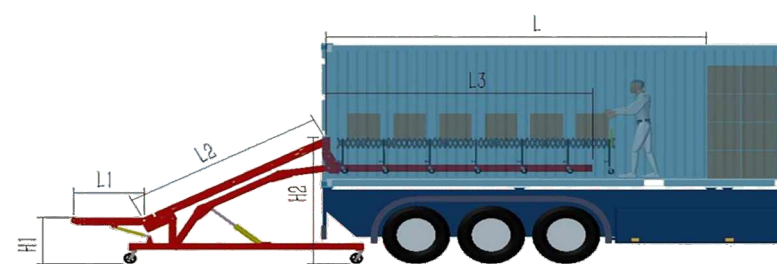

技术参数 Technical Parameters

Model	Belt Width (mm)	L1 (mm)	L2(mm)	L3 (mm)	L (mm)	H1 (mm)	H2 (mm)
CBLC-600	600	1100	3000	3100	7200	750~1050	1050~2300
CBLC-800	800	1100	3000	3100	7200	750~1050	1050~2300



05  
06

# 皮带伸缩机 Telescopic Belt Conveyor

Model: TBC

NINGBO YIFAN  
CONVEYOR EQUIPMENT CO.,LTD


伸缩式皮带输送机主要应用在车辆装卸和有伸缩要求的物料传输系统中，如物流、港口、码头、车站、机场、仓库、邮电、电器、轻工、食品、烟草等行业。它大大的缩短了人工往返搬运物料的距离，缩短装卸货时间，降低劳动强度，减少货品损伤，降低装卸成本，提高工作效率。

1. 伸缩皮带机是在普通的带式输送机上增加了伸缩机构，使得皮带机可以在长度方向上自由伸缩。客户可以按照自己的要求调节按钮，随意控制输送机的长度；也可根据要求，设计成输送机头部高度可调节。
2. 伸缩皮带机可与提升机、辊道输送机、固定皮带输送机、装配线等组成完整的立体自动化输送系统，实现产品的原料进厂到生产、装配、成品入库、车辆装卸等工作。
3. 伸缩皮带机可双向运转输送物料，在细节方面有多种选择，如：输送和伸缩速度都可选择定速或变速，设备可选择固定式或移动式，输送带可选择化纤带货强化PVC带，可耐油、耐磨、防切割等。

Telescopic Belt Conveyor is automatic loading/unloading equipment whose length is controllable widely used in logistics, ports, docks, stations, airports and warehouses, involving industries of post, home appliances, food, tobacco and light industry. It saves time of carrying back and forth and therefore makes the delivery work more efficient and less intensive, and also does less damage to the goods and helps enterprises decrease costs and increase efficiency and quality.


## Features

1. In structure, the telescopic conveyor makes the common belt conveyor extendable and retractable freely. The length can be controlled at will by the buttons; and also height adjustment is available if needed.
2. The conveyor can combine other conveying equipment such as lifting conveyors, inflexible roller/belt conveyors and assembly line, in which way an automatic conveying system is complete for production, assembly, storage, loading and unloading of goods.
3. The conveyor can transmit items in both forward and reverse way; and some options in details: either constant or variable in conveying/telescoping speed, either fixed or movable type by adding universal wheels, and belt types of chemical fiber/PVC belt, oil-proof or cutting-proof

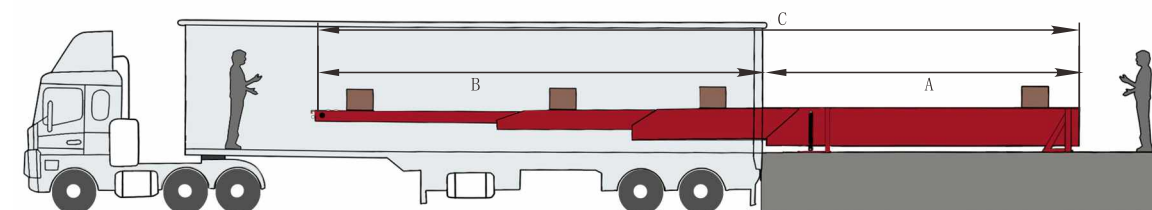


固定式 Fixed Type

Sections	Model	A(m)	B(m)	C(m)	H(mm)	Belt Width(mm)
3	FTBC-3S-4/5.4	4	5.4	9.4	800	600 / 800
	FTBC-3S-4.5/6	4.5	6	10.5	800	600 / 800
	FTBC-3S-5/7	5	7	12	800	600 / 800
	FTBC-3S-5.4/7.3	5.4	7.3	12.7	800	600 / 800
	FTBC-3S-6/8.5	6	8.5	14.5	800	600 / 800
	FTBC-3S-6.5/9.4	6.5	9.4	15.9	800	600 / 800
	FTBC-3S-7/9.6	7	9.6	16.6	800	600 / 800
4	FTBC-4S-4/7	4	7	11	950	600 / 800
	FTBC-4S-4.5/8.5	4.5	8.5	13	950	600 / 800
	FTBC-4S-5/9.5	5	9.5	14.5	950	600 / 800
	FTBC-4S-5.4/10.3	5.4	10.3	15.7	950	600 / 800
	FTBC-4S-6/12	6	12	18	950	600 / 800
	FTBC-4S-6.5/12.8	6.5	12.8	19.3	950	600 / 800
	FTBC-4S-7/14	7	14	21	950	600 / 800

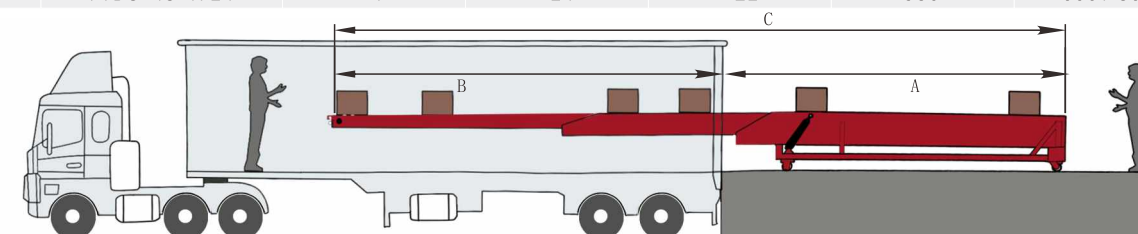

移动式 Mobile Type

Sections	Model	A(m)	B(m)	C(m)	H(mm)	Belt Width(mm)
3	MTBC-3S-4/5.4	4	5.4	9.4	1100	600 / 800
	MTBC-3S-5/7	5	7	12	1100	600 / 800
	MTBC-3S-6/8.5	6	8.5	14.5	1100	600 / 800
4	MTBC-4S-4/7	4	7	11	1200	600 / 800
	MTBC-4S-5/9.5	5	9.5	14.5	1200	600 / 800
	MTBC-4S-6/12	6	12	18	1200	600 / 800

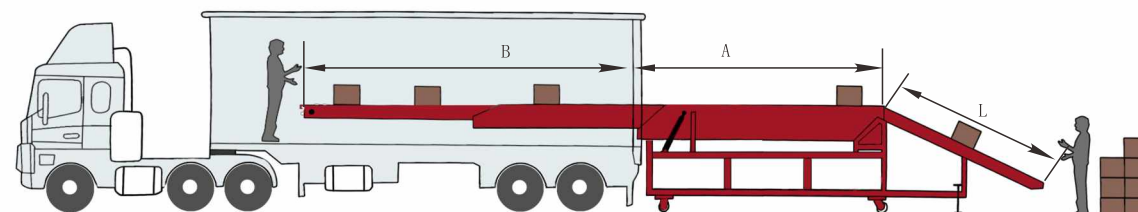

斜坡式 Inclined Type

Sections	Model	A(m)	B(m)	L(mm)	H1/H2(mm)	Belt Width(mm)
3	ITBC-3S-4/5	4	5	3000-4500	750 / 1500	600 / 800
	ITBC-3S-6/8	6	8	3000-4500	750 / 1500	600 / 800
4	ITBC-4S-6/12	6	12	3000-4500	750 / 1500	600 / 800
	ITBC-4S-7/14	7	14	3000-4500	750 / 1500	600 / 800



07  
08

## 滚筒卸货机

Telescopic Gravity Unloading  
Roller Conveyor

Model: TBR

## NINGBO YIFAN

CONVEYOR EQUIPMENT CO.,LTD


 YIFAN CONVEYOR



This gravity conveyor is a development of the highly successful telescopic mounted on a large robust box section chassis with an adjustable platform which suits most tailboard heights. Fully welded steel construction giving stability & strength. Low inertia 50mm dia PVC rollers set at 75mm centers allows transportation small & large parcels. Smooth transfer between decks is achieved by a series of 25mm dia steel rollers within a transfer slider section. Intended for off-loading only without the need of a loading dock, the telescopic can be used in conjunction with other conveyor from our extensive range to reach all areas of the warehouse.



### Robust extendable gravity conveyor for unloading container vehicles of all kinds

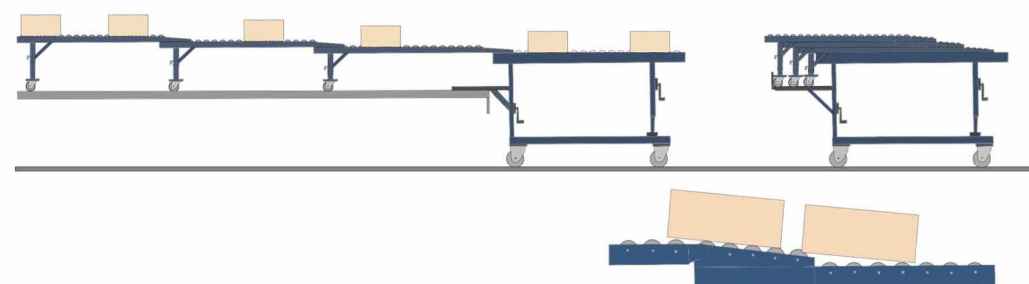


Screwjack height adjustment on each leg  
Transfer sections with steel runners between each deck  
Support platform for upper decks  
When closed easily movable and compact for storage  
25mm dia steel rollers for smooth transfer between decks

Standard Width: 600mm  
Close Length: 4700mm  
Open Length: 13500mm overall, 10000mm in vehicle  
Vehicle Tailboard: 1250-1600mm  
Load height in vehicle: 700/900mm  
Discharge height outside vehicle: 1500/1800mm



### Specifications

- Vast range of width and models
- Robust solid welded construction
- 50mm diameter rollers fitted in decks
- 50mm diameter steel rollers fitted at load end
- 20mm diameter steel rollers used in transfer sections to ensure smooth transfer
- Screw jack adjustable height on each dek
- Can load 50kgs per running meter
- Handles and package stops as standard
- Quality powder coat finish in BLUE, other colors available on request
- 125mm diameter swivel braked castors on each deck
- Standard options available: Drop-down end stops, connecting hooks

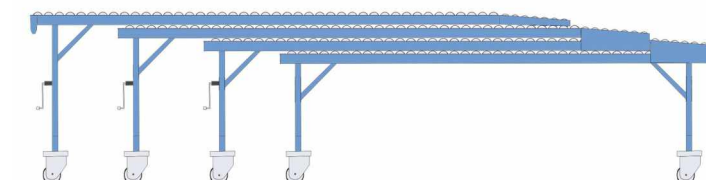

### 技术参数 Technical Parameters

		Standard track width: 400,500,600,700						(all mentions are in mm)
	Open Length	4000	6000	8000	6000	9000	12000	15000
	Close Length	2530	2970	3410	3505	3945	4385	5165
Number of decks		2	3	4	2	3	4	4



09  
10

## O带电动单辊伸缩机

Flexible Powered Roller  
Conveyor-O belt

Model: FPR-O

NINGBO YIFAN

CONVEYOR EQUIPMENT CO.,LTD



O带电动单辊伸缩机是一款带动力中载伸缩机，最大承重可以达到50kg/m，高度可调节，输送面能按要求伸长、倾斜或弯曲或圆弧形。本伸缩机主要用于车间、仓库、货场等场合的货物装卸，也可用于生产包装线、临时输送线、物流配送等场合的货物接收和发送。一经使用即可使生产工序科学化、条理化、从而大大改善了厂商的管理面貌。在产品品质控制、产量计划、提高生产力方面具有无可比拟的作用，为工厂企业单位节省了大量的劳动力资源。

O Belt Flexible Powered Roller Conveyor is an extendable powered automatic roller conveyor with controllable conveying speed & direction and adjustable supporting leg height. Having enough power supply by one mini motor per section, it is well qualified to intensively transport goods especially with flat bottom in the warehouse/storehouse, workshop, factory, harbor, docks, etc.



1. 输送面采用了Φ50mm"O"型带镀锌滚筒，壁厚1.5mm，轴径12mm
2. 单节一个动力：90W 中大电机
3. 伸缩片采用折弯结构，增加承载力
4. 单台配有一个电控箱，标准电压单相220V或者三相380V

1. Adopt 50\*1.5mm galvanized groove rollers driven by O belt
2. Every meter is equipped with one independent motor: 90W, Zhongda
3. Galvanized curved joint plates with better figure and load
4. Controlled by one independent electrical box with Emergency Stop. Standard Voltage: 220V 1-PH or 380V 3-PH

### 技术参数 Technical Parameters

Model	单节伸缩长度 Extendable Length/Section (mm)	滚筒宽度 Roller Width (mm)	可调高度 Adjustable Height (mm)	单元承载 Max. Load (kg/m)	可调速度 Adjustable Speed (m/min)	滚筒/节 Rollers/Section (pcs)
FPR-O	460~1200	600,800	600~800	50	10~18	9

PS: section means the length between two continuous legs.

YIFAN CONVEYOR



- 仓库输送纸箱  
Loading unloading cartons  
in warehouse.jpg



- 快递行业使用  
Applied in Express Company.jpg



- 与装车机联合使用  
Combine with truck loading  
conveyor.jpg





11  
12

# 多楔带电动单辊伸缩机

## Flexible Powered Roller Conveyor-V belt

### Model: FPR-V

**NINGBO YIFAN**  
CONVEYOR EQUIPMENT CO.,LTD

**YIFAN CONVEYOR**



壹帆的多楔带电动单辊伸缩机是一款重型、带动力的、可以在一定范围内自由伸缩的输送机。最大承重可以达到100kg/m，高度可调节，输送面能按要求伸长、倾斜或弯曲或圆弧形。本伸缩机主要用于车间、仓库、货场等场合的货物装卸，也可用于生产包装线、临时输送线、物流配送等场合的货物接收和发送，特别适合输送纸箱类平直底的成件货物。在输送过程中，满足货物的快速、安全地在两接口之间的输送。提高工作效率，降低劳动强度。

YiFan's V Belt Flexible Powered Roller Conveyor is absolutely an durable & expandable motorized roller conveyor with Max. load capacity of 100kg/m.It can be operation in two directions with adjustable speed and working height. Having enough power supply by one mini motor per meter, it is well qualified to intensively transport goods especially with flat bottom in the warehouse, workshop, factory, harbor, dock, etc. In addition, it can be applied to such situations as production-packing line, temporary conveying line and goods distribution line. It satisfies the easy, quick and efficient goods delivery.



1. 输送面采用Φ50的金属镀锌滚筒，多楔带传动，输送能力更强。
2. 采用L270\*5mm加长加厚伸缩片，增加承载力。
3. 每米一个动力：90W 中大电机
4. 单台配有一个电控箱，标准电压单相220V或者三相380V

- 1.Adopt Φ50 galvanized steel rollers driven by V belt
- 2.Reinforced L270\*5mm side links with nice load capacity
- 3.Every meter is equipped with one independent motor: 90W,Zhongda
- 4.Controlled by one independent electrical box with Emergency Stop  
Standard Votalge: 220V 1-PH or 380V 3-PH

#### 技术参数 Technical Parameters

Model	单节伸缩长度 Extendable Length/Section (mm)	滚筒宽度 Roller Width (mm)	可调高度 Adjustable Height (mm)	单元承载 Max.Load (kg/m)	可调速度 Adjustable Speed (m/min)	滚筒/节 Rollers/Section (pcs)
FPR-V	510~1200	600,800	700~1000	50	10~18	9

PS: section means the length between two continuous legs.



1.成品食用油纸箱输送线  
Finished oil cartons storage line



2.50kg茶叶袋仓库堆码输送线  
50kg tea bags stacking and offloading conveyor system



3. 输送茶叶袋  
Transport 60KG tea bags





13  
14

# 多楔带包胶电动单辊伸缩机

## Flexible Powered Rubber Coated Roller Conveyor-V belt

### Model: FPR-RV

NINGBO YIFAN  
CONVEYOR EQUIPMENT CO.,LTD



壹帆的多楔带包胶电动单辊伸缩机是专门为输送袋装货物而设计的。包胶滚筒摩擦力强，V带驱动力大，两者结合完美解决了普通滚筒机输送袋子打滑的问题。

YiFan's V-belt Type Flexible Powered Rubber Coated Roller Conveyor is specially designed for conveying different kinds of bags.The combination of rubber coated rollers and V belt driven structure perfectly solves the problem of bags getting slippery on gener steel roller conveyors.We have tested that it works well with 50kg rice/fertilizer bags.



- 1、输送面采用Φ55的多楔带滚筒，表面包丁晴橡胶，增加摩擦力。
- 2、采用L270\*5mm加长加厚伸缩片，增加承载力。
- 3、每米一个动力：90W 中大电机
- 4、单台配有一个电控箱，标准电压单相220V或者三相380V



- 1、Φ55mm rubber coated rollers are driven by V belt with good power transmission
- 2、Reinforced L270\*5mm side links with nice load capacity
- 3、Eevery meter is equipped with one independent motor: 90W, Zhongda
- 4、Controlled by one independent electrical box with Emergency Stop, standard voltage 220V 1-PH/380V 3-PH



#### 技术参数 Technical Parameters

Model	单节伸缩长度 Extendable Length/Section (mm)	滚筒宽度 Roller Width (mm)	可调高度 Adjustable Height(mm)	单元承载 Max.Load (kg/m)	可调速度 Adjustable Speed(m/min)	滚筒/节 Rollers/Section(pcs)
FPR-RV	550~1200	600,800	700~1000	100	10~18	9

PS: section means the length between two continous legs.



- 袋子装集装箱  
Loading unloading bags into containers



- 皮带伸缩机联合使用  
Combine with telescopic belt conveyor for loading trucks



- 空油桶进货储存线  
Empty jerry cans sotrage line





15  
16

# 无动力单辊伸缩机

## Flexible Gravity Roller Conveyor

Model:FGR

NINGBO YIFAN  
CONVEYOR EQUIPMENT CO.,LTD

 YIFAN CONVEYOR



无动力单辊伸缩机是利用可伸缩的组件做机架，专门为输送纸箱等底部平滑的成件货物而设计的，当输送机按弯道或组合弯道全伸长布置时还是保持结构的整体性。机体可自由变向，伸缩自如，单元伸缩量为1:3。改变任意角度，支腿高度可以调节，下部设有脚轮可以移动，脚轮可带刹车。

Flexible Gravity Roller Conveyor is widely used in assembly or transport line, physical distribution, container stuffing, etc. It is designed especially to convey flat-bottom items like cartons.It is all-steel joint structure makes sure that it holds its integrity when extended or curved.It helps to increase work efficiency and decrease labor intensity in material handling.



壹帆的重型无动力单辊伸缩机是一个稳健的输送机类型，负载能力100公斤每米。如果你需要一个更长的系统或弯曲成曲线，它可以扩展；甚至压缩，不使用时也可以更好的存储，更重要的是，这种输送带非常容易且快速进出卡车的操纵，更快，更安全，更容易地装卸货物。

YiFan's Heavy Duty Flexible Gravity Roller Conveyor is an robust type with load capacity of 100KG per meter.It can be expanded if you require a longer system or bent into curves or even compacted for better storage when not in use.Whats more,this conveyor is very easy to quick manoeuvre in or out of trucks for faster,safer,easier loading and unloading .




●尾部带扶手，防止货物掉落  
With end stop bar



●可以自由伸缩转弯  
Extendable and flexible



●支腿高度可调节  
Hieght Adjustable



●适合输送纸箱  
Suitable for transport cartons



●两侧带导轮，防止货物掉落  
With side guide wheels



●采用加长加厚伸缩片  
Reinforced side links



●高度可调节支腿  
Reinforced H type adjustable legs



●优质带刹脚轮  
Swivel lockable castor

### 技术参数 Technical Parameters

Model	单节伸缩长度 Extendable Length/Section (mm)	滚筒宽度 Roller Width (mm)	可调高度 Adjustable Height(mm)	单元承载 Max.Load (kg/m)	可调速度 Adjustable Speed(m/min)	滚筒/节 Rollers/Section(pcs)
FGR-M	450~1000	600,800	700~1000	50	10-18	9

PS:section means the length between two continnous legs.

### 技术参数 Technical Parameters

Model	单节伸缩长度 Extendable Length/Section (mm)	滚筒宽度 Roller Width (mm)	可调高度 Adjustable Height(mm)	单元承载 Max.Load (kg/m)	可调速度 Adjustable Speed(m/min)	滚筒/节 Rollers/Section(pcs)
FGR-H	510~1200	600,800	700~1000	100	10-18	9

PS:section means the length between two continnous legs.



17  
18


## 福来轮伸缩机

Flexible Skate Wheel Conveyo

Model: FGW

NINGBO YIFAN

CONVEYOR EQUIPMENT CO.,LTD

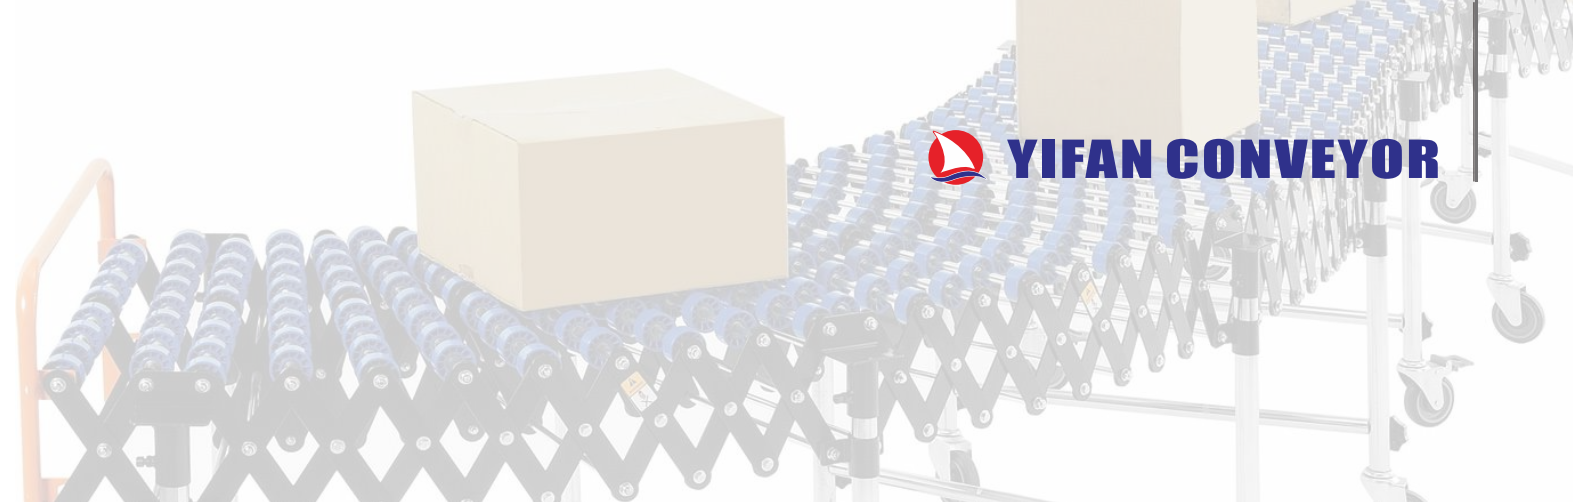

福来轮伸缩机体积小，重量轻，适合于输送底部平整的物品，多用于输送系统的弯道部分，合流部分，即可用来做水平方向的物品输送，可用于倾斜角度的物品输送。支脚通过转动手柄调节高度，即使在恶劣的地面上也能放平伸缩机，平稳运送货物。调节支脚高度，形成倾斜的输送平面，货物运送更流畅，减轻了操作人员工作强度。

Flexible Gravity Skate Wheel Conveyor is often chosen to convey small & medium sized flat-bottom items in harbor, dock, warehouse/storehouse, factory, etc. It is extendable, retractable and bendable. It can take curve flexibly even in zigzag narrow aisles. The crossed skate wheels make sure that conveyed goods will be automatically oriented and not fall down from sides. The conveyor largely facilitates goods delivery work.



可伸缩，伸缩3:1，可以根据需要在最大长度范围内随意伸缩。  
Freely extendable and retractable with an expansion ratio of 1:3

### 技术参数 Technical Parameters

Model	福来轮材料 Wheel Material(mm)	有效宽度 Effective Width(mm)	伸缩长度 Extendable Length(mm)	可调高度 Adjustable Height(mm)	单元承载 Max.Load (kg/m)	单排轮数 Wheels/tow(pcs)
FGW-P6	PLASTIC 塑料	450,600	2200~6900	700~1000	40	6 or 8
FGW-S6	STEEL 金属	450,600	2200~6900	700~1000	40	6 or 8



● 钢制福来轮输送面  
Crossed galvanized  
steel wheels




● 多台设备可用挂构连接  
Connecting hooks to  
extend further



● 塑料（尼龙）福来轮输送面  
Plastic (nylon) wheel conveying  
surface



● 支腿高度可调  
Adjustable height  
Castors with brakes

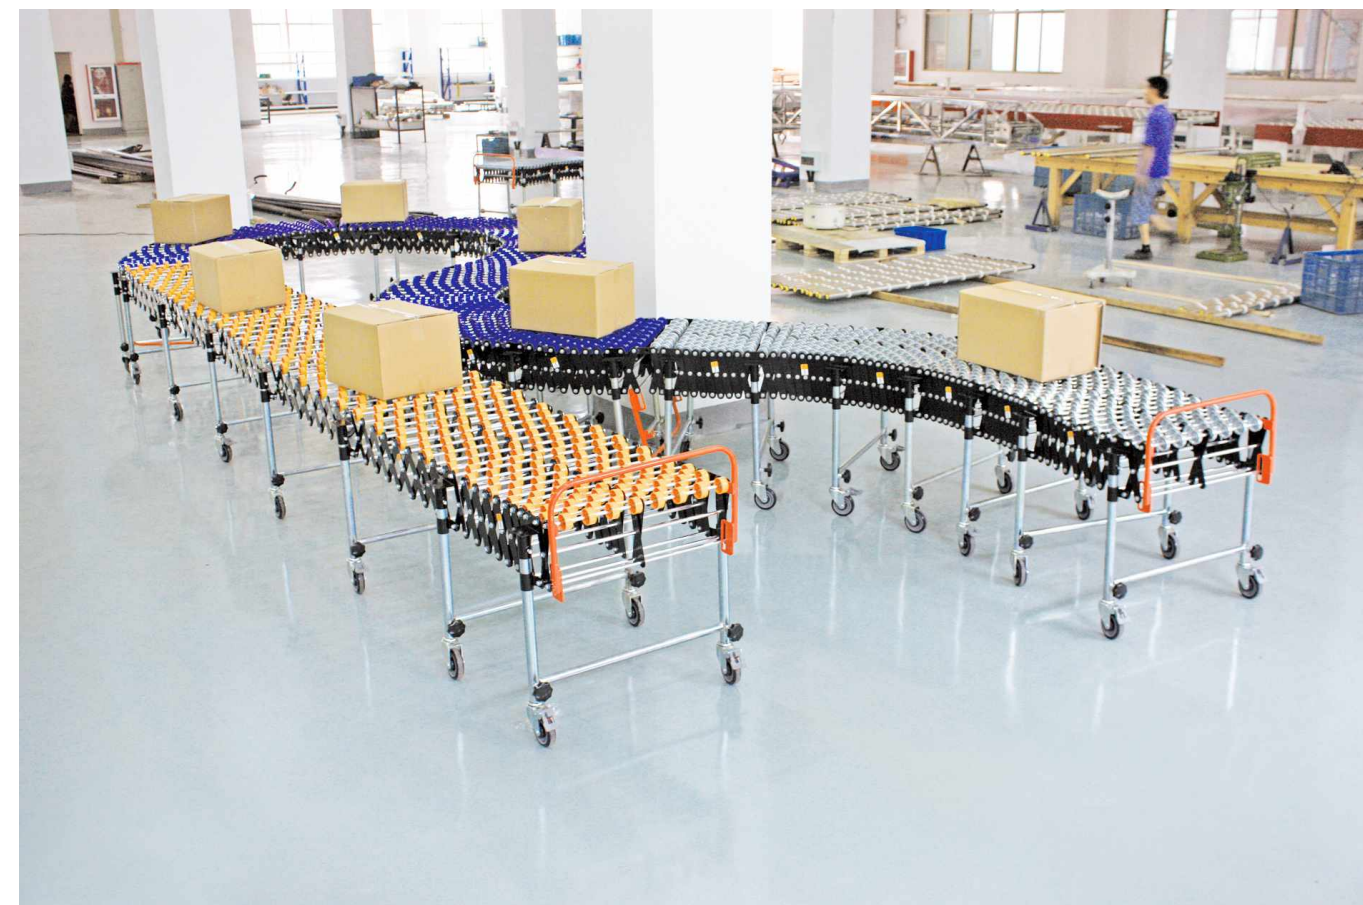



19  
20


# 垂直提升机

Vertical Lifting Conveyor


Model: VLC

NINGBO YIFAN  
CONVEYOR EQUIPMENT CO.,LTD


YIFAN CONVEYOR

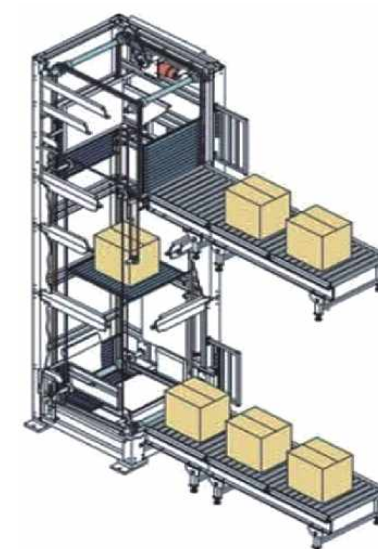

C Type

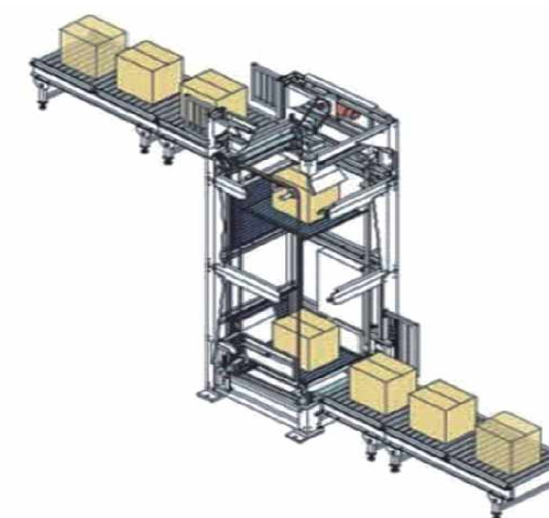

Z Type

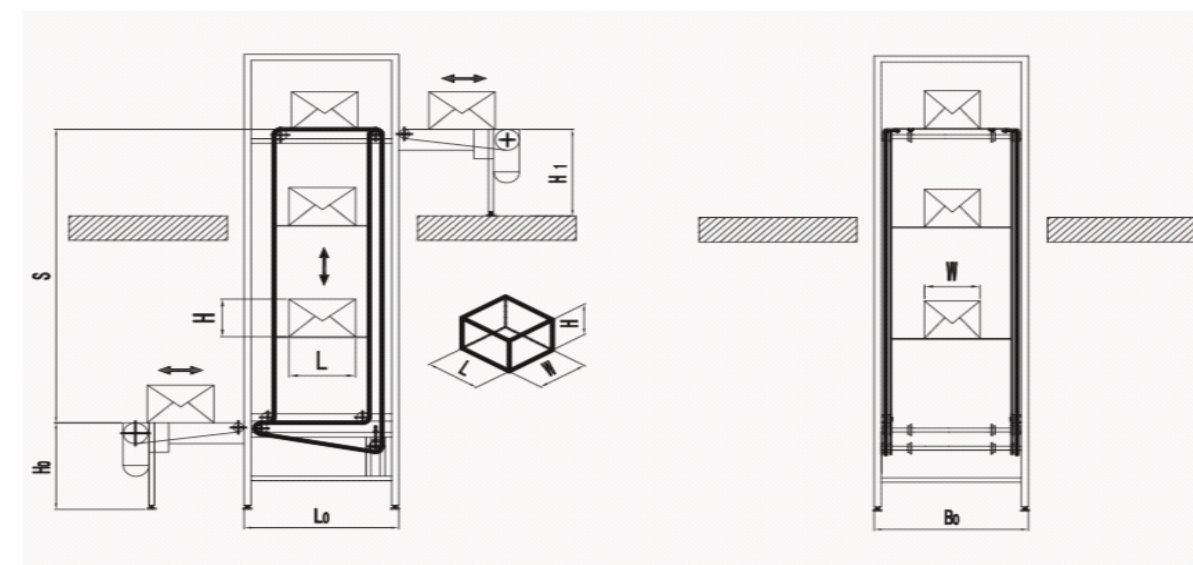

## 技术参数 Technical Parameters

Model型号	C Type C型垂直提升机	Z Type Z型垂直提升机
Lifting Height 升降高度	>1500mm	>1000mm
Lifting Speed 升降速度	<30m/min	<40m/min
Lifting Beat 输送节拍	<30pcs/min	<30pcs/min
Load Capacity 最大载重	<500kg	<2000kg
Item Type 物料种类	boxes/pallets 包装箱、托盘等	boxes/pallets 包装箱、托盘等



连续式垂直提升机主要应用于箱式包装物的提升输送。根据进出口方向可分为：C型和Z型。它由连续式垂直输送机、进出口动力装置、电控箱组成。本机在物流系统中能够高效、平稳、快速地将物品在不同高度直接输送。

主要特点：

- 1) 工作时托盘的回程不占用工作节拍，输送效率高，且不受输送高度的影响。
- 2) 能够多层之间连续输送，并能双向运行。输送的最小货物为350\*350mm
- 3) 与出入口输送设备配套使用，使输送过程实现完全自动化，提高生产效率。
- 4) 结构紧凑，占地面积小，安全可靠，易于维护。

Vertical Lifting Conveyor is mainly applied to convey box-shaped items continuously vertically(min. feasible box bottom size:350mm\*350mm).Based on its input & output conveyors' direction, it can be sorted as two types: Type C & Type Z. The conveyor boasts:

1. No wasted time from reverting pallets, high efficiency
2. Continuous working in bidirectional ways
3. Fully automatic with input and output conveyors
4. Compact in size, either indoors or outdoors.



21  
22

## 其他输送机 Other Optional Conveyors

**NINGBO YIFAN**  
CONVEYOR EQUIPMENT CO.,LTD


**YIFAN CONVEYOR**



● 铝合金皮带机  
Aluminum Belt Conveyor



● 环形皮带机  
Circular Belt Conveyor

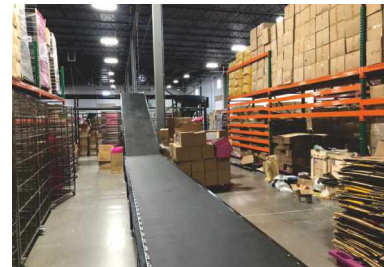

● 电商仓库  
E-business Warehouse Belt Conveyor



● 抽屉机  
Two Level Belt Conveyor



● 网带输送线  
Plastic Mesh Belt Conveyor



● Z型网带爬坡机  
Z Type Modular Belt Conveyor



● 太阳能板输送机  
Solar Panel Belt Conveyor



● 皮带机装配线  
Belt Conveyor Assembly Line



● 挡板爬坡皮带机  
Inclined Cleated Belt Conveyor



● 不锈钢304滚筒机  
Stainless Steel 304 Roller Conveyor



● 铝合金机架动力滚筒机  
Aluminum Frame Motorized Roller Conveyor



● 动力辊道机  
Motorized Roller Conveyor



● 移动式爬坡皮带机  
Portable Inclined Belt Conveyor



● 蝴蝶机  
V Type Loading Unloading Conveyor



● 楼层爬坡皮带机  
Belt Conveyor Between Floors



● 头部伸缩装置可拆卸  
The front part can be removed when not use



● 头部托架通过螺栓固定，方便拆卸。  
The front bracket is joint by bolt for easy removal.



● 头部伸缩机滚筒可升级为防滑包胶滚筒  
Optional rubber coated rollers is available