

**INKGIANT®**  
Focus on inkjet printing solution

# INKGIANT PRINTING

EQUIPMENT AND SOLUTION PROVIDER

Web: [www.inkgiant.com.cn](http://www.inkgiant.com.cn)

Email: [info@inkgiant.com.cn](mailto:info@inkgiant.com.cn)

Tel.: 86-0371-5596-0872


ZHENGZHOU BIGFOOT DIGITAL TECHNOLOGY CO., LTD



**BF-60E4-UV-G**  
**Hot Stamping Solution**



# BF-60E4-UV-G UV DTF PRINTER

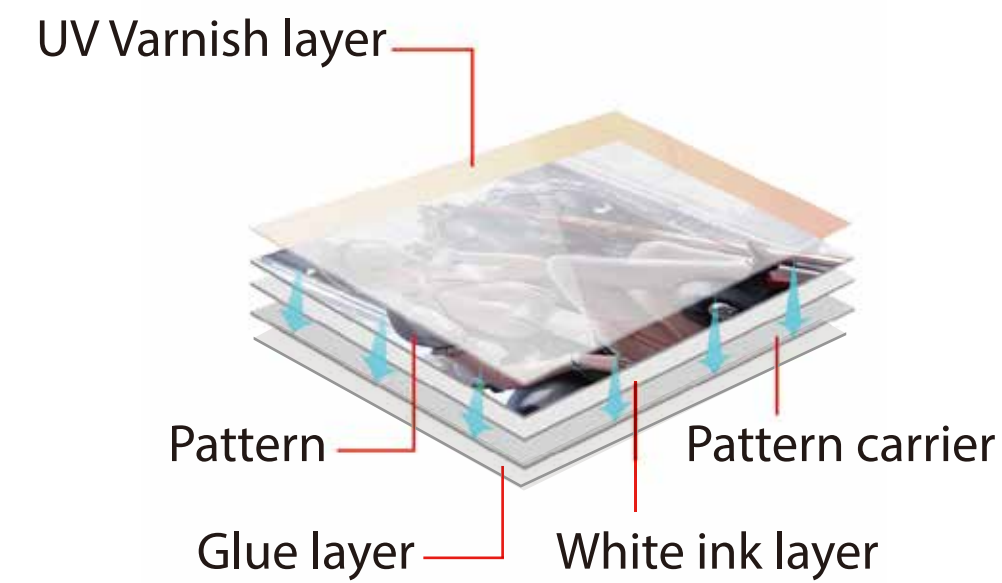

- Modern and durable
- UV DTF flexible application
- Epson I 3200

## White circulation system



White ink stirring




White ink circulation pump



White ink shunt

## Important accessories

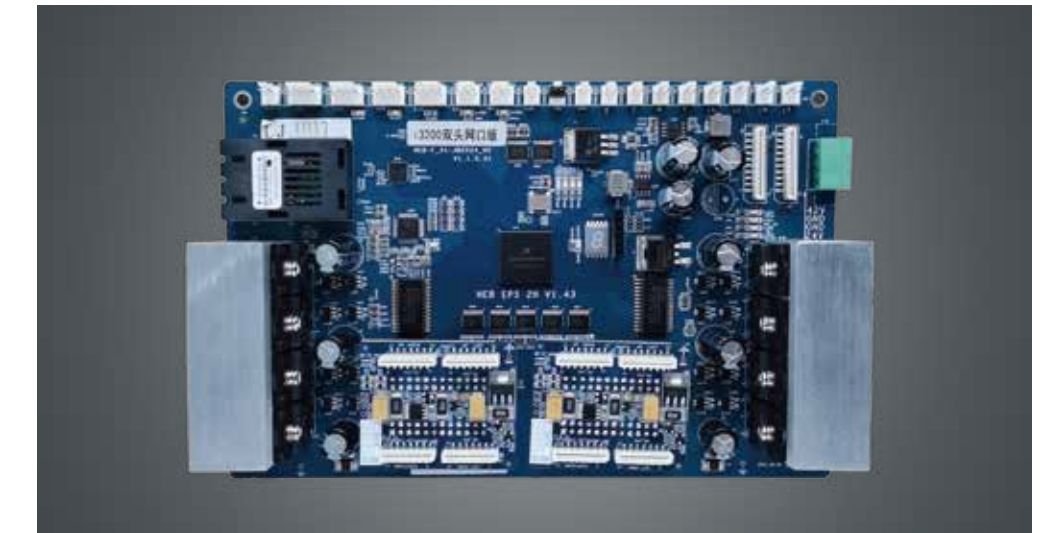

Head Board



Base plate and damper heating (optional)



I3200 Epson print head



## Applicable


Widely apply on paper/glass/  
ceramic/plastic etc.



Carriage Ink Capping Station



Enhanced Stepper Motor

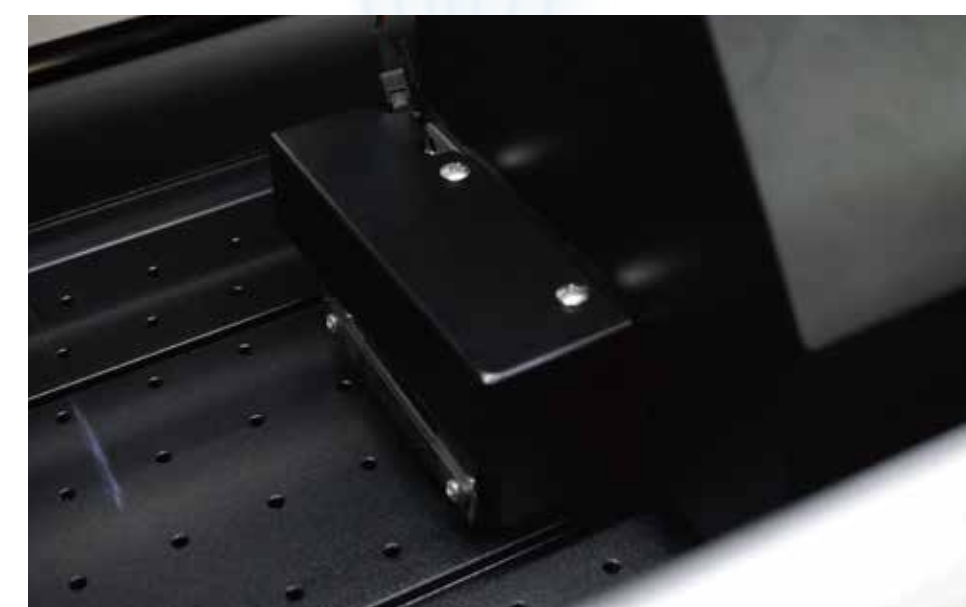

Anti-Collision System




Rubber Roller Pressure Knob




High Quality Driving Wheel



Functional Buttons

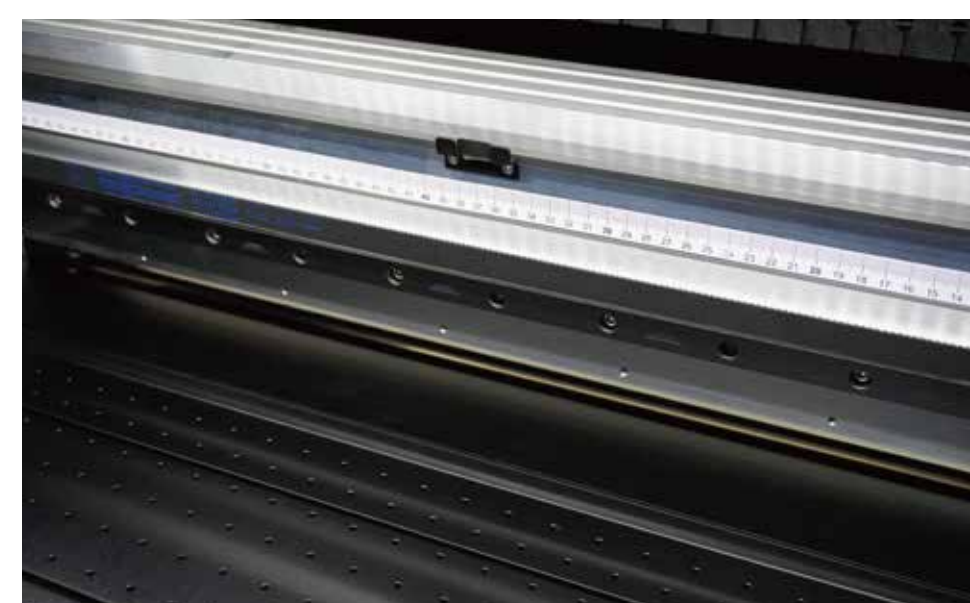

HIWIN Linear Guide

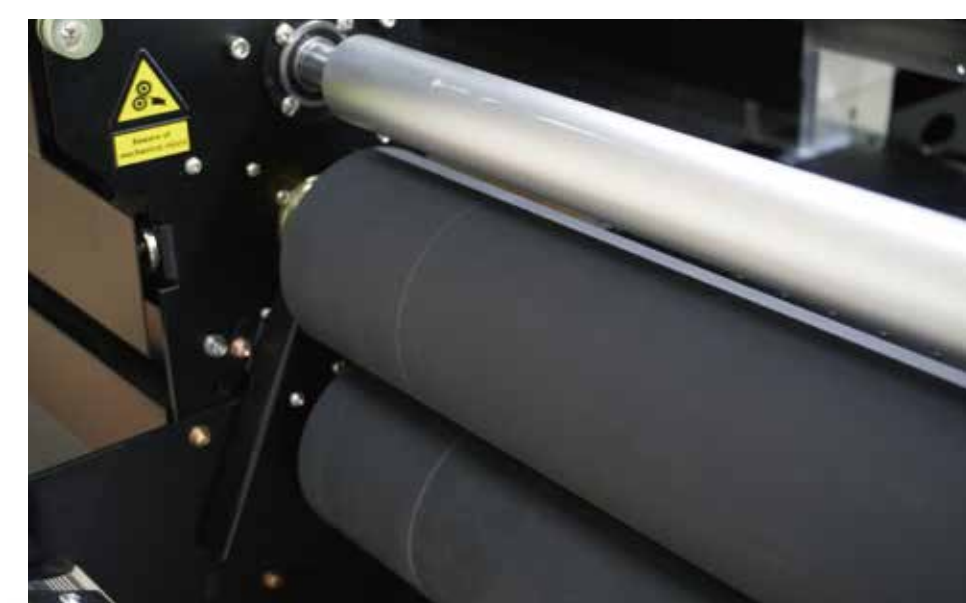

Reinforced Stepper Motor Rubber Roller



Media Shortage Sensor



Air Switch



# BF-60E4-UV-G

## Advantage

- 1 Super high appearance value: The surface has a very high three-dimensional gloss and a beautiful appearance



- 2 Printing gold/silver and other special color



- 3 Using much softer glue, which can be applied to the surface of paper products such as gift boxes, cartons, envelopes, etc.



## Meet different needs



Integral gold solution



Partial gold solution



Integral silver solution



Partial silver solution



PRODUCT PARAMETER



Emergency Stop



Flexiprint Rip Softwar



Simple and Clear Key Board

Model Type	BF-60E4-UV-G
Print head	4 Epson Head
RIP software	FLEXIPRINT
Resolution	4Pass: 720*1200DPI
	6Pass: 720*1800DPI
	8Pass: 720*2400DPI
Speed	8-10m²/h
Color	CMYK+W+Varnish+Glue
Print width	600mm
Ink	UV ink
Operation	Temperature 15°C-30°C
Environment	Humidity 50%-75%
Power	220V 10A 1700W
System	Windows7 or Above
Image format	Bitmap,Tiff,Jpeg,Eps,Pdf
Color control	ICC color profile with adjust function
Printer	Machine size:1962*900*1385mm(L*W*H)
	Packing size:2590*760*870mm(L*W*H)
	Net weight:250KG    Gross weight:350KG



■

HOT STAMPING SOLUTION



laminator machine for laminating clear flm for hot stamping solution

Model Number	Special laminating machine for crystal mark	Speed Gear Controlling	Variable
Nominal Voltage	110V/220V	Maximum roll film OD	130mm
Power	90w	The diameter specification of Roll film	3 inches
Laminating Width	<650 mm	The raise height of roller	30mm
Frequency Respons	50HZ-60HZ	Method of roller up-down	Pneumatic
Laminating speed	0-13 m/Min	Automatically uncovering film and rolling body paper equipment	linkage
Scope of Suitable Film Thickness	10-250 μ m	Foot-propelled switch	Yes
Laminating Thickness	28mm	Diameter of roller	130mm
Product Size	980 x570x1240(mm)	Weight	110kg
Packing Size	1030x630x680(mm)		



# UV INK



Colour:	W BK C M Y 1G 4G VG VN
Shelf life:	color ink 12months, white ink 9 months
Optional packing:	5Kg/bot,1KG/bot,500ml/bot,100ml/bot etc.
Storage temperature:	5°C-35°C
Recommended temperature(printing):	15°C-25°C
Humidity(printing):	45%-75%
Packing size:	460*370*240mm,1KG/BOT, 20BOT/carton
Gross weight :	23KG/carton
Net weight:	20KG/carton

Much softer glue, special varnish



UV#1G



UV#4G

DTF UV glue liquid  
Glue 1:1 mixing



UV#VN



UV#VG


DTF UV normal Varnish    DTF UV gold Varnish

Different ink tank configuration





# UV Gold/Silver Film

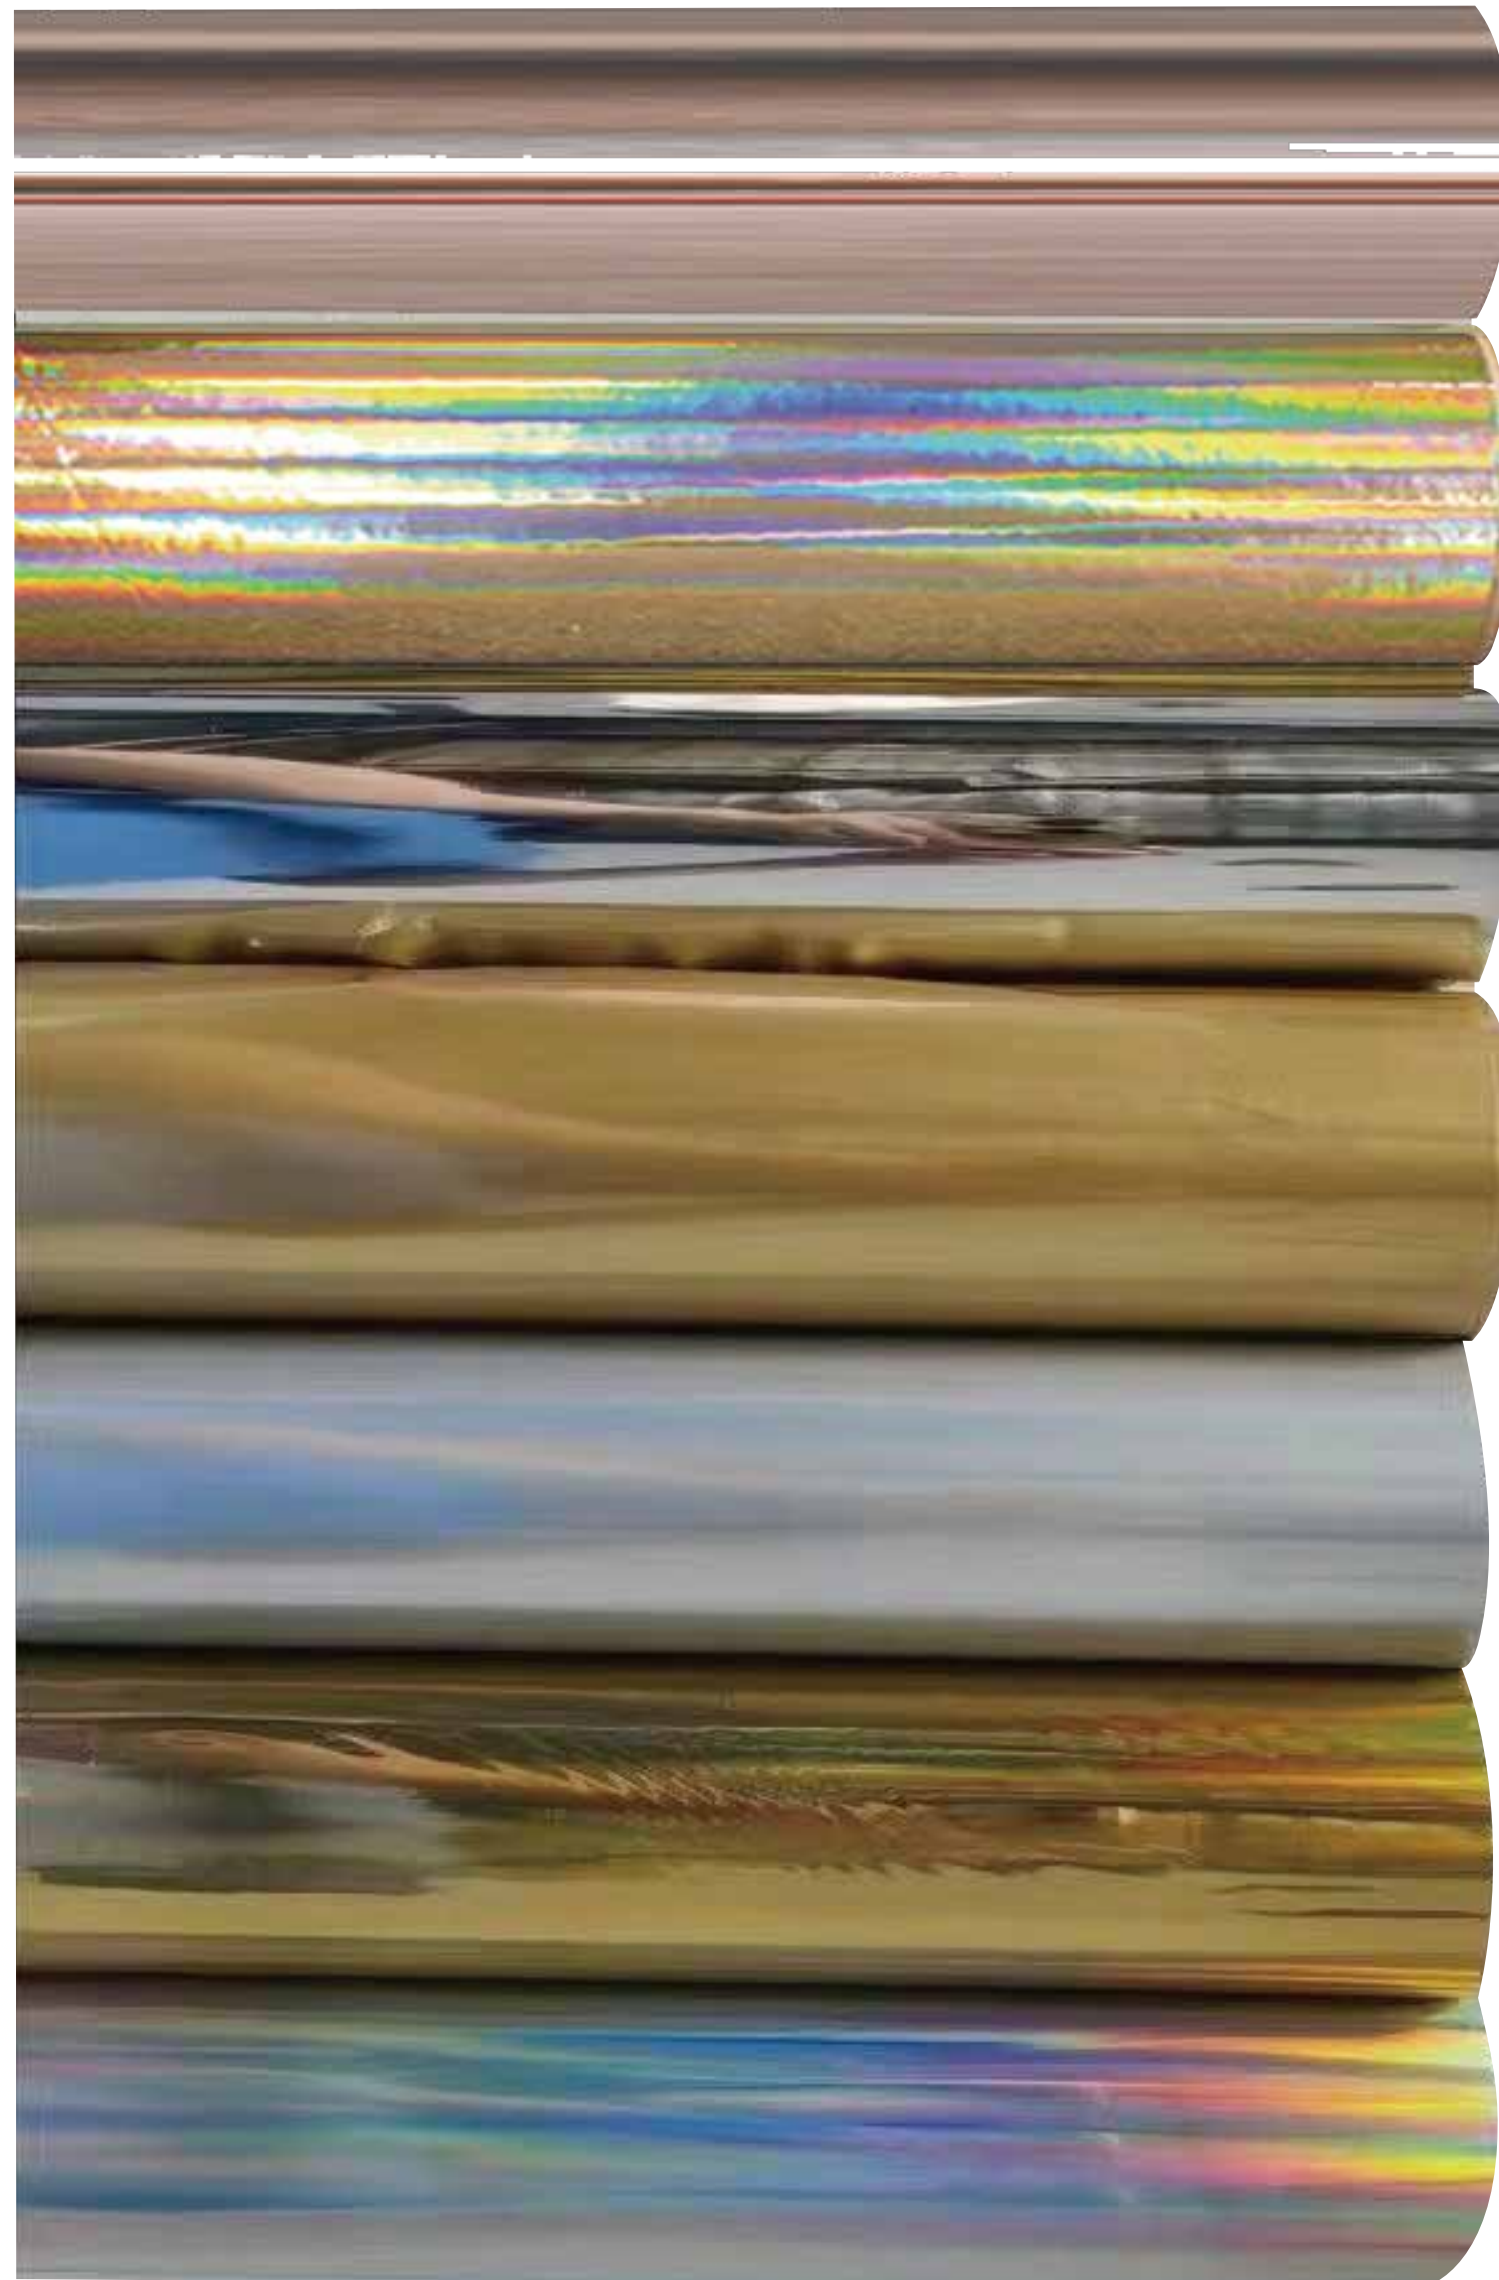

rose gold

laser gold


silver

matt gold

matt silver

gold

laser silver

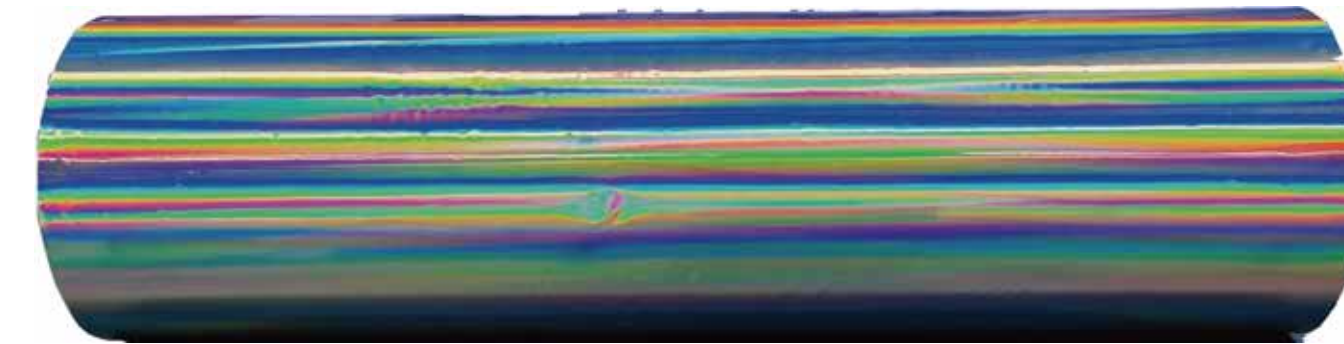

UV DTF gold/silver film  
62cm\*200m/roll



UV DTF clear flm  
62cm\*100m/roll



UV DTF release paper  
62cm\*100m/roll



# OPERATION PROCESS

