

MB-KST300CK-6

6 tires 300cc cargo tricycle



C Car material chasis, long time using guaranteeing

E Double headlight light, can see more clearly in night

B Low rate oil brake rear axle. bigger gear box, bigger rear axle rooster, bigger loading capacity and longer life



A Double tire, bigger loading capacity, driver more stable.

D 300cc rear reverser, high oil seal, no out of gear, no big noise

Dimension(mm)	2900×1400×700
Net Weight(kg)	385kg
Maximum Load(kg)	2ton
20' container	14pcs SKD
40'HQ container	34 pcs SKD



Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China


Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com



TEB-36

Dimension (L*W*H)	3300*1200*1420MM
Power	60V 1200W
Cargo dimension	1800*1200*330mm
Front tyre	3.25-16
Rear tyre	4.00-12
Wheelbase	2230mm
Vehicle weight	295KGS
Loading weight	800-1000KGS
Max speed	25km/h
Drive	Chain drive

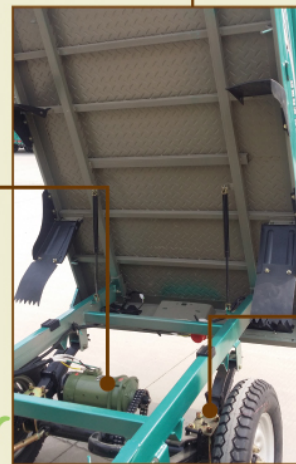

Mainbon Group Company Limited
1212, 578 TianBao Road, Shanghai 200086 China
Tel: +86(21)6515 0555 Fax: +86(21)6515 0777
www.mainbon.com sales@mainbon.com





Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China

Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com



MB-KST200ZK-3 200cc water cooling



Model Name	KST200ZK-3 Tricycle
Engine	zongshen Single cylinder, four stroke, storm water cooling
Bore and stroke (mm)	63.5x62.5
Displacement (ml)	197
Compression ratio	10.5:1
Maximum power/speed accordingly	10.3/7500Kw/(r/min)
Maximum torque/speed accordingly	14.2/6000N.m/(r/min)
Ignition way	CDI
The engine weight (dry)	47kg
Fuel standred	93#
The minimum fuel consumption rate	≤4.5L/100km
The minimum stable speed	1500r/min
Oil capacity	1000ml
The cooling system	water cooling
The clutch	Wet clutch, Laminated, 5 pieces
The transmission	5 gear, constant mesh all spur gea
Maximum speed	60km/h
Fuel tank capacity MAX	10.5l
Load (including the driver)	500kg
Body weight	350kg
The maximum length	2680mm
Maximum width	1250mm
Highly	1630mm
The wheelbase	2000
Wheel base	1080mm
Clearance from the ground	180mm
Turning radius	3000mm
Maximum gradeability	15c

MB-KST200ZK-3 200cc air forced cooling



Model Name	KST200ZK-3 Tricycle
The engine	zongshen Single cylinder, 200cc four stroke, air forced cooling
Bore and stroke mm	61x68 mm
Displacement	198.6cc
Compression ratio	9.7:1
Maximum power/speed accordingly	7.27/5500Kw/(r/min)
Maximum torque/speed accordingly	13.6/4500N.m/(r/min)
Ignition way	PEI
The engine weight (dry)	48kg
Fuel	standred 93#
The minimum fuel consumption rate	≤4.5L/100km
The minimum stable speed	1500r/min
Oil capacity	1000ml
The cooling system	air forced cooling
The clutch	Wet clutch, Laminated, 5 pieces
The transmission	4gear, constant mesh all spur gear connection with transmission
Differential	
Maximum speed	60km/h
Fuel tank capacity MAX	10.5L
Load (including the driver)	500kg
Self-respect	350kg
The maximum length	2680mm
Maximum width	1250mm
Highly	1630mm
The wheelbase	2000mm
Wheel base	1080mm
Clearance from the ground	180mm
Turning radius	3000mm
Maximum gradeability	15c



Mainbon Group Company Limited
 1212, 578 TianBao Road, Shanghai 200086 China
 Tel: +86(21)6515 0555 Fax: +86(21)6515 0777
 www.mainbon.com sales@mainbon.com



Bubble Trike



180°

Color: **Red** **green** **blue** **orange** **yellow** **pink**



Model No.	TEB-38
Motor type	DC series excitation
Voltage	48V 500w
Approved speed	35KM/h
Approved load	200KG , 1-3 person
Front wheel	3.25-16
Back wheel	3.25-16
wheel base	100cm
A set of storage battery	48V 20ah
A single storage battery	12V/20ah
Continued trip mileage	40-50km one set battery
Outline dimension	2100*1200*1500mm
Container capacity	8pcs/ 20 feet, 40pcs /40HQ
Option	60v 500w, 48v 750w, 60v 850w

MBP-200CC



Engine	200cc, water-cooled
Displacement	200cc
Capacity of Tank	23L
Wheel	4.00-12 (three)
Shock Absorber	43 Outer spring + hydraulic
Leaf Spring	4PCS, 5.3KGS
Rear Axle	5 holes, one-body
Overall Dimension (mm)	L2800*W1040*H1800mm
Kerb Weight	370kg
Loading Capacity	1000kgs
Starting System	Electrical , kick
Standard Output Power (kw/r/min)	7.2(1±10%/8500 (1±5%) rpm
Maximum Net Torque (N.m/r/min)	8.6(1±10%/7500 (1±5%) rpm
Wheel Base(mm)	1180mm
Ground Clearance(mm)	215mm
Climbing	Climb full 8° gradient
Max Speed	50km/h
Economic Fuel Consumption	≤4L/100km
Braking Type	Drum brake
Transmission Mode	Shaft drive
Starting Battery	12V 9Ah
Type of Fuel	Petrol
Clutch type	Manual-clutch
Shift Gears	By hand
Carburetor Type	PZ19
Air Filter	Sponge filter
Muffler Material	1.5mm steel plate
Brake Lever Material	HPB235
Po format	CKD & SKD
Loading Qty/40'HC,MOQ	28 sets

MBP-250CC



Engine	250cc, water-cooled
Displacement	250cc
Capacity of Tank	23L
Wheel	500-12(3 wheel)
Shock Absorber	45 Outer spring + hydraulic
Leaf Spring	6pcs, 17.5kgs
Rear Axle	5 holes, one-body
Overall Dimension (mm)	L3560*W1350*H1450mm (carriage size2200*1.35)
Kerb Weight	460kgs
Loading Capacity	1500kgs
Starting System	Electrical , kick
Standard Output Power (kw/r/min)	11.5(1±10%/7000 (1±5%) rpm
Maximum Net Torque (N.m/r/min)	19.5(1±10%/5000 (1±5%) rpm
Wheel Base(mm)	1200mm
Ground Clearance(mm)	180mm
Climbing	Climb full 11° gradient
Max Speed	60km/h
Economic Fuel Consumption	≤4L/100km
Braking Type	Drum brake
Transmission Mode	Shaft drive
Starting Battery	12V 9Ah
Type of Fuel	Petrol
Clutch type	Manual-clutch
Shift Gears	By hand
Carburetor Type	PZ30
Air Filter	Sponge filter
Muffler Material	1.5mm steel plate
Brake Lever Material	HPB235
Po format	CKD & SKD
Loading Qty/40'HC,MOQ	33 sets



Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China

Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com





Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China

Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com



TEB-35

SPECIFICATION AS BELOW

outline dimension: 3300*1300*1800mm
cargo tank: 1300*1020*285mm
loading capacity: 1000kgs
drive type: shaft or chain drive
max range: 100-150km
charging time: 6-8hours
max speed: 50km/h
motor power: 60V 1500W
gradient: 30%
wheel base: 2100mm
track: 910mm

Motor brush electric engine or brushless

battery: a set of 5 pcs 60V stroage batteries or 12V 120AH

stroage batteries

back tire: 4.50-12

front tire: 4.50-12

brake: drum bake or disc brake

36tubes

35pcs/40hq around, 6pcs/20ft



CRUISE

Brand new outlook design with super strong structure. Police cruise.

Front and rear big windshield glass.

LED head lamp, Width lamp.

Front luggage basket.

4.00-12 wheel, 8PR high level tyre.

Top quality new designed dashboard, comes with three switch (you can use for fan, wiper, and blinks), cup holder, etc.



Stereo music system, include FM radio, SD card and USB drive.



Hydraulic brake system.



Stand on back bumper.

Top roof unibody.

Sofa seat

All seat wider enough for 3 passengers



Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China

Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com





Mainbon Group Company Limited 1212, 578 TianBao Road, Shanghai 200086 China

Tel: +86(21)6515 0555 Fax: +86(21)6515 0777

www.mainbon.com sales@mainbon.com



SHOOT



Motor type	DC series excitation
Voltage	1100W/60V
Approved speed	50km/h
Approved load	1000kg
Power consumption	6-8degree/100km
Transmission mode	CVT
Front wheel	3.25-16
Back wheel	3.25-16
Break type	drum type
Break distance	33-36km/h
A set of storage battery	60V/600AH
Charger voltage	220v(50Hz)
A single storage battery	12V/120AH-130AH
Continued trip mileage	100-150km
Outline dimension	2800*1050*1700

