

LOCK

MANUFACTURING
EXPERT

www.lokinlock.com

ZHONGSHAN FUYU HARDWARE PRODUCTS CO., LTD.

ADD.: Liansheng South Road, Lianfeng Industrial Zone, Xiaolan,
Zhongshan, China.

Post Code: 528416

TEL:+86-760-2213 8688(50 Lines)

FAX:+86-760-2210 1021

Email: sales@lokinlock.com



FUYU & LOKIN
MECHANICAL LOCK
2018-2019

"The bitterness of poor quality remains long after the sweetness of low price is forgotten." We always keep this in mind.

The owner of our factory has dedicated to lock set manufacture industry almost 35 years, he understands how to make good locks.

In order to fully control and ensure trustable quality, we produce the complete lock set including cylinders and mortise locks all by ourselves in house, and our management team think over how to do that better all the time.

INDEX

P001	ABOUT FUYU	P083	33 SERIES—LEVER SET—2 IN 1 MECHANISM
P003	PRODUCTION WORKSHOP	P085	32 SERIES—LEVER SET— TUBULAR MECHANISM
P004	MANUFACTURE EQUIPMENT	P090	TUBULAR LEVER SET
P005	QUALITY TEST	P092	TUBULAR KNOB SET
P006	FINISH AND FUNCTION LIST	P093	CYLINDRICAL KNOB SET
P007	82 SERIES—GRIP HANDLE SET—MORTISE MECHANISM	P094	DEADBOLT
P018	81 SERIES—GRIP HANDLE SET—MORTISE MECHANISM	P095	COMBO LOCK
P028	89 SERIES—GRIP HANDLE SET—MORTISE MECHANISM	P096	ALUMINUM DOOR LOCK & SECURITY RIM LOCK
P040	86 SERIES—GRIP HANDLE SET—TUBULAR MECHANISM	P097	PROFILE CYLINDER
P045	87 SERIES / 83 SERIES / 80 SERIES—GRIP HANDLE SET—TUBULAR MECHANISM	P099	LOCK CASE SERIES
P051	26 SERIES—PANEL DOOR HANDLE—MORTISE MECHANISM	P101	LATCH AND BOLT
P062	22 SERIES—ROSE DOOR HANDLE—MORTISE MECHANISM	P102	KEY
P068	29 SERIES—PANEL DOOR HANDLE—MORTISE MECHANISM	P104	LEVER STYLE LIST
P072	28 SERIES—PANEL DOOR HANDLE—MORTISE MECHANISM	P105	DESIGN COLLOCATION SUGGESTIONS
P077	56 SERIES—SLIDING DOOR LOCK—MORTISE MECHANISM		
P079	556 SERIES—SLIDING DOOR LOCK—MORTISE MECHANISM		
P081	550 SERIES—SLIDING DOOR LOCK—ITALIAN STANDARD		
P082	551 SERIES—SLIDING DOOR LOCK—ITALIAN STANDARD		

ABOUT FUYU



Established in 1999, FUYU Hardware has gradually become one of the most famous lockset & hardware manufacturers because of high quality, high added value, variety and variation. The management and engineers of FUYU possess decades of experience in the high precision lock manufacturing industry, which makes the products highly known and respected not only in China, but also in South East Asia, Europe, America, etc. Our product lines are extensive, such as high class grip handle sets, mortise locks, cylindrical Locks, tubular Locks, deadbolts, rim locks, combo locks, etc.

In 2005, we built a new modern plant with area 20,000 square meters, staff 1,000 and annual production capability of 4,000,000sets.

For non-stop improvement purpose, we have been bringing many top grade automatically manufacturing and quality testing machines in FUYU, which are applied to punching, die-casting, polishing, cylinders manufacturing, assembly production workshops and quality control system. The new equipments are capable of producing high precision locksets and quality of FUYU products has improved

obviously. In addition, because of the high-tech testing equipments, our quality testing system has met ANSI/BHMA standard.

We always pay most attention to the long-term training of production technique for our workers and management skill for our department chiefs. The experienced and creative R&D team promotes new products regularly with the popular style and excellent performance. The strict QC system ensures the products with high quality. The after-sale service team always tries the best to serve our customers.

We got certificate of ISO 9001 :2000 in 2006 and further upgraded to ISO 9001 :2008 in 2009. By endeavors of all staff day and night, we have got many qualified certificates, related to Intertek ANSI/BHMA standard, fire-proof, patent, and quality prized by authoritative organizations. Nowadays, FUYU and LOKIN, our two brands, have been widely recognized by customers from all over the world. In future, we will always try our best to make high quality, popular and reliable products for our customers.

INTERTEK ANSI/BHMA STANDARD CERTIFICATE AND QUALITY PRIZED BY AUTHORITATIVE ORGANIZATIONS



FIRE-PROOF CERTIFICATE



ISO CERTIFICATE



PATENT CERTIFICATE



PRODUCTION WORKSHOP



Die-cast Workshop



Punching Workshop



CNC Processing Workshop



Cylinder Processing Workshop



Cylinder Assembly Line



Lock Case Assembly Line



Mechanical Lock Assembly Line



Hotel Lock Assembly Workshop



Electronic Lock Assembly Workshop



Programming Line



Precise Component Assembly Line

MANUFACTURE EQUIPMENT



Computer Number Control (CNC) Lathe



CNC For Pin Hole Drilling Of Cylinder Casing



CNC For Pin Hole Drilling Of Cylinder Plug



CNC For Plug Hole Drilling Of Cylinder Casing



Broaching Machine For Cylinder Plug



CNC For Cylinder Casing Cutting



CNC For Pin Hole Drilling Of Cylinder Plug And Casing



CNC For Keyway Milling Of Angle-cut-pin



CNC For Keyway Milling Of Double-row-pin And Single-row-pin



CNC For Keyway Milling Of Yale, Kwikset, Schlage and Weiser



CNC Precise Carving Machine



1250 Kilo-newton Pressure Punch



Die-casting Machine



Robotic Arm Of Die-casting Machine



CNC For Hole Drilling Of Trim



CNC Polishing For Surface Of Forend And Strike Plate



CNC Trademark Carving Machine



Trademark Laser Printing Machine

QUALITY TEST



Cycle Test For Individual Part



Multiple Cycle Test For Complete Set
(Max. test 16 sets at the same time)




Complete Cycle Test For Individual Lockset



Vertical Impact Test



Horizontal Impact Test

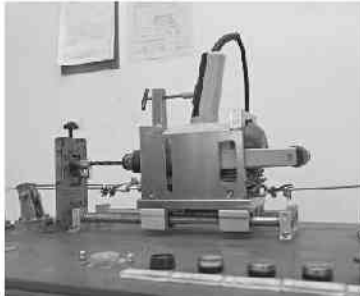

Anti-drill Test For Cylinder



Fatigue Test For Key



Salt-spray Test Equipment



Metal Plasticity Test



Pressure-Endurance Test
Equipment



Torsion Test



Digital Dimension Projector



Accelerated Aging Test



Using Temperature Range and
Humidity Range Test



Multiple Cycle Test



Vibration Test

FINISH LIST

FUYU Code	US Code	Description
AB	US 5	Antique Brass
AC	US 11	Antique Copper
ACC		Antique Coffee Copper
AN	US 15A	Antique Nickel
ASL		Antique Silver
BLK		Black Paint
BN	US 17A	Black Nickel
CCH		Coffee Copper Highlighted
CP	US 26	Chrome Polished
DAB		Dim Antique Brass
DAC		Dim Antique Copper
DSN		Dim Satin Nickel
GP		True Gold Polished
GRL		Gray Lacquer
MB		Matt Black
NP		Nickel Polished
OAC		Oil Antique Copper
ORB	US 10B	Oil Rubbed Bronze
ORBH		Oil Rubbed Bronze Highlighted
PB	US 3	Polished Brass
PVD		Lifetime Finish
RG		Rose Gold
SB	US 4	Satin Brass
SCH	US 26D	Satin Chrome Plated
SG		Satin True Gold
SN	US 15	Satin Nickel
SP	US 32	Stainless Steel Polished
SS	US 32D	Satin Stainless Steel
YB		Yellow Bronze

FUNCTION LIST

FUYU Code	Description
BK	Bathroom(privacy)function
BL	Bathroom(privacy)with indicator function
CM	Communicating function
CN	Construction key function
CR	Classroom function
DC	Double cylinders function
DM	Dummy function
ET	Entrance function
FH	Flush handle function
KA	Keyed—allke function
LB	Balcony function
MS	Master key function
PS	Passage function
ST	Storeroom(hotel)function

FULL INTRODUCTION OF SERIES 82

MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Global first—creative revolutionary design for lock case.
- Mortise type.
- ANSI/BHMA Grade 2 A156.13 standard.
- 800,000 cycles.
- Patented products.
- Fire-proof mechanism.
- Anti-drill cylinder.
- Construction key function.
- Anti-insert and silent-closed three-piece latch.
- Anti-cut bolt.
- Anti-panic.
- Auto-locking.
- Easily reversible for left and right handing.

PATENT CERTIFICATE



ANSI/BHMA GRADE 2 CERTIFICATE BY INTERTEK

Intertek
Global Legal Entity: Intertek Testing Services (Europe) Ltd., Guangzhou Branch
Block E, No. 7-8 Guang Dong Software Science Park, Caihong Road, Guangzhou, GZ510630, China
Tel: +86 20 8213 9389/6-20 3230 7524

Test Verification of Conformity

On the basis of the tests undertaken, the sample(s) of the below product have been found to comply with the requirements of the referenced specifications at the time the tests were carried out.

Applicant Name & Address:
Zhongshan FuYu Hardware Products Co., Ltd.
Lianheng South Road, Lianfeng Industrial Zone,
Xianlin, Zhongshan, Guangdong, China.

Product(s) Tested:
Mortise Lock

Referrals and principal characteristics:
Grade 2

Model(s):
Mortise Lock 82

Brand name:
FUYU, LOKIN

Relevant Standard(s)/Specification(s):
ANSI/BHMA A156.13-2009

Verification Issuing Office Name & Address:
Same as Legal Entity

Verification/Report Number(s):
GZ11103031-1


NOTE: This verification is part of the full test reports and should be read in conjunction with it.

This verification is for the exclusive use of the client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility is limited to the terms and conditions of the agreement. Intertek assumes no liability to any party other than its Client in accordance with the agreement. Any use of the Intertek name or logo or its marks for the sale or endorsement of the product or service must first be approved in writing by Intertek. The description and identification should be identical to the description as required only in the Intertek authentication program. Intertek will not be held responsible for any loss or damage caused by the use of this report.

Name: David Gu
Position: Manager
Date: December 16, 2011

www.intertek.com

ASSEMBLY ILLUSTRATION

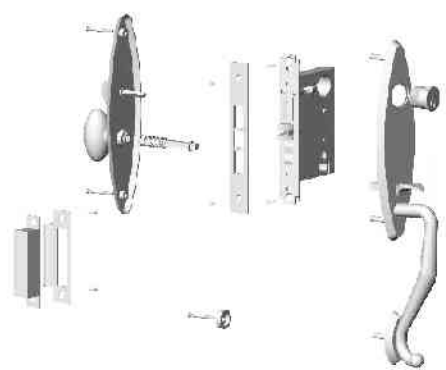

SUPPLYING FUNCTION FOR RESIDENTIAL:

- Entrance
- Dummy
- Two-open Door

BOX DESIGN



SUPPLYING FUNCTION FOR ANSI/BHMA STANDARD

FUYU CODE	DESCRIPTION	FUNCTION	ANSI NO.
82F01	Passage Latch	Latchbolt retracted by knob/lever from either side at all times.	F01
82F02	Privacy/Bathroom Lock	Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by emergency turn outside or thumbturn inside.	F02
82F14	Store/Utility Room Lock	Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by key from either side.	F14
82F16	Double Cylinder Lock	Deadbolt operated by key from either side.	F16
82F17	Cylinder x Thumbturn Lock	Deadbolt thrown or retracted by key outside or thumbturn inside.	F17
82F18	Cylinder w/o turn Lock	Deadbolt thrown or retracted by key from one side. No trim on opposite side.	F18
82F21	Dormitory/Bedroom Lock	Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by key outside or thumbturn inside.	F21
82F25	Store/room with grip handle Lock	Latchbolt retracted by thumb button from either side. Deadbolt operated by key from either side.	F25


DETAILS DESCRIPTION FOR CYLINDER

Each lock set with a sole keyway—code tag, you can only duplicate the keys by the tag, which enables the lock set to be a higher security level.




- Anti-drill American style cylinder. With construction key function.
- Solid brass cylinder(Brass housing, plugs and pins).
- With American angle-cut-pin technology, each pin is different from both angle and length, ensure top security performance.
- Processed with CNC (Computer Numeric Control) machines, key-combination is over International standard.
- Each cylinder with 5 pcs cupronickel owner keys, 1 pc brass construction and 1pc installation key. Angle-cut-pin keyway, each set of keys with a solo keyway code tag, make your keys not to be duplicated by others.
- Thickness of Key is 3.0mm.

THE STRUCTURE OF CYLINDER WITH ANGLE-CUT-PIN A B KEYS

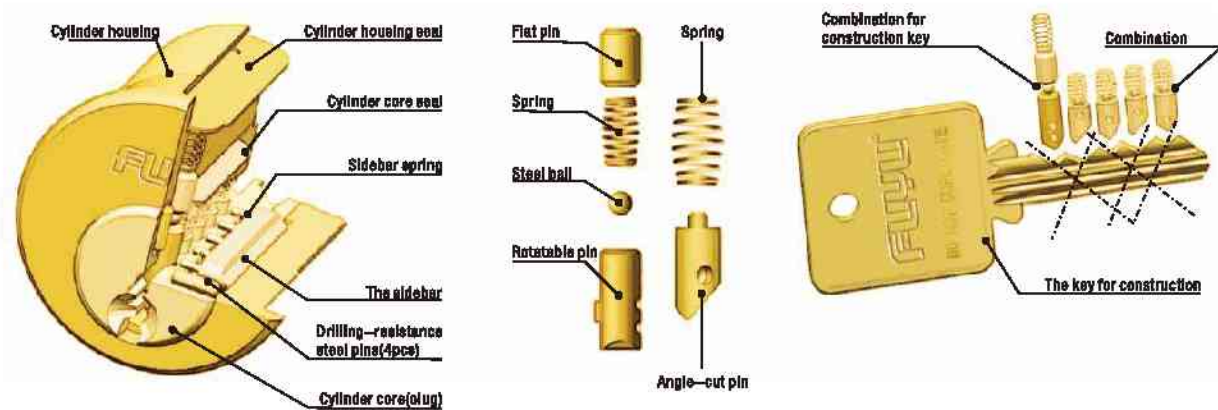


SUPPLYING KEYWAY

Standard



Customized Keyway

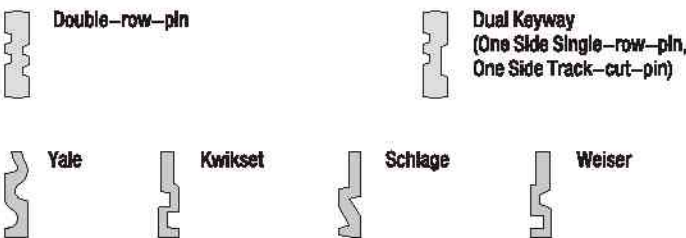

For customized keyway, MOQ is necessary, please contact our sales for win-win solution.

DETAILS DESCRIPTION FOR LOCK CASE:



- Because of the global first—creative revolutionary design and simple structure, our lock case contains only about 60 pieces components, while other American style lock cases contain at least 90 pieces components. To achieve the same function, less parts means more simple, stable and effective, trouble-free.
- From inside to outside, Including latch, bolt, rotors and cams, all parts are made by solid investment-casting stainless steel, much more durable and higher fire-proof level. So far, in worldwide lockset industry, only FUYU executes this technique, others manufacture American style lock cases with brass and steel material.
- According to the authoritative testing reports, brass-made assemblies were damaged badly after 800,000 cycles, but investment-casting stainless steel-made assemblies remain good condition after 1,200,000 cycles.



- Casing is sealed by revolving rivets, stronger and more elegant, the surface is flatter, maximum avoid potential operation problems caused by wrongly drilled holes.




- Stainless steel for casing, strong and durable.
- Solid investment casting stainless steel 304 for bolt, hardened-steel rods inside, anti-cut.
- Solid Investment casting stainless steel 304 for three-piece latch, with anti-insert and silent-closed function, easily reversible for left and right handing, no need to disassemble the complete lock case.
- Solid investment casting stainless steel 304 for auto locking/unlocking switch.
- Solid stainless steel 304 or brass for forend and strike plate, high quality metal strike box.
- Anti-panic function available for entry set.

Specific Strike Plate for Two-Open Door(Customized fitting,not standard)



Advantage: The optional strike fills the big gap of two-open door which is caused by traditional strike. With it, you will never see the daylight go through from the gap when you are outside. Meanwhile, it avoids the thieves open your two-open door by inserting latch of the lock because the gap is filled. Therefore, the optional strike can make your two-open door more artistic and higher security.

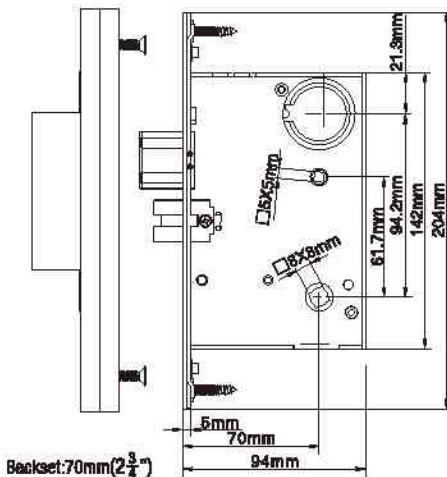

82 SERIES-MORTISE MECHANISM

800,000
CYCLES

MODEL NO. : **8201** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, SG, SN.
Standard Door Thickness: 46-53mm

8201 SN ET

MODEL NO. : **8202** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, SG, SN.
Standard Door Thickness: 46-53mm

8202 SG ET


MODEL NO. : **8203** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG/GP, SN/NP.
Standard Door Thickness: 51-54mm

8203 SN/NP ET

MODEL NO. : **8205** MATERIAL: Solid zinc alloy die-casting

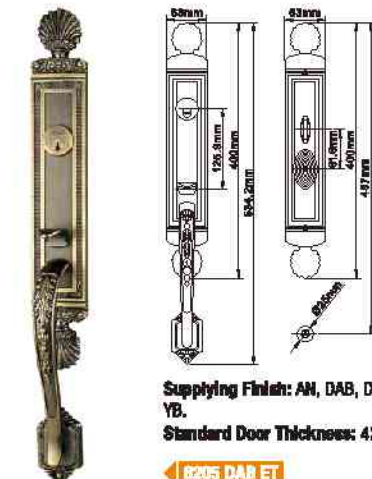

Supplying Finish: AN, DAB, DAC, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8205 DAB ET

MODEL NO. : **8206** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Standard Door Thickness: 42-49mm

8206 SCH/CH ET


MODEL NO. : **8208** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 46-53mm

8208 ASL ET

MODEL NO. : **8209** MATERIAL: Solid zinc alloy die-casting

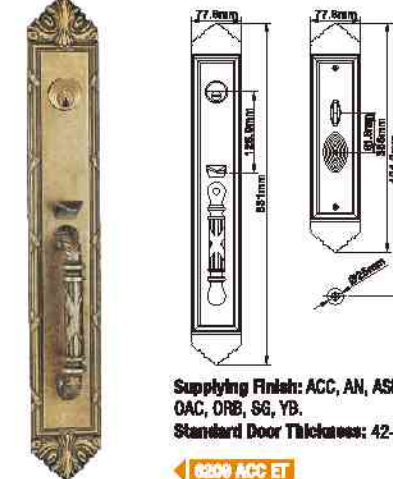

Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8209 ACC ET


MODEL NO. : **8210** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 45-52mm

8210 DAB ET

MODEL NO. : **8211** MATERIAL: Solid zinc alloy die-casting

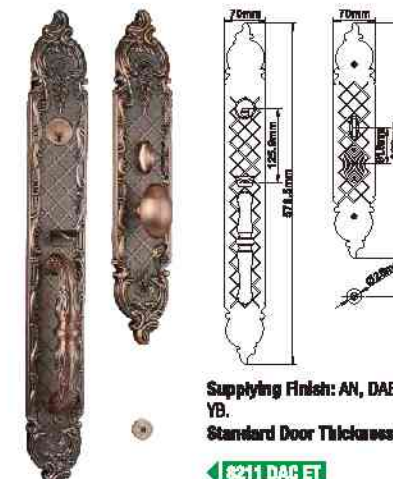

Supplying Finish: AN, DAB, DAC, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8211 DAC ET


MODEL NO. : **8212** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8212 AN ET

MODEL NO. : **8213** MATERIAL: Solid zinc alloy die-casting

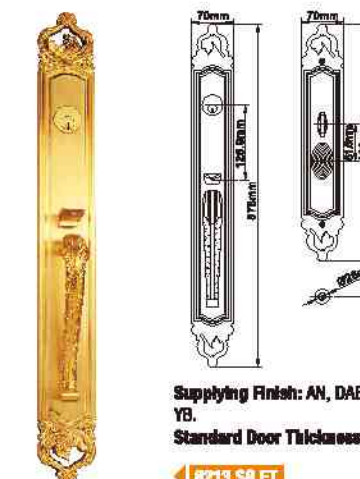

Supplying Finish: AN, DAB, DAC, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8213 SG ET

MODEL NO. : **8215** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 46-53mm

8215 DAB ET

82 SERIES-MORTISE MECHANISM

800,000
CYCLES

MODEL NO. : **8216** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8216 GP ET

MODEL NO. : **8219** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/MP.
Standard Door Thickness: 46-53mm

8219 SCH/CH ET


MODEL NO. : **8220** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8220 YB ET


MODEL NO. : **8223** MATERIAL: Solid zinc alloy die-casting

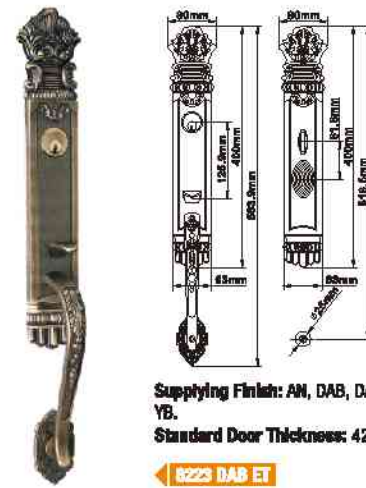

Supplying Finish: AN, DAB, DAC, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8223 DAB ET

MODEL NO. : **8228** MATERIAL: Solid zinc alloy die-casting

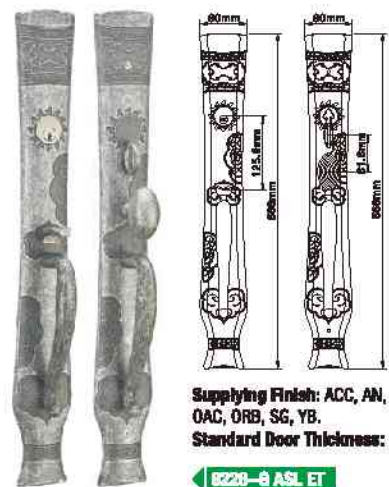

Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8228-8 ASL ET

MODEL NO. : **8230** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: ACC, AN, ASL, DAB, DAC, GP, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8230 ASL ET


MODEL NO. : **8232** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: DAB, DAC, DSN, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8232-6 DSN ET

MODEL NO. : **8235** MATERIAL: Solid zinc alloy die-casting

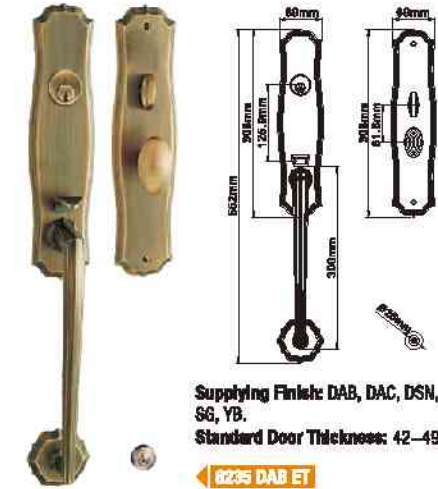

Supplying Finish: DAB, DAC, DSN, OAC, ORB, SG, YB.
Standard Door Thickness: 42-49mm

8235 DAB ET

MODEL NO. : **8268** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AN, DAB, DAC, DSN, OAC, ORB, ORBH, SG, YB.
Standard Door Thickness: 42-49mm

8268 ORBH ET

MODEL NO. : **8288** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AN, DAB, DAC, DSN, OAC, ORB, SG, YB.
Standard Door Thickness: 43-50mm

8288-B ORB ET

MODEL NO. : **82B01** MATERIAL: Solid forged brass



Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Standard Door Thickness: 37-46mm

82B01 GP ET

MODEL NO. : **82B03** MATERIAL: Solid forged brass



Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Standard Door Thickness: 39-48mm

82B03 GP ET

82 SERIES-MORTISE MECHANISM

800,000
CYCLES

MODEL NO. : 82ST01 MATERIAL: Stamping stainless steel 304



MODEL NO. : 82ST03W MATERIAL: Stamping stainless steel 304




MODEL NO. : 82ST05 MATERIAL: Stamping stainless steel 304



MODEL NO. : 82ST08 MATERIAL: Stamping stainless steel 304



MODEL NO. : 82ST09 MATERIAL: Stamping stainless steel 304

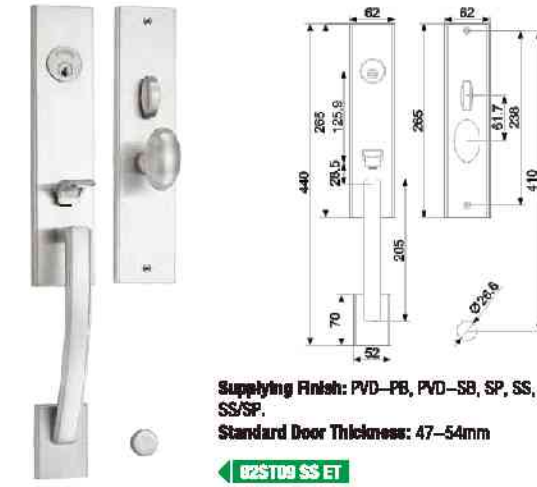

MODEL NO. : 82ST19 MATERIAL: Stamping stainless steel 304



FULL INTRODUCTION OF SERIES 81

MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Mortise type.
- 10 years mechanism warranty under correct installation and normal usage.
- Fire-proof qualified.
- Patented products.
- Construction key function.
- Anti-cut bolt.
- Anti-panic.
- Easily reversible for left and right handing.


Patent Certificate



Fire-Proof Certificate



ASSEMBLY ILLUSTRATION

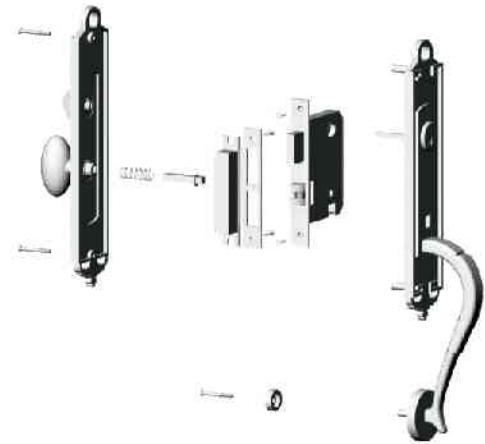


BOX DESIGN



THE 5TH GENERATION MORTISE LOCK CASE




- **Rotor:** Solid investment-casting stainless steel 304, anti-rust, stronger and more durable than brass and zinc alloy.
- **Cam:** Solid investment-casting stainless steel 304, anti-rust, stronger and more durable than brass and zinc alloy.
- **Casing:** High class imported EGI(electric galvanized) steel, higher grade fingerprint resistant, thickness 1.5mm.
- **Latch:** Solid investment-casting stainless steel 304, anti-rust, stronger and more durable than brass and zinc alloy, easily reversible for left and right handing.
- **Deadbolt:** Solid stainless steel 304, reinforced with two hardened steel inserts, anti-saw, anti-rust, stronger and more durable than brass and zinc alloy, offering maximum protection and security.
- **Forend (thickness 3.0mm)/Strike plate (thickness 1.5mm):** Solid stainless steel 304 or brass.

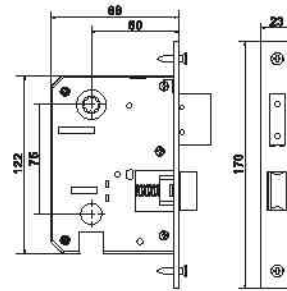

Backset Standard: 80mm(2 3/8") Customized: 70mm(2 3/4")


MODEL NO. : **8101** MATERIAL: Solid zinc alloy die-casting

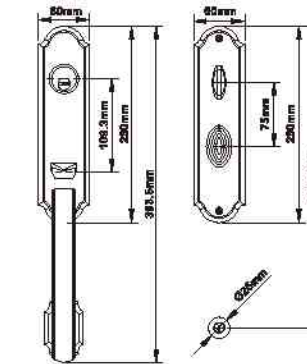

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, SCH/CH, SG/GP, SN/GP, SN/NP.
Standard Door Thickness: 40-60mm.

8101 SG/GP ET


MODEL NO. : **8102** MATERIAL: Solid zinc alloy die-casting

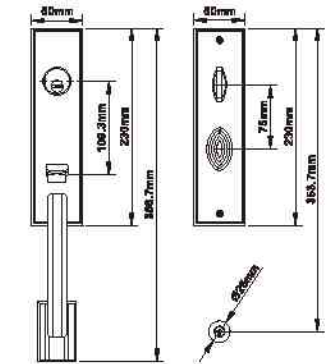

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, SCH/CH, SG/GP, SN/GP, SN/NP.
Standard Door Thickness: 38-60mm

8102 AB ET


MODEL NO. : **8103** MATERIAL: Solid zinc alloy die-casting

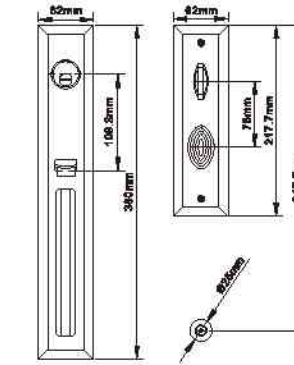

Supplying Finish: AB, AC, ACC, DAB, DAC, DSN, GP, SCH/CH, SG/GP, SN/GP, SN/NP.
Standard Door Thickness: 35-60mm

8103 SN/NP ET


MODEL NO. : **8105** MATERIAL: Solid zinc alloy die-casting

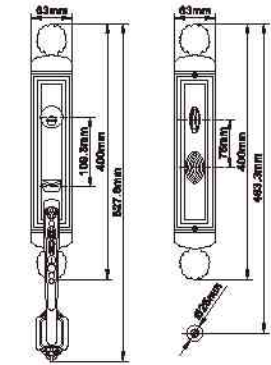

Supplying Finish: AB, AC, AN, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8105 DAC ET


MODEL NO. : **8106** MATERIAL: Solid zinc alloy die-casting

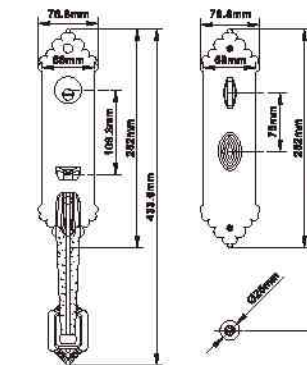

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-60mm

8106 DAB ET

MODEL NO. : **8108** MATERIAL: Solid zinc alloy die-casting

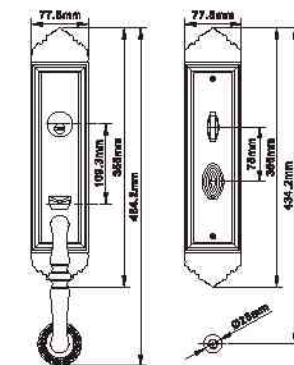

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-55mm


8108 SG ET

THE 3RD GENERATION HIGH-TECH CYLINDER



- High-tech solid brass cylinder(Brass for housing, core/plug, pins and nut).
- Machined by precise CNC (Computer Numeric Control) equipments according to the most strict QA standard.
- Keyway: Double-Row-Pin technology, 10 pins, pin-combinations are much more than international standard, extremely security.
- Construction key function available: Each cylinder with 5 pcs OWNER keys + 1 pc CONSTRUCTION key, all keys are made by solid brass, thickness 2.5mm.
- Hardened process for tail-piece, stronger and more durable.

The Structure Of 81 Series Cylinder

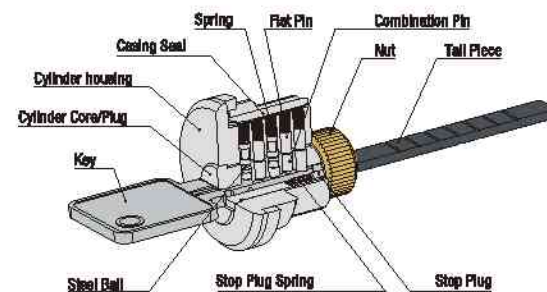

Supplying Keyway

Standard


Double-row-pin

Customized Keyway



For customized keyway, MOQ is necessary, please contact us for win-win solution.

Double-row-pin With Construction Key Function

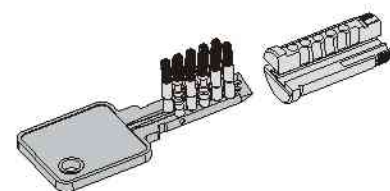

Plastic Box For Owner Keys




The owner keys are sealed inside the plastic box, you could not get the owner keys unless make the box broken, offering maximum security.

81 SERIES-MORTISE MECHANISM




MODEL NO. : **8109** MATERIAL: Solid zinc alloy die-casting

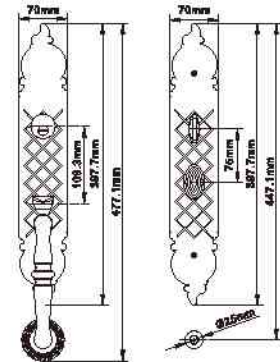

Supplying Finish: AB, AC, AN, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 38-55mm.

8109 DAB ET


MODEL NO. : **8110** MATERIAL: Solid zinc alloy die-casting

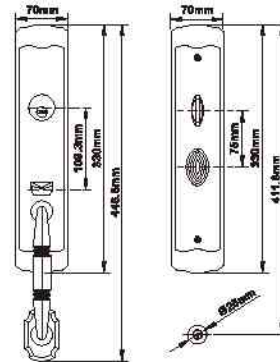

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-60mm

8110 AN ET


MODEL NO. : **8118** MATERIAL: Solid zinc alloy die-casting

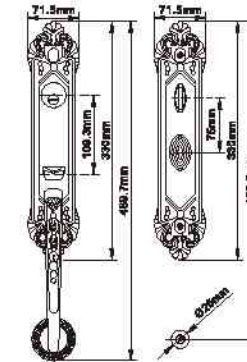

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, OAC, SG, YB.
Standard Door Thickness: 38-55mm

8118 OAC ET


MODEL NO. : **8119** MATERIAL: Solid zinc alloy die-casting

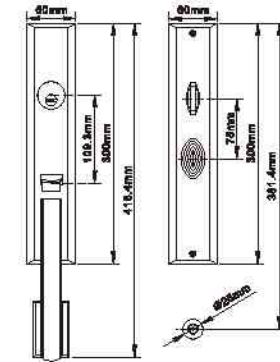

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, ORB, SCH/CH, SG/GP, SNMP.
Standard Door Thickness: 38-60mm

8119 SCH/CH ET


MODEL NO. : **8112** MATERIAL: Solid zinc alloy die-casting

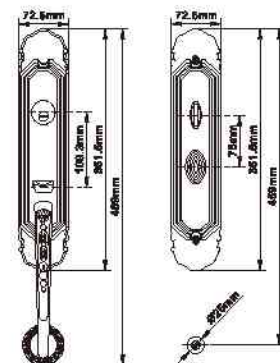

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8112 DAB ET


MODEL NO. : **8113** MATERIAL: Solid zinc alloy die-casting

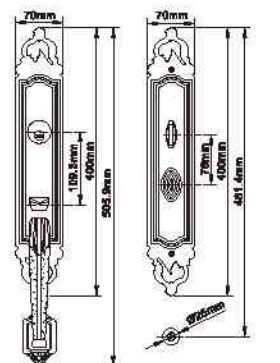

Supplying Finish: AB, AC, AN, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8113 SG ET


MODEL NO. : **8120** MATERIAL: Solid zinc alloy die-casting

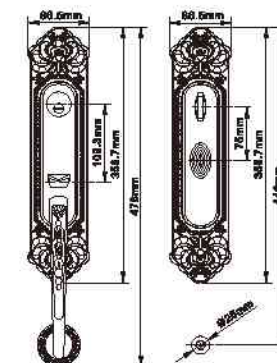

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8120 DAC ET


MODEL NO. : **8121** MATERIAL: Solid zinc alloy die-casting

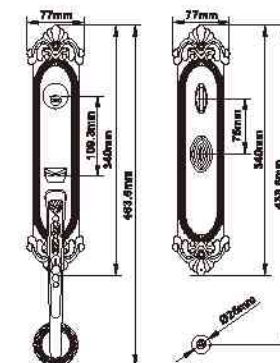

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8121 YB ET


MODEL NO. : **8115** MATERIAL: Solid zinc alloy die-casting

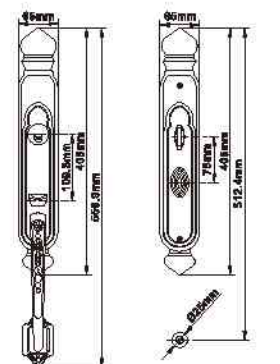

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-60mm

8115 DAB ET


MODEL NO. : **8116** MATERIAL: Solid zinc alloy die-casting

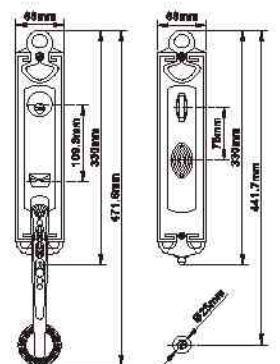

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 38-55mm

8116 GP ET


MODEL NO. : **8122** MATERIAL: Solid zinc alloy die-casting

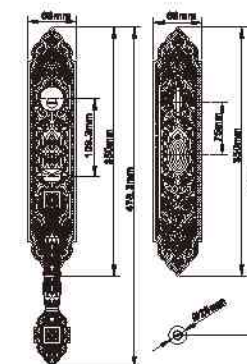

Supplying Finish: AB, AC, AN, DAB, DAC, SG, YB.
Standard Door Thickness: 38-55mm

8122 AC ET

MODEL NO. : **8123** MATERIAL: Solid zinc alloy die-casting

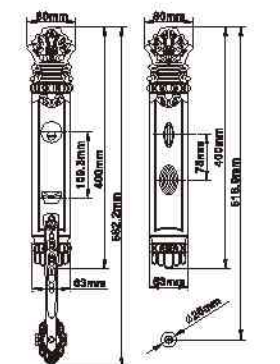

Supplying Finish: AB, AC, AN, DAB, DAC, SG, YB.
Standard Door Thickness: 38-55mm

8123 DAB ET


81 SERIES-MORTISE MECHANISM



MODEL NO. : **8125** MATERIAL: Solid zinc alloy die-casting




MODEL NO. : **8126** MATERIAL: Solid zinc alloy die-casting

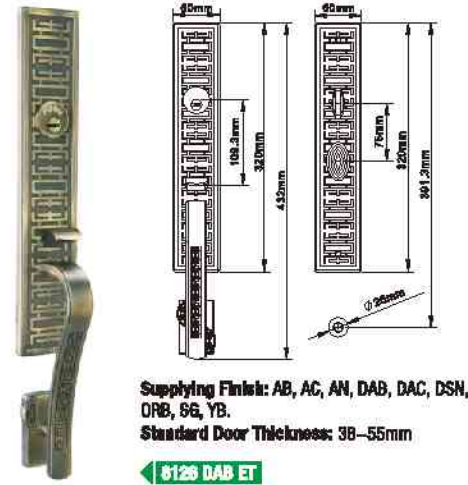


MODEL NO. : **8129** MATERIAL: Solid zinc alloy die-casting



MODEL NO. : **8130** MATERIAL: Solid zinc alloy die-casting

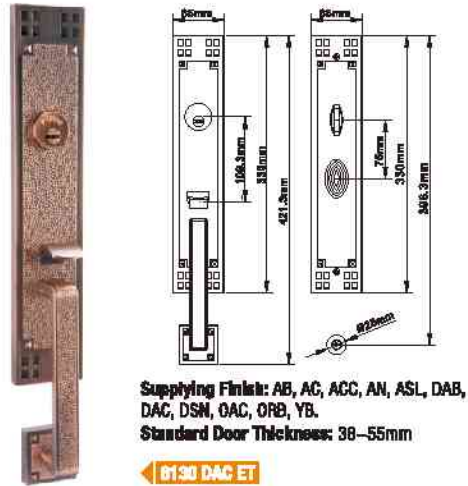

MODEL NO. : **8131** MATERIAL: Solid zinc alloy die-casting

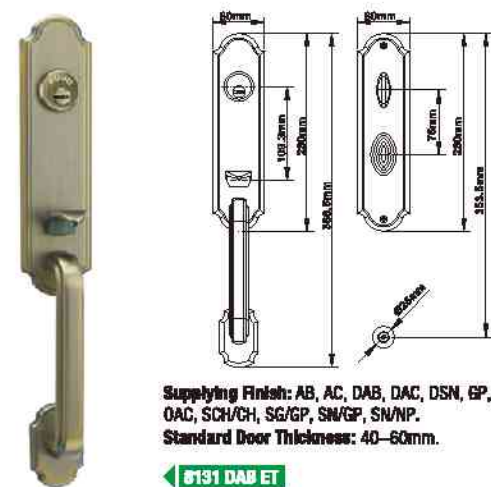

MODEL NO. : **8132** MATERIAL: Solid zinc alloy die-casting




MODEL NO. : **8133** MATERIAL: Solid zinc alloy die-casting



MODEL NO. : **8136** MATERIAL: Solid zinc alloy die-casting



MODEL NO. : **81B01** MATERIAL: Solid forged brass

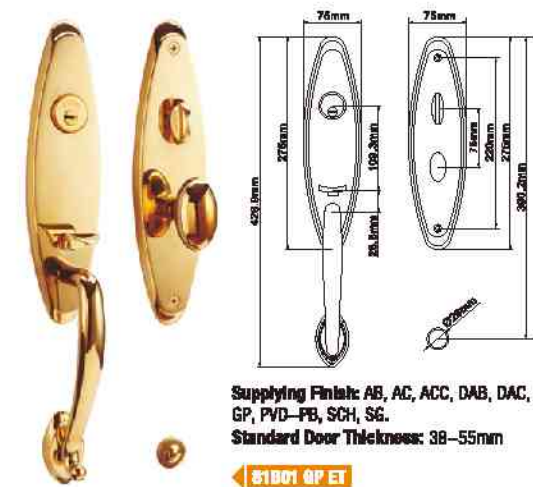


MODEL NO. : **8135** MATERIAL: Solid zinc alloy die-casting



MODEL NO. : **8188** MATERIAL: Solid zinc alloy die-casting



MODEL NO. : **81B02** MATERIAL: Solid forged brass

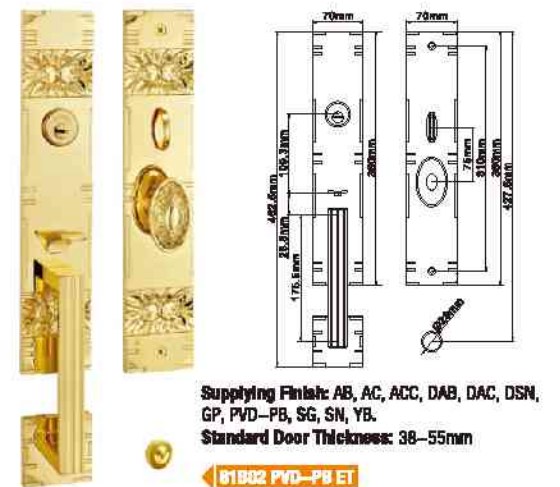

81 SERIES-MORTISE MECHANISM



MODEL NO. : **81ST02** MATERIAL: Stamping stainless steel 304




MODEL NO. : **81ST03** MATERIAL: Stamping stainless steel 304



MODEL NO. : **81ST03W** MATERIAL: Stamping stainless steel 304



MODEL NO. : **81ST05** MATERIAL: Stamping stainless steel 304

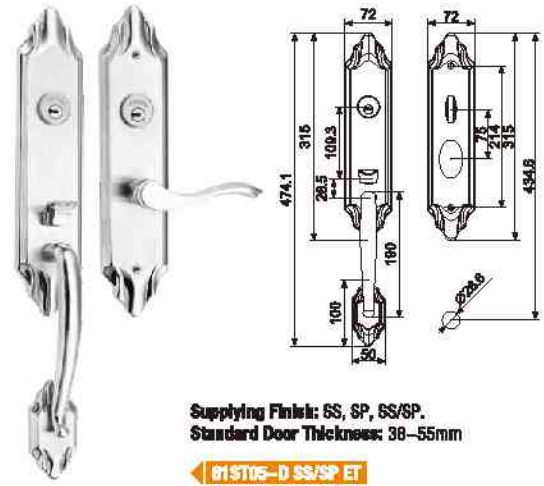

MODEL NO. : **81ST08** MATERIAL: Stamping stainless steel 304



MODEL NO. : **81ST09** MATERIAL: Stamping stainless steel 304




FULL INTRODUCTION OF SERIES 89


MAIN SPECIFICATIONS OF SERIES 89

- Apply to all kinds of security doors, metal doors and wooden doors.
- Mortise type.
- First—creative revolutionary design for lock case and cylinder.
- Production permitted by the Ministry of Public Security of P.R.C.
- Security level certified by Testing Centre of the Ministry of Public Security of P.R.C.
- Fire—proof qualified.
- 10 years mechanism warranty under correct installation and normal usage.
- Multipoint locking system.
- Cylinder with high grade anti—drill level.
- Construction key Function.
- Anti—cut bolt.
- Anti—panic.
- Back locking function.
- Easily reversible for left and right handling.

ASSEMBLY ILLUSTRATION

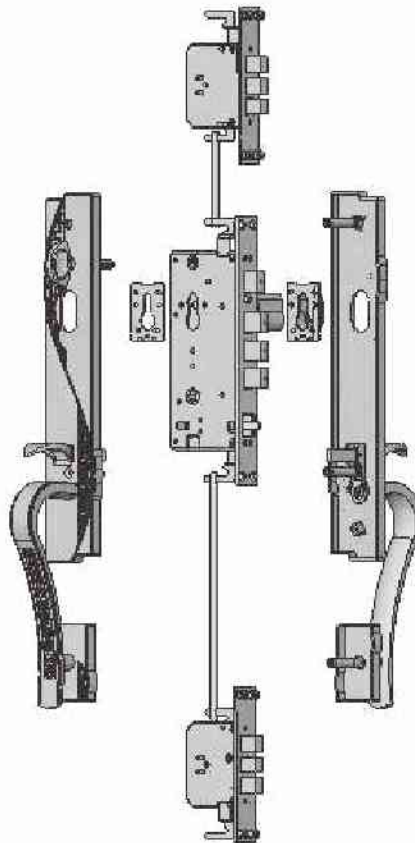

Multipoint Locking System

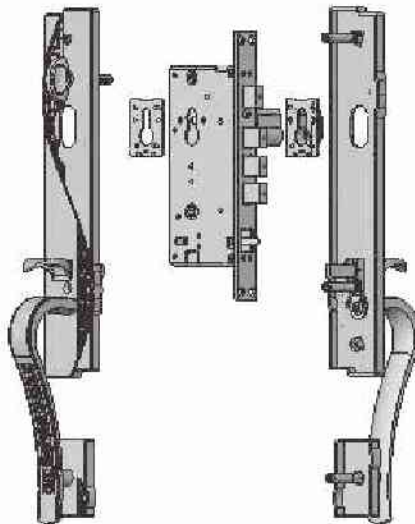

Standard Locking System

1. The door thickness range can be customized to thinner or thicker, please contact us for discussion.
2. All product pictures are just for reference, if any discrepancy found between certain picture and product, please take actual product as standard.
3. FUYU has the rights to improve or revise specifications without notice.

Production Permitted By The Ministry Of
Public Security Of P.R.C.




Fire-proof Certificate



CYLINDER

Dual Keyway(one-side Single-row Pin,one-side Track-cut Pin)

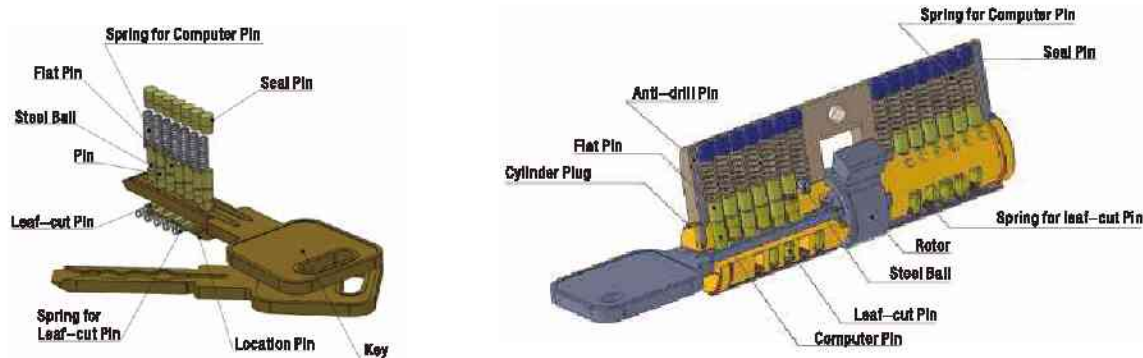

Test Report By The Ministry Of Public
Security Of P.r.c. Grade A Test



Test Report By The Ministry Of Public
Security Of P.r.c. Grade B Test



Half Cylinder(type G And Type I)



Double Cylinder(type F And Type H)



Plastic Box For Owner Keys



The owner keys are sealed inside the plastic box, you could not get the owner keys unless make the box broken, offering maximum security.

- Global first—creative revolutionary to combine track and pin technology, one side single—row pin and one side leaf—cut pin, valid different key cuts are up to **15,000,000** sets, top security.
- High quality brass for housing, core(plug) and pins, processed with highly precise CNC machines.
- Inside with anti—drill pin and outside with cylinder protector, double security guarantee.
- With construction key function, each cylinder with **5 pcs** owner keys + **2 pcs** construction keys.
- Thickness of key is **2.8mm**.

Test Report By The Ministry Of Public
Security Of P.r.c. Grade C Test




BOX DESIGN



MASTER MORTISE LOCK CASE


Standard Version Mortise Lock

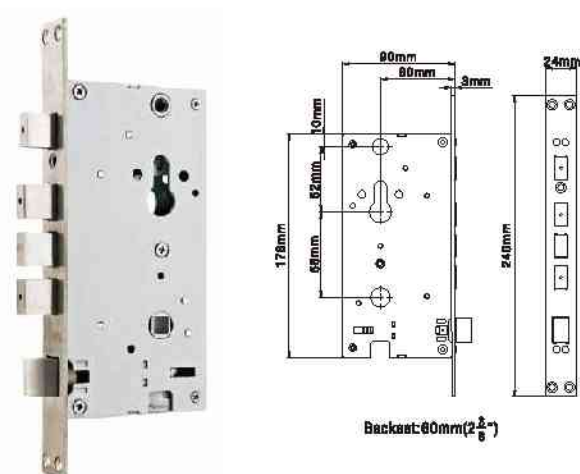


- Standard dimension design, easy and convenient for installation.
- Gear—operating mechanism inside, smooth, labor—saving and reliable.
- First—creative revolutionary design for lock case, simple structure, stable and effective.
- High quality Imported EGI (electric galvanized) steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid investment—casting stainless steel for cam and rotor, strong and durable.
- Solid stainless steel for back locking bolt and three—piece—bolt, hardened—steel rods inside, anti—cut, strong and high security.
- Solid investment—casting stainless steel for latch, strong and durable, easily reversible for left and right handing.
- Solid stainless steel for forend (thickness 3.0mm)
- Solid stainless steel for strike plate, thickness 2.0mm for wooden doors and 1.2mm for metal doors.

Heavy Duty Version Mortise Lock

- First—creative revolutionary mechanical design, simple structure with less working parts, more stable and effective than other ordinary lock cases.
- Kick and pry resistant, anti—theft certified.
- Most working parts are processed by powder metallurgy technique, which greatly enhance lifetime and high temperature resistance.
- High quality Imported EGI (electric galvanized) steel sheet for casing, thickness 2.0mm, firm and strong.
- Solid Investment—casting stainless steel 304 for cam and rotor, strong and durable.
- Solid stainless steel 304 for back locking bolt and three—piece bolt, hardened—steel rods inside, anti—saw, stronger and higher security.
- Solid Investment—casting stainless steel 304 for latch, easily reversible for left and right handing.
- Solid stainless steel for forend (thickness 3.0mm)/strike plate(thickness 2.0mm).

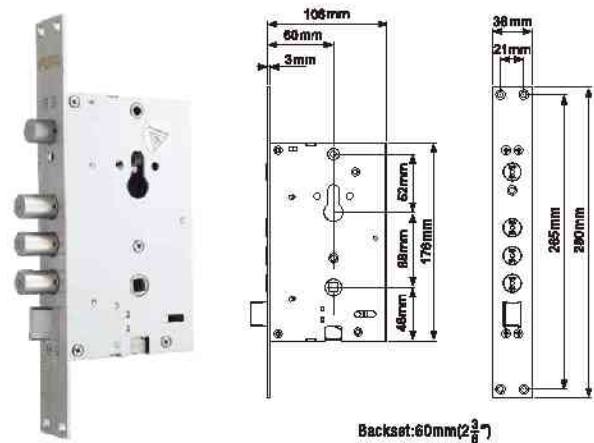

King Version Mortise Lock

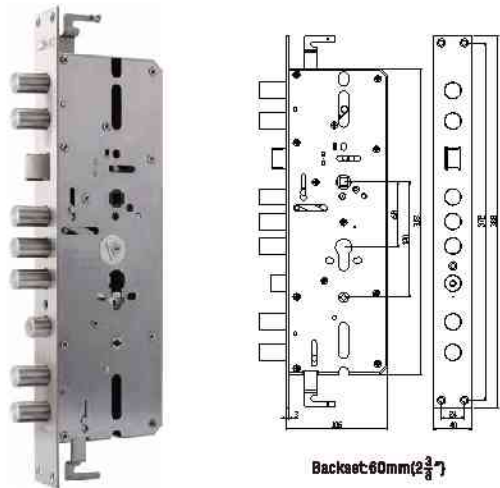

- First—creative revolutionary mechanical design, simple structure with less working parts, more stable and effective than other ordinary lock cases, patented.
- Easily reversible for inward, outward, left and right opening, without disassembling inside components.
- Kick and pry resistant, anti—saw, anti—theft certified at top grade level.
- Stainless steel for casing, thickness 1.5mm, strong and corrosive—resistant.
- The most inside components are made by stainless steel 304 powder metallurgy technology for strongest and heaviest duty purpose.
- Solid investment—casting stainless steel 304 for cam and rotor, strong and durable.
- Solid stainless steel 304 for all bolts and stainless steel 304 powder metallurgy technology for the latch, strong and corrosive—resistant.
- Solid stainless steel 304 for forend (thickness 3.0mm).
- Solid stainless steel for strike plate (thickness 1.5mm).



Strike Box



Strike Plate (For Wooden Door)




Strike Plate (For Metal Door)


Note: Strike plate and strike box are not standard fittings, they are customized. If need, please advise our sales when you fix the order.

FUNCTION DESCRIPTION

89 SERIES WITH HALF CYLINDER(TYPE G AND TYPE I)

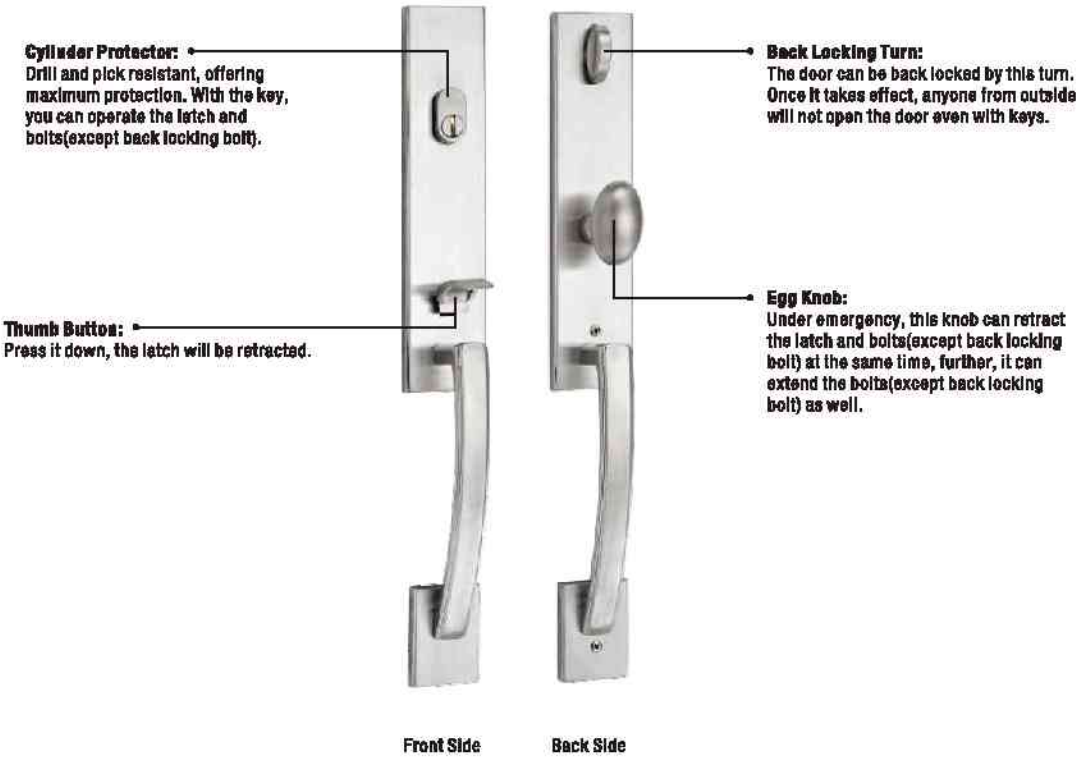


89 SERIES WITH DOUBLE CYLINDER(TYPE F AND TYPE H)

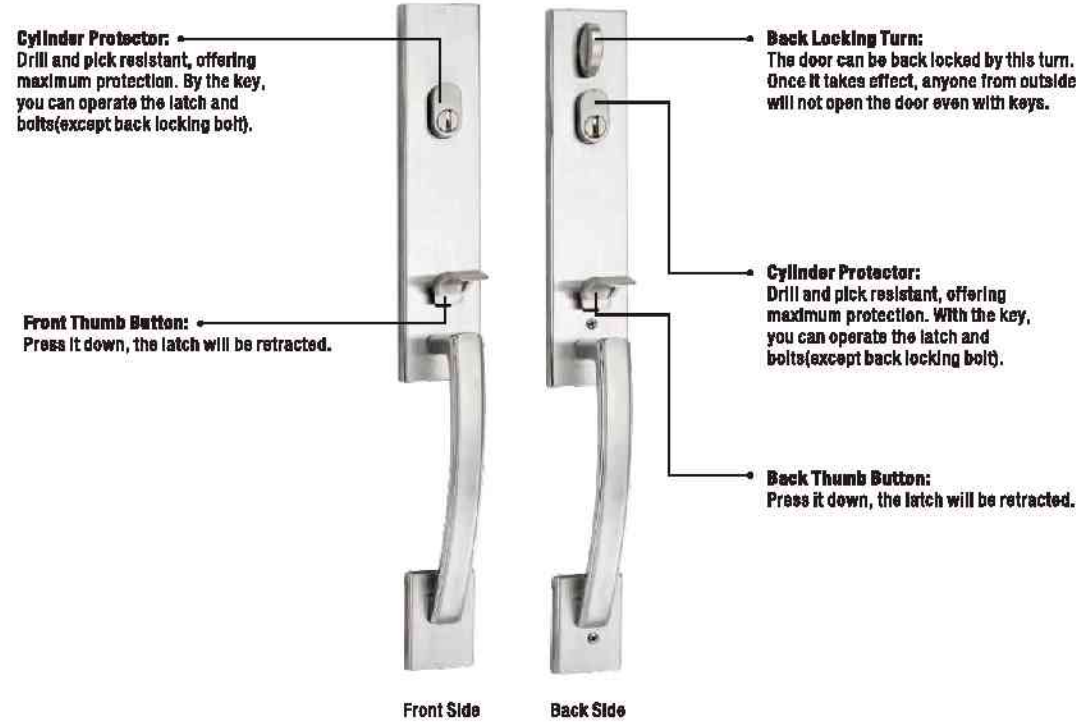

89 SERIES-MORTISE MECHANISM




MODEL NO. : **8919-F** MATERIAL: Solid zinc alloy die-casting

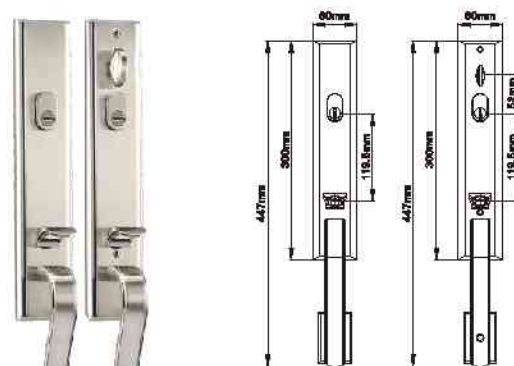

Supplying Finish: DAB, DAC, DSN, ORB, SG/GP, SN/PP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8919-F SN/PP ET


MODEL NO. : **8919-G** MATERIAL: Solid zinc alloy die-casting

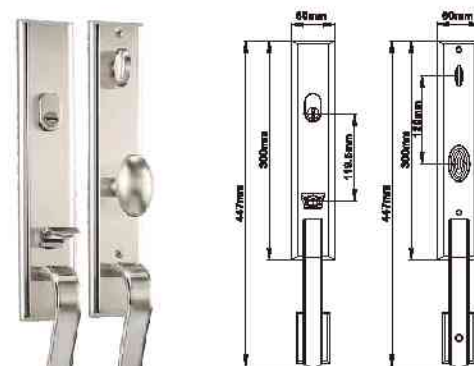

Supplying Finish: DAB, DAC, DSN, ORB, SG/GP, SN/PP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8919-G SN/PP ET


MODEL NO. : **8920-F** MATERIAL: Solid zinc alloy die-casting

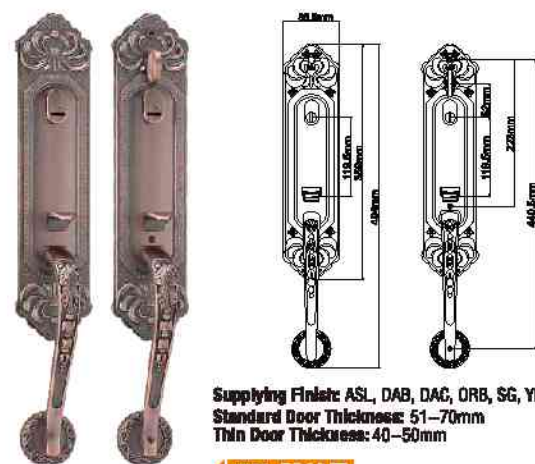

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8920-F DAC ET

MODEL NO. : **8920-G** MATERIAL: Solid zinc alloy die-casting

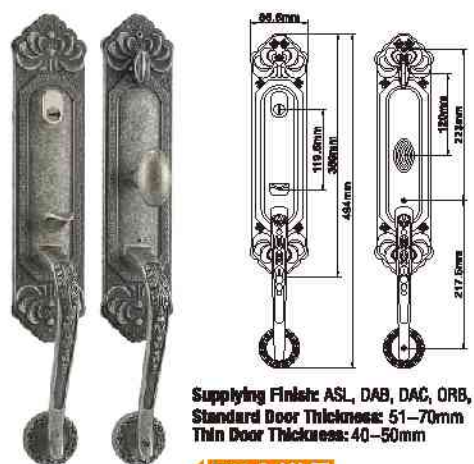

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8920-G ASL ET

MODEL NO. : **8920-H** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8920-H SG ET

MODEL NO. : **8920-J** MATERIAL: Solid zinc alloy die-casting




Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8920-J DAB ET

89 SERIES-MORTISE MECHANISM




MODEL NO. : **8922-F** MATERIAL: Solid zinc alloy die-casting

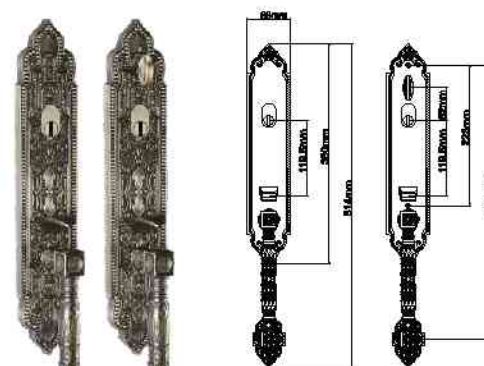

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8922-F DAB ET


MODEL NO. : **8922-G** MATERIAL: Solid zinc alloy die-casting

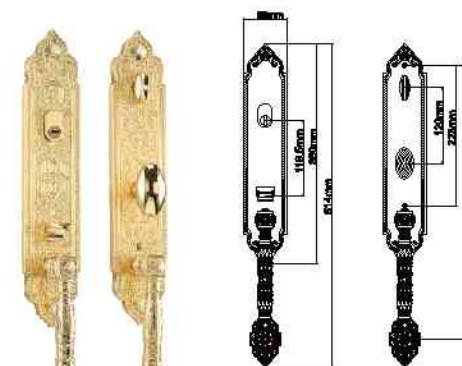

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8922-G SG ET


MODEL NO. : **8923-F** MATERIAL: Solid zinc alloy die-casting

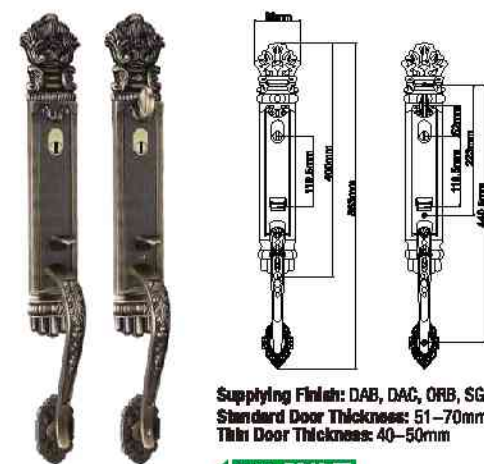

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8923-F DAB ET


MODEL NO. : **8923-G** MATERIAL: Solid zinc alloy die-casting

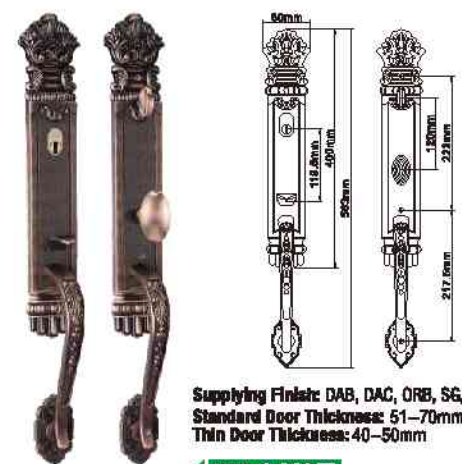

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8923-G DAC ET


MODEL NO. : **8925-F** MATERIAL: Solid zinc alloy die-casting

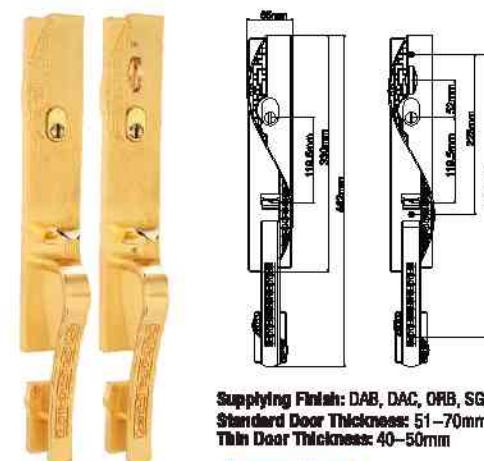

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8925-F SG ET

MODEL NO. : **8925-G** MATERIAL: Solid zinc alloy die-casting

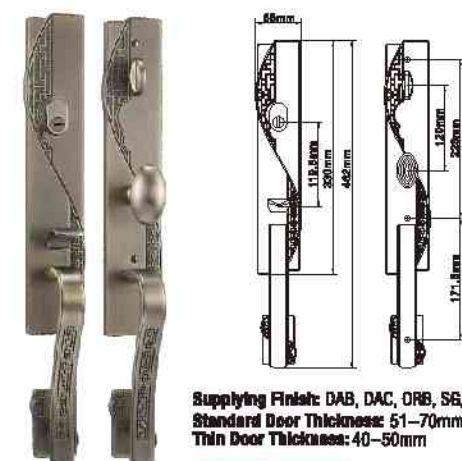


Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8925-G DAB ET

89 SERIES-MORTISE MECHANISM




MODEL NO. : **8930-F** MATERIAL: Solid zinc alloy die-casting

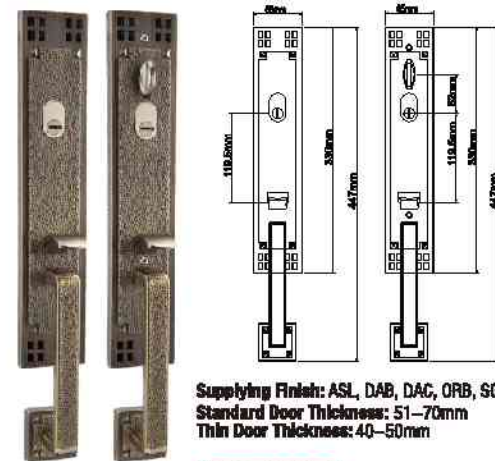

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8930-F DAB ET


MODEL NO. : **8930-G** MATERIAL: Solid zinc alloy die-casting

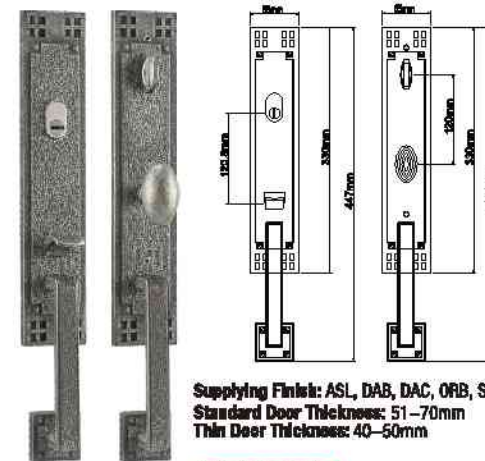

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8930-G ASL ET


MODEL NO. : **8930-H** MATERIAL: Solid zinc alloy die-casting

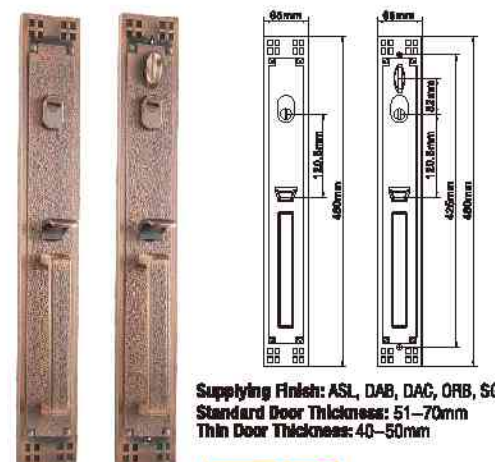

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8930-H DAC ET

MODEL NO. : **8930-J** MATERIAL: Solid zinc alloy die-casting

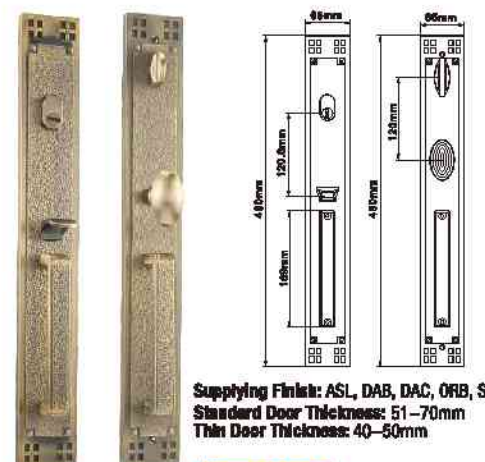

Supplying Finish: ASL, DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8930-J DAB ET

MODEL NO. : **8932-H** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: DAB, DAC, DSN, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8932-H DAB ET

MODEL NO. : **8932-J** MATERIAL: Solid zinc alloy die-casting




Supplying Finish: DAB, DAC, DSN, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8932-J DAC ET

89 SERIES-MORTISE MECHANISM




MODEL NO. : **8935-A** MATERIAL: Solid zinc alloy die-casting

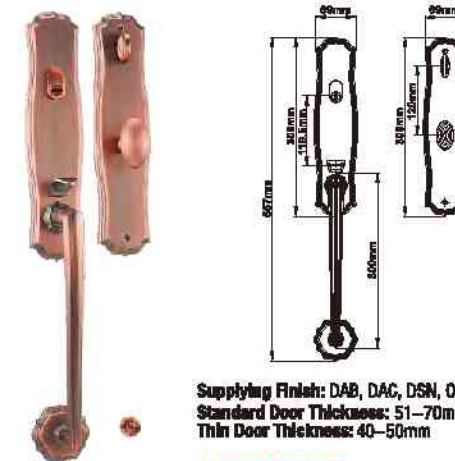

Supplying Finish: DAB, DAC, DSN, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8935-A DAC ET

MODEL NO. : **8935-B** MATERIAL: Solid zinc alloy die-casting

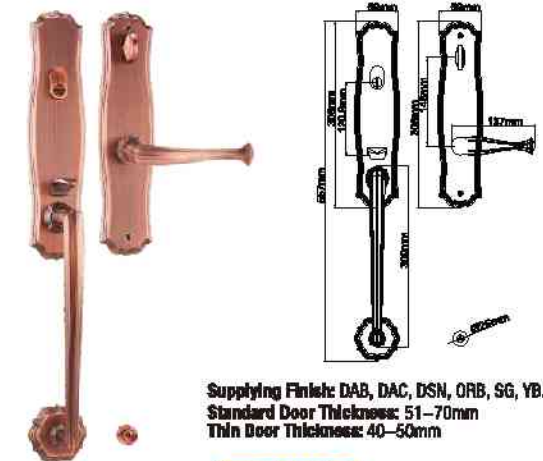

Supplying Finish: DAB, DAC, DSN, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8935-B DAC ET


MODEL NO. : **8988-A** MATERIAL: Solid zinc alloy die-casting



Supplying Finish: DAB, DAC, DSN, ORB, SG
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8988-A GAB ET


MODEL NO. : **8988-B** MATERIAL: Solid zinc alloy die-casting

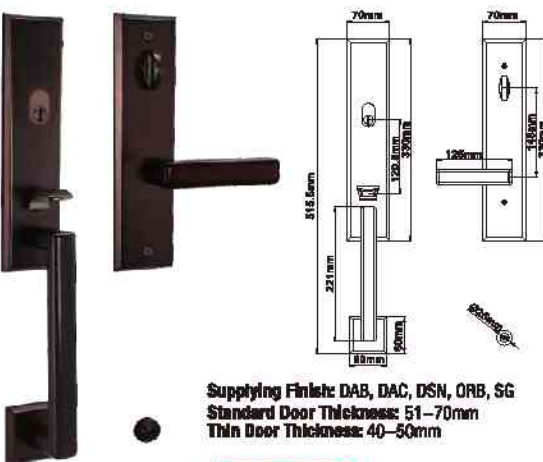

Supplying Finish: DAB, DAC, DSN, ORB, SG
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8988-B ORB ET


MODEL NO. : **8989-F** MATERIAL: Solid zinc alloy die-casting

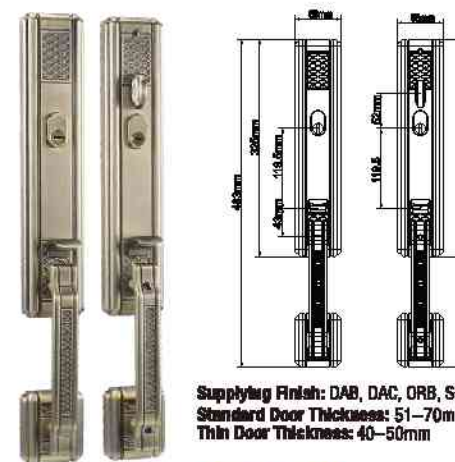

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8989-F DAB ET


MODEL NO. : **8989-G** MATERIAL: Solid zinc alloy die-casting

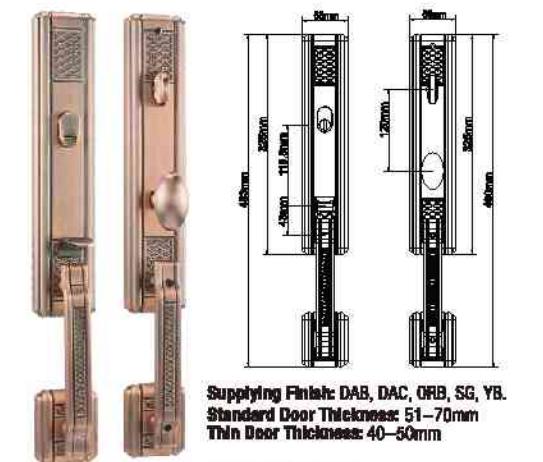

Supplying Finish: DAB, DAC, ORB, SG, YB.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

8989-G DAC ET


MODEL NO. : **89ST03-H** MATERIAL: Stamping stainless steel 304

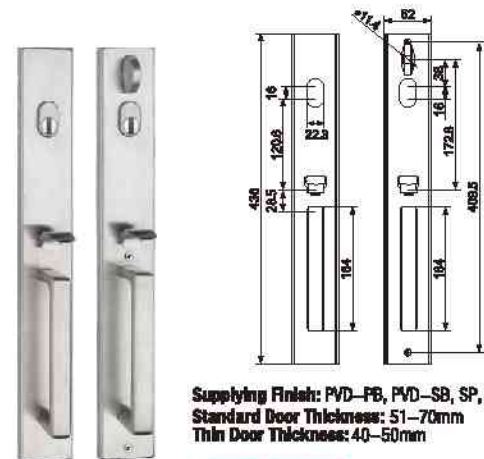

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST03-H SS ET


MODEL NO. : **89ST03-J** MATERIAL: Stamping stainless steel 304

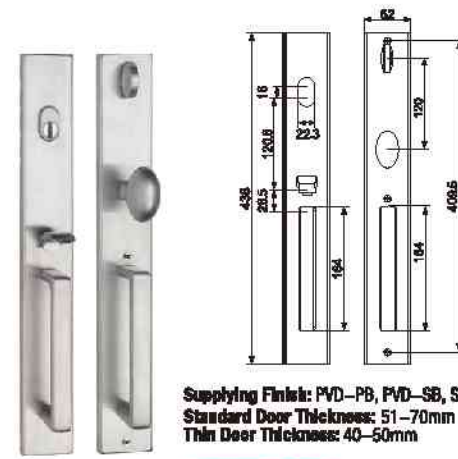

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST03-J SS ET


MODEL NO. : **89ST09-F** MATERIAL: Stamping stainless steel 304

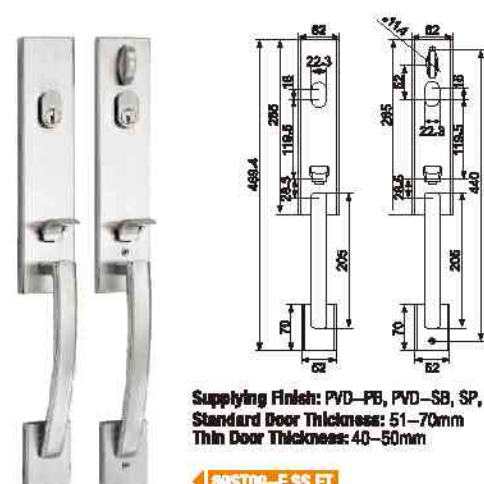

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST09-F SS ET

MODEL NO. : **89ST09-G** MATERIAL: Stamping stainless steel 304

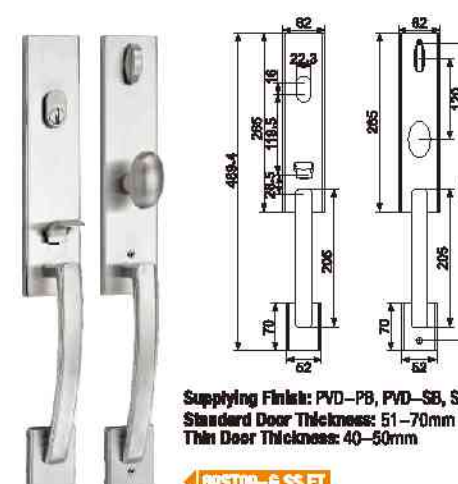

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST09-G SS ET

MODEL NO. : **89ST19-F** MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST19-F SP ET

MODEL NO. : **89ST19-G** MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Standard Door Thickness: 51-70mm
Thin Door Thickness: 40-50mm

89ST19-G SP ET

FULL INTRODUCTION OF SERIES 86

MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Tubular type.
- Distinguished entrance trim designs with rich styles, finish selections and levers of configurability.
- Heavy-duty, 10 years mechanical warranty under correct installation and normal usage.
- The 3rd generation tubular mechanism with anti-saw function.
- The 3rd generation high-tech cylinder with secure keyway and construction key function.
- Easily reversible for left and right opening doors.
- Easy Installation, Instruction manual Included.


ASSEMBLY ILLUSTRATION



THE 3RD GENERATION TUBULAR LATCH AND DEADBOLT


Deadbolt

- Solid brass for bolt tongue.
- Reinforced with a big & hardened steel insert, anti-saw, higher security.
- High quality steel for casing, precise mechanism inside, strong and stable.
- Solid stainless steel for forend and strike plate.
- Backset: 60mm($2\frac{3}{8}$ ")-70mm($2\frac{7}{8}$ ") adjustable.

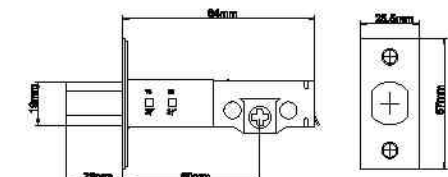

Latch

- Solid brass for latch tongue.
- High quality steel for casing, precise mechanism inside, strong and stable.
- Solid stainless steel for forend and strike plate.
- Backset: Standard: 60mm($2\frac{3}{8}$ ")
Customized: 70mm($2\frac{7}{8}$ ")

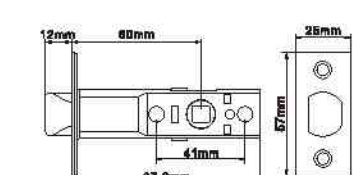

Driving Rack For Latch

High quality steel turning rack & gear driving mechanism inside, enable the latch to work smoothly.




THE 3RD GENERATION HIGH-TECH CYLINDER




- High-tech solid brass cylinder (Brass for housing, core/plug, pins and nut).
- Machined by precise CNC (Computer Numeric Control) equipments according to the most strict QA standard.
- Keyway: Double-Row-Pin technology, 10 pins, pin-combinations are much more than international standard, extremely security.
- Construction key function available: Each cylinder with 5 pcs **OWNER** keys + 1 pc **CONSTRUCTION** key, all keys are made by solid brass, thickness 2.5mm.
- Hardened process for tail-piece, stronger and more durable.

The Structure Of 86 Series Cylinder

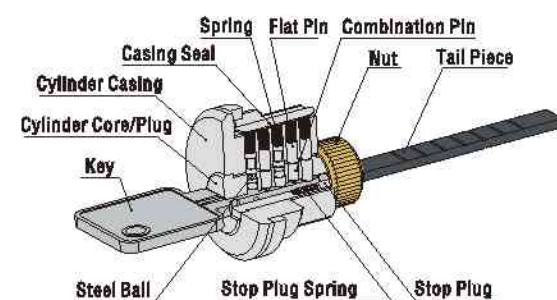

Double-row-pin With Construction Key Function

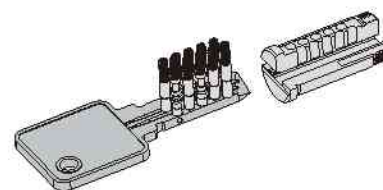


Plastic Box For Owner Keys



The owner keys are sealed inside the plastic box, you could not get the owner keys unless make the box broken, offering maximum security.

Supplying Keyway

Standard



Customized Keyway



For customized keyway, MOQ is necessary, please contact us for win-win solution.

BOX DESIGN



86 SERIES-TUBULAR MECHANISM



MODEL NO. : 8601 MATERIAL: Solid zinc alloy die-casting




MODEL NO. : 8602 MATERIAL: Solid zinc alloy die-casting



MODEL NO. : 8603 MATERIAL: Solid zinc alloy die-casting




MODEL NO. : 8606 MATERIAL: Solid zinc alloy die-casting

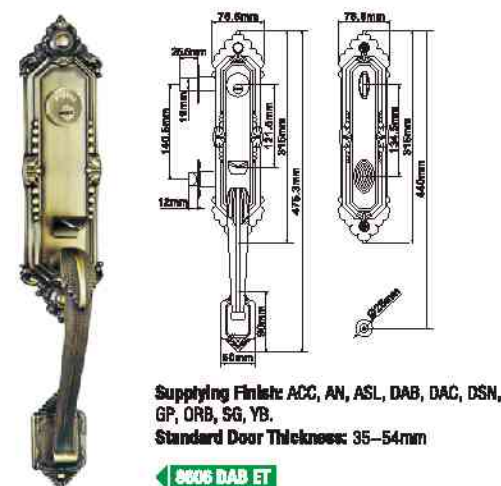

MODEL NO. : 8610 MATERIAL: Solid zinc alloy die-casting



MODEL NO. : 8612 MATERIAL: Solid zinc alloy die-casting

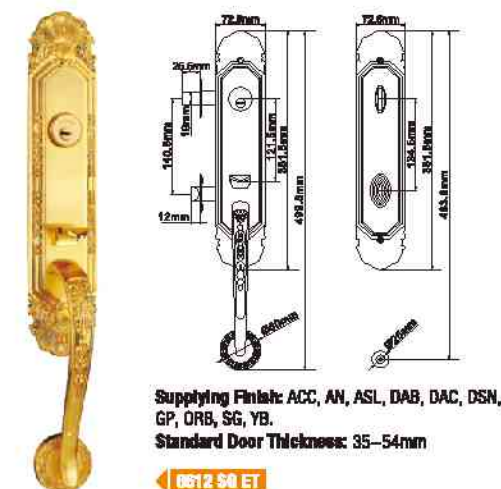


1. The door thickness range can be customized to thinner or thicker, please contact us for discussion.
2. All product pictures are just for reference, if any discrepancy found between certain picture and product, please take actual product as standard.
3. FUYU has the rights to improve or revise specifications without notice.

86 SERIES-TUBULAR MECHANISM




MODEL NO. : **8616** MATERIAL: Solid zinc alloy die-casting

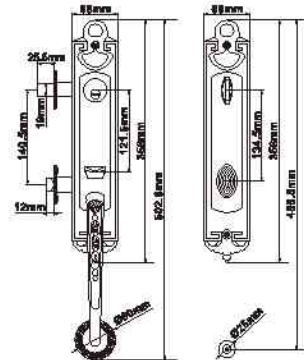

Supplying Finish: ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 35-54mm

8616 GP ET


MODEL NO. : **8618** MATERIAL: Solid zinc alloy die-casting

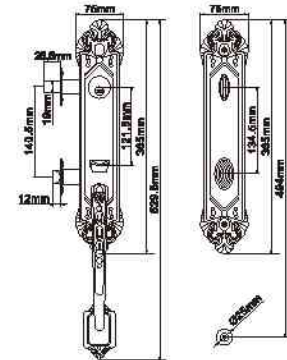

Supplying Finish: ACC, AN, ASL, DAB, DAC, DSN, GP, ORB, SG, YB.
Standard Door Thickness: 35-54mm

8618 DAB ET


MODEL NO. : **8619** MATERIAL: Solid zinc alloy die-casting

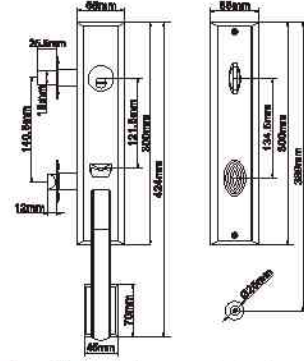

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, ORB, SCH/CH, SG/GP, SN/NP.
Standard Door Thickness: 35-54mm

8619 SG/GP ET


MODEL NO. : **8620** MATERIAL: Solid zinc alloy die-casting

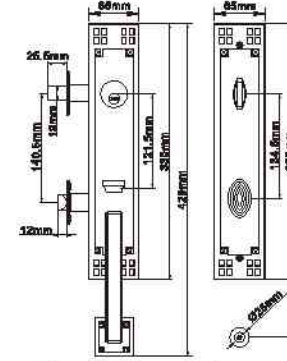

Supplying Finish: ACC, AN, ASL, DAB, DAC, DSN, OAC, ORB, YB.
Standard Door Thickness: 35-54mm

8620 ASL ET


MODEL NO. : **8621** MATERIAL: Solid zinc alloy die-casting

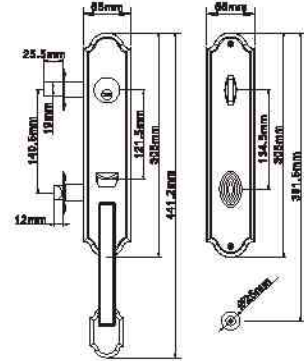

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, ORB, SCH/CH, SG/GP, SN/NP.
Standard Door Thickness: 35-54mm

8621 DAB ET


MODEL NO. : **8622** MATERIAL: Solid zinc alloy die-casting

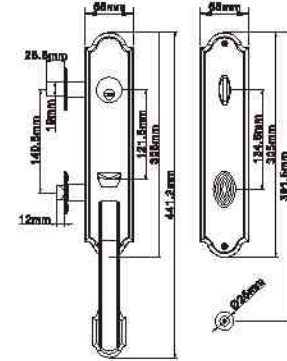

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, ORB, SCH/CH, SG/GP, SN/NP.
Standard Door Thickness: 35-54mm

8622 SN/NP ET


MODEL NO. : **8623** MATERIAL: Solid zinc alloy die-casting

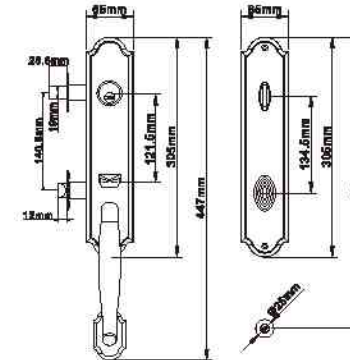

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, SCH, SG, SN.
Standard Door Thickness: 35-54mm

8623 SN/NP ET


MODEL NO. : **8625** MATERIAL: Solid zinc alloy die-casting

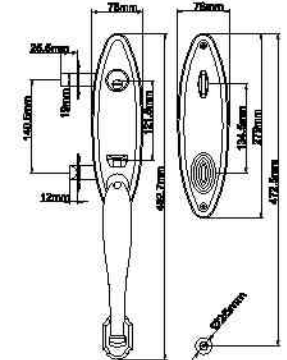

Supplying Finish: AB, AC, AN, DAB, DAC, DSN, GP, OAC, ORB, ORBH, SG, SN.
Standard Door Thickness: 35-54mm

8625 OAC ET


MODEL NO. : **8668** MATERIAL: Solid zinc alloy die-casting

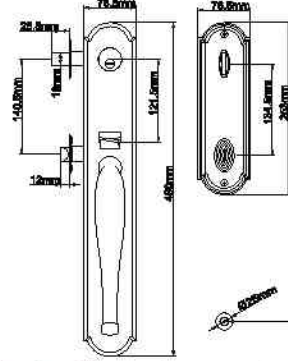

Supplying Finish: AB, AC, AN, DAB, DAC, DSN, GP, OAC, ORB, ORBH, SG, SN.
Standard Door Thickness: 35-54mm

8668 ORBH ET

MODEL NO. : **8688** MATERIAL: Solid zinc alloy die-casting

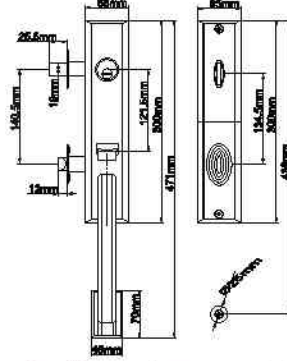

Supplying Finish: AB, AC, AN, DAB, DAC, DSN, GP, OAC, ORB, ORBH, SG, SN.
Standard Door Thickness: 35-54mm


8688 ORBH ET

MODEL NO. : **8669** MATERIAL: Solid zinc alloy die-casting



8669 AN ET

8669 ORBH ET

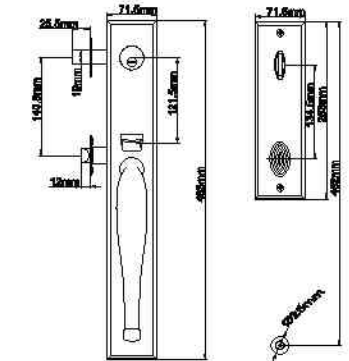

Supplying Finish: AB, AC, AN, DAB, DAC, DSN, GP, OAC, ORB, ORBH, SG, SN.
Standard Door Thickness: 35-54mm

FULL INTRODUCTION OF SERIES 87/SERIES 83/SERIES 80

MAIN SPECIFICATIONS

- Artistic design, overturning the old fashion style of similar products, make your entrance doors more personalized and beautiful.
- Apply to all kinds of wooden doors and metal doors.
- Tubular Type.
- Anti-cut for bolt for securer purpose.
- Easily installation and reversible for left & right handing.

LATCH



- Latch tongue is made by zinc alloy die-casting.
- High quality components inside to ensure good mechanism.
- Backset 60mm($2\frac{3}{8}$ ")-70mm($2\frac{3}{4}$ ") adjustable.

CYLINDER

- Zinc alloy housing + Solid brass plug (Core)+ Brass pins.
- Normal key (Thickness 2.2mm) or Computer key (Thickness 2.5mm) for option.
- Number of Pin Combination (Key Cut) is over international standard, make your home secure.

ASSEMBLY ILLUSTRATION



BOLT



- Bolt tongue is made by zinc alloy die-casting.
- Big hardened steel rod inside for anti-saw and securer purpose.
- High quality components inside to ensure good mechanism.
- Backset 60mm($2\frac{3}{8}$ ")-70mm($2\frac{3}{4}$ ") adjustable.




BOX DESIGN



MODEL NO. : 8701

MATERIAL: Solid zinc alloy + Stainless steel 304/201

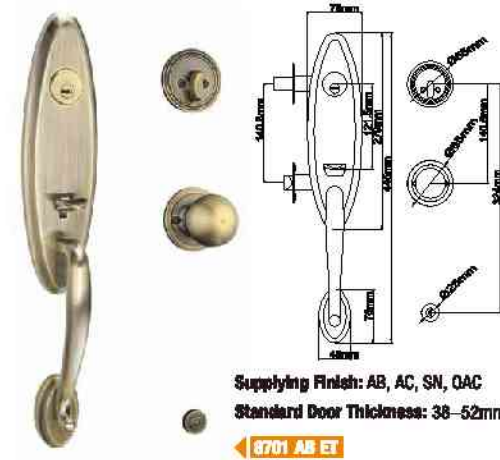

MODEL NO. : 8702

MATERIAL: Solid zinc alloy + Stainless steel 304/201




MODEL NO. : 8703

MATERIAL: Solid zinc alloy + Stainless steel 304/201



MODEL NO. : 8706

MATERIAL: Solid zinc alloy + Stainless steel 304/201

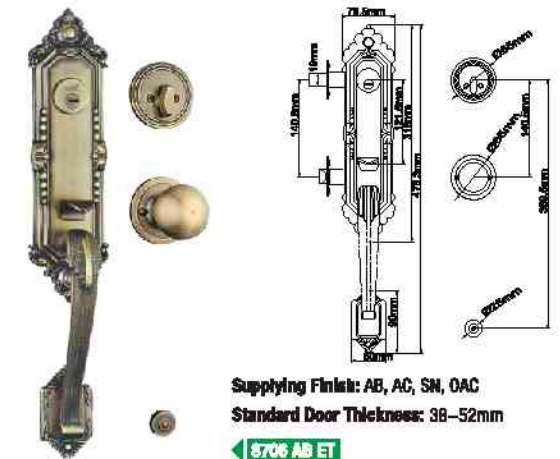


MODEL NO. : 8710

MATERIAL: Solid zinc alloy + Stainless steel 304/201



MODEL NO. : 8712


MATERIAL: Solid zinc alloy + Stainless steel 304/201

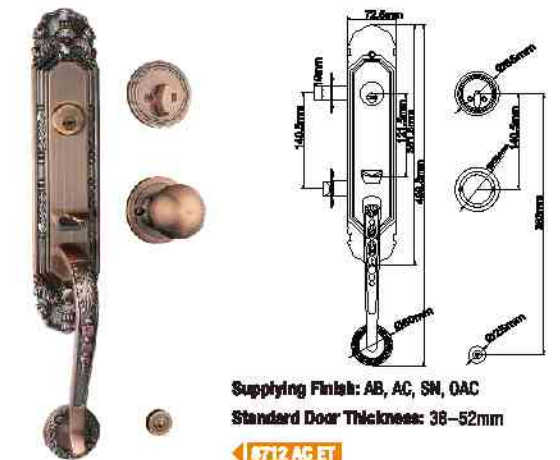

1. The door thickness range can be customized to thinner or thicker, please contact us for discussion.
2. All product pictures are just for reference, if any discrepancy found between certain picture and product, please take actual product as standard.
3. FUYU has the rights to improve or revise specifications without notice.

MODEL NO. : 8716


MATERIAL: Solid zinc alloy + Stainless steel 304/201

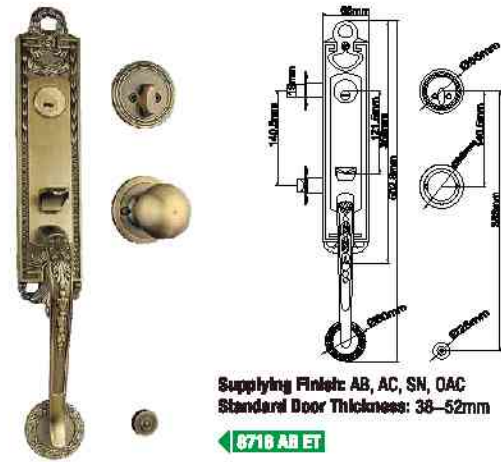

Supplying Finish: AB, AC, SN, OAC
Standard Door Thickness: 38-52mm
8716 AB ET

MODEL NO. : 8718

MATERIAL: Solid zinc alloy + Stainless steel 304/201

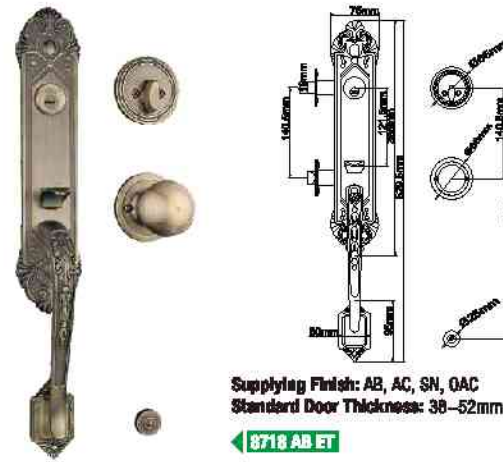

Supplying Finish: AB, AC, SN, OAC
Standard Door Thickness: 38-52mm
8718 AB ET

MODEL NO. : 8723

MATERIAL: Solid zinc alloy + Stainless steel 304/201



Supplying Finish: AB, AC, SN/MP, OAC
Standard Door Thickness: 38-52mm
8723 AB ET

MODEL NO. : 8725


MATERIAL: Solid zinc alloy + Stainless steel 304/201



Supplying Finish: AB, AC, SN, OAC
Standard Door Thickness: 38-52mm
8725 OAC ET

MODEL NO. : 8719


MATERIAL: Solid zinc alloy + Stainless steel 304/201

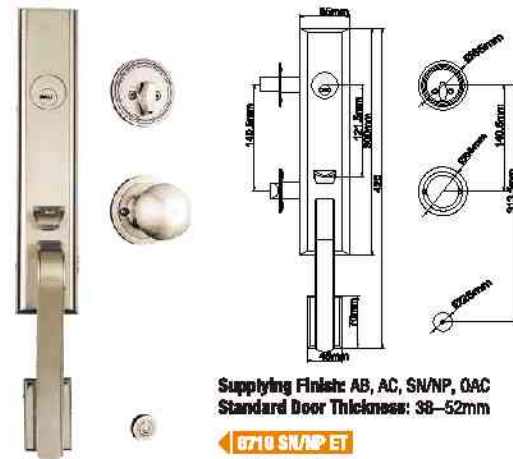

Supplying Finish: AB, AC, SN/MP, OAC
Standard Door Thickness: 38-52mm
8719 SN/MP ET

MODEL NO. : 8720

MATERIAL: Solid zinc alloy + Stainless steel 304/201

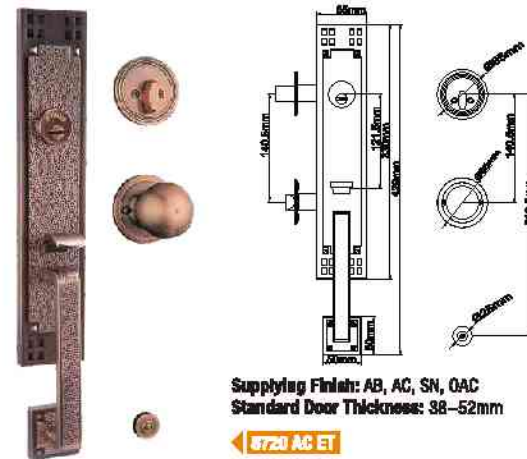

Supplying Finish: AB, AC, SN, OAC
Standard Door Thickness: 38-52mm
8720 AC ET

MODEL NO. : 8788


MATERIAL: Solid zinc alloy + Stainless steel 304/201



Supplying Finish: AB, AC, SN, OAC
Standard Door Thickness: 38-52mm
8788 OAC ET

MODEL NO. : 8301-1

MATERIAL: Solid zinc alloy + Stainless steel 304/201

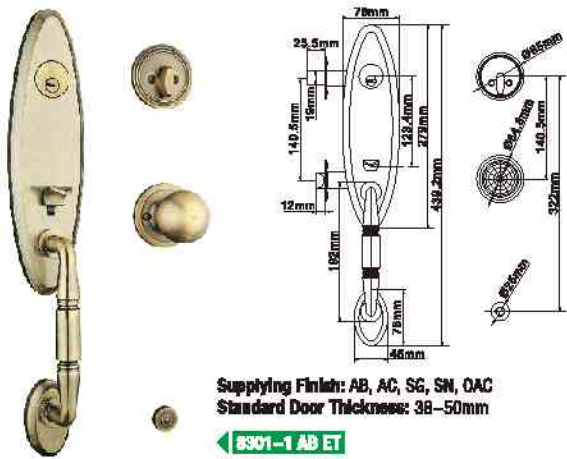

Supplying Finish: AB, AC, SG, SN, OAC
Standard Door Thickness: 38-50mm
8301-1 AB ET

MODEL NO. : 8721


MATERIAL: Solid zinc alloy + Stainless steel 304/201



Supplying Finish: AB, AC, SN/MP, OAC
Standard Door Thickness: 38-52mm
8721 SN/MP ET

MODEL NO. : 8722


MATERIAL: Solid zinc alloy + Stainless steel 304/201

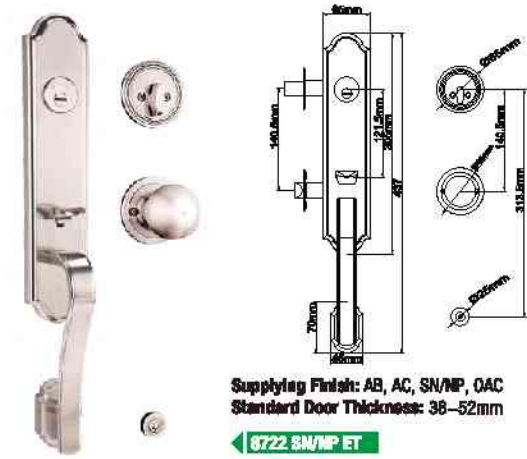

Supplying Finish: AB, AC, SN/MP, OAC
Standard Door Thickness: 38-52mm
8722 SN/MP ET

MODEL NO. : 8301-2


MATERIAL: Solid zinc alloy + Stainless steel 304/201

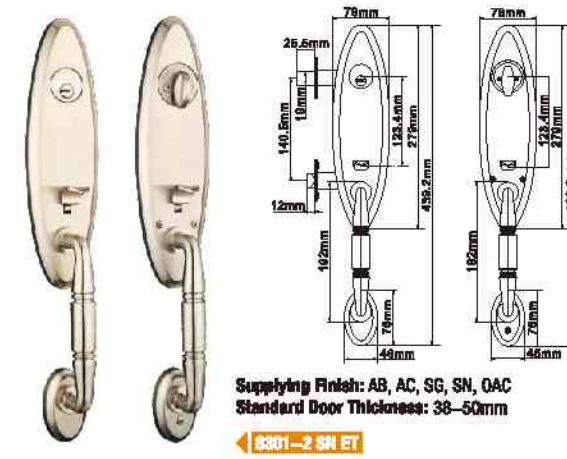

Supplying Finish: AB, AC, SG, SN, OAC
Standard Door Thickness: 38-50mm
8301-2 SN ET

MODEL NO. : 8302-2

MATERIAL: Solid zinc alloy + Stainless steel 304/201

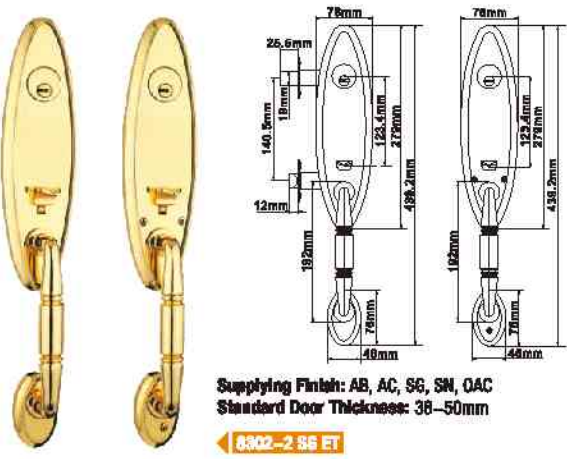

Supplying Finish: AB, AC, SG, SN, OAC
Standard Door Thickness: 38-50mm
8302-2 SG ET



8011 SN ET



8011-B SN ET



8021 AB ET



8031 AB ET



8050 SN ET



8050-B SN ET



8051 OAC ET



8051-B SN ET



8053 SN ET



8053-B SN ET



8055 SN ET



8055-B SN ET



8056 SN ET



8056-B SN ET



8061 AB ET



8061-B PB ET



8063-B AC ET



8065-B AB ET



8081 SN ET



8081-B AC ET



8091 AB ET



8091-B AC ET



8092 AB ET



8093 AC ET



8303 PB ET



8303-B AB ET



8305 AB ET



8305-B AB ET



8307 AB ET



8307-B AC ET



8309 AB ET



8309-B AC ET

FULL INTRODUCTION OF SERIES 26


MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Mortise type.
- 10 years mechanism warranty under correct installation and normal usage.
- Artistic design, high added-value.
- Abundant choices for trim and plating.
- Fire-proof qualified.
- Anti-cut bolt.
- Easily reversible for left and right handing.

FIRE-PROOF CERTIFICATE



ASSEMBLY ILLUSTRATION

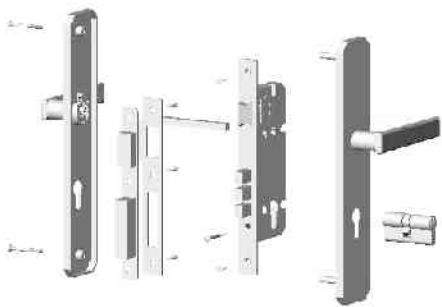

BOX DESIGN



MORTISE LOCK CASE

Stainless Steel 304 Version



- High quality imported EGI (electric galvanized) steel sheet for casing, thickness 1.2mm, firm and strong.
- Solid investment-casting stainless steel 304 for cam, strong and durable. Octagon design, fitting many kinds of spindles in different shapes, size 8×8 mm.
- Solid stainless steel 304 for bolts, two throws.
- Solid investment-casting stainless steel 304 for latch, easily reversible for left and right handing.
- Solid stainless steel for forend (thickness 3.0mm) and strike plate (thickness 1.2mm).

Optional Size
40×85mm
45×85mm
50×85mm
60×85mm

Optional Size for European Standard
45×72mm
55×72mm
60×72mm

BRASS VERSION

- High quality imported EGI (electric galvanized) steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid brass for cam, strong and durable. Octagon design, fitting many kinds of spindles in different shapes, size 8×8 mm.
- Solid brass for bolts, both one-piece and three-piece bolt available for choices, two throws, hardened-steel rods inside, anti-cut, strong and high security.
- Solid brass for latch, strong and durable, easily reversible for left and right handing.
- Solid stainless steel or brass for forend (thickness 3.0mm) and strike plate (thickness 1.5mm).



With one-piece bolt



With three-piece bolt

CYLINDER

Single Cylinder(Key To Knob) Double Cylinder(Key To Key)



- High quality solid brass cylinder(Brass housing, plugs and pins).
- High class computer keyway technology, 7 pins, processed with high precise CNC machines, pin-combination is much more than international standard, high security.
- Each set with 5 pcs keys, all keys are made by solid brass, thickness 2.5mm.

Supplying Size

60mm, 70mm, 80mm, 90mm, 100mm

Specialty Optional Function

Master Keying(Maximum 4 levels)
Construction Key
Anti-Drill

Supplying Keyway

Standard	Customized Keyway
Computer	Dual Keyway (One Side Single-row-pin, One Side Track-cut-pin)
Double-row-pin	Yale
Kwikset	Schlage
Welsch	

H59 solid brass turn knob available


Turn Knob No. No.1 	Turn Knob No. No.2 	Turn Knob No. No.3
Turn Knob No. No.4 	Turn Knob No. No.5 	Turn Knob No. No.6
Turn Knob No. No.8 	Turn Knob No. No.9 	Turn Knob No. No.10

Notes: No.1 knob is standard, others are customized.



MODEL NO. : 2601

MATERIAL: Solid zinc alloy die-casting

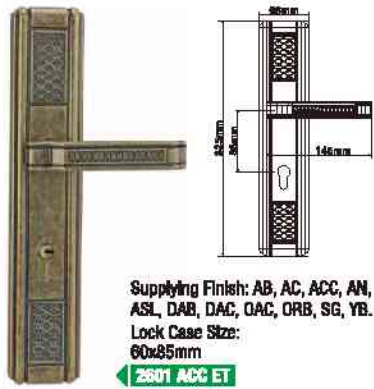


Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2601 ACC ET

MODEL NO. : 2602

MATERIAL: Solid zinc alloy die-casting

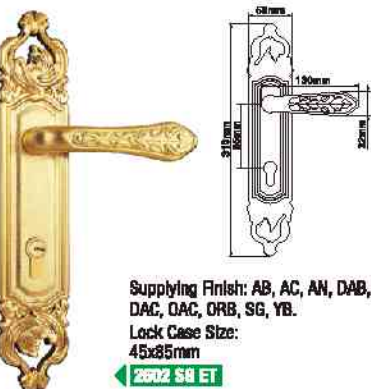


Supplying Finish: AB, AC, AN, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

2602 SG ET

MODEL NO. : 2603

MATERIAL: Solid zinc alloy die-casting

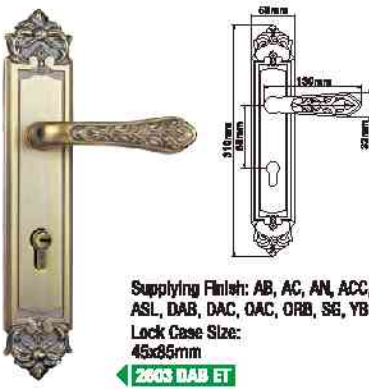


Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

2603 DAB ET

MODEL NO. : 2605

MATERIAL: Solid zinc alloy die-casting

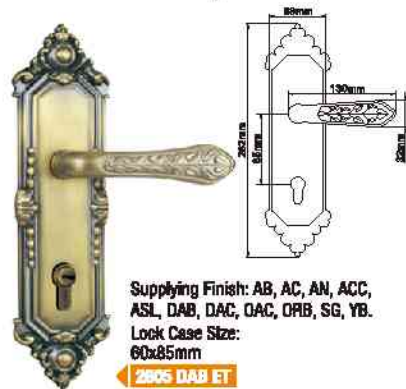


Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2605 DAB ET

MODEL NO. : 2606

MATERIAL: Solid zinc alloy die-casting

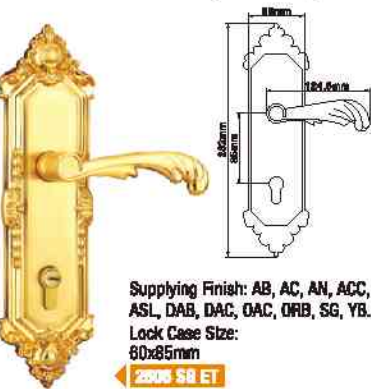

Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2606 SG ET

MODEL NO. : 2608

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

2608 ASL ET

MODEL NO. : 2609

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

2609 SG ET

MODEL NO. : 2610

MATERIAL: Solid zinc alloy die-casting

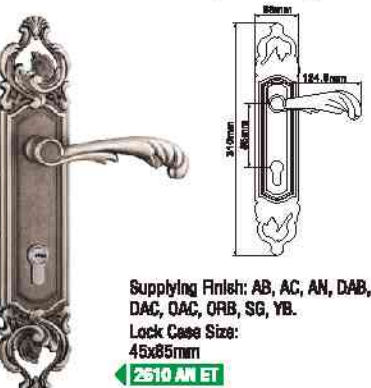

Supplying Finish: AB, AC, AN, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

2610 AN ET

MODEL NO. : 2611

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2611 SCH/CH ET

MODEL NO. : 2612

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2612 AB ET

MODEL NO. : 2613

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2613 SN/GP ET

MODEL NO. : 2615

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2615 SN/GP ET

MODEL NO. : 2616

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2616 SN/NP ET

MODEL NO. : 2618

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 60x85mm

2618 SG/GP ET

MODEL NO. : 2619

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 60x85mm

2619 SCH/CH ET

MODEL NO. : 2620

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 60x85mm

2620 SN/GP ET

MODEL NO. : 2621

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm

2621 SN/NP ET

MODEL NO. : 2622

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm


2622 SN/NP ET

26 SERIES - MORTISE MECHANISM



MODEL NO. : 2623

MATERIAL: Solid zinc alloy die-casting

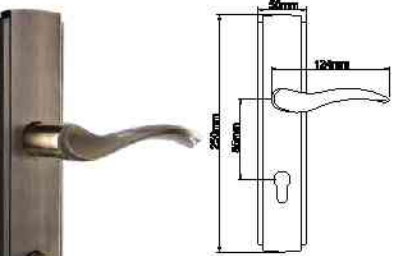


Supplying Finish: AB, AC, DAB, DAC,
DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Lock Case Size:
60x85mm

2623 AB ET

MODEL NO. : 2628

MATERIAL: Solid zinc alloy die-casting

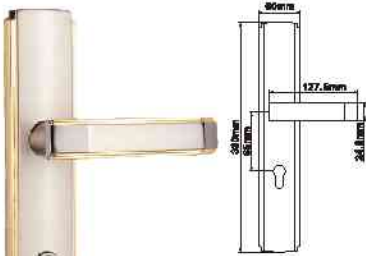


Supplying Finish: AB, AC, DAB, DAC,
DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size:
60x85mm

2628 SN/GP ET

MODEL NO. : 2629

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, DAB, DAC,
DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size:
60x85mm

2629 SN/NP ET

MODEL NO. : 2652

MATERIAL: Solid zinc alloy die-casting

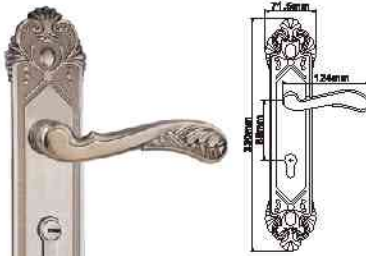


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2652 AN ET

MODEL NO. : 2653

MATERIAL: Solid zinc alloy die-casting

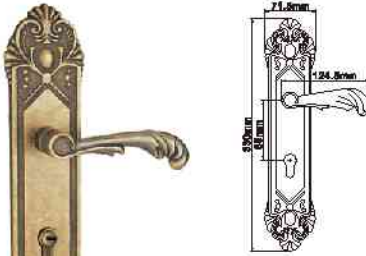


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2653 ACC ET

MODEL NO. : 2655

MATERIAL: Solid zinc alloy die-casting

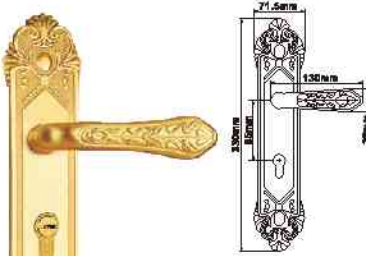


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2655 SG ET

MODEL NO. : 2630

MATERIAL: Solid zinc alloy die-casting

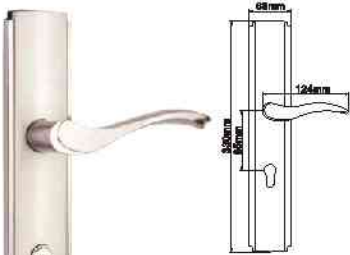


Supplying Finish: AB, AC, DAB, DAC,
DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size:
60x85mm

2630 SN/NP ET

MODEL NO. : 2632

MATERIAL: Solid zinc alloy die-casting

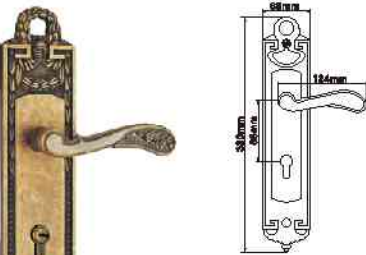


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2632 ACC ET

MODEL NO. : 2633

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2633 SG ET

MODEL NO. : 2656

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2656 ASL ET

MODEL NO. : 2658

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2658 DAB ET

MODEL NO. : 2659

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2659 ACC ET

MODEL NO. : 2635

MATERIAL: Solid zinc alloy die-casting

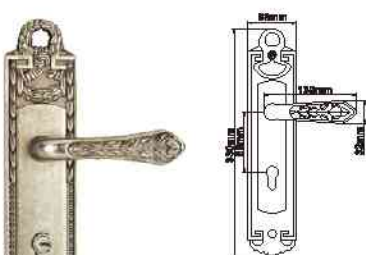


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2635 ASL ET

MODEL NO. : 2636

MATERIAL: Solid zinc alloy die-casting

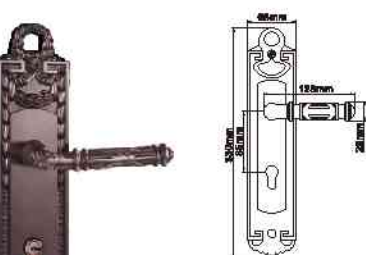


Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2636 ORB ET

MODEL NO. : 2638

MATERIAL: Solid zinc alloy die-casting

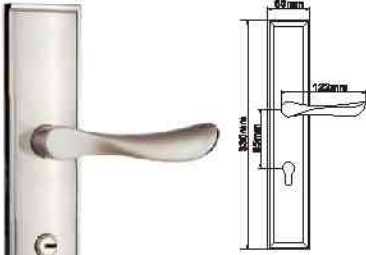


Supplying Finish: AB, AC, DAB, DAC,
DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size:
60x85mm

2638 SN/NP ET

MODEL NO. : 2660

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2660 SG ET

MODEL NO. : 2661

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm

2661 DAB ET

MODEL NO. : 2662

MATERIAL: Solid zinc alloy die-casting

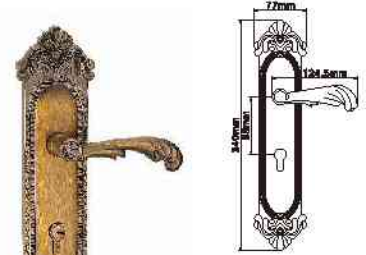

Supplying Finish: AB, AC, AN, ACC,
ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size:
60x85mm


2662 YB ET

26 SERIES - MORTISE MECHANISM



MODEL NO. : 2663

MATERIAL: Solid zinc alloy die-casting

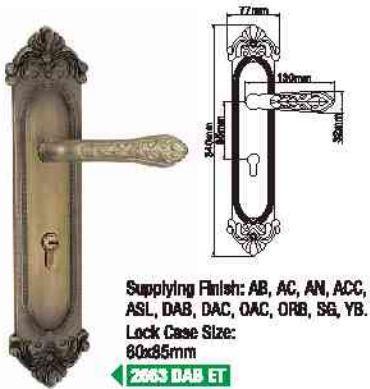


Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2663 DAB ET

MODEL NO. : 2665

MATERIAL: Solid zinc alloy die-casting

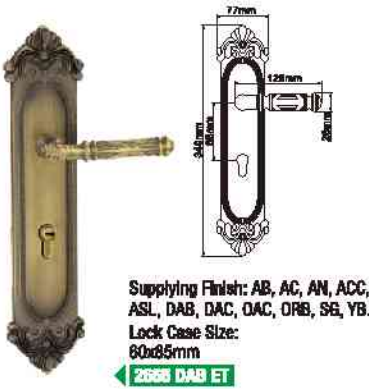


Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2665 DAB ET

MODEL NO. : 2666

MATERIAL: Solid zinc alloy die-casting

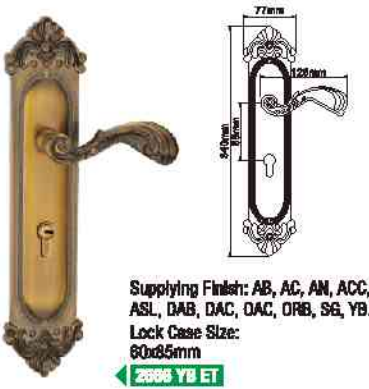

Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2666 YB ET

MODEL NO. : 2689

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 60x85mm

2689 SN/NP ET

MODEL NO. : 2690

MATERIAL: Solid zinc alloy die-casting

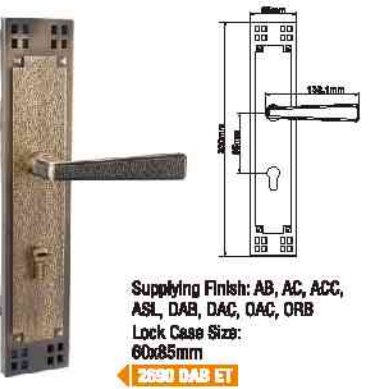

Supplying Finish: AB, AC, ACC, ASL, DAB, DAC, OAC, ORB
Lock Case Size: 60x85mm

2690 DAB ET

MODEL NO. : 2691

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, YB
Lock Case Size: 45x85mm

2691 DAC ET

MODEL NO. : 2682

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2682 DAC ET

MODEL NO. : 2683

MATERIAL: Solid zinc alloy die-casting

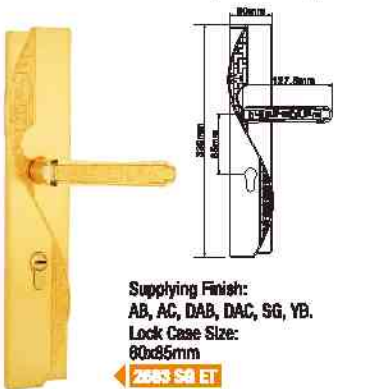


Supplying Finish: AB, AC, DAB, DAC, SG, YB.
Lock Case Size: 60x85mm

2683 SG ET

MODEL NO. : 2685

MATERIAL: Solid zinc alloy die-casting

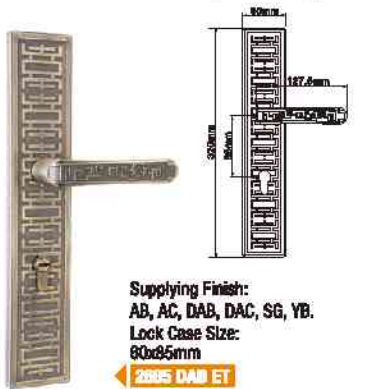

Supplying Finish: AB, AC, DAB, DAC, SG, YB.
Lock Case Size: 60x85mm

2685 DAB ET

MODEL NO. : 2692

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: DAB, DAC, DSN
Lock Case Size: 60x85mm

2692 DSN ET

MODEL NO. : 2693

MATERIAL: Solid zinc alloy die-casting

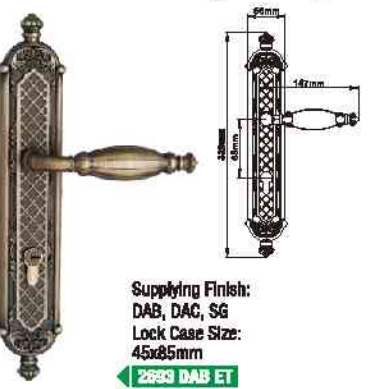


Supplying Finish: DAB, DAC, SG
Lock Case Size: 45x85mm

2693 DAB ET

MODEL NO. : 2698

MATERIAL: Solid zinc alloy die-casting

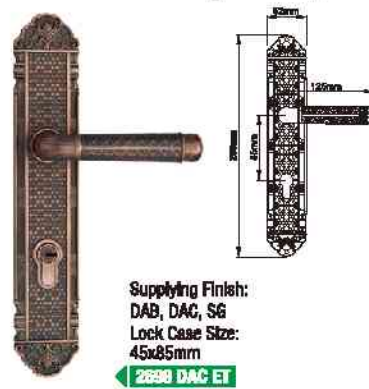


Supplying Finish: DAB, DAC, SG
Lock Case Size: 45x85mm

2698 DAC ET

MODEL NO. : 2686

MATERIAL: Solid zinc alloy die-casting

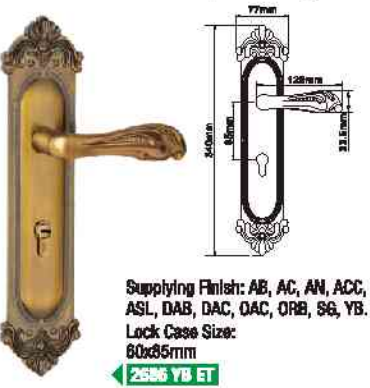

Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2686 YB ET

MODEL NO. : 2687

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2687 SN/NP ET

MODEL NO. : 2688

MATERIAL: Solid zinc alloy die-casting

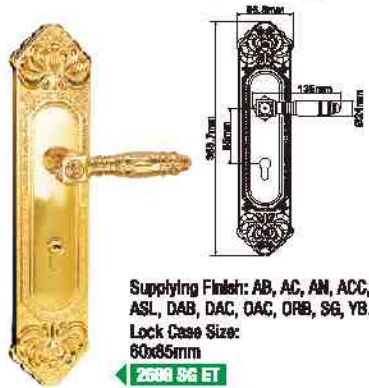


Supplying Finish: AB, AC, AN, ACC, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2688 SG ET

MODEL NO. : 2699

MATERIAL: Solid zinc alloy die-casting

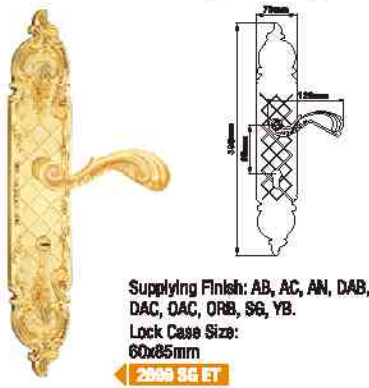

Supplying Finish: AB, AC, AN, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 60x85mm

2699 SG ET

MODEL NO. : 2611H

MATERIAL: Solid zinc alloy die-casting



Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2611H SN/NP ET

MODEL NO. : 2612H

MATERIAL: Solid zinc alloy die-casting




Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2612H SN/GP ET



MODEL NO. : 2615H

MATERIAL: Solid zinc alloy die-casting

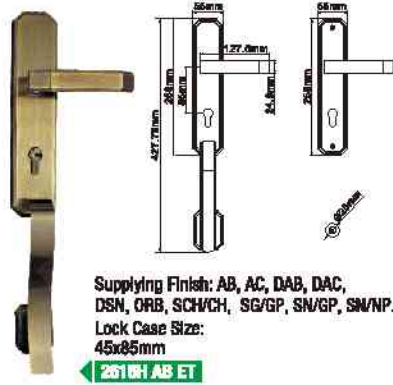


Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2615H AB ET

MODEL NO. : 2616H

MATERIAL: Solid zinc alloy die-casting

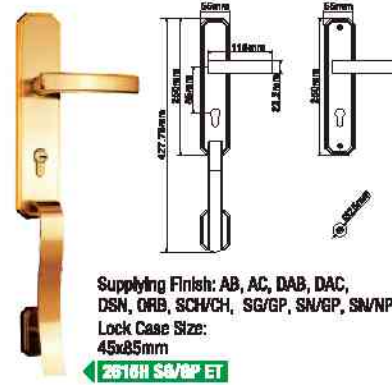

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/GP, SN/GP, SN/NP.
Lock Case Size: 45x85mm

2616H SG/GP ET

MODEL NO. : 26B03

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Lock Case Size: 45x85mm

26B03 PVD-PB ET

MODEL NO. : 26B22

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B22 RG ET

MODEL NO. : 26B33

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, DSN, ORBH, PVD-PB, RG, SG, SN.
Lock Case Size: 45x85mm

26B33 ACC ET

MODEL NO. : 26B81

MATERIAL: Solid forged brass




Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Lock Case Size: 45x85mm

26B81 PVD-PB ET

MODEL NO. : 26B05

MATERIAL: Solid forged brass

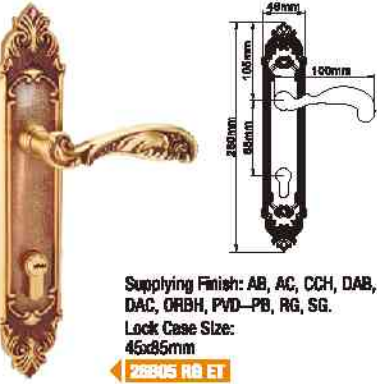

Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B05 RG ET

MODEL NO. : 26B06

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B06 DAB ET

MODEL NO. : 26B08

MATERIAL: Solid forged brass




Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 60x85mm

26B08 CCH ET

MODEL NO. : 26B82

MATERIAL: Solid forged brass

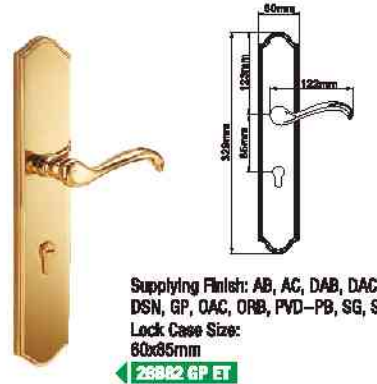

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Lock Case Size: 60x85mm

26B82 GP ET

MODEL NO. : 26B91

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B91 CCH ET

MODEL NO. : 26B92

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B92 ORBH ET

MODEL NO. : 26B09

MATERIAL: Solid forged brass




Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B09 ORBH ET

MODEL NO. : 26B10

MATERIAL: Solid forged brass

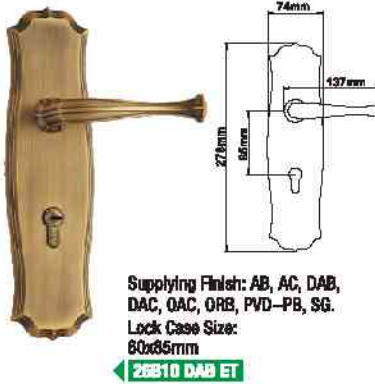


Supplying Finish: AB, AC, DAB, DAC, OAC, ORB, PVD-PB, SG.
Lock Case Size: 60x85mm

26B10 DAB ET

MODEL NO. : 26B11

MATERIAL: Solid forged brass

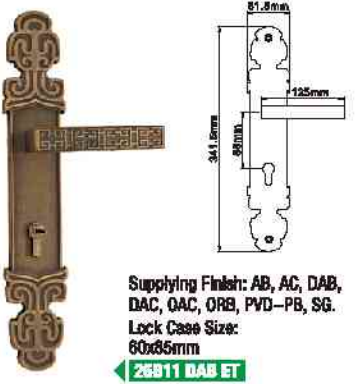


Supplying Finish: AB, AC, DAB, DAC, OAC, ORB, PVD-PB, SG.
Lock Case Size: 60x85mm

26B11 DAB ET

MODEL NO. : 26B93

MATERIAL: Solid forged brass

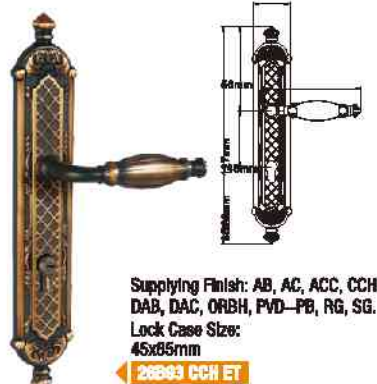

Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B93 CCH ET

MODEL NO. : 26B95

MATERIAL: Solid forged brass



Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B95 ORBH ET

MODEL NO. : 26B96

MATERIAL: Solid forged brass




Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B96 CCH ET



MODEL NO. : **26B98**
MATERIAL: Solid forged brass

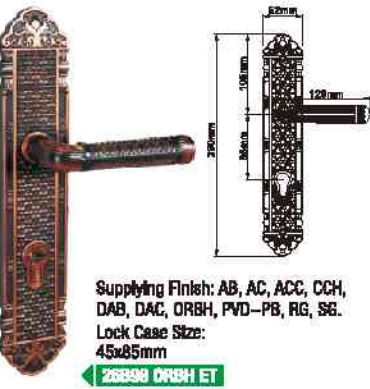

Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

26B98 ORBH ET

MODEL NO. : **26ST01**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST01 SS/SP ET

MODEL NO. : **26ST02**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST02 SS/SP ET

MODEL NO. : **26ST03**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST03 SS ET

MODEL NO. : **26ST05**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST05 SS/SP ET

MODEL NO. : **26ST06**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST06 SS/SP ET

MODEL NO. : **26ST07**
MATERIAL: Stamping stainless steel 304



Supplying Finish: PVD-PB, PVD-SB, SS, SP, SS/SP.
Lock Case Size: 60x85mm

26ST07 SS/SP ET

FULL INTRODUCTION OF SERIES 22

MAIN SPECIFICATIONS


- Apply to all kinds of wooden doors and metal doors.
- Mortise type.
- 10 years mechanism warranty under correct installation and normal usage.
- Artistic design, high added-value.
- Abundant choices for trim and plating.
- Anti-cut bolt.
- Easily reversible for left and right handing.

BOX DESIGN



ENTRANCE FUNCTION

ASSEMBLY ILLUSTRATION

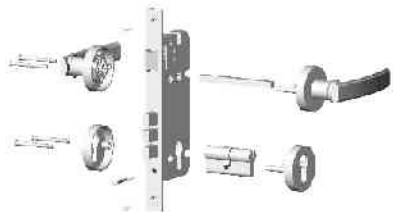

Supplying Size

60mm, 70mm,
80mm, 90mm, 100mm

Specially Optional Function

Master Keying(Maximum 4 levels)
Construction Key
Anti-Drill

Supplying Keyway


Standard



Computer

Customized

Dual Keyway
(One Side Single-row-pin,
One Side Track-cut-pin)



Double-row-pin



Yale



Kwikset



Schlage



Weiser

CYLINDER

Single Cylinder(Key To Knob)



Double Cylinder(Key To Key)



- High quality solid brass cylinder(Brass housing, plugs and pins).
- High class computer keyway technology, 7 pins, processed with high precise CNC machines, pin-combination is much more than international standard, high security.
- Each set with 5 pcs keys, all keys are made by solid brass, thickness 2.5mm.

MORTISE LOCK CASE

Stainless Steel 304 Version



- High quality Imported EGI (electric galvanized) steel sheet for casing, thickness 1.2mm, firm and strong.
- Solid investment-casting stainless steel 304 for cam, strong and durable. Octagon design, fitting many kinds of spindles in different shapes, size 8x8 mm.
- Solid stainless steel 304 for bolts, two throws.
- Solid investment-casting stainless steel 304 for latch, easily reversible for left and right handing.
- Solid stainless steel for forend (thickness 3.0mm) and strike plate (thickness 1.2mm).

Optional Size


40x85mm 45x85mm
50x85mm 60x85mm

Optional Size for European Standard

45x72mm 55x72mm 60x72mm

BRASS VERSION

- High quality imported EGI (electric galvanized) steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid brass for cam, strong and durable. Octagon design, fitting many kinds of spindles in different shapes, size 8×8 mm.
- Solid brass for bolts, both one-piece and three-piece bolt available for choices, two throws, hardened-steel rods inside, anti-cut, strong and high security.
- Solid brass for latch, strong and durable, easily reversible for left and right handing.
- Solid stainless steel or brass for forend (thickness 3.0mm) and strike plate (thickness 1.5mm).

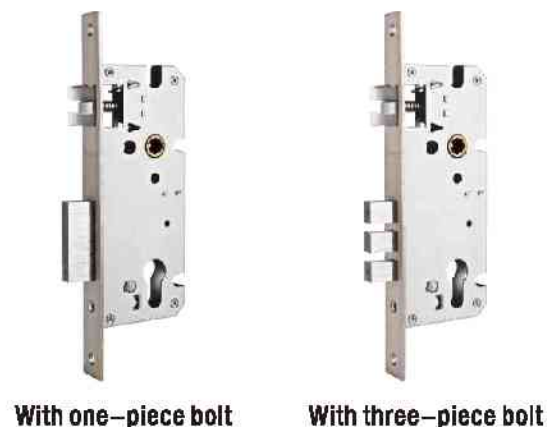

With one-piece bolt


With three-piece bolt

BATHROOM (PRIVACY) AND PASSAGE FUNCTION


ASSEMBLY ILLUSTRATION



LATCH OF BATHROOM (PRIVACY) FUNCTION

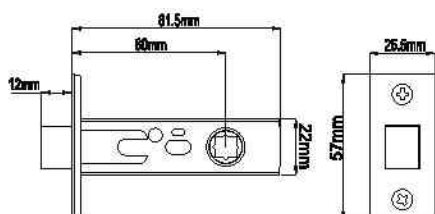

LATCH OF PASSAGE FUNCTION

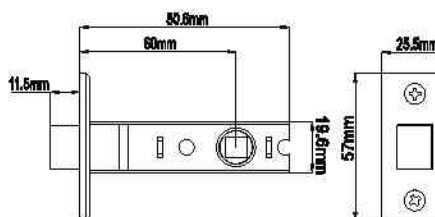

- Solid brass for latch tongue.
- High quality steel for casing, precise mechanism inside, works stably.
- Bathroom (privacy) latch with a locking rod.
- Solid stainless steel for forend and strike plate.

Backset

Standard: 60mm($2\frac{3}{8}$ "

Customized: 70mm($2\frac{3}{4}$ "

Notes: Backset is fixed and unadjustable for stable working purpose.

22 SERIES - MORTISE MECHANISM



MODEL NO. : 2208

MATERIAL: Solid zinc alloy die-casting




2208 DAC ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2211

MATERIAL: Solid zinc alloy die-casting

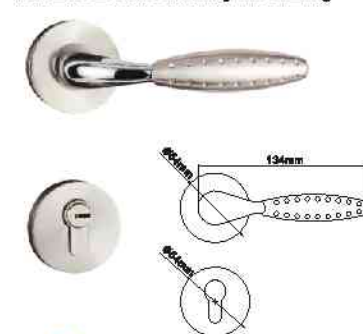

2211 SN/NP ET

Supplying Finish: AB, AC, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm

MODEL NO. : 2212

MATERIAL: Solid zinc alloy die-casting




2212 SG/GP ET

Supplying Finish: AB, AC, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm

MODEL NO. : 2213

MATERIAL: Solid zinc alloy die-casting

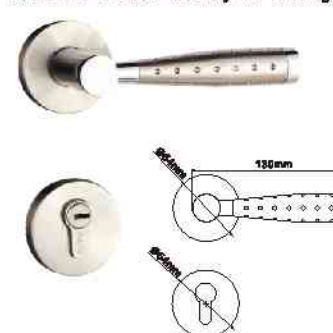

2213 SN/NP ET

Supplying Finish: AB, AC, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm

MODEL NO. : 2215

MATERIAL: Solid zinc alloy die-casting



2215 SG ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2216

MATERIAL: Solid zinc alloy die-casting




2216 AB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2218

MATERIAL: Solid zinc alloy die-casting

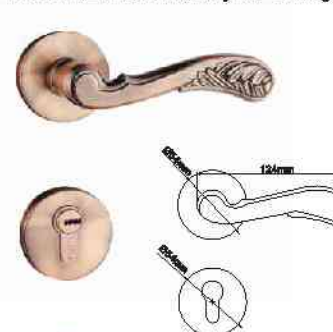


2218 AC ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2219

MATERIAL: Solid zinc alloy die-casting

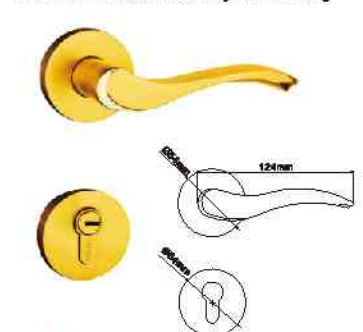

2219 SG/NP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm

MODEL NO. : 2220

MATERIAL: Solid zinc alloy die-casting




2220 SN/NP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/GP, SN/NP.
Lock Case Size: 45x85mm



MODEL NO. : 2221

MATERIAL: Solid zinc alloy die-casting

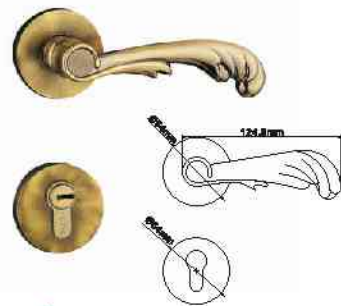

2221 AB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2222

MATERIAL: Solid zinc alloy die-casting



2222 YB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2223

MATERIAL: Solid zinc alloy die-casting



2223 ASL ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2225

MATERIAL: Solid zinc alloy die-casting



2225 DAB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2226

MATERIAL: Solid zinc alloy die-casting



2226 SG ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2228

MATERIAL: Solid zinc alloy die-casting



2228 DAB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2229

MATERIAL: Solid zinc alloy die-casting




2229 ASL ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2230

MATERIAL: Solid zinc alloy die-casting

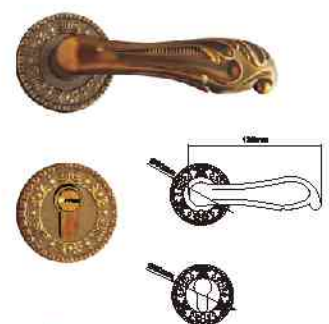


2230 YB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Lock Case Size: 45x85mm

MODEL NO. : 2231

MATERIAL: Solid zinc alloy die-casting

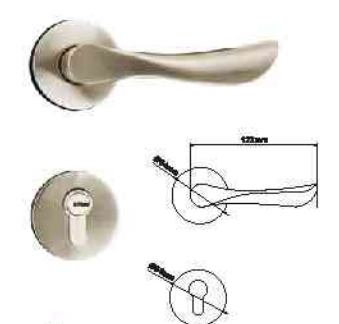

2231 SN ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH, SG, SN.
Lock Case Size: 45x85mm



MODEL NO. : 2232

MATERIAL: Solid zinc alloy die-casting




2232 SN/MP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SCH/CH, SG/OP, SN/MP.
Lock Case Size: 45x85mm

MODEL NO. : 2233

MATERIAL: Solid zinc alloy die-casting

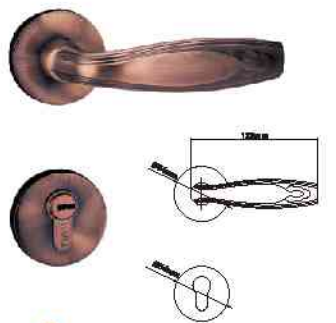


2233 DAC ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Lock Case Size: 45x85mm

MODEL NO. : 2235

MATERIAL: Solid zinc alloy die-casting




2235 DAB ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Lock Case Size: 60x85mm

MODEL NO. : 2236

MATERIAL: Solid zinc alloy die-casting



2236 DAC ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Lock Case Size: 45x85mm

MODEL NO. : 2238

MATERIAL: Solid zinc alloy die-casting




2238 DAC ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Lock Case Size: 45x85mm

MODEL NO. : 2239

MATERIAL: Solid zinc alloy die-casting




2239 DAC ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Lock Case Size: 45x85mm

MODEL NO. : 22B03

MATERIAL: Solid forged brass




22B03 OP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, GP, OAC, ORB, PVD-PB, SG, SN.
Lock Case Size: 45x85mm

MODEL NO. : 22B05

MATERIAL: Solid forged brass



22B05 CCH ET

Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 60x85mm

MODEL NO. : 22B08

MATERIAL: Solid forged brass



22B08 ORBH ET

Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 60x85mm




MODEL NO. : **22B09**
MATERIAL: Solid forged brass




22B09 CCH ET
Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 60x85mm

MODEL NO. : **22B10**
MATERIAL: Solid forged brass

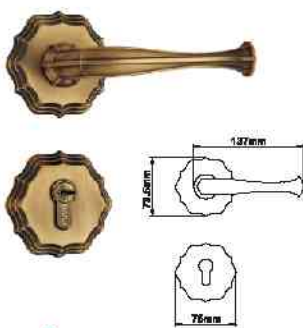


22B10 DAB ET
Supplying Finish: AB, AC, DAB, DAC, QAC, ORB, PVD-PB, SG.
Lock Case Size: 60x85mm

MODEL NO. : **22B11**
MATERIAL: Solid forged brass

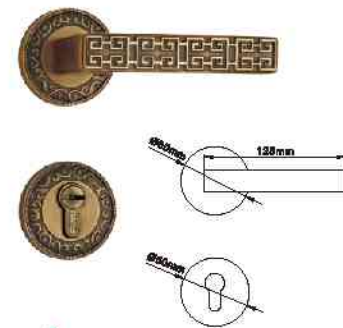


22B11 DAB ET
Supplying Finish: AB, AC, DAB, DAC, QAC, ORB, PVD-PB, SG.
Lock Case Size: 45x85mm

MODEL NO. : **22B22**
MATERIAL: Solid forged brass

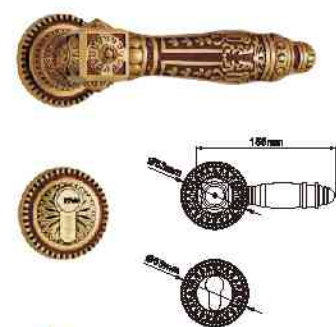


22B22 RG ET
Supplying Finish: AB, AC, CCH, DAB, DAC, ORBH, PVD-PB, RG, SG.
Lock Case Size: 45x85mm

MODEL NO. : **22B33**
MATERIAL: Solid forged brass

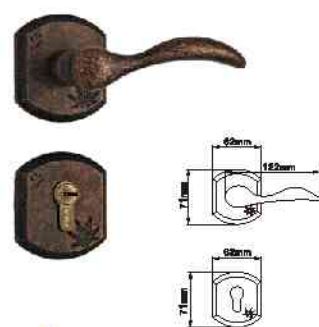


22B33 ACC ET
Supplying Finish: AB, AC, ACC, CCH, DAB, DAC, DSN, ORBH, PVD-PB, RG, SG, SN.
Lock Case Size: 80x85mm

MODEL NO. : **2250**
MATERIAL: Stamping stainless steel 304

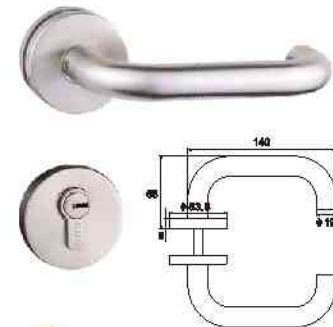

2250 SS ET
Supplying Finish: SS
Lock Case Size: 45x85mm

MODEL NO. : **2251**
MATERIAL: Stamping stainless steel 304




2251 SS ET
Supplying Finish: SS
Lock Case Size: 45x85mm

MODEL NO. : **2253**
MATERIAL: Stamping stainless steel 304



2253 SS ET
Supplying Finish: SS
Lock Case Size: 45x85mm

MODEL NO. : **2263**
MATERIAL: Stamping stainless steel 304

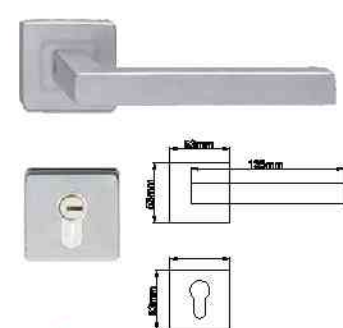

2263 SS ET
Supplying Finish: SS
Lock Case Size: 45x85mm

FULL INTRODUCTION OF SERIES 29

MAIN SPECIFICATIONS

- Apply to all kinds of interior wooden doors and metal doors.
- Mortise type.
- 10 years mechanism warranty under correct installation and normal usage.
- Artistic design, high added-value.
- Abundant choices for trim and plating.
- Easily reversible for left and right handing.

PATENT CERTIFICATE



ASSEMBLY ILLUSTRATION



BOX DESIGN




MORTISE LOCK CASE

SUPPLYING SIZE

Standard: 45x50mm Customized: 50x50mm

LOCK CASE OF SIZE 45X50mm/50X50mm

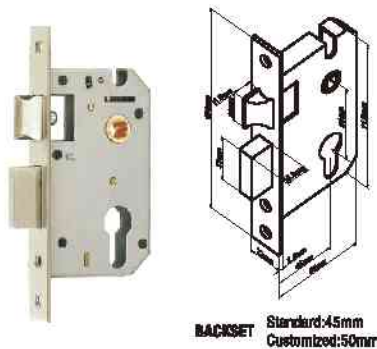

- High quality imported EGI(electric galvanized) steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid brass for cam, strong and durable. Octagon design, fitting many kinds of spindles in different shapes, size 8x8 mm,.
- Solid brass for bolt, one-piece bolt available, one throw, strong and durable.
- Solid brass for latch, strong and durable, easily reversible for left and right handing.
- Solid stainless steel or brass for forend(thickness 3.0mm) and strike plate(thickness 1.0mm).

CYLINDER

Single Cylinder(Key To Knob) Double Cylinder(Key To Key)



- High quality solid brass cylinder(Brass housing, plugs and pins).
- High class computer keyway technology,7 pins, processed with high precise CNC machines, pin-combination is much more than International standard, high security.
- Each set with 5 pcs keys, all keys are made by solid brass, thickness 2.5mm.

Supplying Size

60mm, 70mm, 80mm, 90mm, 100mm

Specially Optional Function

- Master Keying(Maximum 4 levels)
- Construction Key
- Anti-Drill

Supplying Keyway

Standard

Computer

Customized Keyway

Dual Keyway
(One Side Single-row-pin,
One Side Track-cut-pin)

Double-row-pin

Yale

Kwikset

Schlage


Wiseer

H59 solid brass turn knob available

Turn Knob No. No.1	Turn Knob No. No.2	Turn Knob No. No.3
Turn Knob No. No.4	Turn Knob No. No.5	Turn Knob No. No.6
Turn Knob No. No.8	Turn Knob No. No.9	Turn Knob No. No.10


Notes: No.1 knob is standard, others are customized.

MODEL NO. : 2901
MATERIAL: Solid zinc alloy die-casting

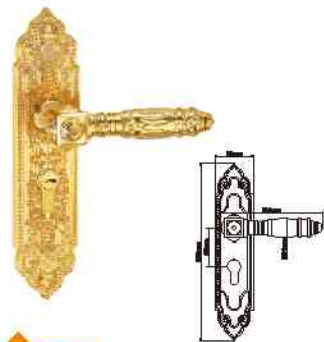


2901 SG ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2902
MATERIAL: Solid zinc alloy die-casting

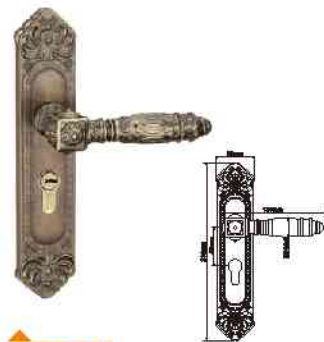


2902 ACC ET
Supplying Finish: ACC, ASL, DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2903
MATERIAL: Solid zinc alloy die-casting

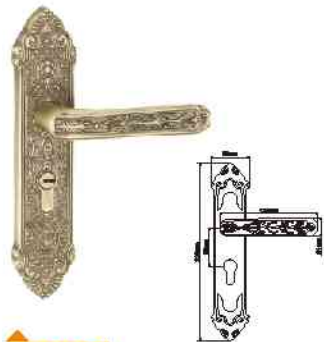


2903 DAB ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2905
MATERIAL: Solid zinc alloy die-casting

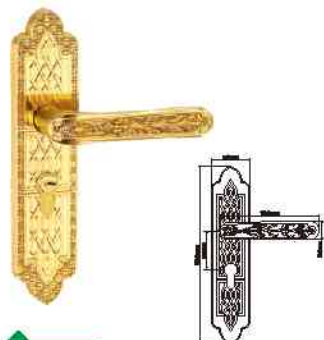


2905 SG ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2906
MATERIAL: Solid zinc alloy die-casting

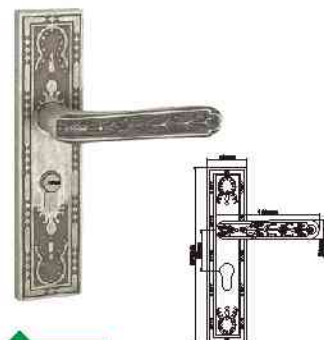


2906 ASL ET
Supplying Finish: ACC, ASL, DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2908
MATERIAL: Solid zinc alloy die-casting

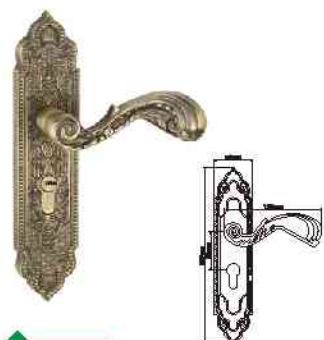


2908 DAB ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2909
MATERIAL: Solid zinc alloy die-casting

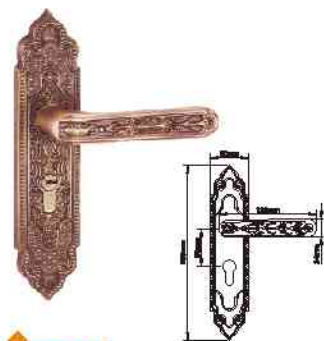

2909 DAC ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2910
MATERIAL: Solid zinc alloy die-casting

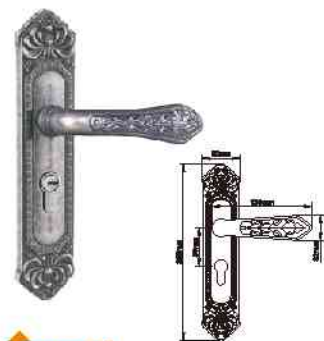

2910 ASL ET
Supplying Finish: ACC, ASL, DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm


MODEL NO. : 2911
MATERIAL: Solid zinc alloy die-casting



2911 SG ET
Supplying Finish: ACC, ASL, DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm




MODEL NO. : 2912
MATERIAL: Solid zinc alloy die-casting

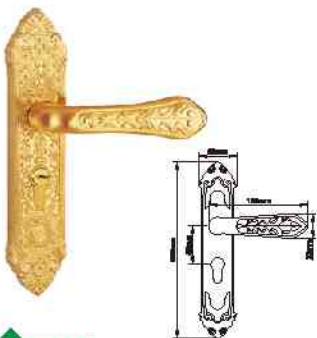


2912 SG ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2913
MATERIAL: Solid zinc alloy die-casting

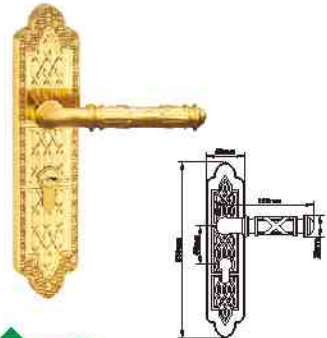


2913 SG ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2915
MATERIAL: Solid zinc alloy die-casting

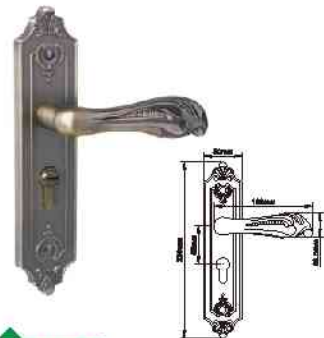


2915 DAB ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2916
MATERIAL: Solid zinc alloy die-casting

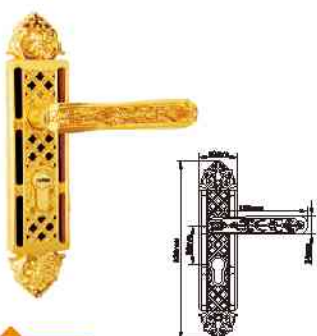


2916 SG ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2918
MATERIAL: Solid zinc alloy die-casting

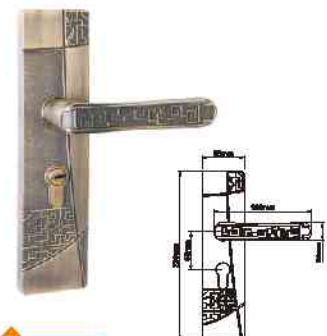


2918 DAB ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2919
MATERIAL: Solid zinc alloy die-casting

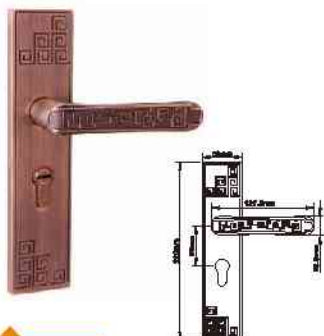


2919 DAC ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2920
MATERIAL: Solid zinc alloy die-casting

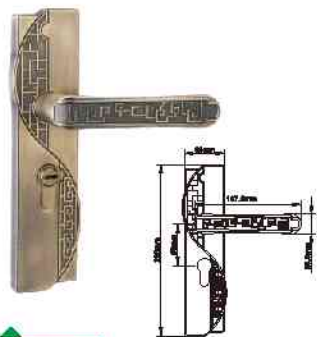

2920 DAB ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

MODEL NO. : 2921
MATERIAL: Solid zinc alloy die-casting

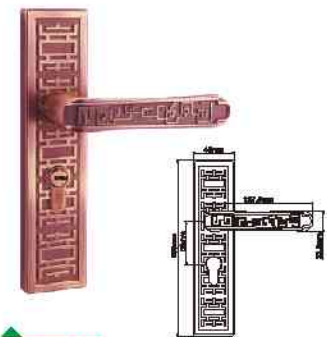

2921 DAC ET
Supplying Finish: DAB, DAC, ORB, SG, YB.
Lock Case Size: 45x50mm

FULL INTRODUCTION OF SERIES 28

MAIN SPECIFICATIONS

- Apply to all kinds of interior wooden doors and metal doors.
- 10 years mechanism warranty under correct installation and normal usage.
- Artistic design, high added-value.
- Abundant choices for trim and plating.
- Easily reversible for left and right handling.

BOX DESIGN



CYLINDER



- High quality solid brass cylinder(Brass housing, plug and pins).
- Yale keyway, 5 pins, processed with high precise CNC machines.
- Each set with 3 pcs keys made by solid brass.
- Hardened process for tall-piece, stronger and more durable.

Supplying Keyway

Standard



Yale

Customized Keyway



Computer



Kwikset



Schlage



Weiser

MORTISE LOCK CASE VERSION

Backset: 50mm
Center to Center Distance: 50mm



LATCH VERSION


Backset:
Standard: 50mm
Customized: 60mm, 70mm



28 SERIES - MORTISE MECHANISM

MODEL NO. : 2801

MATERIAL: Solid zinc alloy die-casting

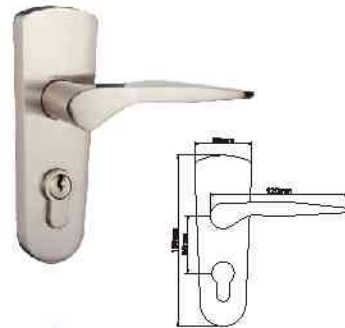


2801 SN ET

Supplying Finish: AB, AC, DAB, DAC, DSN, OAC, ORB, SG, SN.
Door thickness: 35-50mm

MODEL NO. : 2802

MATERIAL: Solid zinc alloy die-casting

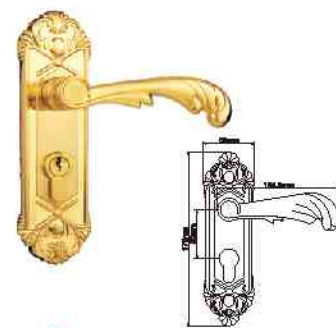


2802 SG ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2803

MATERIAL: Solid zinc alloy die-casting

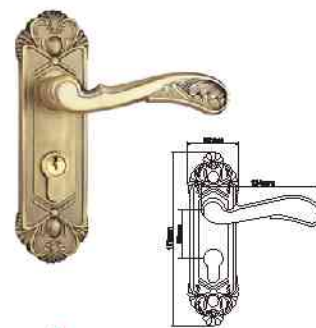


2803 DAB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2805

MATERIAL: Solid zinc alloy die-casting

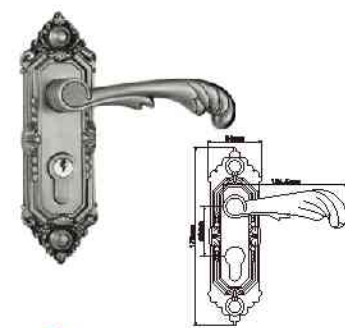


2805 AN ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2806

MATERIAL: Solid zinc alloy die-casting

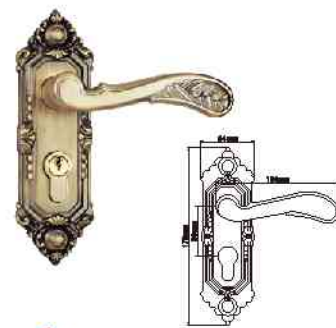


2806 DAB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2808

MATERIAL: Solid zinc alloy die-casting

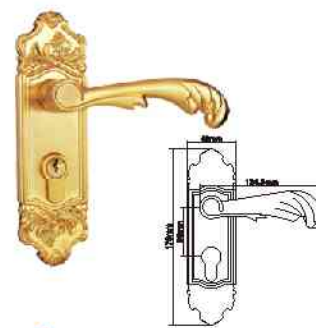


2808 SG ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2809

MATERIAL: Solid zinc alloy die-casting

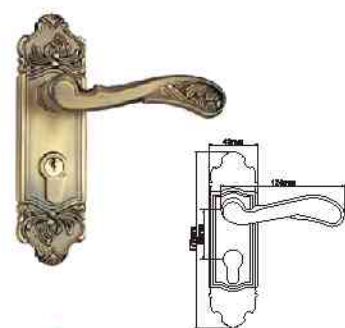

2809 DAB ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2811

MATERIAL: Solid zinc alloy die-casting




2811 SG/SP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2812

MATERIAL: Solid zinc alloy die-casting

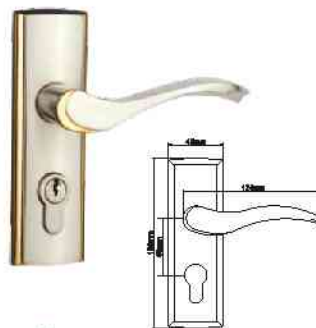


2812 SN/SP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2813

MATERIAL: Solid zinc alloy die-casting

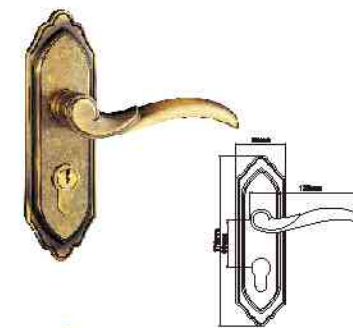


2813 ACC ET

Supplying Finish: AB, AC, ACC, AN, ASL, DAB, DAC, OAC, ORB, SG, YB.
Door thickness: 35-50mm

MODEL NO. : 2815

MATERIAL: Solid zinc alloy die-casting

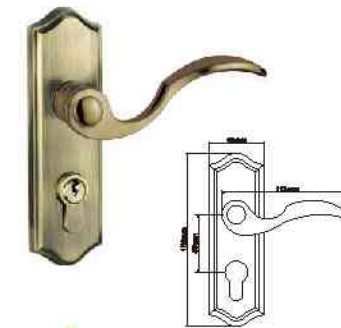


2815 AB ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2821

MATERIAL: Solid zinc alloy die-casting

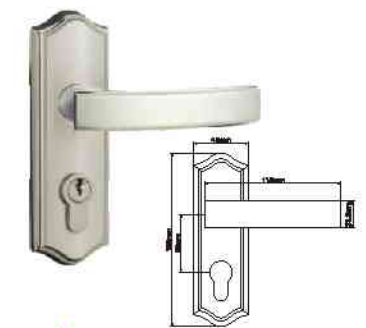


2821 SN/MP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2822

MATERIAL: Solid zinc alloy die-casting

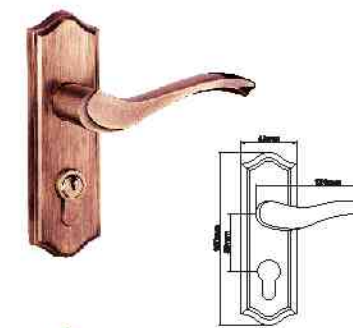

2822 AC ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2831

MATERIAL: Solid zinc alloy die-casting



2831 SN/SP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2832

MATERIAL: Solid zinc alloy die-casting



2832 SN/MP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 2838

MATERIAL: Solid zinc alloy die-casting




2838 SN/MP ET

Supplying Finish: AB, AC, DAB, DAC, DSN, ORB, SCH/CH, SG/SP, SN/SP, SN/SP.
Door thickness: 35-50mm

MODEL NO. : 28ST01

MATERIAL: Stamping stainless steel 304

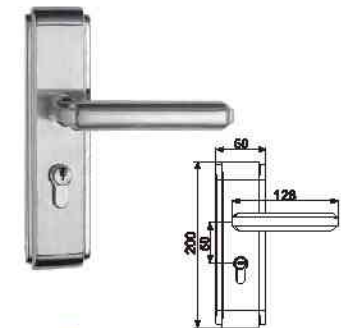


28ST01 SS/SP ET

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Door thickness: 35-50mm

MODEL NO. : 28ST03

MATERIAL: Stamping stainless steel 304

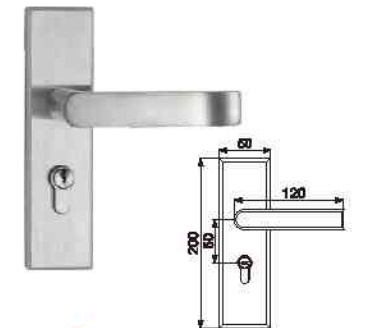


28ST03 SS ET

Supplying Finish: PVD-PB, PVD-SB, SP, SS, SS/SP.
Door thickness: 35-50mm

28 SERIES - MORTISE MECHANISM

MODEL NO. : 28ST05

MATERIAL: Stamping stainless steel 304

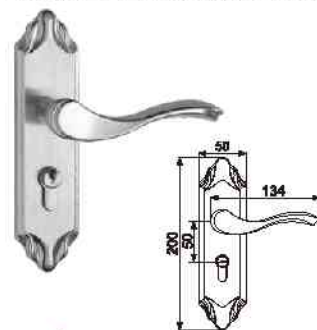

28ST05 SS/SP

Supplying Finish:
PVD-PB, PVD-SB, SP, SS, SS/SP.
Door thickness:
35-50mm

MODEL NO. : 28ST06

MATERIAL: Stamping stainless steel 304




28ST06 SS/SP ET

Supplying Finish:
PVD-PB, PVD-SB, SP, SS, SS/SP.
Door thickness:
35-50mm

MODEL NO. : 28ST07

MATERIAL: Stamping stainless steel 304

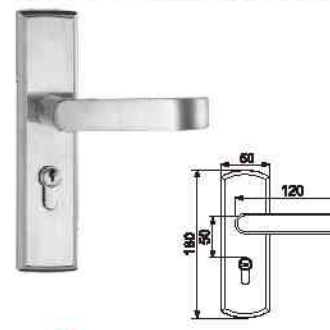

28ST07 SS/SP ET

Supplying Finish:
PVD-PB, PVD-SB, SP, SS, SS/SP.
Door thickness:
35-50mm

"The bitterness of poor quality remains long after the sweetness of low price is forgotten." We always keep this in mind.

The owner of our factory has dedicated to lock set manufacture industry almost 35 years, he understands how to make good locks.


In order to fully control and ensure trustable quality, we produce the complete lock set including cylinders and mortise locks all by ourselves in house, and our management team think over how to do that better all the time.

FULL INTRODUCTION OF SERIES 556


MAIN SPECIFICATIONS

- Apply to all kinds of wooden sliding doors and metal sliding doors.
- Simple mechanism, stable performance.
- Artistic design, high added-value.
- Abundant choices for trim, function and plating.

ASSEMBLY ILLUSTRATION

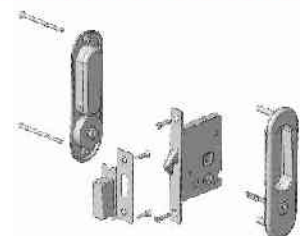

MORTISE LOCK CASE

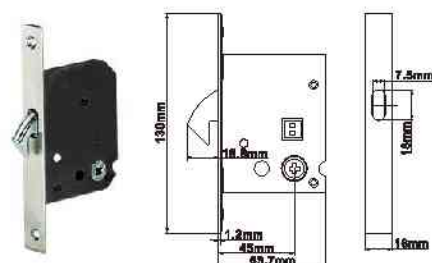

- High quality steel sheet for housing, firm and strong.
- Solid zinc alloy die-casting for crossing rotor, stable and smooth performance.
- Solid zinc alloy die-casting for compass bolt, strong and durable.
- Solid stainless steel for forend and strike plate.

CYLINDER




- High quality solid brass cylinder (Brass casing, plugs and pins).
- Yale keyway, 3 pins, processed with high precise CNC machines, running smoothly.
- Each set with 3 pcs keys, all keys are made by solid brass.
- Hardened process for tall-piece, stronger and more durable.

MODEL NO. : **5561** MATERIAL: Solid zinc alloy die-casting



5561 SN ET

5561 SN FH

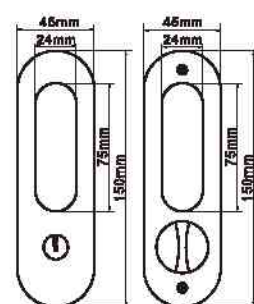

Supplying Finish: AB, AC, CP, DAB, DAC, DSN, OAC, PB, SCH, SG, SN.

Standard Door Thickness: 35-50mm


556 SERIES - MORTISE MECHANISM

MODEL NO. : **5562** MATERIAL: Solid zinc alloy die-casting



5562 SG ET

5562 SG BK

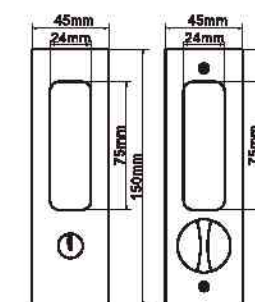

Supplying Finish: AB, AC, CP, DAB, DAC, DSN, OAC, PB, SCH, SG, SN.


Standard Door Thickness: 35-50mm

MODEL NO. : **5563** MATERIAL: Solid zinc alloy die-casting



5563 ACC ET

5563 DAB DC

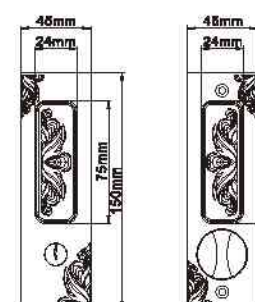

Supplying Finish: ACC, AN, ASL, DAB, DAC, DSN, OAC, PB, SG.


Standard Door Thickness: 35-50mm

MODEL NO. : **5565** MATERIAL: Solid zinc alloy die-casting



5565 DAB ET

5565 PB DM

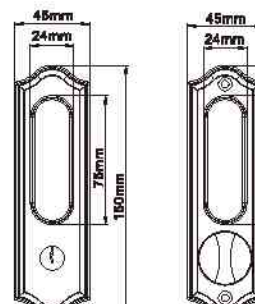

Supplying Finish: AB, AC, CP, DAB, DAC, DSN, OAC, PB, SCH, SG, SN.

Standard Door Thickness: 35-50mm

FULL INTRODUCTION OF SERIES 550

MAIN SPECIFICATIONS

- Apply to all kinds of wooden sliding doors and metal sliding doors.
- Italian standard, high quality mechanism.
- Artistic design, high added-value.
- Abundant choices for trim and plating.


MORTISE LOCK CASE

- High quality steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid powder metal for cam, strong and durable.
- Lock case fits spindles in size 8×8 mm.
- Solid zinc alloy die-casting for compass bolt, strong and durable.
- Solid stainless steel or brass for forend (thickness 2.5mm) and strike plate (thickness 2.5 mm).


5501 Italian Standard
MATERIAL: Solid zinc alloy die-casting



Bathroom

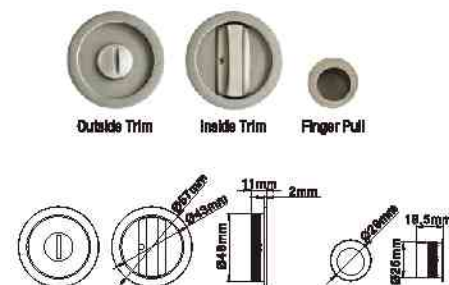


Flush Handle

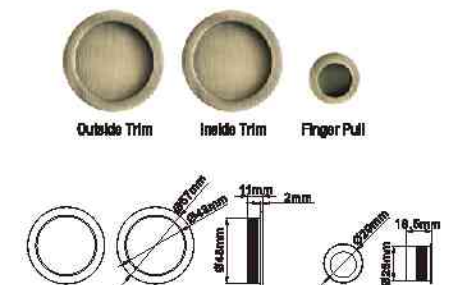


Standard Door Thickness: 35-50mm
Supplying Finish: ACC, ASL, CP, DAB, DAC, DSN, GP, PB, SCH, SG.

ASSEMBLY ILLUSTRATION

Bathroom (Privacy)




Flush Handle / Passage

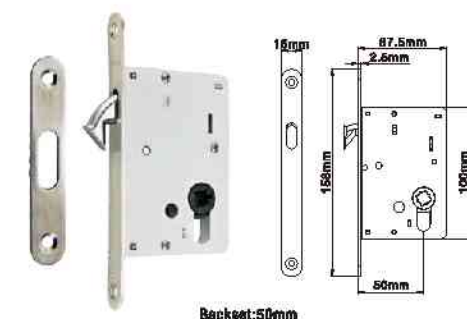


5502 Italian Standard
MATERIAL: Solid zinc alloy die-casting

Bathroom

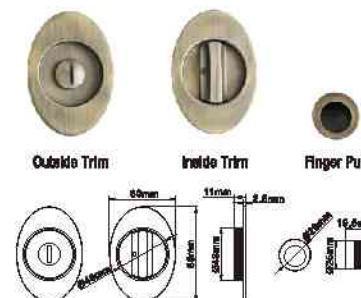

Flush Handle

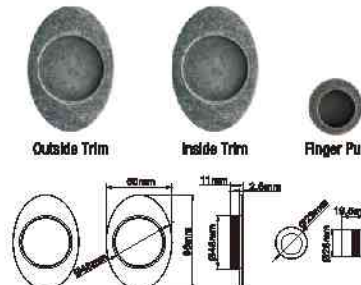


Standard Door Thickness: 35-50mm
Supplying Finish: ACC, ASL, CP, DAB, DAC, DSN, GP, PB, SCH, SG.

FULL INTRODUCTION OF SERIES 551

MAIN SPECIFICATIONS


- Apply to all kinds of wooden sliding doors and metal sliding doors.
- Italian standard, high quality mechanism.
- Artistic design, high added-value.
- Abundant choices for trim and plating.

MORTISE LOCK CASE

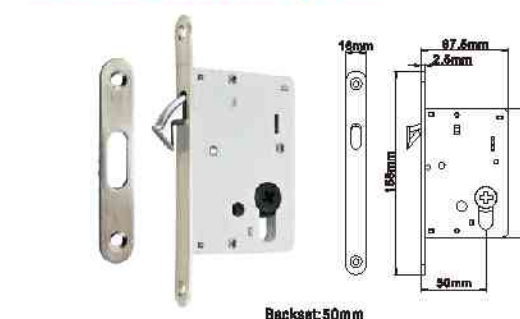

5511 Italian Standard
MATERIAL: Solid zinc alloy die-casting

Bathroom

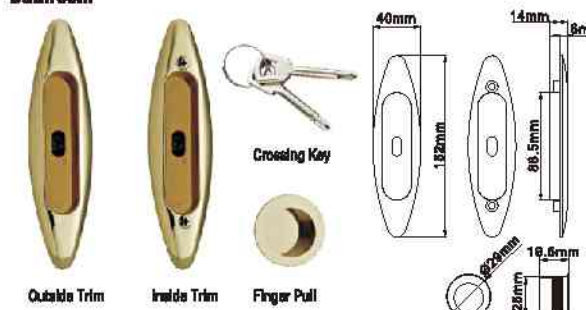

Notes: For bathroom (privacy) is with both lock case and crossing keys, the keys are without keyway and cutting, just for operation of lock case.


Flush Handle



Standard Door Thickness: 35-50mm
Supplying Finish: ACC, ASL, CP, DAB, DAC, DSN, GP, PB, SCH, SG.

ASSEMBLY ILLUSTRATION

Bathroom (Privacy)

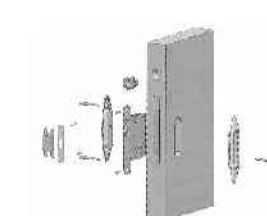

Flush Handle / Passage



- High quality steel sheet for casing, thickness 1.5mm, firm and strong.
- Solid powder metal for cam, strong and durable.
- Lock case fits crossing keys as provided.
- Solid zinc alloy die-casting for compass bolt, strong and durable.
- Solid stainless steel or brass for forend (thickness 2.5mm) and strike plate (thickness 2.5 mm).


5512 Italian Standard
MATERIAL: Solid zinc alloy die-casting

Bathroom



Notes: For bathroom (privacy) is with both lock case and crossing keys, the keys are without keyway and cutting, just for operation of lock case.

Flush Handle

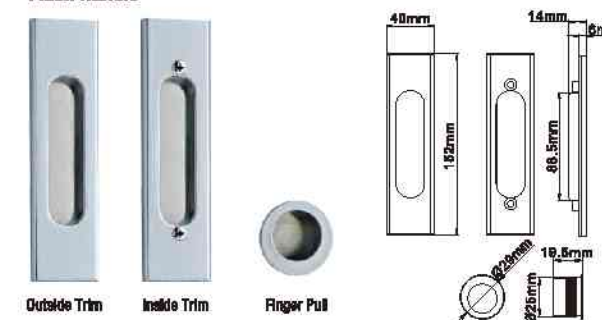

Standard Door Thickness: 35-50mm
Supplying Finish: ACC, ASL, CP, DAB, DAC, DSN, GP, PB, SCH, SG.

FULL INTRODUCTION OF SERIES 33


MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Easily reversible for left and right handing.
- 2 In 1 mechanism, combined with advantages of cylindrical and tubular, offering a special structure, excellent performance and strong operation feeling.
- Under correct installation and normal usage, the lever will not come down automatically in 10 years.
- Cylindrical chassis, anti-pry and higher fire-rated level.



- Concealed mounting—screw design for back rosetta, looks more artistic and higher class.

LATCH

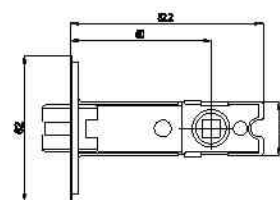

- Solid zinc alloy die-casting three-piece latch.
- Solid zinc alloy die-casting for cam, strong and durable.
- With anti-insert function, high security.
- With silent-closed function, make your life less noisy and more comfortable.
- Precise mechanism inside, works stably.
- Solid stainless steel for forend and strike plate.

Backset

Standard: 70mm
Optional: 60mm

Notes: Backset is fixed and unadjustable for stable working purpose.

CYLINDER



- High quality solid brass cylinder (Brass housing, plug and pins).
- Kwikset keyway, 5 pins, processed with high precise CNC machines, pin-combination is much more than international standard, high security.
- Each set with 3 pcs keys made by solid brass.

Standard Keyway



Customized Keyway



BOX DESIGN



BLISTER PACK DESIGN




33 SERIES - 2 IN 1 MECHANISM



MODEL NO. : 3310

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette




3310 SQ ET

Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

MODEL NO. : 3312

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette




3312 SCH ET

Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

MODEL NO. : 3315

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette




3315 SN ET

Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

MODEL NO. : 3311

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette




3311 AC ET

Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

MODEL NO. : 3313

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette




3313 AB ET

Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

MODEL NO. : 3316

MATERIAL: Solid zinc alloy lever + stainless steel or brass rosette



3316 AC ET


Supplying Finish: AB, AC, CP, SCH, SG, SN.
Standard Door Thickness: 35-50mm

FULL INTRODUCTION OF SERIES 32

MAIN SPECIFICATIONS

- Apply to all kinds of wooden doors and metal doors.
- Solid zinc alloy die-casting for both lever handles and rosettes, strong and firm.
- Inside components processed with special treatment for good quality mechanism.
- 45° tubular latch for heavy duty purpose.

LATCH

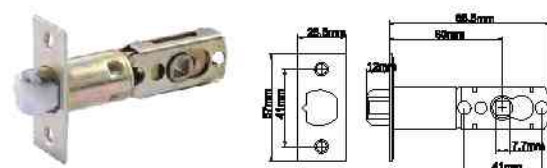

- Latch tongue is made by zinc alloy die-casting.
- 45° tongue for heavy duty purpose.
- High quality components inside to ensure good mechanism.
- Backset 60–70mm adjustable.

CYLINDER



- High quality solid brass cylinder (Brass housing, plug and pins).
- Kwikset keyway, 5 pins, processed with high precise CNC machines, pin-combination is much more than international standard, high security.
- Each set with 3 pcs keys made by solid brass.

Standard Keyway



Customized Keyway



SUPPLYING FINISH

AB (US 5)	BN (US 17A)	PB (US 3)	SN (US 15)
AC (US 11)	CP (US 26)	SB (US 4)	
AN (US 15A)	ORB (US 10B)	SCH (US 28D)	

BOX DESIGN



BLISTER PACK DESIGN



32 SERIES - HEAVY DUTY TUBULAR LEVER SET

MODEL NO. : 3201

MATERIAL: Solid zinc alloy die-casting

Entry




Bathroom



Passage



Single Side Dummy

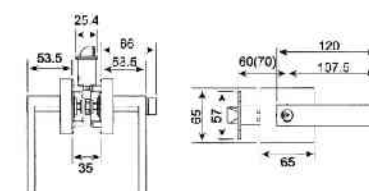

Standard Door Thickness: 35–45mm
Customized Door Thickness: 45–50mm

MODEL NO. : 3202

MATERIAL: Solid zinc alloy die-casting

Entry




Bathroom



Passage



Single Side Dummy

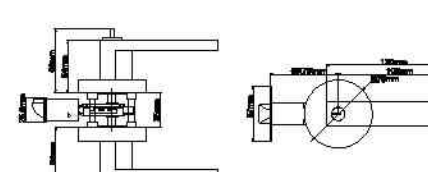

Standard Door Thickness: 35–45mm
Customized Door Thickness: 45–50mm

MODEL NO. : 3203

MATERIAL: Solid zinc alloy die-casting

Entry




Bathroom



Passage



Single Side Dummy

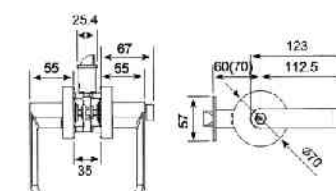

Standard Door Thickness: 35–45mm
Customized Door Thickness: 45–50mm

MODEL NO. : 3205

MATERIAL: Solid zinc alloy die-casting

Entry




Bathroom



Passage



Single Side Dummy

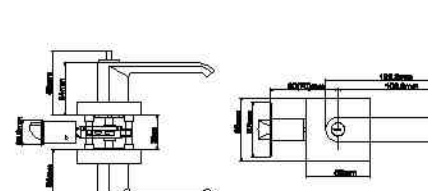


Standard Door Thickness: 35–45mm
Customized Door Thickness: 45–50mm

32 SERIES - HEAVY DUTY TUBULAR LEVER SET

MODEL NO. : 3206


MATERIAL: Solid zinc alloy die-casting

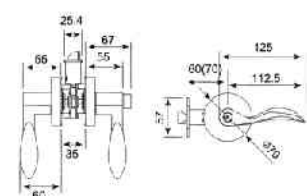

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3213


MATERIAL: Solid zinc alloy die-casting

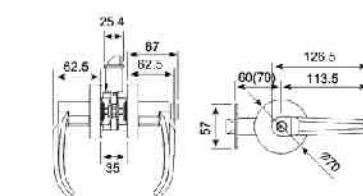

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3225


MATERIAL: Solid zinc alloy die-casting

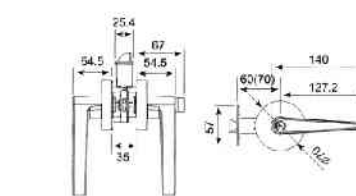

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3230


MATERIAL: Solid zinc alloy die-casting

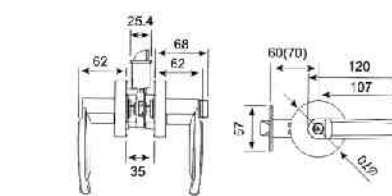

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3216


MATERIAL: Solid zinc alloy die-casting

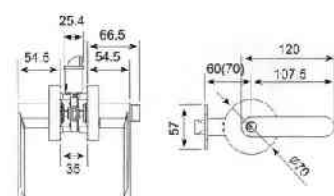

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3219


MATERIAL: Solid zinc alloy die-casting

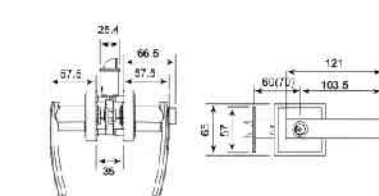

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3231


MATERIAL: Solid zinc alloy die-casting

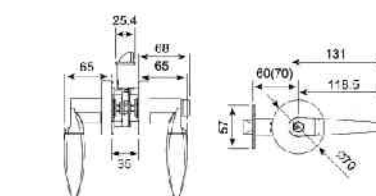

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3232


MATERIAL: Solid zinc alloy die-casting

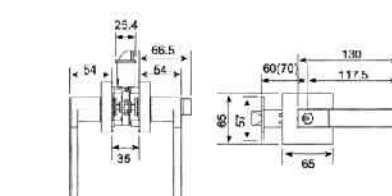

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm


32 SERIES - HEAVY DUTY TUBULAR LEVER SET

MODEL NO. : 3233
MATERIAL: Solid zinc alloy die-casting

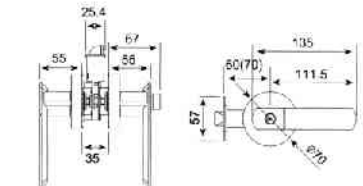

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : 3228
MATERIAL: Solid zinc alloy die-casting
Lever Handles are Interchangeable

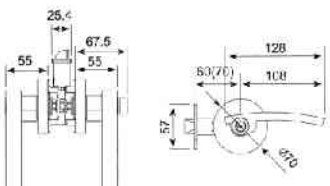


Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

How to Interchange lever handle:




Loosen the fixing screws on both handles and pull them out, then interchange and install them again, finally, fasten them with fixing screws.

MODEL NO. : 3201K
MATERIAL: Solid zinc alloy die-casting
Cylinder is changeable

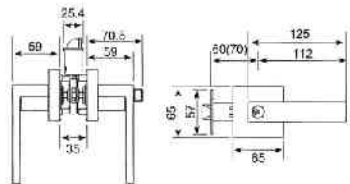


Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

How to change cylinder:

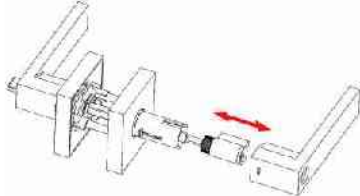


Under unlocked status, press down inward the snap panel and pull out the handle, replace the cylinder with the new one, then install the handle back, finally make sure the snap panel rebound to its position on handle and fix the handle firmly.

MODEL NO. : 611

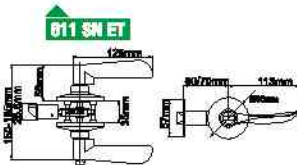


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 616

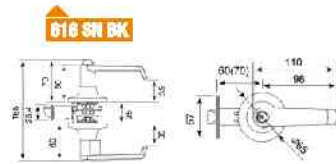


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 630

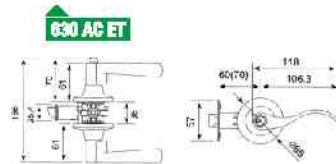


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 613

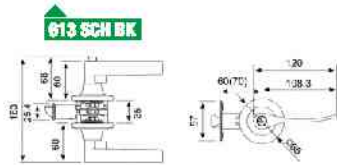


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 619

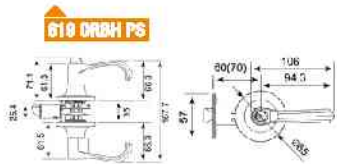


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 650

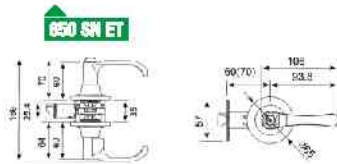


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 615

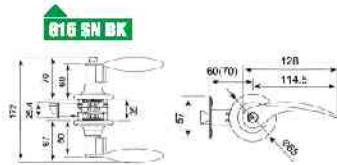


Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 630

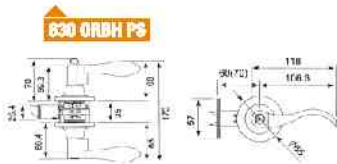

Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 651

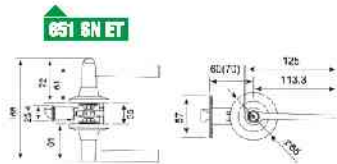

Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 28), ORB (US 108), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

TUBULAR LEVER SET

MODEL NO. : 806



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 811



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 816



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 808



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 813



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 830



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 809



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 815



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

MODEL NO. : 831



Standard Door Thickness: 35-50mm
Supplying Finish: AB (US 5), AC (US 11), CP (US 26), ORB (US 10B), PB (US 3), SN (US 15).
Supplying Function: Entry, Bathroom, Passage, Single Side Dummy, Master Keying (Maximum 4 levels), Storeroom, Key-alike.

Latch



Supplying Finish:

AB (US 5)
AC (US 11)
CP (US 26)
ORB (US 10B)
PB (US 3)
SB (US 4)
SS (US 32D)
SP (US 32)

Supplying Function:

Entry
Bathroom
Bathroom With Indicator
Passage
Single Side Dummy
Master Keying (Maximum 4 levels)
Storeroom
Key-alike

Standard Keyway: Kwikset

Customized Keyway:

Yale
Schlage
Weiser
C4

Standard Door Thickness: 35-50mm
Customized Door Thickness: 26-40mm



576 PB ET 576 CP ET 576 AB ET 590 PB ET 591 SS ET



591 PB ET 607 SS ET 607 AB ET 607 PB ET 607 PB PS




609 SS/SP ET 609 PB ET 609 SB/PB BL 6082 SB/PB ET (70mm Rosette) 6082 SS/SP ET (70mm Rosette)



6083 AB ET (75mm Rosette) 6083 SS ET (75mm Rosette) Fixing screws on backside are concealed.

CYLINDRICAL KNOB SET

Latch

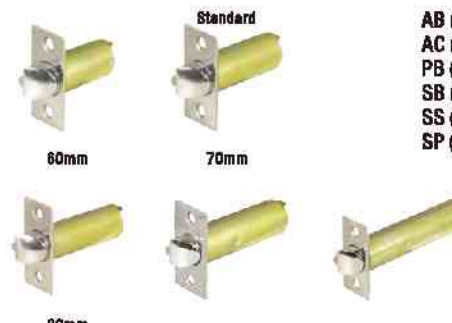

60mm 70mm 90mm 100mm 127mm

Supplying Finish:

AB (US 5)
AC (US 11)
PB (US 3)
SB (US 4)
SS (US 32D)
SP (US 32)

Supplying Function:

Entry
Bathroom
Passage
Master Keying (Maximum 4 levels)
Storeroom
Key-alike

Standard Keyway: Yale

Customized Keyway:
Kwikset
Schlage
Weiser
C4
Computer

Standard Door Thickness: 35-50mm
Customized Door Thickness: 28-40mm



587 SS ET
(65mm Rosette)



587 AB ET
(65mm Rosette)



587 PB ET
(65mm Rosette)



587 SP BK
(65mm Rosette)



587 SS PS
(65mm Rosette)



5871 AC ET
(75mm Rosette)



5871-H SS ET
(75mm Rosette with higher edge)



5791 SS ET



5791 SP ET



5791 PB ET



5791 SS/SP ET



5791 SB/PB ET



5791-H SS ET
(Rosette with higher edge)



5831 SS ET



5831 SS/SP ET



5831 SB/PB ET



5832 SS/SP ET



5832 SB/PB ET



5881 SS ET
(58mm Knob, 80mm Rosette)



5881 AC ET
(58mm Knob, 80mm Rosette)



5881-H SS ET
(58mm Knob, 80mm Rosette with higher edge)



5881-H PB ET
(58mm Knob, 80mm Rosette with higher edge)

DEADBOLT

Supplying Finish:

AB (US 5) ORB (US 10B) SS (US 32D)
AC (US 11) PB (US 3) SP (US 32)
CP (US 26) SB (US 4)


Supplying Function:

Entry
Master Keying (Maximum 4 levels)
Key-alike

Standard Keyway: Kwikset


Customized Keyway:
Yale Weiser
Schlage C4

MODEL NO. : D101
MATERIAL: Stainless Steel 304 or Brass




Standard Door Thickness: 35-50mm

MODEL NO. : D102
MATERIAL: Stainless Steel 304 or Brass




Standard Door Thickness: 35-45mm

MODEL NO. : D105
MATERIAL: Stainless Steel 304 or Brass




Standard Door Thickness: 35-45mm

MODEL NO. : R101
MATERIAL: Solid zinc alloy die-casting




Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : R102
MATERIAL: Solid zinc alloy die-casting



Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : S101
MATERIAL: Solid zinc alloy die-casting



Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : S102
MATERIAL: Solid zinc alloy die-casting



Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : DR101
MATERIAL: Solid zinc alloy die-casting




Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : DR102
MATERIAL: Solid zinc alloy die-casting




Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : DS101
MATERIAL: Solid zinc alloy die-casting

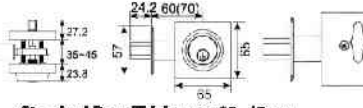


Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : DS102
MATERIAL: Solid zinc alloy die-casting

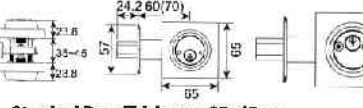

Standard Door Thickness: 35-45mm
Customized Door Thickness: 45-50mm

MODEL NO. : D103
MATERIAL: Solid zinc alloy die-casting

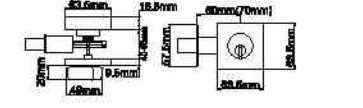

Standard Door Thickness: 40-55mm

093

FUYU & LOKIN

1. The door thickness range can be customized to thinner or thicker, please contact us for discussion.
2. All product pictures are just for reference, if any discrepancy found between cartain picture and product, please take actual product as standard.
3. FUYU has the rights to improve or revise specifications without notice.

094

COMBO LOCK

Supplying Finish:

AB (US 5) ORB (US 10B) SS (US 32D)
AC (US 11) PB (US 3) SP (US 32)
CP (US 28) SB (US 4)

Supplying Function:

Entry
Master Keying (Maximum 4 levels)

Standard Keyway: Kwikset

Customized Keyway:
Yale Weiser
Schlage C4

Standard Door Thickness:
35–45mm

Customized Door Thickness:
45–50mm



3201 SN ET + DS101 SN ET



3216 SN ET + DR101 SN ET



3201 SN PS + S101 SN ET



3203 SN ET + R102 SN ET



3232 SN ET + DS102 SN ET



3233 SN ET + DR102 SN ET



650 SN ET + D101 SS ET



808 SN ET + D102 SS ET



815 SN ET + D101 SS ET



607 AB ET + D101 AB ET



607 SS ET + D102 SS ET -B



6082 SS/SP ET + D101 SS ET -B

SERIES 5588 (FOR ALUMINUM DOOR)



5588AR SN




5588A SN



5588B SN

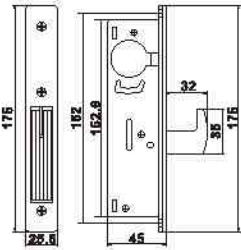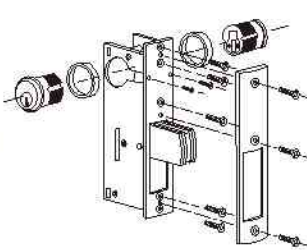

5588A

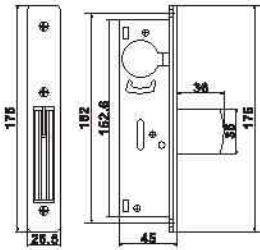

5588B

Package Information

Box packing
Qty/Ctn: 32 sets
G.W/Ctn: 30 kgs
Meas./Ctn: 40×27×23.5cm

Function available

Single cylinder (entrance function)
Double cylinder (entrance function)
Door thickness: 45–48mm
3 Schlage keys

SECURITY RIM LOCK

9333 SS/SN



9331 SS/SP



9332 SS/SP



Package Information

Box packing
Qty/Ctn: 12 sets
G.W/Ctn: 19 kgs
Meas./Ctn: 49.5×40×22.5cm

Door Thickness

Standard: 35–50mm
Extra: 60–70mm

Package Information

Box packing
Qty/Ctn: 20 sets
G.W/Ctn: 23 kgs
Meas./Ctn: 40.5×34.5×43.5cm

Door Thickness

Standard: 35–50mm
Extra: 60–70mm

ELECTRIC LOCK

9882 SS/SP



Package Information

Box packing
Qty/Ctn: 20 sets
G.W/Ctn: 30 kgs
Meas./Ctn: 42.8×40.5×42cm

Door Thickness

Standard: 35–50mm
Extra: 60–70mm

PROFILE CYLINDER

OEM and ODM orders are warmly welcome.

MAIN SPECIFICATIONS

- High quality solid brass cylinder (Brass housing, plugs and pins).
- Phosphor copper or stainless steel material for springs.
- All keys are made by solid brass or cupronickel (Silver Brass).
- All turn knobs are made by solid brass.
- Processed with high class CNC machines for the greatest accuracy, stable and reliable performance.
- Pin-combination is much more than international standard.

SUPPLYING FUNCTION

Double Cylinder (Key to Key)
Single Cylinder (Key to Knob)
Half Cylinder
Bathroom (Privacy)
Master keying (Maximum 4 levels)
Keyed-allike
Construction Key
Anti Drill

SUPPLYING KEYWAY

Angle-cut-pin
Computer
Double-row-pin
Dual Keyway (one-side Single-row
Pin, one-side Track-cut Pin)
Yale
Kwikset
Schlage
Weiser


SUPPLYING FINISH

AB (Antique Brass)
AC (Antique Copper)
PB (Polished Brass)
SB (Satin Brass)
SN (Satin Nickel)

PACKAGE INFORMATION

Item	Packing	Qty/ctn (PCS)	G.W (Kgs)	Meas./ctn (cm)
60mm one-side key cylinder	Plain box	60	20	34x17x20.5
60mm both-side keys cylinder	Plain box	60	17	28x17x20.5
70mm one-side key cylinder	Plain box	60	21	34x17x20.5
70mm both-side keys cylinder	Plain box	60	18	28x17x20.5
80mm one-side key cylinder	Plain box	60	22.5	40x17x20.5
80mm both-side keys cylinder	Plain box	60	19	34x17x20.5
90mm one-side key cylinder	Plain box	60	23.5	40x17x20.5
90mm both-side keys cylinder	Plain box	60	20	34x17x20.5
100mm one-side key cylinder	Plain box	60	25	43x17x20.5
100mm both-side keys cylinder	Plain box	60	21.5	37x17x20.5

SUPPLYING FINISH

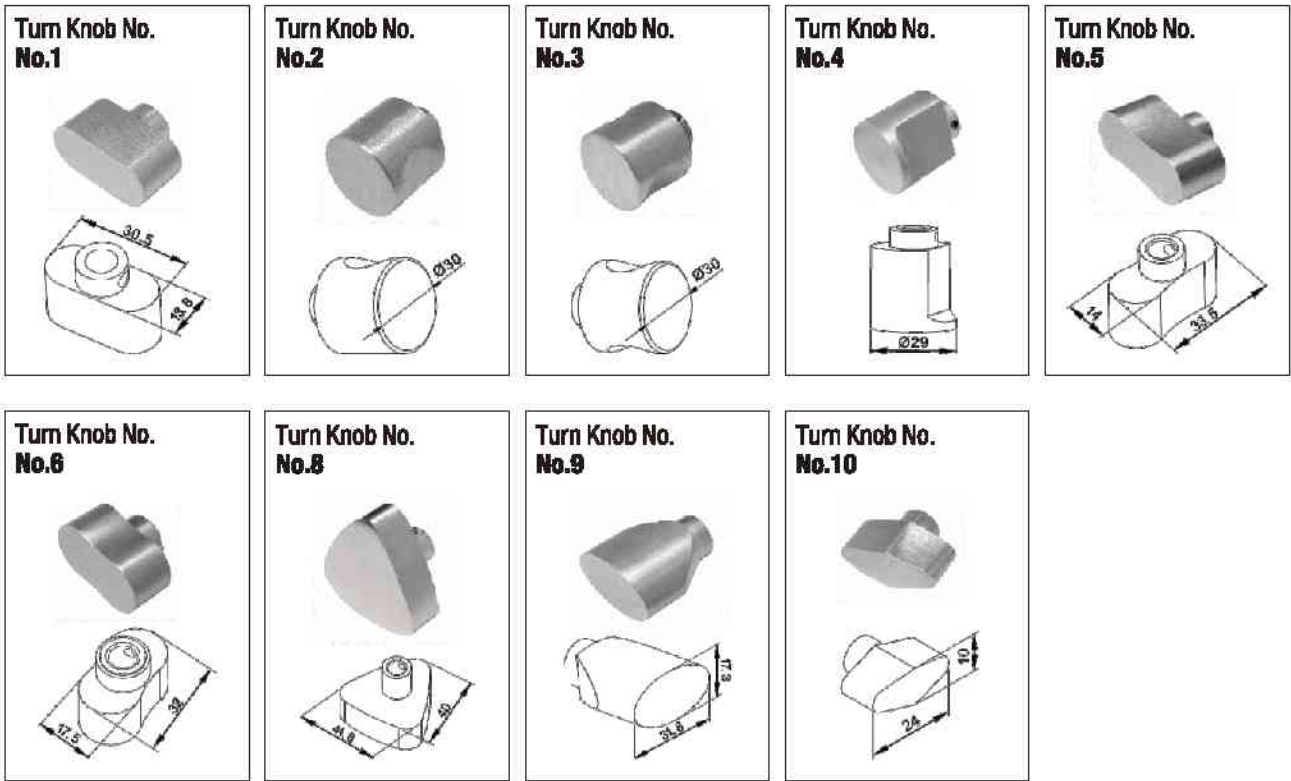

Single Cylinder (Key To Knob)



Size available: 60mm, 70mm, 80mm, 90mm, 100mm

Double Cylinder (Key To Key)



Size available: 60mm, 70mm, 80mm, 90mm, 100mm

Half Cylinder With Turn Knob



Size available: 40mm, 45mm, 50mm

Half Cylinder With Key




Size available: 40mm, 45mm, 50mm

LOCK CASE SERIES


30×85mm
Roller Latch Lock Case



Series 56 Double Compass
Bolt Lock Case

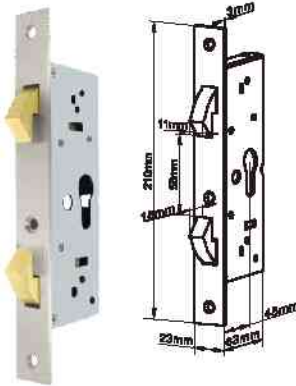


81 Series Lock Case

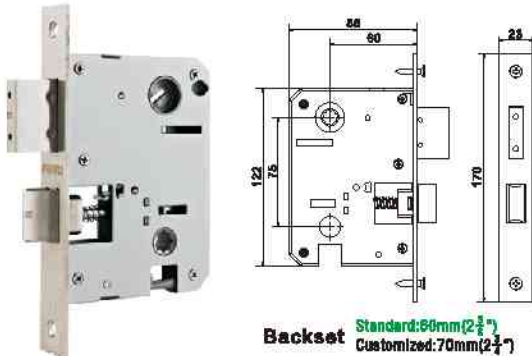


Backset **Standard: 60mm (2 3/8")**
Customized: 70mm (2 7/8")


Series 550 Lock Case

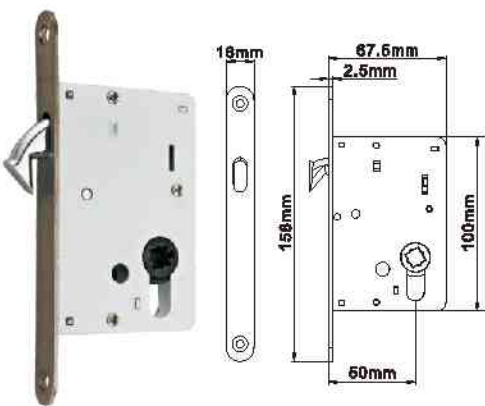

Series 82 ANSI/BHMA Grade 2 Lock Case

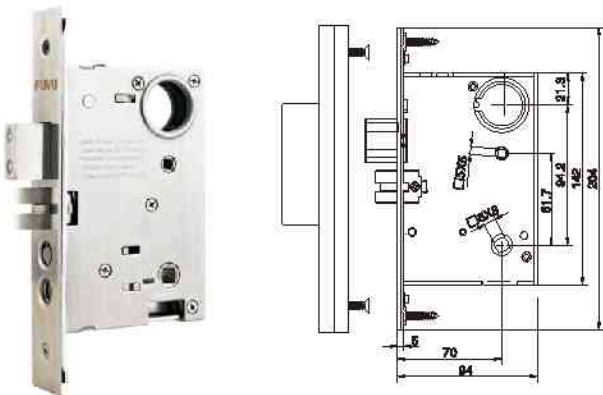


Series 89 Heavy Duty Version Mortise Lock

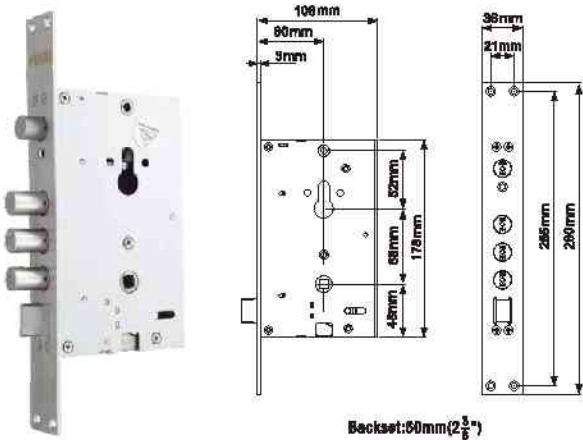

Backset: 60mm (2 3/8")

Series 89 King Version Mortise Lock

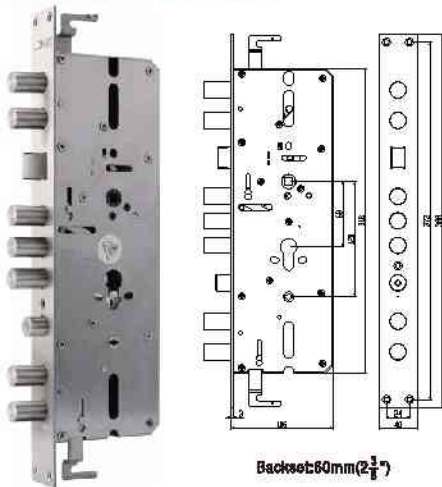

Backset: 60mm (2 3/8")


LOCK CASE SERIES

FIRE-PROOF STAINLESS STEEL MORTISE LOCK CASE

- Investment-casting stainless steel cam, size 8×8mm
- Solid investment-casting stainless steel for latch and bolt
- Solid stainless steel forend (thickness 3.0mm) and strike plate (thickness 1.2mm)
- Stainless steel screws for installation

Supplying Size

20×85mm	25×85mm	30×85mm	40×85mm
45×85mm	50×85mm	60×85mm	70×85mm
45×72mm	55×72mm	60×72mm	50×58mm

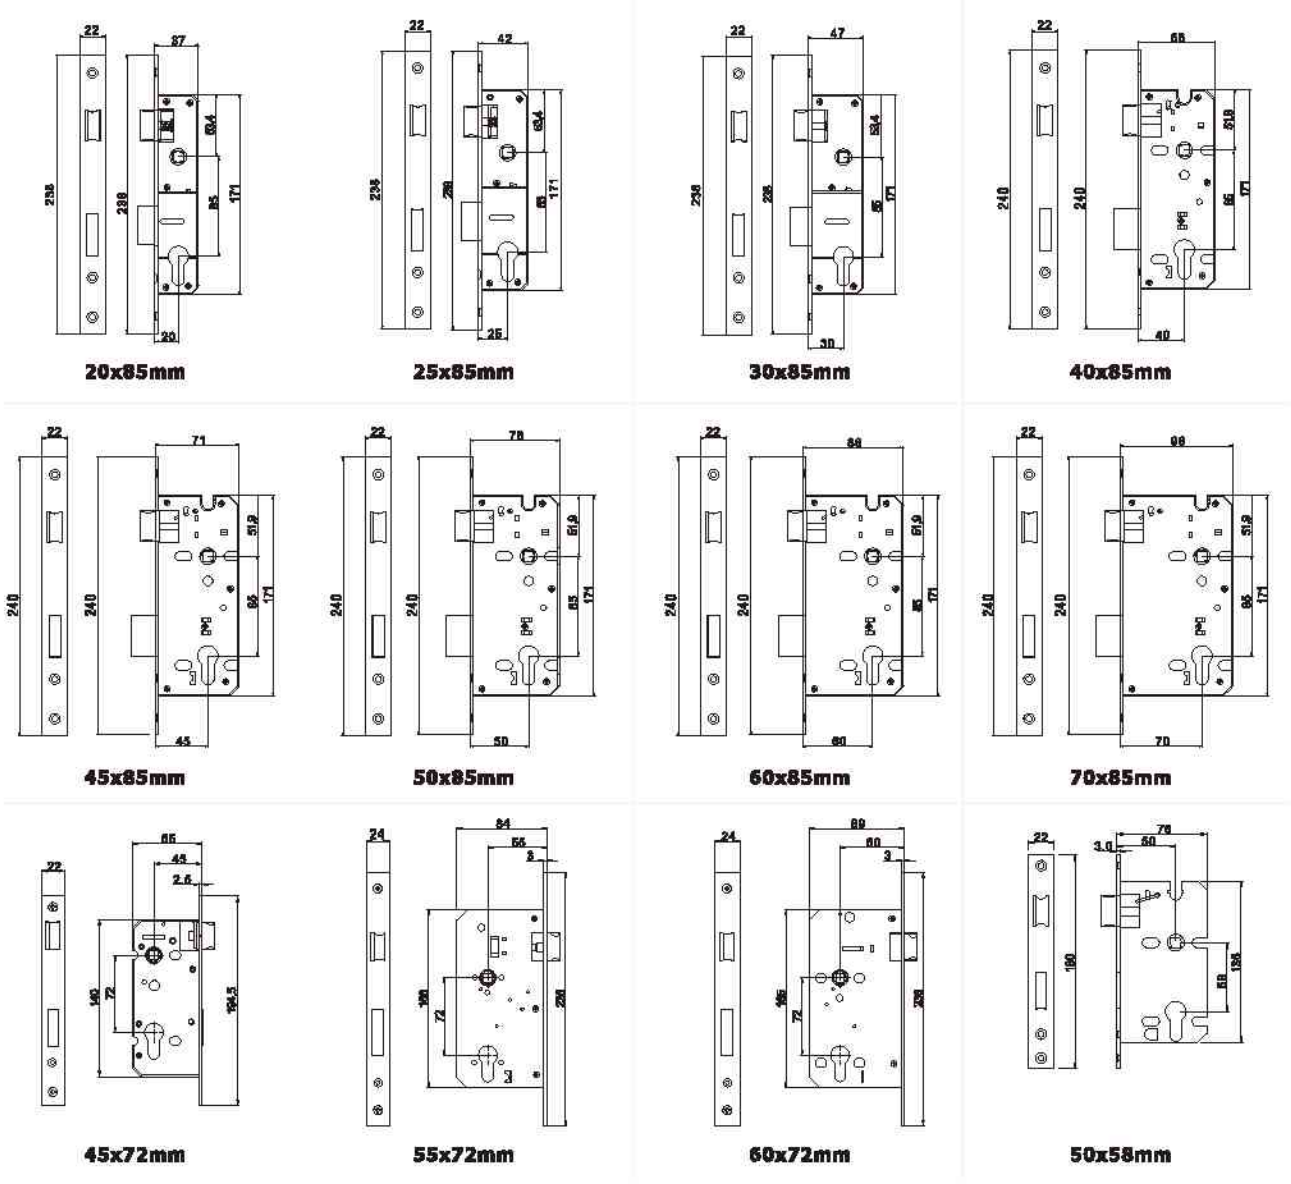

LATCH AND BOLT

OEM and ODM orders are warmly welcome.

KEY

Item No.: L22-BK
Backset: 60mm



Item No.: L22-PS
Backset: 60mm



Item No.: L33
Backset: 50mm / 60mm / 70mm



Item No.: L88
Backset: 60mm / 70mm



Item No.: TL-A
Backset: 60-70mm adjustable
90-100mm adjustable



Item No.: 4 in 1 Latch
Backset: 60-70mm adjustable



Item No.: D88
Backset: 60-70mm adjustable



Item No.: DL-A
Backset: 60-70mm adjustable



Item No.: 4 in 1 Bolt
Backset: 60-70mm adjustable





Item No.: CL-A
Backset: 60mm / 70mm / 80mm
90mm / 100mm / 127mm




Item No.: L28
Backset: 50mm, 60mm, 70mm



Item No.: TL-45°
Backset: 60-70mm adjustable

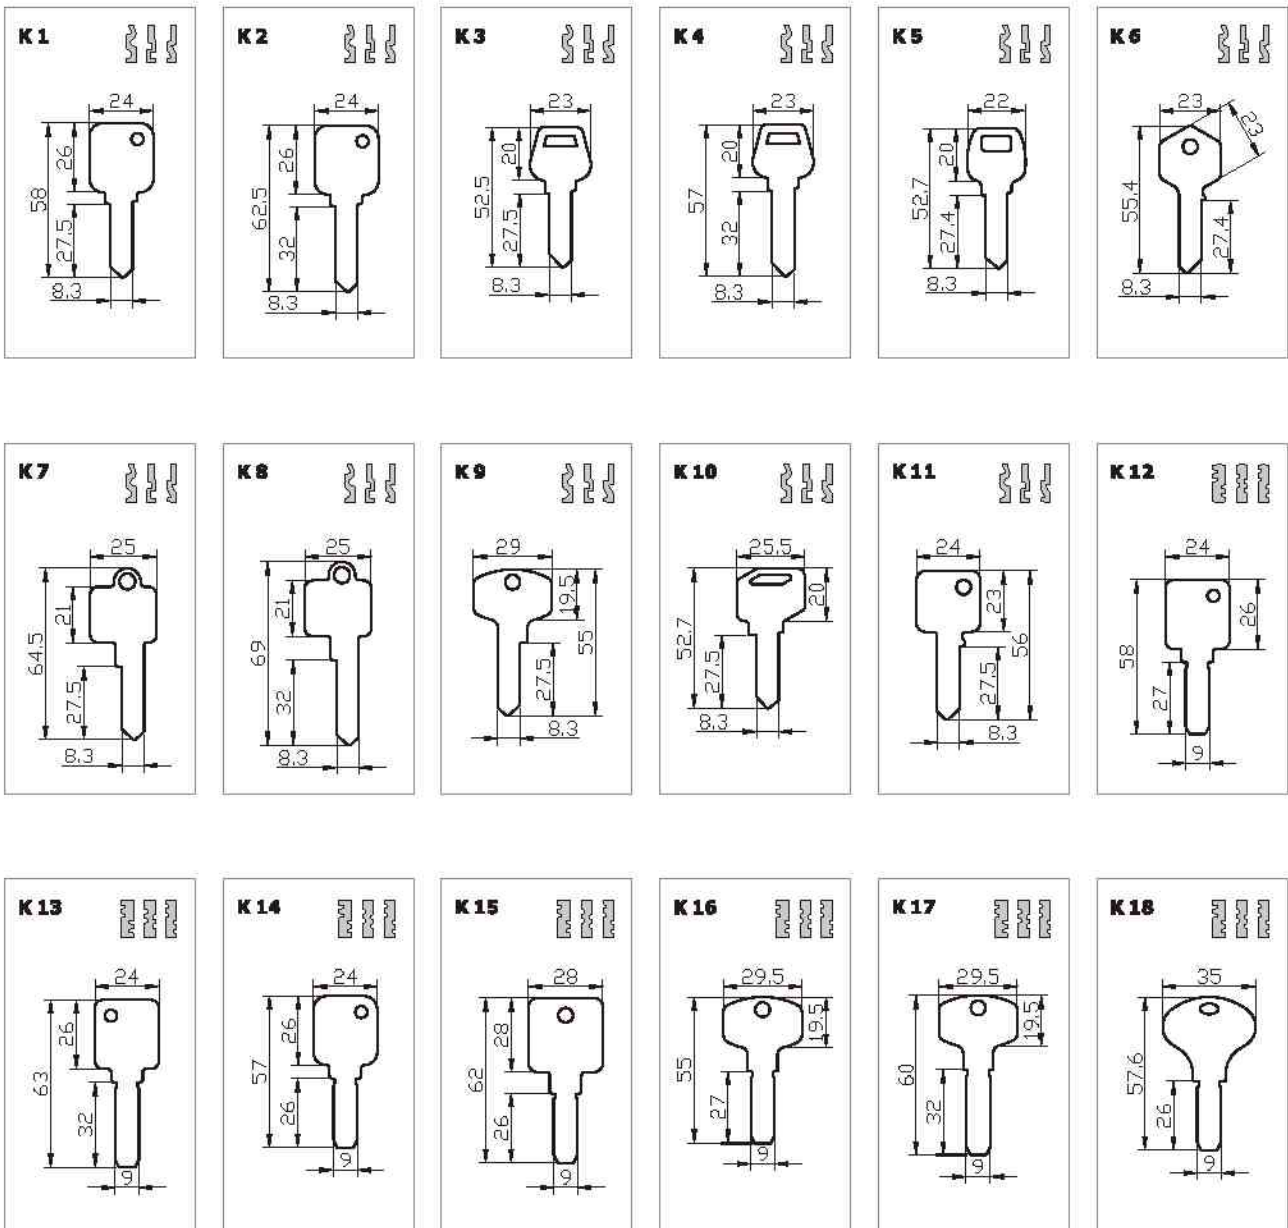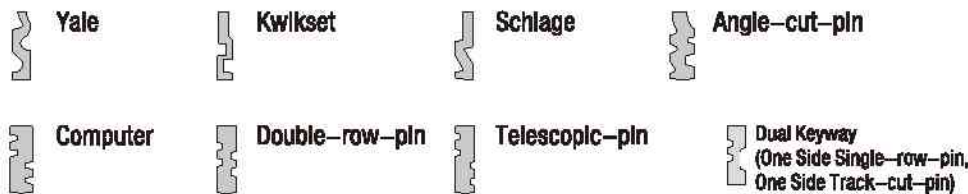

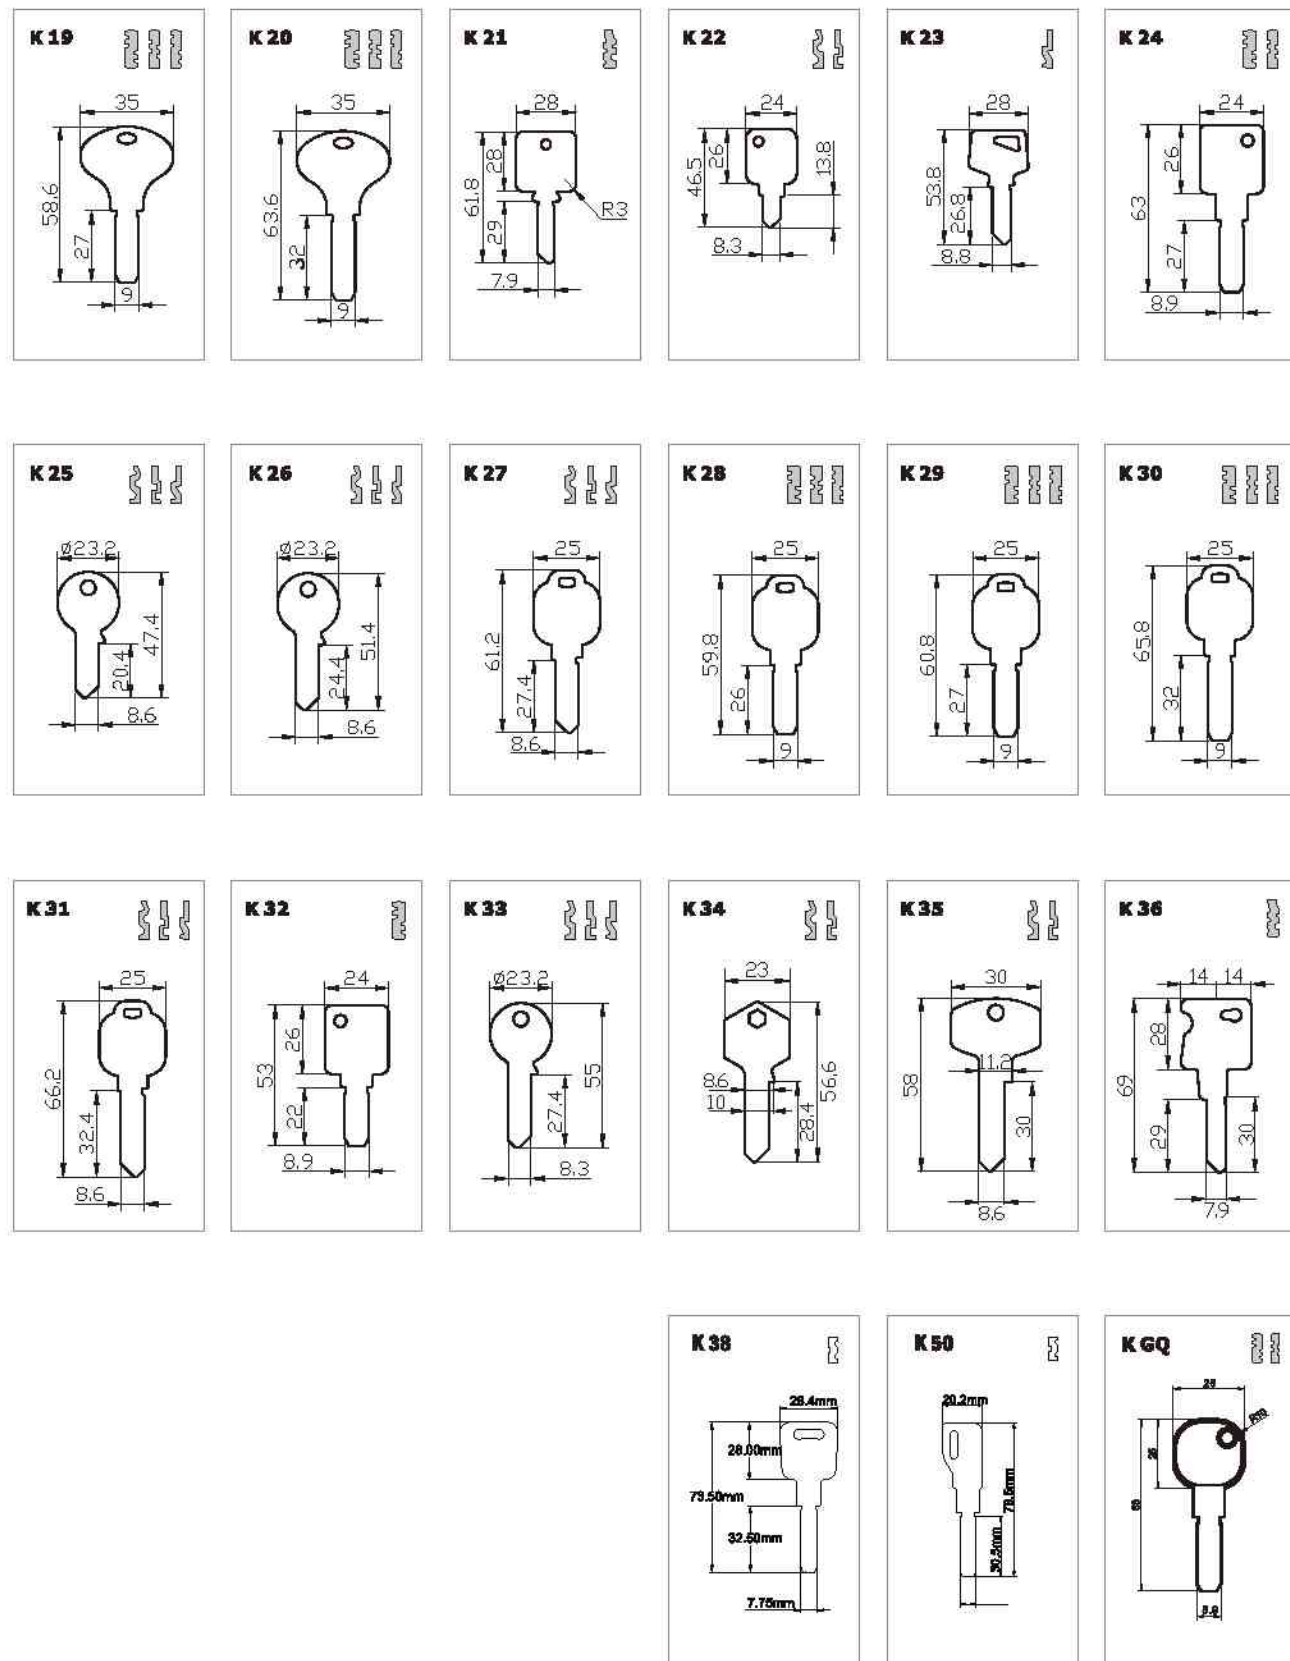

LEVER STYLE LIST



DESIGN COLLOCATION SUGGESTIONS

SOLID FORGED BRASS TRIM

Group No.		1	2	3	4
Entrance Door	81B		81B05-B CCH	81B08 RG	81B09 CCH
	82B	82B03 PVD	82B05 CCH	82B08-B RG	82B09 CCH
	26B	26B03 PVD	26B05 CCH	26B08 RG	26B09 CCH
Interior Door	29B	29B03 PVD	29B05 CCH	29B08 RG	29B09 CCH
	22B	22B03 PVD	22B05 CCH	22B08 RG	22B09 CCH

DESIGN COLLOCATION SUGGESTIONS

SOLID FORGED BRASS TRIM

5	6	7	8
82B10 DAB	82B11-B DAB	82B22-B RG	82B33-B ACC
26B10 DAB	26B11 DAB	26B22 RG	26B33 ACC
29B10 DAB		29B22 RG	29B33 ACC
22B10 DAB	22B11 DAB	22B22 RG	22B33 ACC

DESIGN COLLOCATION SUGGESTIONS

SOLID ZINC ALLOY DIE-CASTING TRIM

Group No.		1	2	3	4	5	6
Entrance Door	81	8103 SN/NP	8106 DAB	8109 DAB	8116 DAB	8119 SN/NP	8120 SG
	82	8203 SN/NP	8208 DAB	8211 DAB	8216 DAB	8219 SN/NP	8220 SG
	86	8603 SN/NP	8606 DAB		8616 DAB	8619 SN/NP	
	89			8909 DAB	8916 DAB	8919 SN/NP	8920 SG
	26	2619 SN/NP	2605 DAB		2635 DAB	2638 SN/NP	2659 SG
Interior Door	28	2811 SN/NP				2838 SN/NP	
	22	2220 SN/NP	2225 DAB	2222 DAB	2225 DAB	2231 SN	2225 SG
	29						2910 SG
Sliding Door	56						5602 SG
	550/551	5512 SN				5502 DAB	
	556	5562 SN			5563 DAB	5562 SN	

DESIGN COLLOCATION SUGGESTIONS

SOLID ZINC ALLOY DIE-CASTING TRIM

7	8	9	10	11	12	13
8122 SG	8125 SG	8130 DAC	8133 SN/NP	8135 DAC		
		8230 DAC	8206 SN	8235 DAC		
		8620 DAC				
8922 SG	8925 SG	8930 DAC		8935 DAC		
	2683 SG	2690 DAC	2612 SN/NP	2692 DAC	2608 AB	2682 DAC
			2822 SN/NP		2813 AB	
2229SG		2239 DAC	2219 SN/NP	2235 DAC	2216 AB	2208 DAC
2901SG	2920 SG					
					5603 DAB	
			5501 SN			
			5565 SN		5565 DAB	