

1500VDC光伏4.0面板式保险丝连接器

1500VDC PV 4.0 Panel Fuse Connector

产品规格:


Product Specifications:

绝缘材料 Insulation material	PPE/PA	保险丝规格 Fuse Specification	1A-50A
额定电流 (不含保险丝) Rated current (Without fuse)	50A	安全等级 Safety degree	II
额定电压 Rated voltage	1500VDC	阻燃等级 Flame class	UL94-V0
最大的测试电压(含保险丝) Maximum voltage (With fuse)	1575V	环境温度范围 Ambient temperature range	-40°C...+85°C (IEC) *
连接器接触电阻 contact resistance	≤ 0.25 mΩ	温度上限 Upper limiting temperature	110°C (IEC)
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	适配电线规格 Suitable cable cross sections	2.5~16mm ² /14~6AWG
保护等级 Degree of protection	IP68(1m,1H)	适配保险丝尺寸 (mm) Suitable for fuse size(mm)	10*85 or 10/14*85
Rated Impulse voltage 额定脉冲电压	16KV	符合标准 Regulatory approval	TUV,CE


图示:

Drawing:


4PFC Panel fuse connector cable end

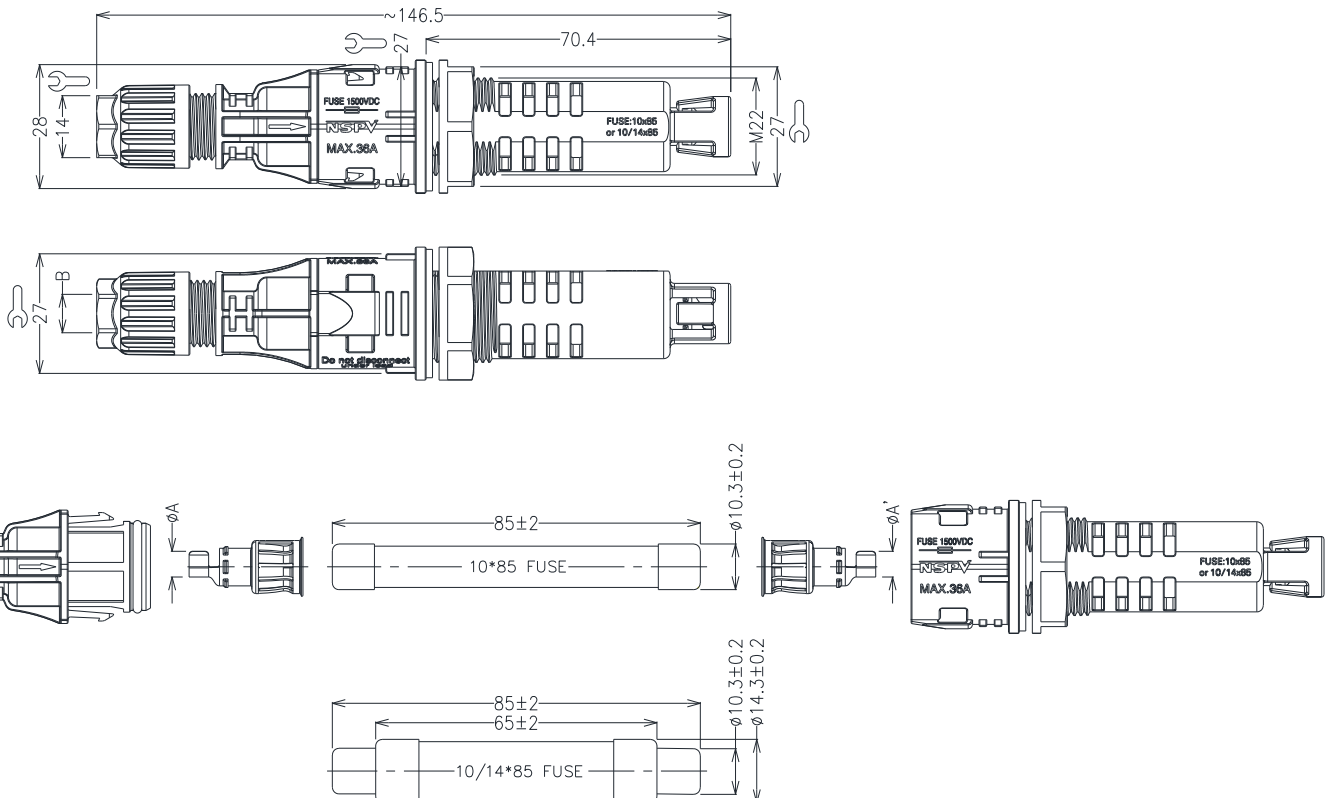

4PFF Panel fuse connector female end

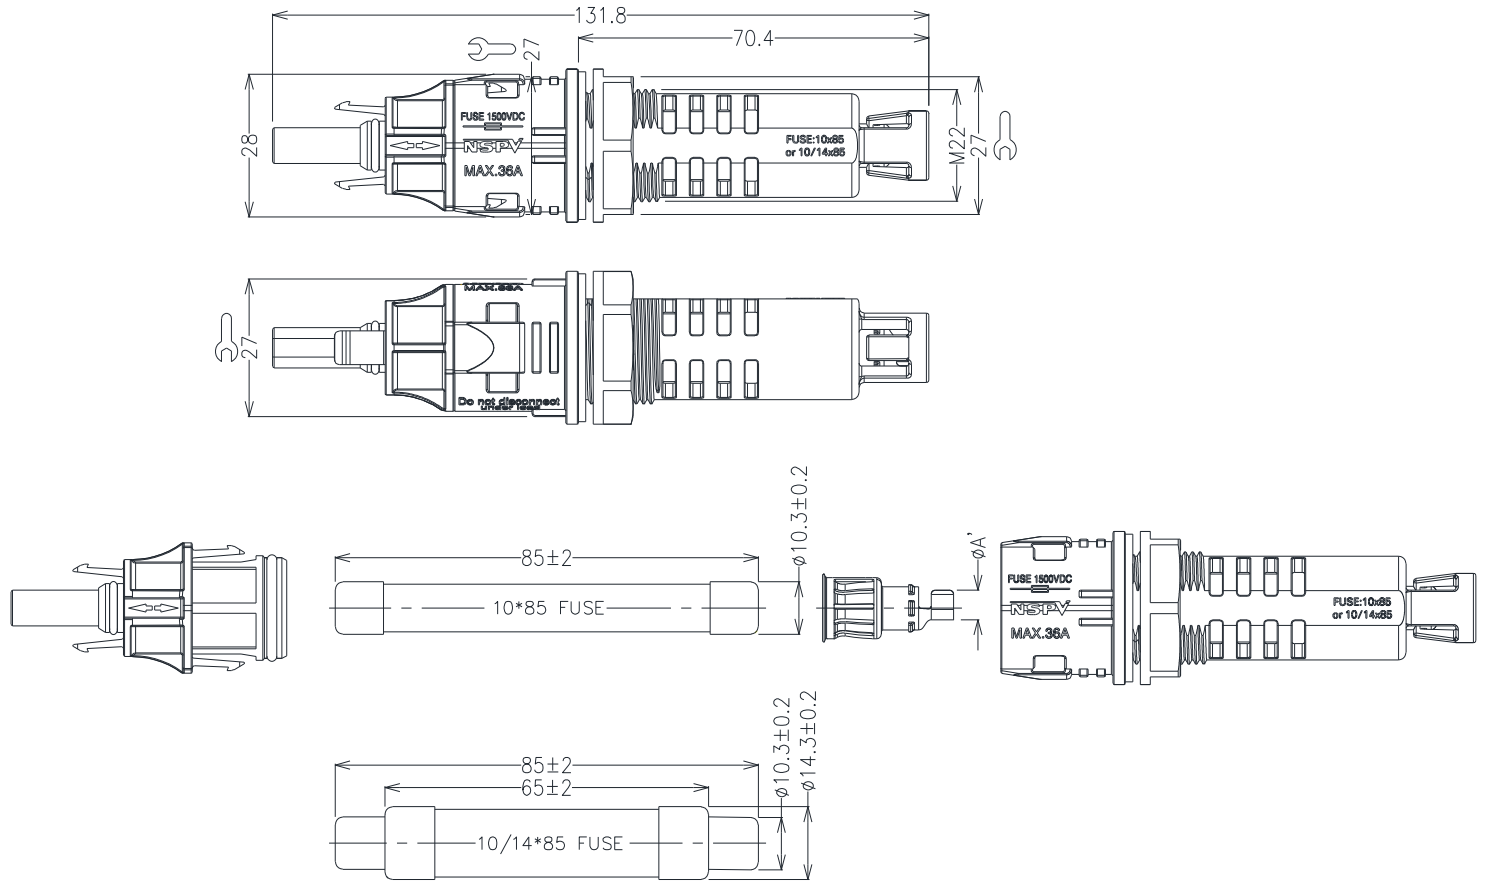

4PFM Panel fuse connector male end

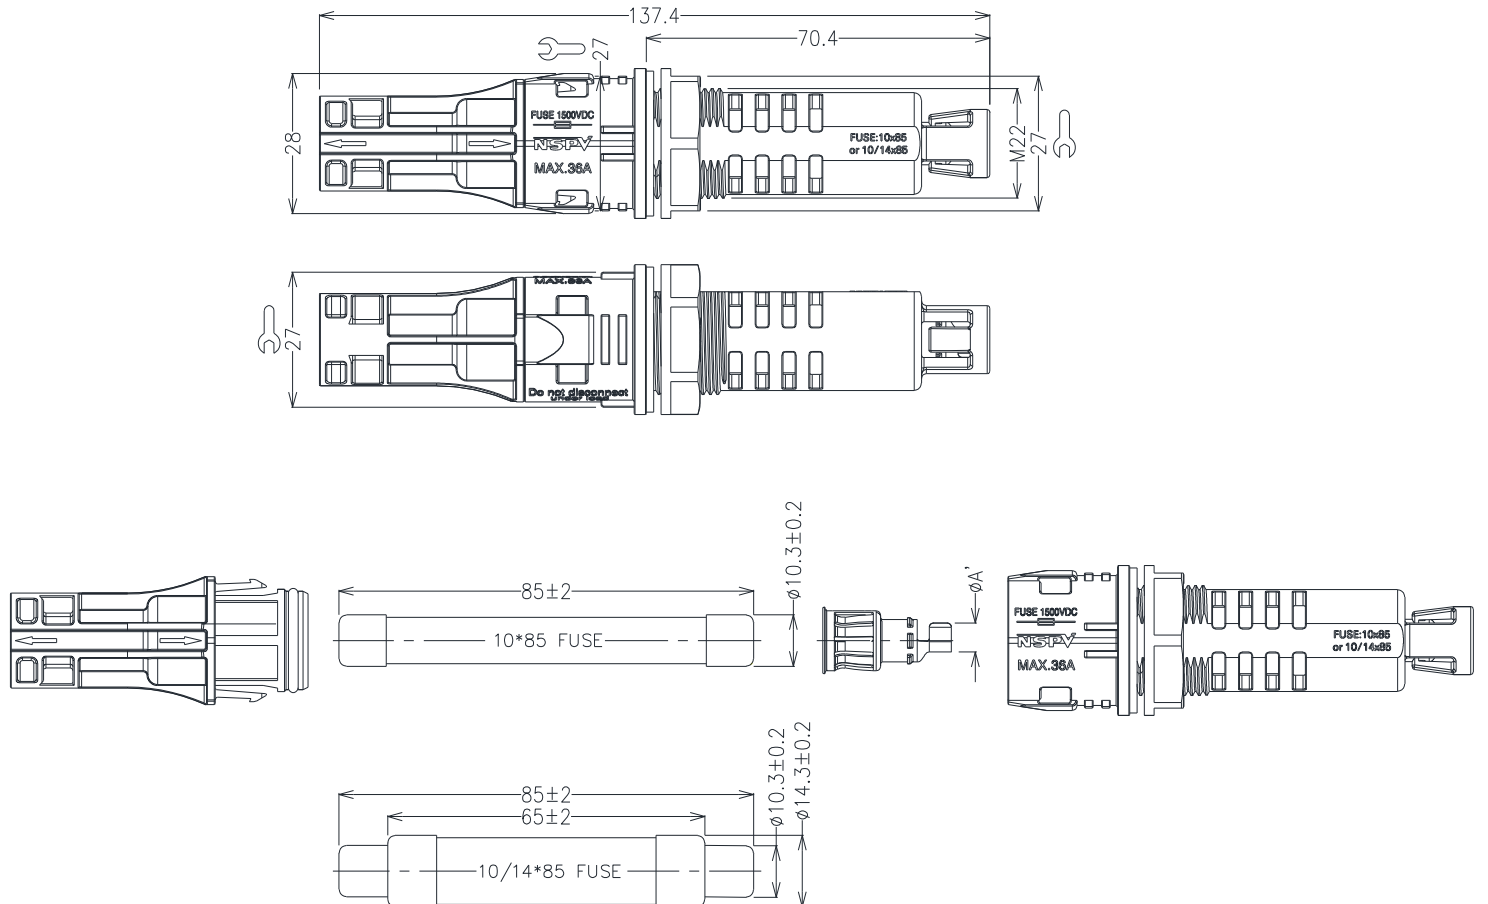

www.new-pv.com,info@new-pv.com